VOL. 14, NO. 6

Electronic Design

THE MAGAZINE OF ESSENTIAL NEWS, PRODUCTS AND TECHNOLOGY

MARCH 15, 1966


IEEE time is here again—this year with more products and more technical sessions than ever. Take a tour through the product exhibits...find out what the speakers will say...analyze the latest trends in technology. Do all of this and more without leaving your desk. How? See the IEEE USA section, **p. U65.**




✓ Check CLIFTON for Servo Packages




ELECTRONIC COMPONENTS FOR COMPUTER USE
F-111 AIRCRAFT



BOOSTER AMPLIFIERS, COMPONENTS OF
THE NAVIGATION AND BOMBING COMPUTERS
F-111 AIRCRAFT

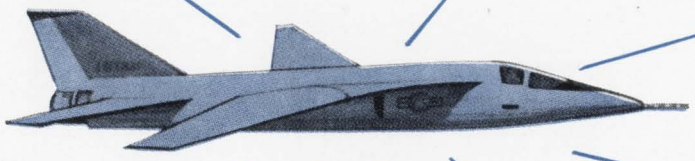



SERVO ASSEMBLY
F-111 AIRCRAFT




SERVO AMPLIFIERS USED
ON VARIOUS AIRCRAFT




AUTO-PILOT SYNCHRONIZER
A7A AIRCRAFT



SERVO ASSEMBLY
F-111 AIRCRAFT

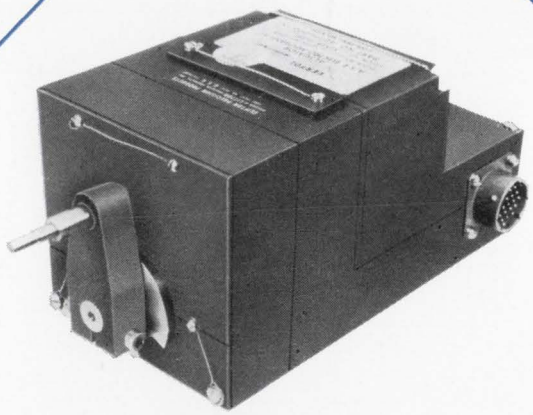

AUTOMATIC STABILIZATION ACTUATOR
CH47A HELICOPTER (SEA KNIGHT)

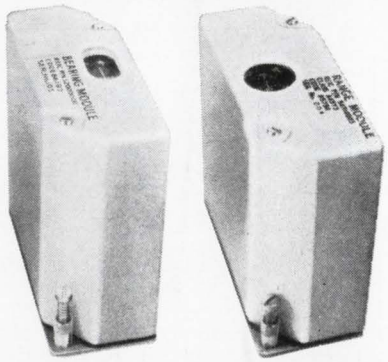

TACAN RANGE AND BEARING COUPLERS
NAVIGATIONAL USE ON VARIOUS AIRCRAFT

All units shown ⅓ actual size.



We have been designers and manufacturers of flight controls and special aircraft devices for the past 10 years. A great many engineers and purchasing people think of Clifton only as a leader-manufacturer of rotating components, synchros, servo motors and resolvers. We would like to point out that we also develop, design and produce servo sub-assemblies, to the most exacting requirements. These precision-engineered modules are now flying, or will soon fly, in our country's most important aircraft.

These packages are built to Clifton synchro standards of reliability and accuracy . . . and in production quantities. While we can hand build models for you, we excel in "in-line" *quantity* and *quality* production.

Give us the opportunity to discuss your next servo package need! Do it now, today!

Call 215 622-1000 and ask for Mr. E. Fisher, or TWX 215 623-1183.

cppc **CLIFTON PRECISION PRODUCTS**
DIVISION OF LITTON INDUSTRIES
Clifton Heights, Pa. Colorado Springs, Colorado

Flash! Clifton has just opened a new synchro plant in Fall River, Mass.

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 842

New at IEEE

70-MHz Solid-State Synthesizer

Available in 20 versions . . . Output adjustable up to 2 volts at accurately known, stable, sine-wave frequencies. 7-digit readout plus continuous frequency control. Signals are coherently synthesized from internal quartz-crystal oscillator. Plug-in modules give you choice of resolution: 10 Hz, 100 Hz, 1 kHz, 10 kHz, and 100 kHz, with or without continuous tuning. Internal calibrated sweep. Programmable to 1 MHz.

This is the fourth of a series of GR synthesizers — other models cover ranges to 100 kHz, 1 MHz, and 12 MHz. Prices start at $3200.00 in U.S.A. for a Type 1161-A 100-Hz-per-step, 100-kHz Coherent Decade Frequency Synthesizer.

A General-Purpose 100-MHz Pulse Generator at Surprisingly Low Cost

Repetition rates from 1 to 100 MHz . . . Durations from 4 to 99 ns in 1-ns steps . . . Rise and fall times 2 nanoseconds . . . Period, duration, and delay jitter less than 0.1 ns . . . 4-volt output into 50Ω . . . Adjustable time delay . . . Synchronizes readily with external clock signals.

Type 1394-A, $995 in U.S.A.

Low-Distortion, All-Solid-State Oscillator

A 10-Hz to 100-kHz sine/square-wave oscillator whose frequency characteristic is flat within ±2% . . . Distortion is less than 0.05% for sine waves from 200 Hz to 10 kHz (open circuit, or 600-Ω load) . . . 60-dB step attenuator . . . Hum is less than 0.001% (100 dB) below full output . . . Square-wave rise time less than 100 ns; symmetry better than ±2% over entire range . . . Synchronization provided for locking to external signals or for syncing other equipment.

Type 1309-A, $325 in U.S.A.



1-pF to 1-*Farad* Electrolytic Capacitance Bridge

Two-, three-, or four-terminal measurements . . . Measures D from 0 to 10 . . . Has Orthonull® balancing mechanism to eliminate sliding balances on lossy capacitors . . . Basic accuracy, ±1% for C and ±2% for D . . . Complete with self-contained 120-Hz generator, detector, and 0-600 Vdc polarizing supply . . . Measures leakage currents as small as 0.5 μA.

Type 1617-A, $1195 in U.S.A.

A High-Speed, Inertialess, 2-Channel Sampling Recorder

. . . Introduces *no* amplitude or phase distortion of transients . . . no lagging response, overshoot, or ringing.

New recording concept . . . No moving pens, coils, or mirrors . . . Uses 101 fixed styli equally spaced along 5-inch vertical axis . . . the instantaneous voltage level of the input signal is measured 6000 times a second . . . Each voltage sample energizes a stylus corresponding to its level, and a point is plotted . . . A complete scan-print cycle takes about 150 μs for each channel, or 300 μs for both . . . Calibrated voltage ranges from 1 V to 500 V, full scale, in 1-2-5 sequence . . . Additional 20-dB and 50-dB full-scale logarithmic ranges provided for each channel . . . Chart speeds selectable from 10 minutes per inch or cm to 0.1 second per inch or cm . . . Resolution is 1% of full scale . . . Prints its own coordinates, as well as voltage range and time scale.

Type 1520-A, $2950 in U.S.A.

Many other GR products will be on display. See them at Booths 3B46-3B51.

BOSTON • NEW YORK • CHICAGO • PHILADELPHIA • WASHINGTON, D.C.
SYRACUSE • DALLAS • SAN FRANCISCO • LOS ANGELES • ORLANDO
CLEVELAND • TORONTO • MONTREAL
GENERAL RADIO COMPANY (Overseas), ZURICH, SWITZERLAND
GENERAL RADIO COMPANY (U.K.) Ltd., BOURNE END, ENGLAND

GENERAL RADIO
WEST CONCORD, MASSACHUSETTS

ON READER-SERVICE CARD CIRCLE 211

NEW LOW COST INTEGRATED CIRCUIT



See REDCOR's new Computer Linkage Systems during the New York IEEE Show—the REDCOR Suite will be located at the Essex House, 160 Central Park South, New York, N.Y.

Engineers: If your field is analog/digital data systems or component design, a career opportunity awaits you at REDCOR. Write to Personnel Director.

COMPLETE SYSTEMS COMPATIBILITY

REDCOR®

CORPORATION

7800 DEERING AVENUE, P.O. BOX 1031
CANOGA PARK, CALIFORNIA 91304
PHONE: (213) 348-5892/TWX/213-348-2573

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 2

VOL. 14, NO. 6

Electronic Design

THE MAGAZINE OF ESSENTIAL NEWS, PRODUCTS AND TECHNOLOGY

MARCH 15, 1966

NEWS

13 News Report

17 **LSI highlighted at solid-state conference**
Debate on large-scale integration and other device developments spark panel sessions at Solid-State Circuits Conference

22 **Full speed ahead for high-speed trains**
Electronics industry expected to play key role in Government's rail transportation program, scheduled for substantiai funding this year

29 Washington Report

35 ACME checks radio dishes

40 Computers control Sky Bus

46 Radio controlled parachutes

52 Equipment for blind engineers

56 Letters

63 **Editorial:** It's the engineer's job to bring order out of chaos.

IEEE USA—A Special Section

TECHNOLOGY

178 **Hot-carrier diode opens new vistas** for designers of high-frequency and microwave devices. Fast, quiet and well-behaved, it combines best for 2 worlds.'

188 **Try capacitance transducers.** You just might be surprised at the advantages. Here are equations and useful circuits for applying this versatile sensor.

196 **New FETS replace tubes** in audio equipment on a one-for-one basis. The advantages include higher gain and reduced distortion, with little parameter drift.

203 **Simplify NAND-circuit synthesis** in your next logic design. Here are various methods for implementing a logic function entirely with NAND gates.

210 **Use magnetic deflection to iron out** problems in display systems. It offers wider design freedom and is as good a frequency response as electrostatic methods.

218 **Buying a spectrum analyzer?** Both conventional and plug-in units are available; so make sure you choose the type best suited to your needs.

226 **Carpet plotting can be easy.** Here is a simple process for generating carpet plots with functional interpolative ability to improve graph reading accuracy.

241 **Nasa Tech Briefs**

242 **Ideas for Design**


PRODUCTS

258 Systems
266 Semiconductors
268 Power Equipment
270 Production
271 Materials
272 Components
305 Microwaves

Departments

314 New Literature
328 Application Notes
332 Advertisers Index
336 Designer's Datebook

ELECTRONIC DESIGN is published bi-weekly by Hayden Publishing Company, Inc., 850 Third Avenue, New York, N. Y. 10022. James S. Mulholland, Jr., President. Printed at Poole Bros., Inc., Chicago, Ill. Controlled-circulation postage paid at Chicago, Ill., and New York, N. Y. Copyright © 1966, Hayden Publishing Company, Inc., 58,062 copies this issue.

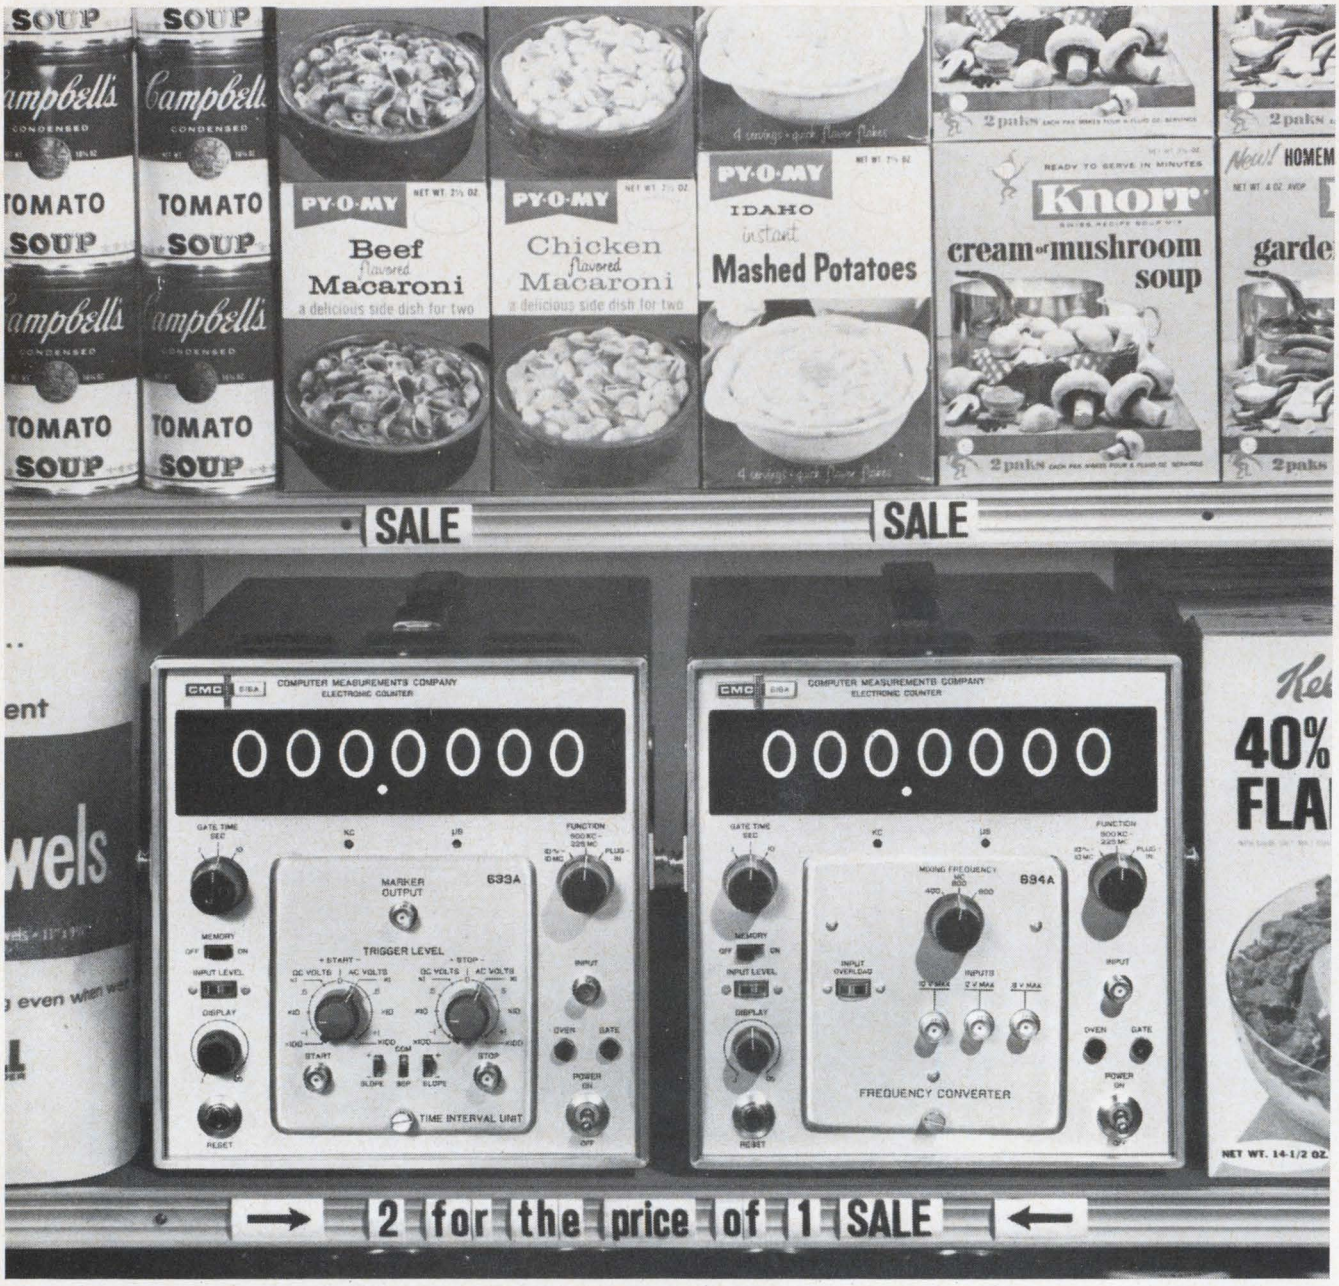

No, it's not the start of a price war. We're simply demonstrating that our new solid-state Model 616A frequency meter costs about half the price of any other comparably performing instrument now available. But, since the 616A is so versatile, who needs two of them anyway? This clever little instrument, with all silicon semiconductor insides, gives you direct frequency measurement through the entire 225 Mc telemetry band, and as high as 12 gigacycles with one plug-in. That's because we cunningly built in the prescaler.

But Hewlett-Packard and Beckman didn't. Theirs is a plug-in to a counter, and the total cost is twice that of our 616A. Then they sell you a second plug-in to measure above 400 Mc. Speaking of plug-ins... the 616A comes well equipped! Slip in a frequency converter or other special CMC frequency extender plug-ins, and your frequency measurements can soar to 1,000 Mc, 3,000 Mc, and even a phenomenal 12 gigacycles! Or, with our time interval plug-ins, measure time from .1 μsec. to 1 sec., or 1 μsec. to 10 sec.

Not only is the Model 616A half the price, but notice, it's half-rack size too! One reason is because, like others in the 600-Series, it features an advanced "mother board" technique. Lost are excess size, weight, and components; gained are new shape, reliability, and ease-of-maintenance. Button it up with its front cover and this rugged 28-pound wizard goes right out in the field.

All this for just $2,185. Interested? Then send now for the complete specs. And, if you're new at comparing our specs to high-powered H-P and big, bad B, you can earn a glorious Crusading Engineers' medal which reveals to everyone that you had the guts to look at somebody else for a change. It's also a great conversation opener for sweet young things you want to dazzle at your next T. G. I. F. party!


CMC

12973 Bradley · San Fernando, California · Phone (213) 367-2161 · TWX 213-764-5993

COMPUTER MEASUREMENTS COMPANY IS A LEADING DESIGNER AND MANUFACTURER OF ELECTRONIC INSTRUMENTATION TO COUNT, MEASURE, AND CONTROL.

ON READER-SERVICE CARD CIRCLE 3

new

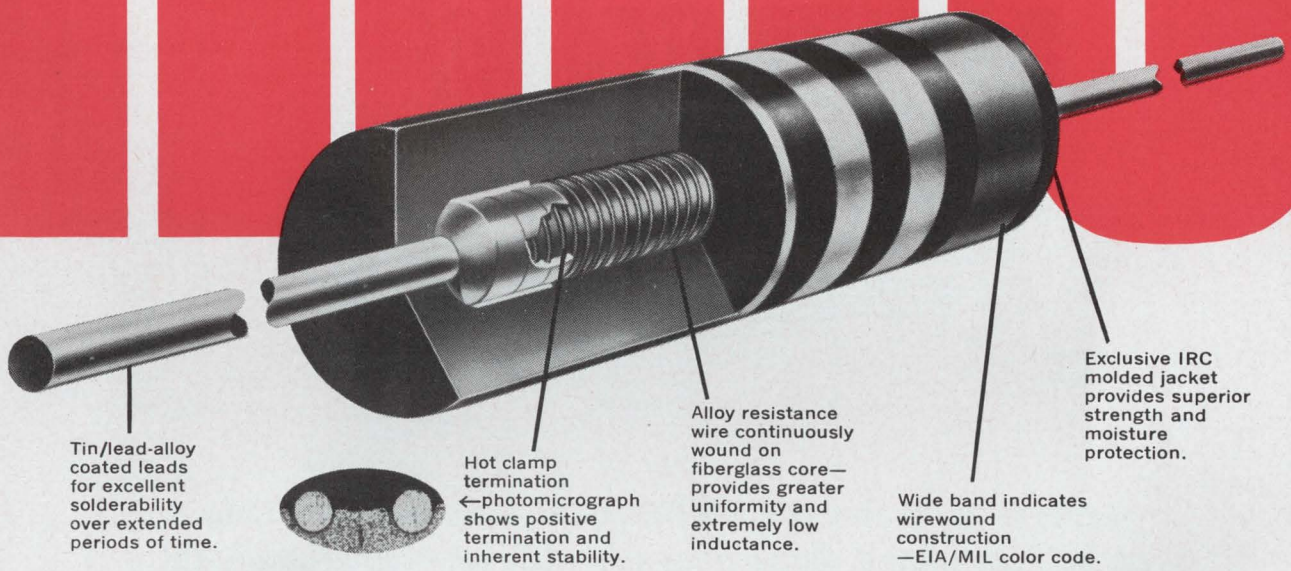

Excellent stability for 1-watt applications

BW-20 molded wirewound resistors are money savers, too

This IRC molded wirewound resistor offers a low cost solution to tight-tolerance design problems. The average load life change is less than 1%. This excellent stability is the direct result of IRC's unique Hot Clamp termination assembly.

The special cup-lead assembly is heated and flowed around the resistance wire. Wire turns are firmly imbedded in the cup. This eliminates wire shifting or shorting during thermal and mechanical stress.

BW-20 resistors are ideal for low-resistance, low-power circuits in appliances; transistorized auto radios, voltage regulators and ignition systems; and in many commercial and industrial equipments.

The smooth, molded body of this new IRC unit fits all ½-watt automatic inserting equipments. Four forms of packaging are available to cut your assembly costs. The BW-20 can upgrade circuit performance with impressive space and cost savings. Write for data, prices and samples to: IRC, Inc., 401 North Broad Street, Philadelphia, Pa. 19108.

CAPSULE SPECIFICATIONS



Size: .390" x .140" diameter.

RESISTANCE:	0.24 ohm to 750 ohms
POWER:	1-watt @ 50°C. Derated to zero @ 150°C.
TOLERANCE—STANDARD:	±5%, ±10%
—SPECIAL:	±2%
INDUCTANCE:	0.22 μh (0.24 ohm) to 2.4 μh (750 ohms)
MIL-R-11 SIZE:	Equivalent to RC20
IRC TYPE:	BW-20

IRC

Speed Inquiry to Advertiser via Collect Night Letter


ON READER-SERVICE CARD CIRCLE 4

Now Available from General Instrument...

HERCULEADS™

The ULTIMATE DIODE



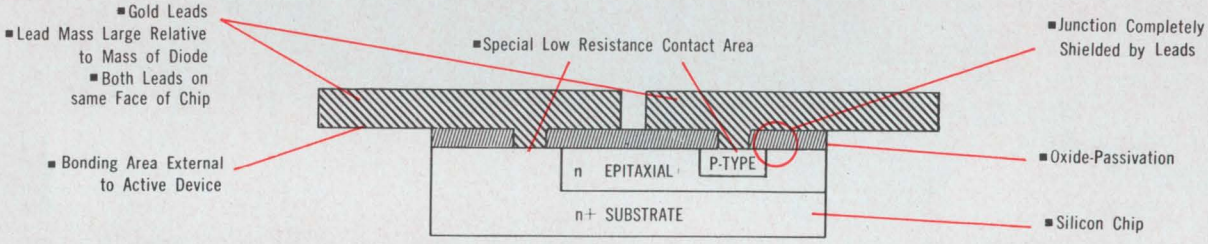

General Instrument's HERCULEADS beam-lead diode is a self-contained diode package with total environmental immunity—the smallest discrete diode available —and it is virtually indestructible.

Ultimate in cost savings

The irreducible minimum in processing achieved via complete batch fabrication and self packaging offers minimum possible cost.

Ultimate in size

The **HERCULEADS** diode is the smallest available. Together with the leads which are uniquely integrated with the diode body, it measures less than 15x30 mils.

Ultimate in reliability

Most potential failure modes commonly associated with diodes, both electrical and mechanical, are eliminated. All bonding leads external to the active device permit simple, economic, high rel connections without the use of eutectics, aluminum or thermal wire bonding. And total surface passivation is assured because of **HERCULEADS'** unique design and metal-over-oxide construction.

Ultimate in versatility

Besides its use as a single, twin lead self-packaged device, the **HERCULEADS** diode is highly adaptable for use in module or stick arrays. Its design and construction make it ideal for automatic handling and positioning, and its pure gold cantilevered leads permit high reliability bonding. Electrical parameters available are comparable to those achieved in the most advanced single-plane devices presently in use.

Electrical Specifications for H100 Series at 25°C

PRV	90 V @ 10 μA
I_F	40 mA @ 1 V
I_R	2 nA @ −40 V
C_D	2.4 pf @ 0 V
t_{rr}	4 ns @ I_F = 10 mA to V_R = −40 V

HERCULEADS diodes in 10-PAKS are now in stock at your authorized General Instrument Distributor.


Write for full data and specifications.

GENERAL INSTRUMENT CORPORATION
SEMICONDUCTOR PRODUCTS GROUP
600 West John Street, Hicksville, New York


GENERAL INSTRUMENT

Booths 2B12-2B14 • IEEE SHOW

ON READER-SERVICE CARD CIRCLE 5

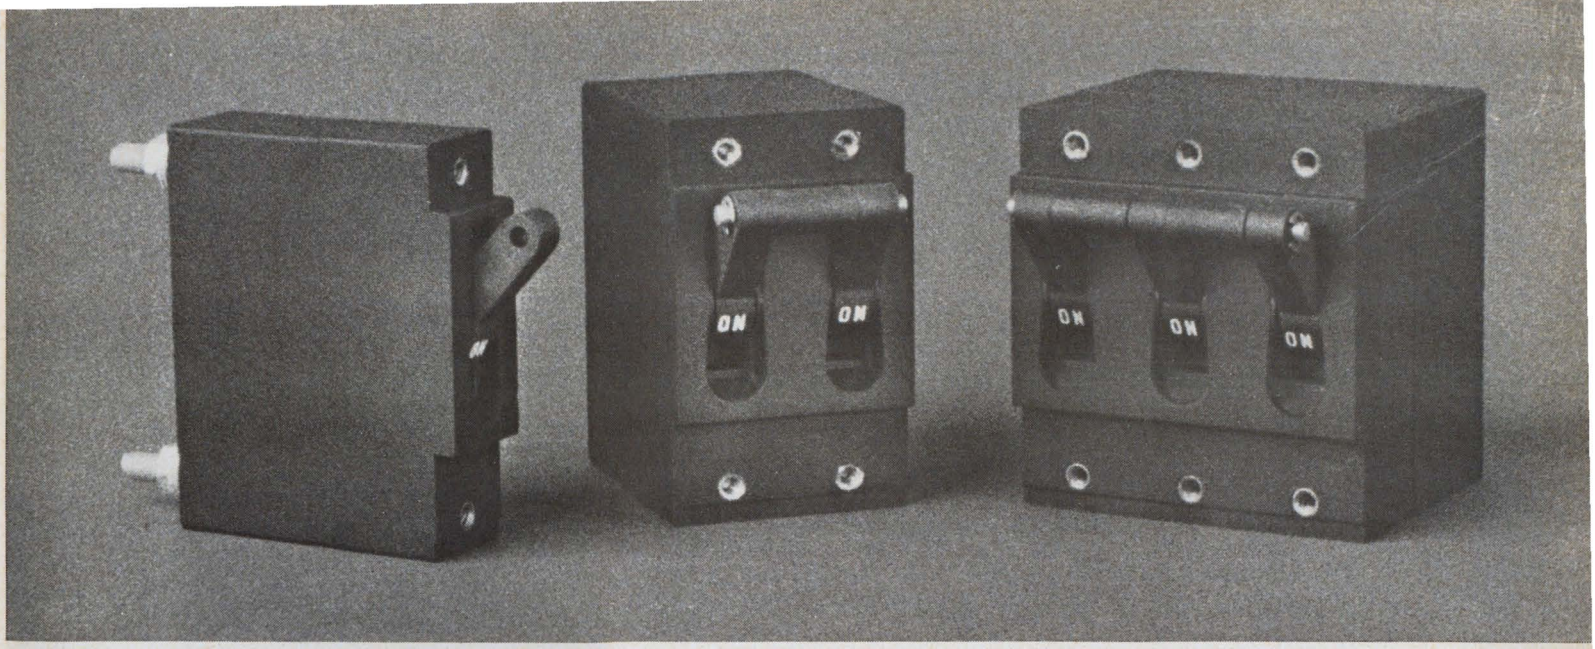

Is it true that the Heinemann Series AM12 is the most popular OEM-type magnetic circuit breaker on the market?

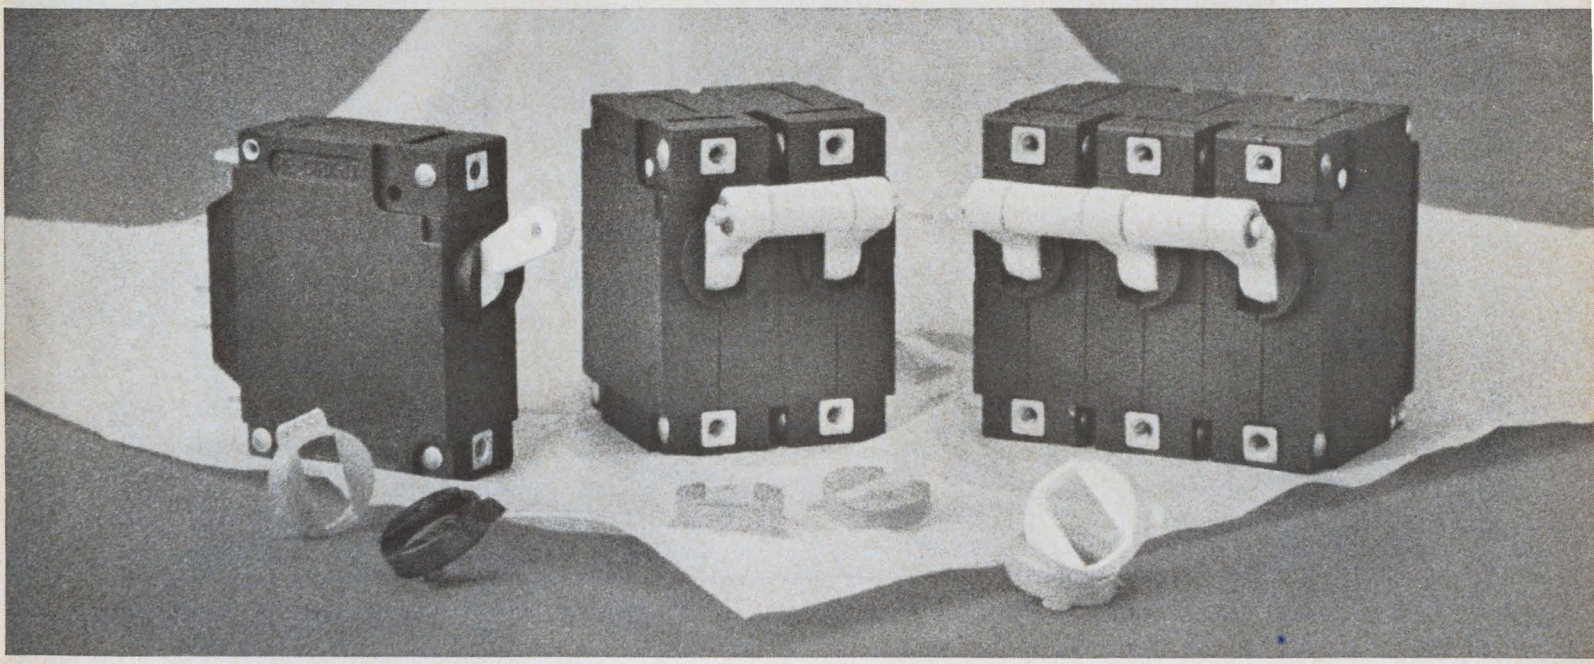


Not anymore.
You're looking at three reasons why. Our new Series JA breaker line.
The new Heinemann JA breaker is one-third smaller and lighter than the AM12.
It is much easier to install (there are no square panel cuts to make).
It is more attractively packaged (note the white handles and the snap-on color caps).
Yet it is available with all the same features and options.
And it carries the same five-year guarantee.
There is one hitch, though. The JA's top current rating is 20 amps, not 50.
But then we're not charging as much for it either.

(For detailed specifications, write for Bulletin 3350. First edition now on press.)


Heinemann Electric Company
2616 Brunswick Pike, Trenton, N. J. 08602

SA3129

ON READER-SERVICE CARD CIRCLE 6

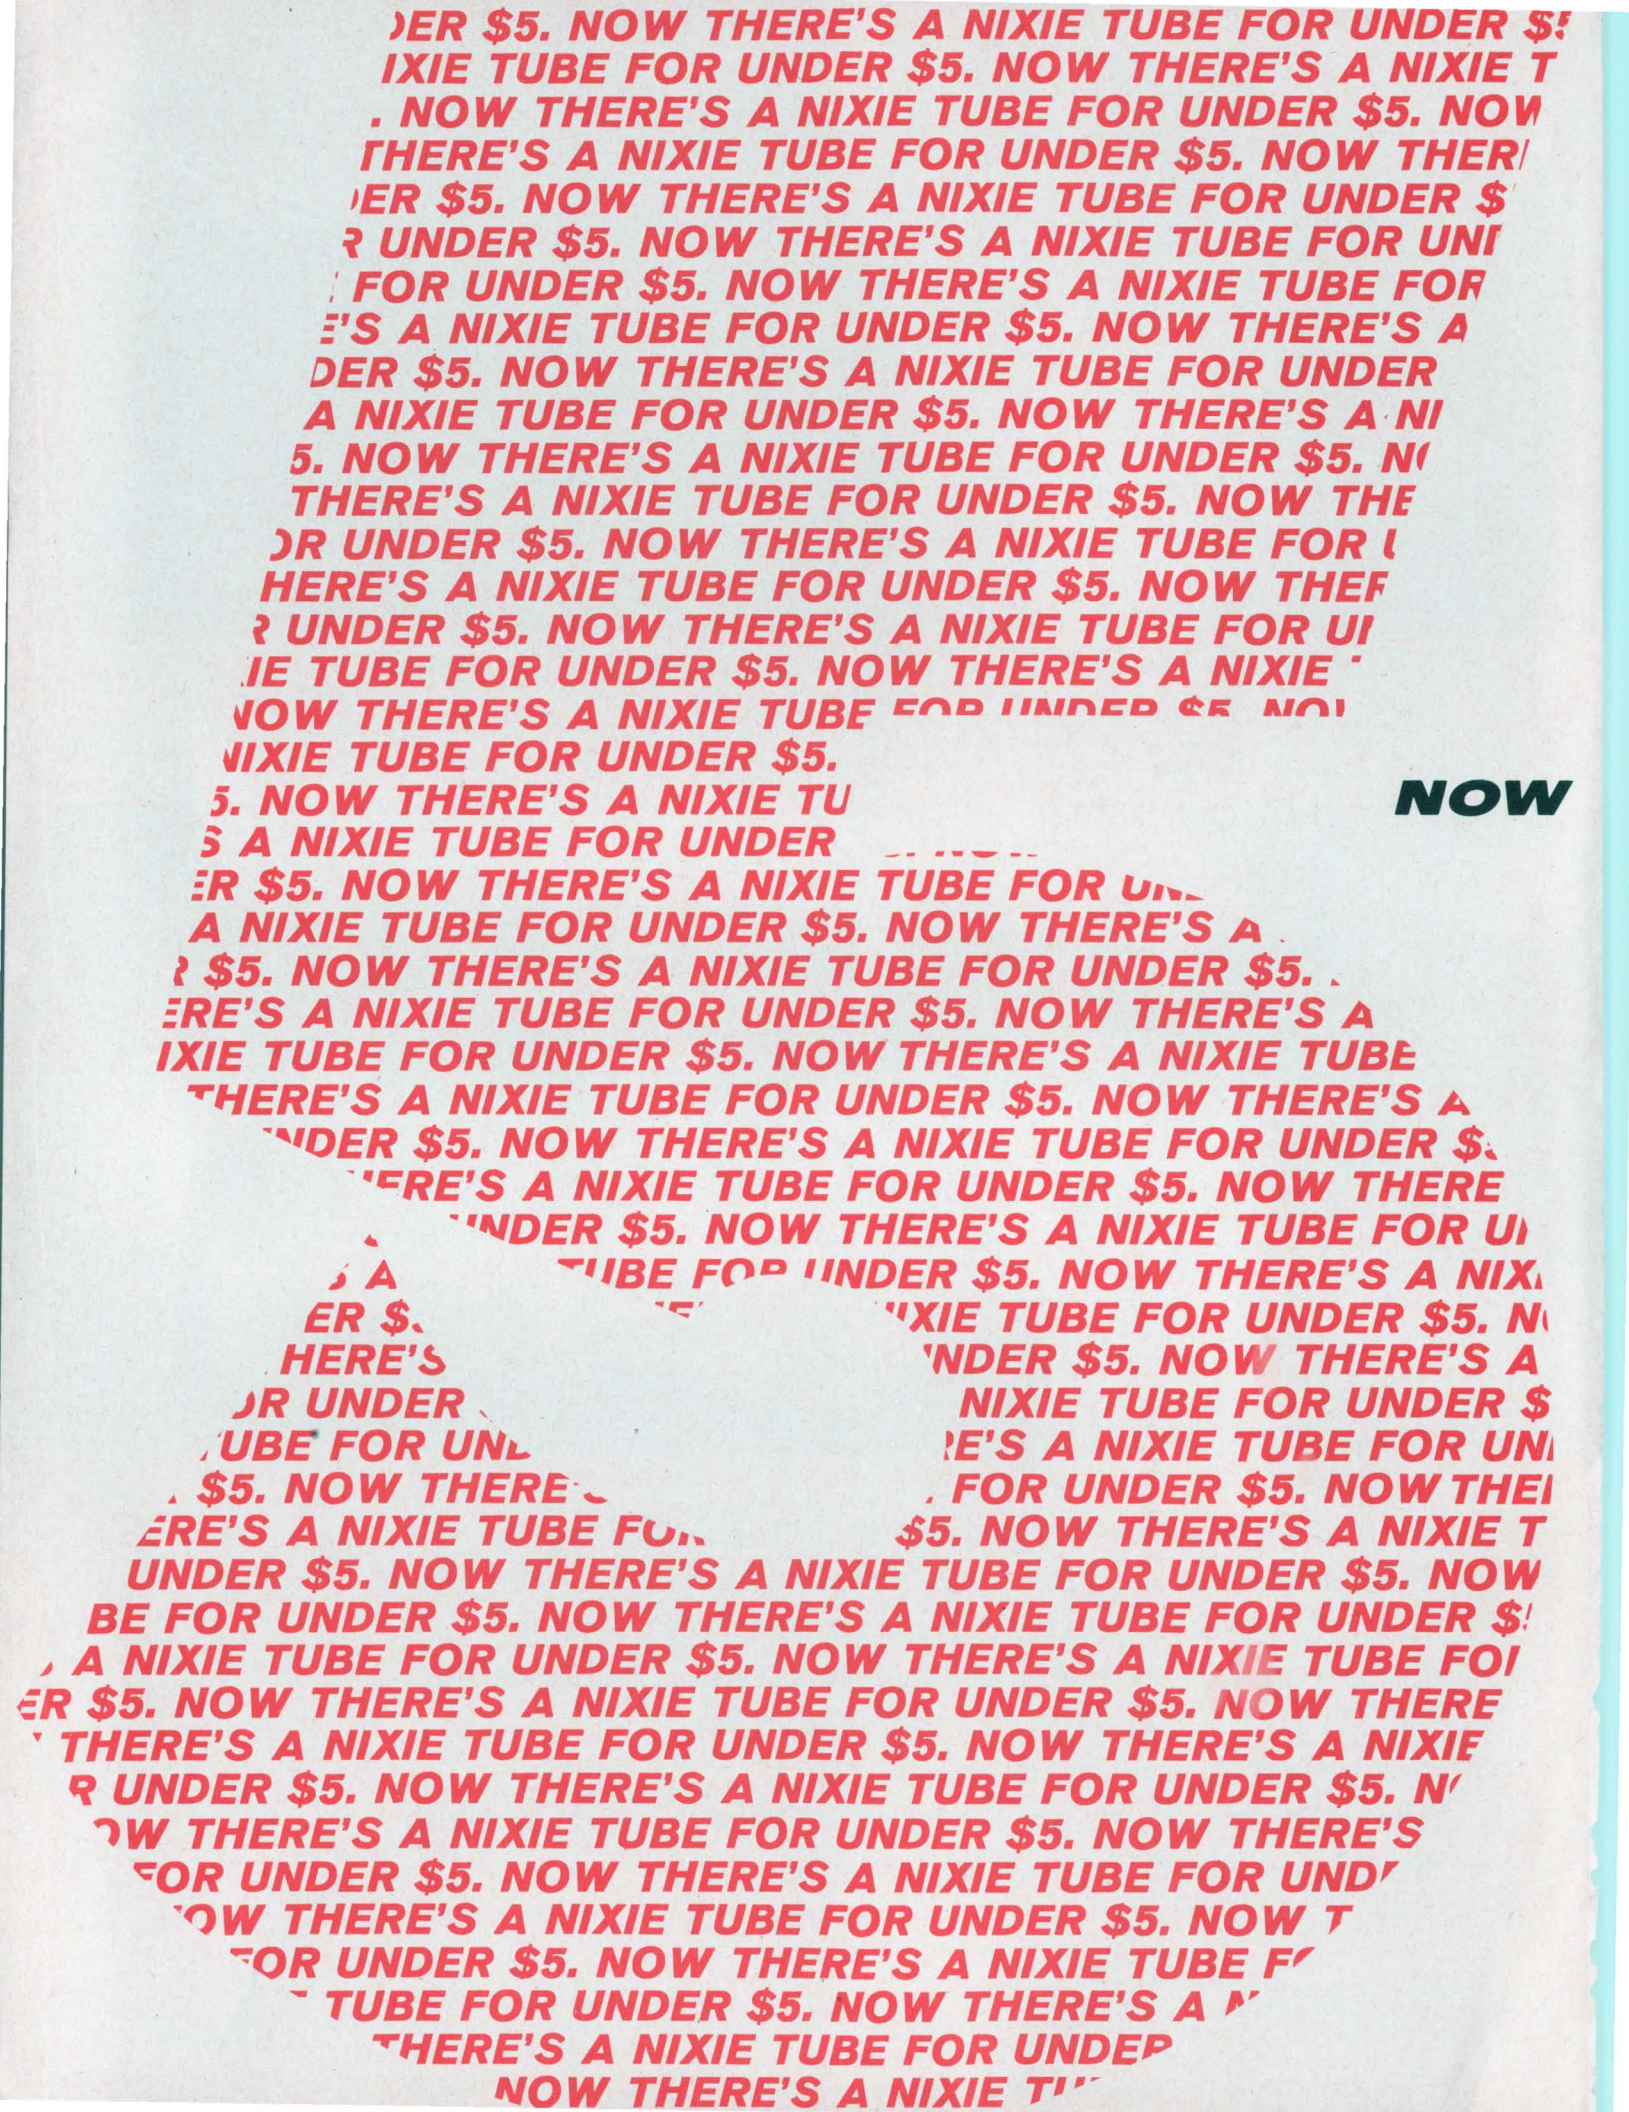
NOW

THERE'S A NIXIE® TUBE FOR UNDER $5

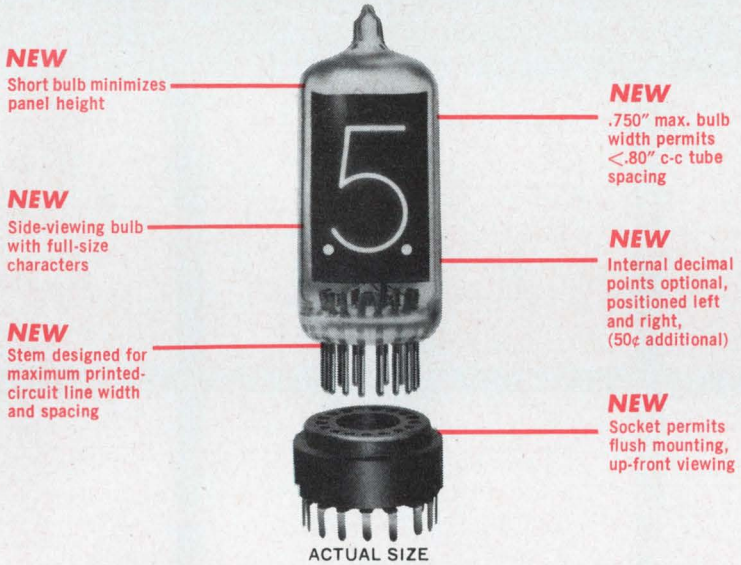

Here it is! Our all-new NIXIE tube—the industry's lowest-cost electronic readout*, and one sure to usher in a whole new generation of low-cost digital instrumentation.

But—*don't be misled by its low, low cost.* It's *all* NIXIE tube—in name, in design, in construction, in performance, in quality, in long trouble-free life.

Important new design and manufacturing techniques have made its low price possible. Now check the important new features shown—they make the new NIXIE tube more functional and easier to use.

The new NIXIE tube Type B-5440 is available now—from stock—both from the factory and from Burroughs Stocking Dealers across the country.

Before you freeze a new design, before you commit your company to a costly and irreversibly uneconomical position, *call*, *wire* or *write* for samples or prototype quantities.

Remember—the low cost of the new NIXIE tube Type B-5440 precludes consideration of other types of numerical readouts such as electro-luminescent and projection types where cost is a major factor. Get a *real* NIXIE tube with *real* NIXIE-tube performance and acceptability.

Use the reply card for full information on the new NIXIE tube and complete readout-application assistance.

**\$4.95 in quantities of 1000.*

Only Burroughs manufactures NIXIE Tubes

Burroughs Corporation / ELECTRONIC COMPONENTS DIVISION
PLAINFIELD, NEW JERSEY 07061

ON READER-SERVICE CARD CIRCLE 212


New from Sprague!

UNICIRCUIT® HYBRID NETWORKS


CUSTOM DESIGNED FOR PRECISION CIRCUITRY

COMBINE MONOLITHIC SILICON CIRCUITS WITH DEPOSITED METAL-FILM RESISTORS


Unicircuit® Custom Hybrid Circuits Utilize Either Tantalum or Ni-Cr Alloy Resistors for: Resistance Values, 15Ω to 150KΩ ■ Resistor Matching, ±½% Low Temperature Coefficient, ±50 ppm/C ■ Improved Resistance Tolerance, ±½%

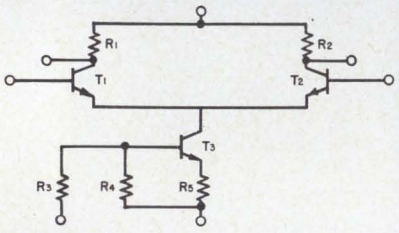


DIFFERENTIAL AMPLIFIER WITH CURREN

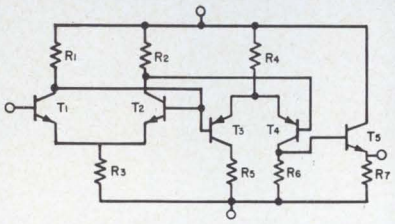


OPERATIONAL AMPLIFIER

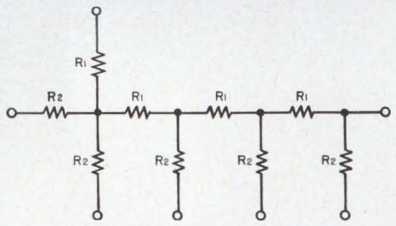


D-A LADDER NETWORK



D-A LADDER SWITCH



D-A BUFFER AMPLIFIER

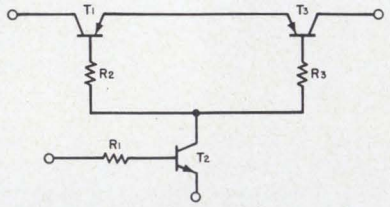

ANALOG SWITCH

For complete information, write to Technical Literature Service, Sprague Electric Co., 347 Marshall St., North Adams, Mass. 01248

SPRAGUE COMPONENTS

INTEGRATED CIRCUITS
THIN-FILM MICROCIRCUITS
TRANSISTORS
CAPACITORS
RESISTORS
PULSE TRANSFORMERS
INTERFERENCE FILTERS
PULSE-FORMING NETWORKS
TOROIDAL INDUCTORS
ELECTRIC WAVE FILTERS
CERAMIC-BASE PRINTED NETWORKS
PACKAGED COMPONENT ASSEMBLIES
BOBBIN and TAPE WOUND MAGNETIC CORES
SILICON RECTIFIER GATE CONTROLS
FUNCTIONAL DIGITAL CIRCUITS

4SS-5154R1


SPRAGUE®
THE MARK OF RELIABILITY

'Sprague' and '②' are registered trademarks of the Sprague Electric Co.

ON READER-SERVICE CARD CIRCLE 7

E|D News


Panel discussions spark solid-state circuits conference PAGE 17
Big role for electronics industry in Federal rail program PAGE 22
Computer wires chip with discretion PAGE 32
ACME to spot flaws in huge radio dishes PAGE 35

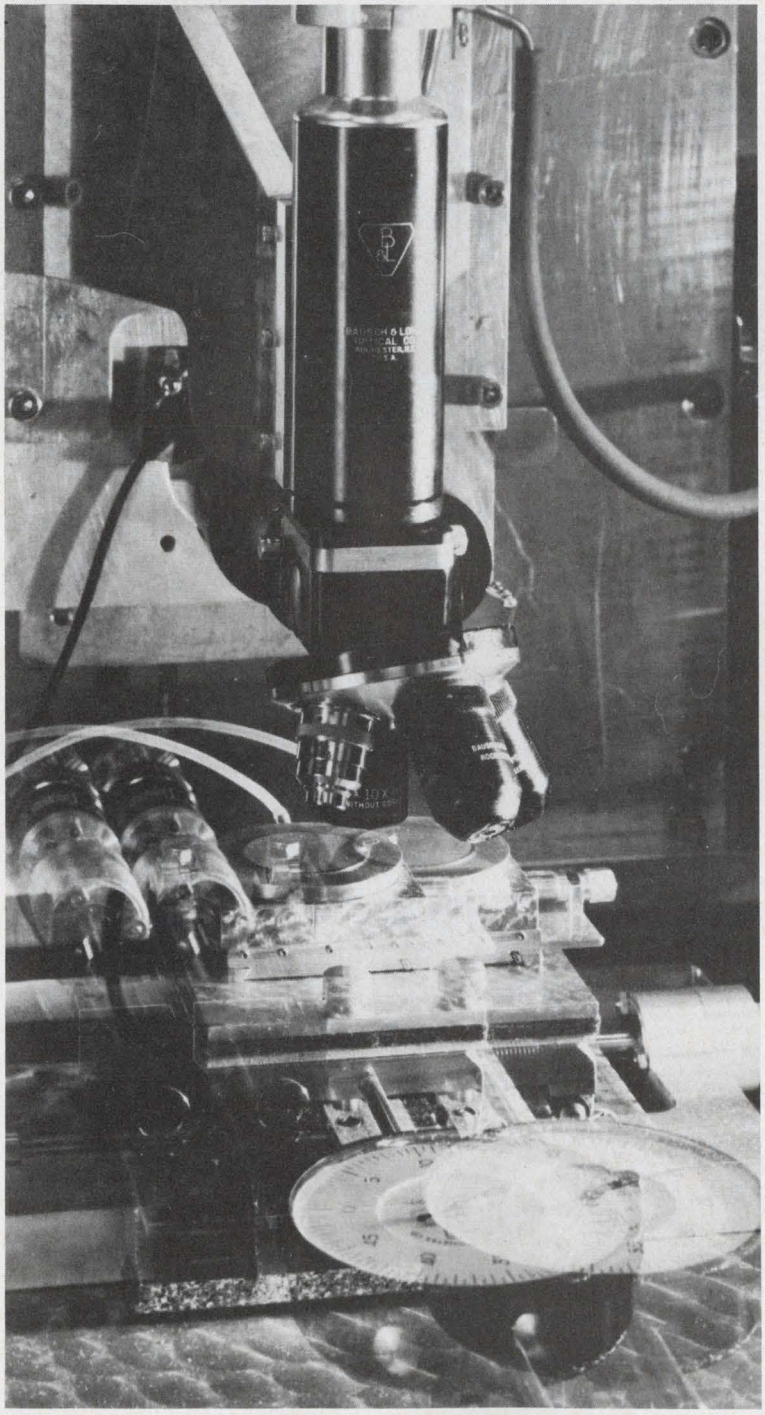


If it doesn't work, don't wire it. 32



Voltage readings by "touch." 52

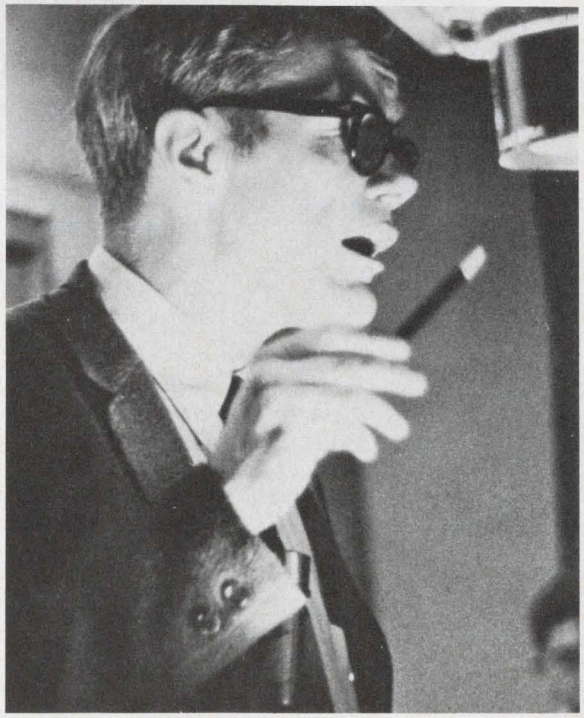

Discussion is the better part of valor. 17

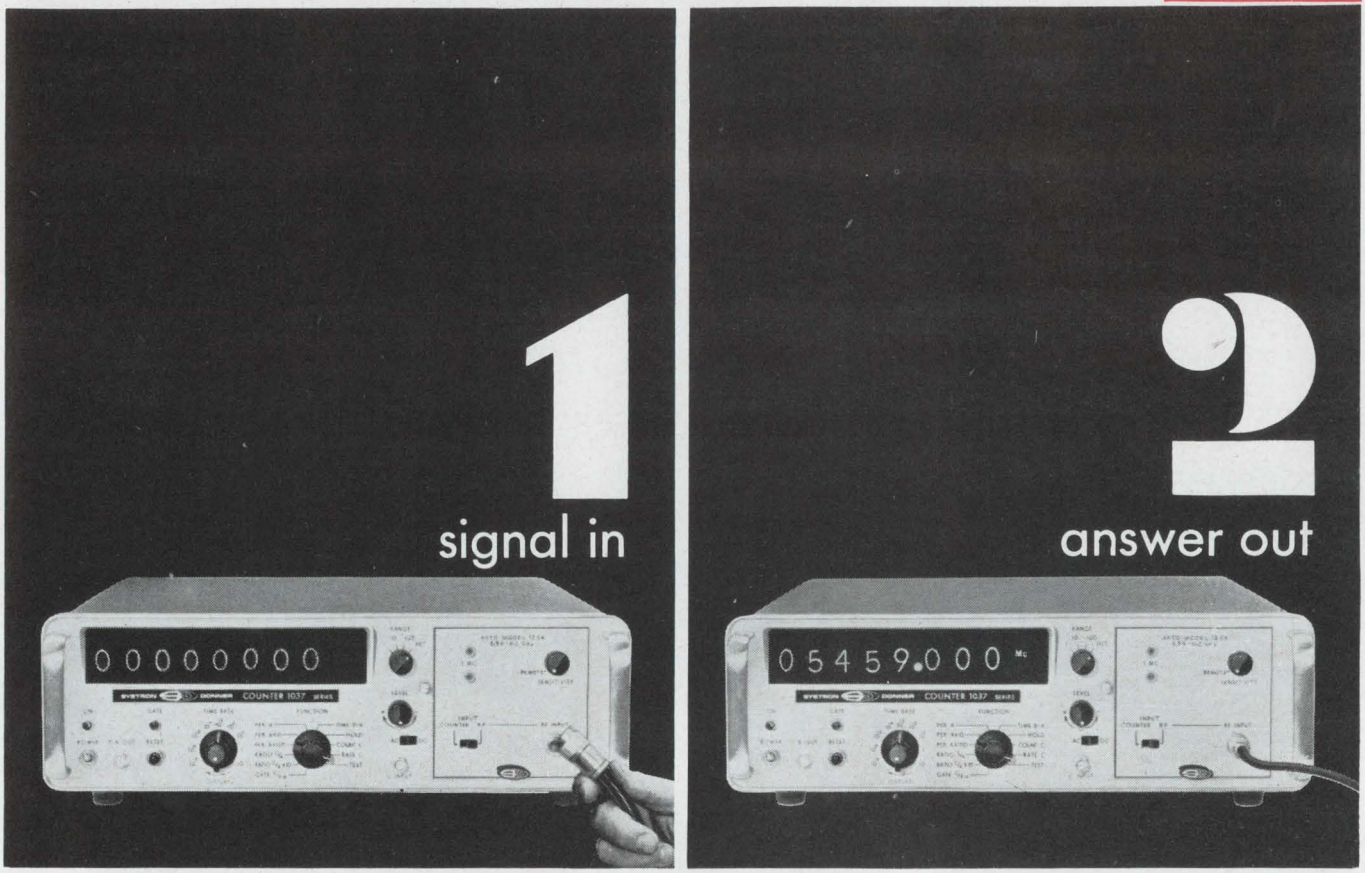

yes, it's that simple to measure microwave frequencies directly

(and with counter accuracy!)

Just connect the input signal and read the answer! Systron-Donner's new frequency measuring system is completely automatic. No calculations, no manipulations of any kind. This great new tool for the lab and production testing will prove to be as necessary as a digital voltmeter.

S-D can deliver this automatic system now for measurements between 3.95 and 8.2 GHz. Soon we'll offer coverage over the rest of the microwave spectrum. The system shown here illustrates the basic concept—a combination of the S-D 50 Mc Model 1037 Counter and the S-D Model 1254 Automatic Computing Transfer Oscillator. Other plug-ins will cover L, S and X bands.

FOR MAXIMUM STABILITY—Systron-Donner exclusively offers a high stability oscillator with an aging rate of *1 part in 10^9 per 24 hours*. That's a threefold increase in stability over the best previous oscillators!

Prices: Model 1037 Counter, $2,550. Model 1254 ACTO Plug-in, $1,950. To learn more about automatic GHz counting, please write to us in Concord or contact your nearest S-D sales engineer (listed in EEM).

SYSTRON DONNER
CORPORATION

888 Galindo Street • Concord, California


Speed Inquiry to Advertiser via Collect Night Letter

See us at IEEE, Booth 3H08-12

ON READER-SERVICE CARD CIRCLE 8

News Report

What size?

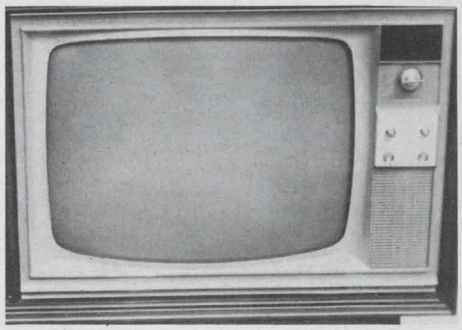

New rule jars TV industry

Much of the television industry is still in a mild state of shock as a result of a ruling by the Federal Trade Commission regarding picture-tube measurements. The new rule, effective July 1, bans the traditional method of specifying tube size—that is, in terms of the over-all diagonal.

After July 1, it will be illegal for a manufacturer "to use any figure or size designation to refer to the size of the picture shown by a television receiving set, or the picture tube contained therein, unless such indicated size is the actual size of the viewable picture area measured on a single-plane basis."

The new rule goes on to say that if the indicated size is other than the horizontal dimension of the actual viewable picture area, the designation must be accompanied by a statement clearly and conspicuously showing the manner of measurement.

In line with its ruling, the FTC provided examples of what will be proper and improper size descriptions for a TV set with a picture measuring 20 inches diagonally, 19 inches horizontally and 15 inches vertically—a picture area of 262 square inches.

PROPER

20-inch picture measured diagonally
19-inch-by-15-inch picture
19-inch picture
262-square-inch picture

IMPROPER

21-inch set
21-inch diagonal set
21-inch over-all diagonal/262 square-inch picture
"brand name" 21

In making the ruling, the FTC said that the practice of unqualifiedly representing picture sizes in terms of the diagonal (in the case of rectangular tubes) or the over-all dimensions of the tubes tends to mislead the public. It also has the effect of diverting business from competitors who do not use unqualified size representations, the FTC noted.

The effects of the new ruling are expected to be far-reaching, especially if the TV industry should adopt the "picture diagonal" method of measurement, as opposed to the other alternatives offered by the FTC. Most TV set designations, would in this case, lose one to two inches, so that what was formerly specified as a 21-inch set would now become a TV set having a 20-inch picture.

A busy period in space

Activity in space has been hectic on both sides of the iron curtain recently, as the next Gemini—number 8—is scheduled to link with an Agena satellite in orbit this week. A two-hour "space walk" is also planned for this mission.

Despite the unfortunate loss in the as-yet-unexplained accident of both Gemini-9 astronauts, that mission's schedule has reportedly not been affected.

And then there were the Russians, embarrassing us again with their Venus crash-landing. U.S. officials are, however, speculating that the hard landing may have been a mistake. But they still did it.

Not too well publicized was the first successful orbit—by the French—of an unmanned satellite recently. Not spectacular by U.S. or U.S.S.R. standards, but *tres bon* in French scientific circles at least.

'Fastest' computer planned

An electronic computer that may be up to 50 times faster than any now contemplated is planned at the University of Illinois. Illiac IV, as the machine will be known, is to pioneer a new concept in special-purpose computer organization. Prof. Daniel L. Slotnick, who developed the concept will head the project.

According to Prof. John R. Pasta of the university, Illiac IV is planned for upwards of one billion computations a second, compared with the eight million of today's fastest machines. To achieve its higher speed, Illiac IV will have one control unit and a very large number of linked arithmetic and storage units. In essence, the organizational concept of Illiac IV can be described as "large-scale, highly parallel."

News Report CONTINUED

Illiac IV is being financed through an $8-million contract with the Department of Defense. Of the total, $6 million is budgeted for construction, to be completed in two and a half years, and $1 million for operation in each of the two following years.

C.B.S. denies video-disc development

Officials of the Columbia Broadcasting System have denied a report that C.B.S. Laboratories has perfected a method of recording video signals on a metal disc.

Although the device has supposedly been demonstrated at the company headquarters in Stamford, Conn., E. K. Meade, vice president of corporate information for C.B.S., states: "We deny we have such a device." But reports persist of C.B.S. activity in the area.

The disc that "doesn't exist" is reportedly seven inches in diameter and three-eighths of an inch thick. It is said to play like a phonograph record on a unit connected to the user's home-TV set, and to record in either black-and-white or color.

RCA reports banner year

Record sales of over $2 billion have been reported by RCA in its 1965 annual report. This represents an increase of 13% over the 1964 sales.

According to the report, color television provided the greatest single stimulus to growth, accounting for one out of every five dollars of current RCA income. Defense business was up over the 1964 figure, with Government business currently accounting for less than 25 per cent of RCA's total volume.

The report predicted further gains for the company in 1966, particularly in the areas of consumer products, data-processing equipment and integrated circuits.

Solid-state light sources being marketed

Visible light from solid semiconductor crystals—hitherto a laboratory curiosity—has become a commercial reality. The Monsanto Co. announces that it has begun to market such devices.

The new light sources are designed for use as instrument signal lights or panel indicators and they have a number of computer uses. The diode-type devices emit a nearly monochromatic red light and have ON-OFF response times of about 8 to 10 nanoseconds. Typical operating conditions call for the new light sources to be operated at 1.6 volts, with 50 milliamperes of current in the forward direction. When operated this way surface brightness exceeds 50 foot-lamberts. Greater brightness levels occur at higher currents.

Comsat plans global system

The Communications Satellite Corporation has asked the Federal Communications Commission for authority to build six advanced synchronous satellites, to be used in the developing global commercial system.

In filing with the FCC, Comsat expressed the belief that a synchronous altitude of 22,300 miles would be the best orbital configuration for the global satellites. This is the same altitude as Early Bird, the world's first commercial communications satellite, which now links North America and Europe.

The orbital weight of each of the proposed satellites would be approximately 250 pounds, as opposed to 85 pounds for Early Bird. With their increased size, the global satellites would be capable of handling all types of communications—data, television or about 1200 telephone circuits. This compares with 240 voice or phone circuits via Early Bird.

Cost of the six satellites is estimated at $30 million. Comsat is currently engaged in negotiations with TRW/Systems for development and production of the satellites. Launching would begin sometime in 1968. Four of the satellites would be sufficient to provide global coverage. The two others would be reserves.

Recovery operations for the Gemini-8 launch, scheduled for late this month, will be televised "live" from the carrier Boxer. ITT World Communications, Inc., will operate the ground station, the same as it did during the Gemini-6/7 recovery. The pictures will be transmitted from the Boxer to Andover, Me., via the Early Bird satellite.

The formation of an organization for users of computer-circuit analysis programs has been proposed by C. H. Purdue of the Sandia Corp. The primary purpose would be to exchange information, from the user's viewpoint. Those interested can get in touch with Purdue at the Sandia Corp., P. O. Box 5800, Albuquerque, N. M.

Fairchild Semiconductor has undertaken an expansion program that will more than double its research and development facilities by the end of this year. Along with an increase in plant facilities, the company expects to almost double its present R&D manpower level from 450 to 800.



IF IT FLIES...IF IT'S MILITARY...IF IT'S PRECISE IT'S PROBABLY DESIGNED AND BUILT BY


BOWMAR

ALL TYPES OF MILITARY DISPLAYS, COUNTERS AND READOUT ASSEMBLIES

SEND FOR DISPLAY DIGEST

© 1966 BOWMAR-FORT WAYNE DIVISION • 8000 Bluffton Road, Fort Wayne, Indiana

ON READER-SERVICE CARD CIRCLE 9

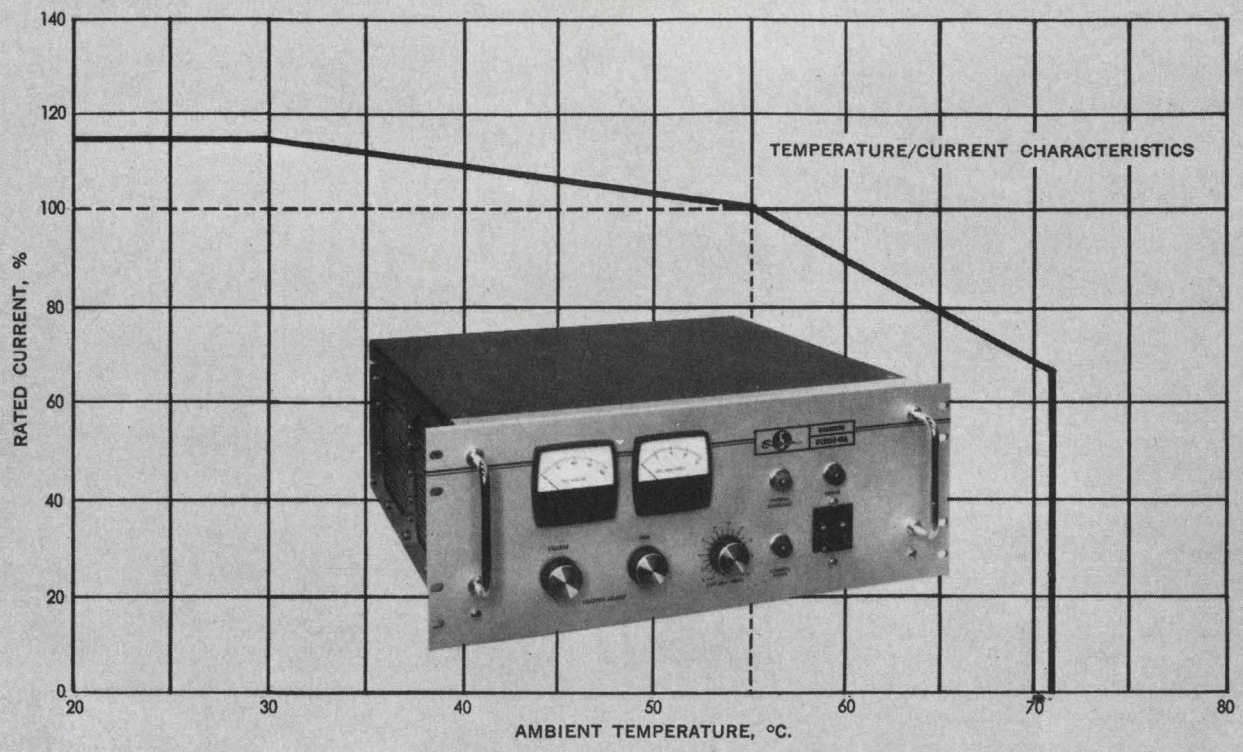

Sorensen DCR Series now with temperature capability to 71°C.

All-Silicon Power Supplies to 20 kW.

Sorensen's wide range DCR Series has been up-dated and improved. What's new about the DCR's? They are now 100% silicon; ambient temperature capability is now to 71°C. • Four 3-phase models have been added extending power capability to 20 kW; 24 models are now available with ranges up to 300 volts. • Multiple mode programming—voltage/current/resistance. • Voltage regulation, line and load combined, is ±.075% for most models • Constant current range 0 to rated current. • DCR's meet MIL-I-26600 and MIL-I-6181 specifications and conform to proposed NEMA standards. • Front panel indicator for voltage/current crossover. These features of the improved DCR (model numbers will have an "A" suffix) are offered at no increase in price.

For DCR details, or for data on other standard/custom power supplies, voltage regulators or frequency changers, call your local Sorensen representative, or write: Sorensen, A Unit of Raytheon Company, South Norwalk, Connecticut 06856.

MODEL SELECTION CHART

Voltage	Amps.	Model	Price	Amps.	Model	Price	Amps.	Model	Price	Amps.	Model	Price
0- 20	125	DCR 20- 125A	$1055	250	DCR 20- 250A	$1495	—	—	—	—	—	—
0- 40	10	DCR 40- 10A	325	20	DCR 40- 20A	525	35	DCR 40- 35A	$ 710	60	DCR 40-60A	$925
0- 40	125	DCR 40- 125A	1350	250	DCR 40 -125A	1995	500	DCR 40-500A	2950	—	—	—
0- 60	13	DCR 60- 13A	525	25	DCR 60- 25A	710	40	DCR 60- 40A	900	—	—	—
0- 80	5	DCR 80- 5A	325	10	DCR 80- 10A	525	18	DCR 80- 18A	710	30	DCR 80-30A	875
0-150	2.5	DCR 150- 2.5A	325	5	DCR 150- 5A	525	10	DCR 150- 10A	710	15	DCR 150-15A	825
0-300	1.25	DCR 300-1.25A	325	2.5	DCR 300- 2.5A	525	5	DCR 300- 5A	710	8	DCR 300- 8A	825

Sorensen

A UNIT OF RAYTHEON COMPANY

ON READER-SERVICE CARD CIRCLE 200

LSI highlighted at solid-state conference

Large-scale integration: yea or nay, FET or bipolar, standardization debated. Lively meet also explores micropower, RF, linear, microwave, memory devices.

Editors **Joseph Casazza, Rene Colen, Roger Field, Richard Harnar** and **Mark Leeds** contributed to this article.

The ever-growing complexity of integrated-circuit arrays—becoming known as LSI (large-scale integration) formed the keynote for the 1966 International Solid State Circuits Conference in Philadelphia last month.

- Two LSI sessions were sparked by debates over FET vs bipolar approaches, and various companies discussed techniques.
- A tutorial session on Gunn and Read effects included computer-generated motion pictures of solutions to the basic equations for the effects.
- The MOS technique is invading micropower circuitry.
- RF transistors are being designed for higher powers, to hundreds or thousands of watts.
- Linear ICs are becoming as common as digital types.
- Thin-film memories still hold an edge over semiconductor types.

What and where is LSI?

When does an integrated circuit become an LSI circuit? Joseph C. Logue of IBM sets the borderline at 100 digital logic circuits per chip (a NOR, NAND or equivalent).

Under this definition, the LSI goal has not yet been reached. But Jack Kilby of Texas Instruments, speaking also at the conference keynote session, said that "it is quite realistic to project, by extension of present techniques, 100-gate units of random logic with either the MOS or bipolar technique in the next few years."



Bipolar LSI is better for logic circuits; FET types will end up in smaller, slower machines, agrees the Keynote Panel (l to r, seated) R. B. Seeds, J. Kilby, J. Logue, G. B. Herzog and (standing) J. Raffel and E. A. Sack.

Where are we now? Bipolar 4- and 6-gate packages are readily available, and 15 to 20 functions per chip will be announced this year, Kilby said. In MOS, 15- to 20-gate units and 20- to 100-bit shift registers have been designed.

These figures seem to indicate that the MOS-FET approach to LSI has a good lead. But the 30-ns delay per package achieved by FETs is not fast enough for large systems of 2000 circuits or more, Logue asserts. "As technical problems are solved and LSI penetrates this performance region, we should see FETs losing ground to bipolar devices," he said. At present, however, FETs are still attractive for small, comparatively slow, systems such as memories.

With the possibility of a "runaway technology," a call for LSI standardization is being heard. E. A. Sack of Westinghouse gave the following reasons for establishing standards now: Economies would be possible in the production, packaging and testing of LSI circuits (these items now account for the major part of the costs), and requirements for second sourcing of devices would be facilitated.

The "standard" LSI package is apparently a long way from realization. Should the leads come from the side of the package or the bottom? Will 25- or 10-mil spacing of leads be the standard? What will the next level of external connections be after the 14-lead pack: between 48 and 64 pins? —**RH**

LSI production problems debated

Three recent production advances in LSI were discussed by another panel.

These are multi-layering of interconnections on a chip, the use of organic insulators in conjunction with molybdenum-gold evaporated connectors, and the use of computer-programed discretionary connection of redundant circuit functions.

Multi-layering techniques have been developed by Motorola of Phoenix to use four layers of connectors. No unusual problems have interfered with the manufacture of these complex structures, and although only small batches have been tested, there is no evidence that these layered connections are unusually fragile. At present, arrays of 4-by-4 memory cells are completely interconnected by the top two additional metalization layers after the first two intraconnect the cells themselves. One distinct advantage to yields is that the cells can be tested after the completion of the second metalization. Then, only chips that have a high number of working, adjacent cells are cut up, so that these good cells can be interconnected.

Texas Instruments, too, has been experimenting with multilayered interconnectors. According to one panelist, J. Lathrop of TI, his company has been using an organic insulator for the upper interconnectors. This insulator is poured into the chip as a liquid, which tends to fill up holes and sharp edges that would be fatal to inorganic insulators. In this manner connector layers can be applied to whole wafers at a time.

The Motorola representative, Raisenen, asked Lathrop: "Why did TI elect to depart from the customary aluminum metalization and silicon-oxide insulation and go to what I would consider a potentially unreliable organic insulation and moly-gold metalization system?"

Lathrop replied: "That's like asking, 'Have you stopped beating your wife?' We departed from the standard aluminum, silicon-dioxide method because, first of all, we don't use aluminum; we use moly-gold. Secondly, we found that silicon dioxide doesn't work. It seems like a simple

(ISSCC, *continued*)

thing to put down an insulating layer, but very few people have interconnected 120 gates. The reason has been that no one has gotten a compatible metal-insulator system that will fit on top of a semiconductor chip. We don't look on this organic material as the ultimate, but at least it has allowed us to get into the computer design of masks."

Lathrop then explained that organic insulation was fine for most commercial and industrial purposes. "You don't heat your computer to 300°C to see how long it'll last," he said. At 125°C the organic insulation will shrink only 5% in weight in 8000 hours, he pointed out. Tests show, he said, that devices can tolerate a 50% shrinkage before they run into difficulties.

There has been a great deal of talk about discretionary connection by computers in large-scale integration. One panelist, R. S. Shahbender of RCA, pointed out that a good portion of the investment in tooling up to make integrated circuits was in making the masks. Also, most of the failures, he said, can be traced to small errors in this operation.

Raisenen insisted that the audience shouldn't put all its hopes on computer-programed, discretionary wiring. He said that the computer is not like "a hole in the wall to which one shouts questions and gets answers." It is costly to rent and program, he pointed out. —**RKF**

Micropower design discussed

Conferees at the informal discussion session on "Elements of Micropower" were treated to the "how to" aspects of micropower design. Linear and switching systems constituted the main subjects, as the panel dwelt on the role of both bipolar and MOS devices.

R. D. Lohman of the Electronic Components and Devices Div. of RCA covered the growing role of MOS transistors in micropower applications. He cited their "negligible standby power, low dynamic power, good noise immunity and high-speed attributes" as meeting the demands of very-low-power digital circuit needs.

Lohman suggested that further power savings accrued when an MOS device, instead of a resistor, was used as the load in logic circuits. Operating as a voltage-variable resistor that is clocked in and out, this extra MOS unit also provides faster switching speeds and lower output impedance.

The all-important aspects of beta (h_{fe}) changes and leakage variations of bipolars in high-radiation environments were considered by A. R. Molozzi of the Defense Research Board, Ottawa, Canada. He pointed out that second-order effects here, especially in near-earth orbits, cannot be neglected. "Aging is as important a factor in micropower design as the circuit itself," he added. The worst-case design must incorporate aging effects and their influence on h_{fe} and I_{cbo}.

"Low-current operation is a must here, and it is in the low-current regions of the transistor where the parameter variations are greatest," Sarles said. The two suggested that annealing be used to minimize the surface effects.

Bulk effects in these environments are marked by decreases in gain, slower transit times and large impedance changes. Leakage currents, however, rise—sometimes by as much as 1000 times.

"For the best performance, small-area devices made up of high-quality oxides should be used. These should typically be heavily doped units with thin bases, to keep h_{fe} high and I_{cbo} low," Molozzi said.

The discussion concluded that bipolar devices were still the trend-setters for linear signal systems and that the MOS might soon be dominating the data-processing (switching) applications in the micropower realm.

More power for RF transistors

A discussion of high power RF circuits indicated that engineers would soon be buying high-frequency transistors capable of accommodating hundreds and even thousands of watts.

Over the last few years the major developmental effort on high-frequency transistors has been aimed at pushing the upper frequency limits up and up. Relatively little has been done to increase the power-handling abilities of these units; tens of watts at 50 MHz or so has been peak. However, recent advances in device technology, improved microelectronic disciplines and a better understanding of high-power, high-frequency circuit design point to the emergence of more powerful transistors for these RF applications.



Complementary MOS pairs are ideal for micropower digital circuits—R. D. Lohman.

Typical of these will be a device capable "of 500 watts output at hundreds of megahertz," said George C. Luettgenau, Research Director of TRW, Inc.


Luettgenau also described the RF transistor of the future as a "super compote of many transistors, interconnected in a one-inch-squared encapsulated circuit."

"This device," he predicted, "will incorporate integrated as well as discrete elements, such as built-in bypass capacitors, and will closely resemble an array in structure."

This opinion was reinforced by another panel member, Donald R. Carley of RCA's Electronic Components and Devices Div. He pointed out that "case developments will be a major factor in these higher-power, high-frequency units of tomorrow." The packages, he said, will feature strip-line and coaxial-line elements, so as to accommodate better the power levels involved in operating at frequencies of 1GHz.

Carley emphasized that individual transistor pellets were now near their ultimate limitations in high-frequency, high-power capabilities: "output impedances can't go much lower, and the packages themselves are as much a part of the input impedance as the devices."

Still another panel member, Neil DiGiacomo of the Wright-Patterson AFB Avionics Laboratory, amplified on the role that IC techniques would enjoy here. He suggested that "a hybrid combination of multi-chips with built-in, etched, discrete inductors on the same sub-

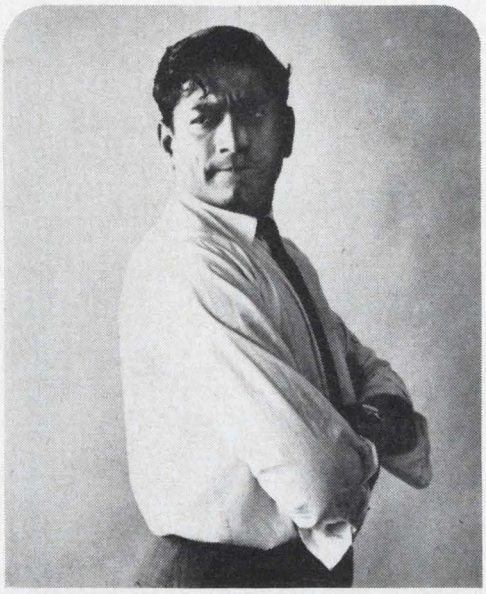

Looking for rugged 3 amp transistors?

Prabodh Shah speaks your language.


Prabodh Shah is one of our applications engineers. We call him Pete. Customers call him just plain great, because he's made available *both* 3 amp germanium DAP and alloy power PNP transistors. Over 60 types in all. All competitively priced. Available in TO-5, TO-37, stud nut MT-27 and hexagonal nut MT-28 packages.


You can use our DAP® (Diffused Alloy Power) transistors for audio amplifiers, pulse amplifiers, relay drivers and switching. Featured are switching times in microseconds without worry of secondary breakdown; high collector-to-base voltage V_{CBO} to -200 V; high DC current gain: h_{FE}=30 to 90 at V_{CE}= -1V, I_C= -0.5 A; low collector cutoff current: I_{CBO}= -3 mA maximum at +85°C; low saturation voltage: $V_{CE(s)}$= -0.2 V typical with I_C= -1 A, I_B= -0.5 mA; excellent frequency response: $f_{\alpha b} \geq 2.5$ MHz. All are SOAR (Safe Operating ARea) specified.

Use our Alloy power transistors for solenoid drivers, small power supplies (inverter/converter), audio amplifiers and control circuits. They feature V_{CBO} to -100 V, V_{CEO} to -60 V, I_C= -3 to -3.5 A, $V_{CE(s)}$= -0.25 V maximum with I_C= -1 A, I_B= -0.1 A; high DC current gain: h_{FE}=20 to 60 at -3 A; $fT \geq 0.25$ MHz. All Bendix 3 amp Alloy transistors are SOAR specified.


Ten types are now available meeting military specifications. In addition, our commercial DAP and Alloy lines offer packages that meet MIL-S-19500, MIL-STD-750 and MIL-STD-202 environmental and mechanical requirements.

More information? Just phone or write our nearest sales office. If it's a particularly tough application, we'll have Prabodh Shah translate it into easy terms for you.





TYPE NUMBER	Ic Amps	V1 Volts	V2 Volts
DAPS 2N2282—2N2284 2N2467—2N2469	3	30 to 70	70 to 110
ALLOYS 2N1038—2N1045 2N2552—2N2567	3 to 3.5	30 to 60	60 to 90



Bendix Semiconductor Division

HOLMDEL, NEW JERSEY


THE Bendix CORPORATION

Baltimore, Md.—(301) 828-6877; **Chicago**—(312) 637-6929; **Dallas**—(214) 357-1972; **Detroit**—(313) JO 6-1420; **Holmdel, N. J.**—(201) 747-5400; **Los Angeles**—(213) 776-4100; **Miami**—(305) 887-5521; **Minneapolis**—(612) 926-4633; **Redwood City, Calif.**—James S. Heaton Co., (415) 369-4671; **Seattle**—Ray Johnston Co., Inc., (206) LA 4-5170; **Syracuse, N. Y.**—(315) 474-7531; **Waltham, Mass.**—(617) 899-0770; **Export**—(212) 973-2121, Cable: "Bendixint," 605 Third Ave., N. Y.; **Ottawa, Ont.**—Computing Devices of Canada, P.O. Box 508—(613) TA 8-2711.

ON READER-SERVICE CARD CIRCLE 10

All from Sprague!

ENERGY-STORAGE CAPACITORS for every type of discharge application

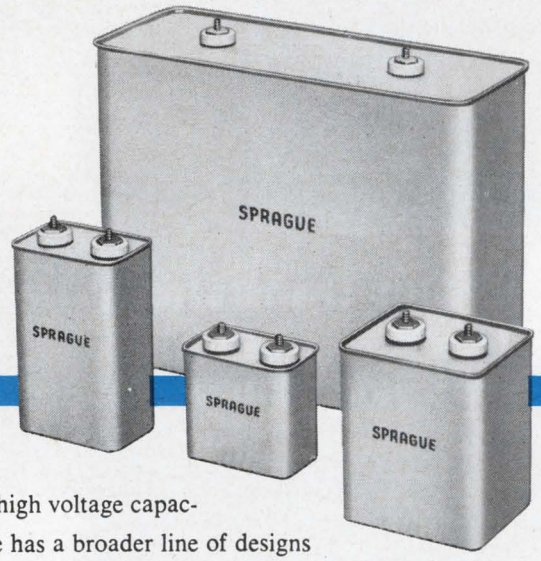

A pioneer in high voltage capacitors, Sprague has a broader line of designs for energy-storage applications than any other capacitor manufacturer. If your project involves lasers, masers, electronic photoflash, time-control circuits, exploding wire, thermonuclear fusion research, magnetization of permanent magnets, medical equipment, or similar discharge applications, Sprague can provide a capacitor to meet your specific needs.

Light, Moderate, or Heavy Duty Capacitors
Available types range from small, light-weight units for aerospace applications such as satellites, missiles, etc., to heavy-duty capacitors for high-current/high-frequency oscillatory discharges.

Broad Range of Electrical Ratings
Voltages from 2 kilovolts to 24 kilovolts. Energy ratings up to 6700 joules. Self-inductance as low as .0025 microhenry.

Paper, Metallized Paper, and Paper/Film Designs
Metallized capacitors intended for light-weight, space-saving applications . . . one-half the size, one-third the weight of conventional capacitors. Other available designs include castor oil impregnation for extremely long life (assuring a high number of discharges), and non-flammable synthetic askarel impregnation for applications where non-combustibility is a prerequisite.



Energy-Storage Electrolytic Capacitors
A selected line of cylindrical 'lytics for industrial applications requiring maximum capacitance in minimum space.

For complete information or application engineering assistance on Sprague Energy-Storage Capacitors, write to Field Engineering Department, Sprague Electric Company, 347 Marshall St., North Adams, Mass. 01248.

SPRAGUE COMPONENTS

CAPACITORS
TRANSISTORS
RESISTORS
THIN-FILM MICROCIRCUITS
INTEGRATED CIRCUITS
INTERFERENCE FILTERS
PACKAGED COMPONENT ASSEMBLIES
FUNCTIONAL DIGITAL CIRCUITS
MAGNETIC COMPONENTS
PULSE TRANSFORMERS
CERAMIC-BASE PRINTED NETWORKS
PULSE-FORMING NETWORKS

4SC-5171

SPRAGUE®
THE MARK OF RELIABILITY

'Sprague' and '②' are registered trademarks of the Sprague Electric Co

ON READER-SERVICE CARD CIRCLE 11

(ISSCC, *continued*)

strate as the transistors will be the form of the high-power, high-frequency device."

"These will include," he said, "protection from high VSWRs due to load changes, matching networks and RF Darlington circuits with very-low collector capacities."

The panel cited present device capabilities and a pool of solutions to circuit-design problems as a springboard for predicting what's in the wings. K. H. Fischer of the U.S. Army Electronics Command, R. C. Hejhall of Motorola Semiconductor Products Div. and R. Etherington of General Electric Co. contributed to the discussion here. They and the others on the panel pointed to following achievements:

- For straight CW power at 75% efficiency, 50 W at 150 MHz, 10 W at 500 MHz and 100 W at 5 MHz are now obtainable.
- For ssb operation, 25 W at 30 MHz and 20 W at 75 MHz, with the third harmonic at least 30 dB down, are now commonplace.
- For RF pulse operation, 100 watts per stage at 100 MHz can be achieved; paralleling is used to produce kilowatts of output.
- For a single wafer in a Class C RF amplifier, 5 to 10 watts at 1.0 GHz designs can be built with 8 dB power gains and 60% efficiencies.

The panel also touched on the role of field-effect devices in these high-frequency, high-power applications. Luettgenau said that junction-FETs might soon be capable of handling watts of power at hundreds of



Basic mechanisms of Gunn & Read effects are now well understood, thanks to computers, Alan Chynoweth tells a tutorial session.

megahertz. He outlined a FET power structure with parallel vertical channels that formed a grid-shaped gate and said this configuration would eventually do the job. He added that the square-law properties of FETs made them ideal here, but that the stability problems of FETs were worse today than with their bipolar counterparts. He predicted, however, that these problems would be solved soon. —**MBL**

More linear ICs foreseen

An evening panel session on "Linear Integrated Circuits" seemed to generate more interest in where and how the devices could be used than in any problems that manufacturers might be encountering.

"The argument that there are problems in manufacturing linear integrated circuits is rubbish," said Robert Widlar of Fairchild Semiconductor.

No one seemed inclined to dispute him.

Widlar pointed out that linear integrated circuits could be made as easily and as well as digital ICs are now being made. He warned, however, that their advantage in circuit design would be realized only by fully employing their unique properties of good device matching and tight temperature coupling. As an example, he said, with the use of ICs, one can use diode bias for transistors, whereas such a bias scheme with the use of discrete components would be expensive and undesirable.

H. C. Lin of Westinghouse supported this view, by pointing out that differential amplifiers built in integrated-circuit form could be much more temperature-stable because of the tight temperature coupling between the differential pairs, more so than with designs that use discrete components.

One recurring question in the audience concerned the establishment of standard amplifiers and standardization of circuit parameters and representation. According to J. Solomon of Motorola, Inc., it seems doubtful that a universal amplifier would be feasible. Circuit demands vary greatly and would not be satisfied by one or two standard amplifiers, he said. In addition, since mask costs are not high and the costs of IC tooling are being quickly reduced, the real determining cost factor becomes the design cost, according to Solomon.

Michael Gay of the Plessey Co. in England described some of the devices his company had recently produced. Within the next six months, he said, his concern will have some 15 linear ICs on the market. Already being marketed are linear wideband amplifiers with typical upper cut-off frequencies of 100 MHz and a log amplifier with a 170-MHz upper cut-off. These devices are primarily intended for IF strips operating in the 10-to-100-MHz region. The intent of the designs is to minimize the number of external components needed. Even the rather large junction type of decoupling capacitors (550 pF) are placed on the chips. One of the IFs built with these devices was a log amplifier that uses four IC packages and two discrete capacitors. This amplifier has a log range of 48 dB ± 5 dB from 12 MHz to 120 MHz. Its noise figure is 5 dB.

One problem in the use of ICs was brought out by a member of the audience who asked whether any standardization on required supply voltages would be forthcoming. The answer from a panelist was that "it is a problem." The solution he gave was to design circuits that would tolerate large supply variations. Solomon said such designs might involve larger power dissipations. He also discussed Motorola's program to manufacture a line of integrated power supplies with current-handling capabilities up to 1 amp. This will be accomplished, he said, by diffusing reasonably good zeners onto the chips and by using discrete zener chips mounted inside the power-supply package.

Other panelists were J. G. Linvill of Stanford University; L. Housey, Texas Instruments, Inc., and W. Engl, Institute fur Hochsfrequenztechnik, Braunshweig, West Germany. The moderator was R. S. Pepper of the Sprague Electric Co.—**RC**

Integrated memories: film vs semiconductors

The consensus of an evening panel session on high-performance memory electronics was that magnetic thin film memories still have the edge over semiconductor types. The costs of both types still remain high, but the appearance of the MOS device and improved manufacturing techniques should result in lower prices, the panelists agreed.

Complementary MOS transistors that draw no standby power will improve the position of semiconductor memories, according to J. D. Schmidt of Fairchild Semiconductor, although bipolar devices are faster and magnetic memories still provide larger system capacity at lower cost. Schmidt described a 150-ns semiconductor memory with a capacity of 2×10^4 bits, at a cost of less than $1 per bit; he said it should be available this year.

Magnetic-film memory advantages were discussed by Harley Kukuk of Fabritek, Inc., who described a planar film system with a 10^6-bit capacity and a speed of 0.25 μs; it costs about 15 cents per bit. Fabritek expects to have the memory available this year. According to Kukuk the cost of a film-memory array accounts for less than half the total system cost, with the associated electronics accounting for the larger share. Cost-per-array remains fairly constant and increased array density will reduce cost.

In the opinion of G. A. Fedde of the Sperry Rand Corp., memories using the word-select scheme get rid of the penalty of nondestructive read-out, and he expects a system of this type to be available in two to four years with a capacity of 10^6 bits, a speed of 1 μs and cost of less than 1 cent per bit.

Also on the panel were J. H. Wuorinen, moderator, of Bell Telephone Laboratories, Inc., L. Heusie of Texas Instruments, Inc., and H. Yourke of IBM. —**JJC**



Integrated-circuit memories are still getting competition from thin films.

Full speed ahead for high-speed trains

150-mph tests planned in Jersey this year, as U.S. presses electronics-oriented transit program with extra R&D millions in the new budget.

S. David Pursglove
Washington Editor

The Government's high-speed rail research program, with stress on electronic controls, is scheduled to move from the planning board to the roadbed this year. By fall, Commerce Dept. officials say, test trains will be whizzing at 150 mph in New Jersey. By year's end, hopefully, faster and more frequent railroad service will begin between Washington and New York.

Unlike most other non-war activities, funds for the High Speed Ground Transportation Research and Development Program were not cut in the 1967 budget. Shortly after the new fiscal year opens July 1, the program expects to let at least $13 million in contracts.

The 1967 budget follows previously announced plans to spend $90 million over three years—two-thirds on R&D and one-third on a demonstration program and a national statistics-gathering project. Most of the money will go into engineering research, with a very large part of it in electronic areas.

For 1967 the Commerce Dept., where the program is centered, is authorized to commit $19,285,000 on engineering R&D, compared with only $1 million in 1966. Officials at the department told ELECTRONIC DESIGN that the three areas requiring greatest effort in the coming year were guideways (tracks, tubes, etc.), vehicle power and control. Two other engineering R&D areas will also receive appreciable attention: materials and aerodynamics.

Many electronics concerns and a large segment of the electronics-oriented aerospace industry have been bombarding the Commerce Dept. with queries on the program's operation, the immediate and long-range plans, and the contract procedures. One Commercial Dept. official said: "Companies have asked us to send everything we have on rail transit that's been printed, mimeographed or even scribbled" (see accompanying list, containing what the program's officials believe are the more useful references).

A key role for electronics

Why is the electronics industry so excited about this new program? Here is how one Commerce official answered the question:


"At the risk of seeming to answer one question with another, the industry is likely excited for the same reason that many of our people in the program are virtually on a hot line to the industry. When you're running 10 trains between Washington and New York just minutes apart, and they're moving up to 160 mph on a single track that they can't veer from, then you darned well want to know where each of your trains is at all times. You want to gauge danger situations and signal those trains to slow or stop, or even to speed up, and you want them to respond immediately.

"You want a reliable, high-speed decision maker to help you out here. And you want those trains to be able to spot other trains—or something else—ahead and slow down automatically. And you've got to price this whole operation low enough to attract riders; so you've got to automate wherever you can —on the operation side and on the business side. That's why we think we have as much call on electronics people as the aviation industry does."

The problems of controlling very-high-speed rail traffic were discussed seriously in debate on the Mass Transportation Act of 1964 and the High Speed Ground Transportation Research and Development Act of 1965. That is when the U. S. public began hearing about the fast, reliable, heavily automated rail service in Europe, and about the extremely high speeds reached on the almost totally automated rail systems in Japan. Some segments of the public began asking: "Why can't we, too?" Congress appropriated funds for studies. Even original skeptics now agree that the U.S. can have high-speed, automated rail passenger service. Few believe that the Federal program will taper off after the planned three years.

Japan leads the way

Right now the fastest train in North America is the Canadian National Railways' "Rapido." It aver-

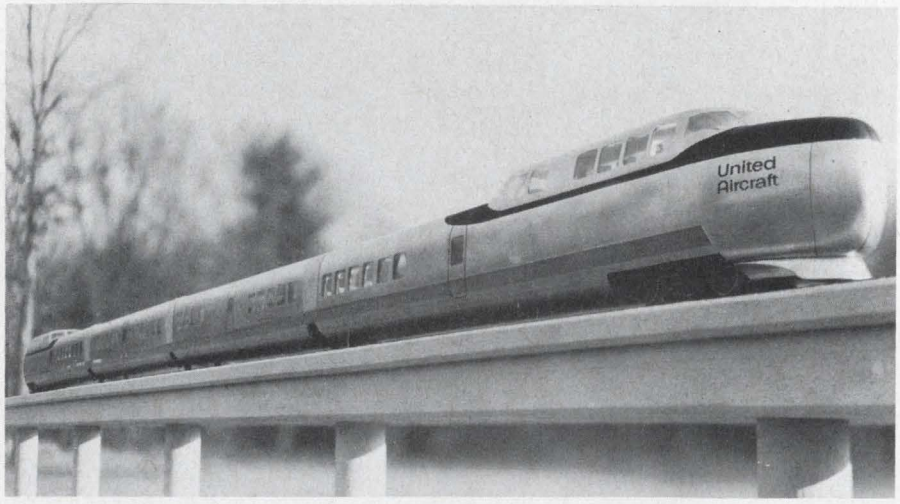

Gas-turbine engines will power this high-speed train designed by United Aircraft. Two such trains will be used in a demonstration project between Boston and Providence as part of the Commerce Dept.'s Northeast Corridor Demonstration program.

ages 67 mph and hits 93 mph on the 335 miles between Montreal and Toronto. The "Rapido," though, is a slowpoke compared with trains on Japan's 320-mile Tokaido System between Tokyo and Osaka. They make the trip in four hours, frequently hitting 125 mph, and they have done 160 mph in test runs. Engineers respond only to signals sent from a central control station, which collects data by TV and analyzes it by computer. The engineer is really only a monitor; the electronic system can operate the trains without engineers.

It is the Canadian National feat that the U.S. will first seek to emulate, beginning in the Northeast Corridor, which stretches from New England to Washington. By 1980 the American R&D program hopes to top the Tokaido System.

Three projects to start program

To begin measuring public acceptance of New York-to-Washington rail transportation comparable to the Canadian "Rapido," the Commerce Dept. is subsidizing an experiment on the Pennsylvania Railroad. Some 50 cars, each electrically powered but also capable of operating in multiple-car trains, will be built for the Pennsy. The cars are to be capable of sustained speeds of 120 mph and top speeds of 150 mph. They are to be able to accelerate and decelerate rapidly, to take advantage of short stretches of track and thus permit high average speeds. The new cars will be fitted into the railroad's normal Washington-New York and New York-Philadelphia operations.

The most highly publicized test phase of the Commerce Dept.'s R&D program is to be conducted at the same time as the Pennsylvania Railroad experiment. This will involve four specially built, stripped-down cars that will be purchased for about $240,000 each from the railway division of Budd & Co. The cars will be run in New Jersey on a carefully maintained stretch of track between Trenton and New Brunswick. They will be outfitted to measure track profile, riding qualities and other characteristics, and to test such prototype hardware as trucks, suspension systems and catenaries.

At the same time a third project will get underway. The New Haven

(Continued on p 26)



hp 333A, 334A Autonulling Distortion Analyzers

automatic fundamental nulling for ease of operation
harmonic distortion measurement 5 Hz-600 kHz
0.1% full-scale distortion sensitivity
input sensitivity 0.3 v rms for 100% set level reference
maximum full-scale voltmeter sensitivity 300 μv rms (residual noise <25 μv)

Use it to:

measure total broadband distortion
measure noise and hum level
measure envelope distortion of AM rf carriers
measure voltage and amplifier gain
amplify signals with high gain over a wide frequency range

The automatic fundamental nulling offered by the solid-state 333A and 334A Distortion Analyzers provides simple, fast measurements. Manually null to less than 10% of set level reference, flip a switch, and nulling is completed automatically. No tedious tuning on the more sensitive ranges. Greater than 80 db rejection with automatic nulling.


The switchable filter, which attenuates frequencies below 400 Hz on signals greater than 1 kHz, removes hum and provides pure distortion measurements. The two models differ only in that the 334A incorporates an amplitude modulation detector, 500 kHz to greater than 65 MHz, which measures distortion at carrier levels as low as 1 v. Prices: 333A, $760; 334A, $790.

Ask your Hewlett-Packard field engineer for a demonstration or for full specifications. Or write for information: Hewlett-Packard, Palo Alto, Calif. 94304, Tel. (415) 326-7000; Europe: 54 Route des Acacias, Geneva.

Data subject to change without notice. Prices f.o.b. factory.

HEWLETT hp PACKARD
An extra measure of quality

1227

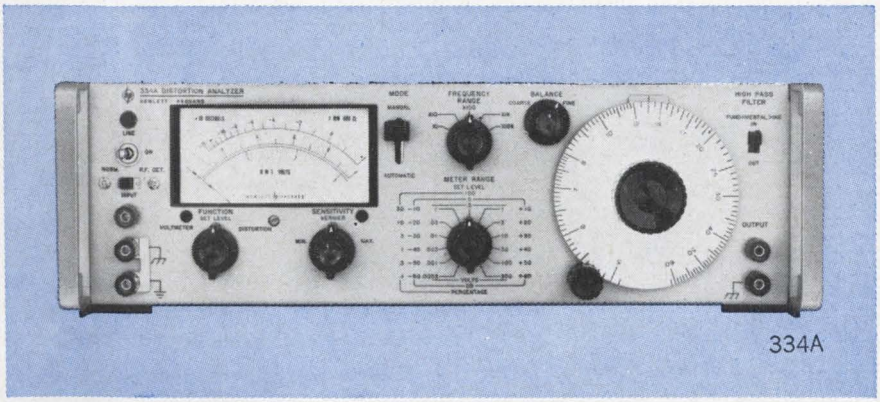

ON READER-SERVICE CARD CIRCLE 12

EXPANDED DTL line 7 nsec at 10



All Radiation integrated circuits are *dielectrically* isolated.

provides mw

Having procurement problems? Check our delivery time on monolithic DTL circuits!

Why compromise on DTL performance *or* delivery? Radiation offers immediate shipment of industry's finest line of circuits! Radiation's dielectric isolation technique assures the best combination of speed, power dissipation and noise immunity.

And Radiation supplies a full line of DTL integrated circuits—17 in all. They include Series 200 and 300, designed for military use, and Series 500 for industrial applications. Compatible fan outs in each series are maintained over the full specified temperature ranges.

Other characteristics include: 7.0 nsec propagation delay (t_{pd}); 250mv "0" output voltage (V_{sat}); and 10.0na "1" input current (I_{in}"1").

All circuits are specially engineered to provide superior performance for their specific applications. All are supplied in TO-84 flat packages.


Why not keep up to date on the latest advances in integrated circuits! Write or phone for our data sheets which include worst-case limits, and contain all information required by design engineers. We'll also send a brochure describing our broad range of engineering and manufacturing capabilities.

Radiation Incorporated, Physical Electronics, Department 00000, Melbourne, Florida 32901. Phone: (305) 723-1511, extension 554.

Expanded Radiation DTL Line*

Circuit	RD 200 SERIES Temp. Range —55 to 125°C Type	FO†	RD 300 SERIES Temp. Range —55 to 125°C Type	FO†	RD 500 SERIES Temp. Range 0 to 75°C Type	FO†
Gates						
Dual 4	210	8	310	5	510	8
Triple 3	205	8	305	5	505	8
Quad 2	206	8	306	5	506	8
RS Flip Flop	208	7	308	4	508	7
Line Driver	209	12	309	8	509	12
Expander	111	—	111	—	711	—

*New high-speed JK Flip Flop soon to be introduced.
†Maintained over full temperature range.

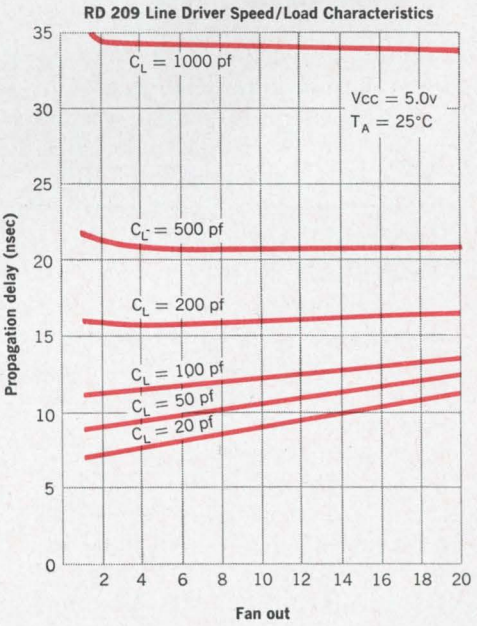

See these and other Radiation products at the IEEE Show, March 21-24 (Booth 2B34 & 2B36)

RADIATION INCORPORATED

Sales offices: 650 North Sepulveda Blvd., Suite 622, El Segundo, Calif. (213) 772-6371—600 Old Country Road, Suite 438, Garden City, N. Y. (516) 747-3730

Speed Inquiry to Advertiser via Collect Night Letter

ON READER-SERVICE CARD CIRCLE 13

(**High-speed trains,** *continued*)

Railroad and the Commerce Dept. will conduct a Boston-to-Providence demonstration, similar to the test on the Pennsylvania. This New England test will use gas-turbine-propelled cars, since the line there is not electrified. United Aircraft and Pullman-Standard will provide two trains of three cars each under a $2.1-million, two-year lease and maintenance contract. The trains will have top speeds of 160 mph.

Projects still being sought

Spearheading the Government's role in all of these programs and in a wide range of smaller research projects soon to be announced is Alan S. Boyd, the Commerce Dept.'s Undersecretary for Transportation. The engineering R&D is being done in the Office of High Speed Ground Transportation, headed by Dr. Robert A. Nelson.

Dr. Nelson says that feasible projects are still being sought for inclusion in the program. Any probable approach will get a personal hearing, without the need for a formal proposal, he said. One area for which R&D funds are slated is investigation of the linear-induction motor and its possible use for high-speed rail transportation.

Although the coming year's R&D contracts are still not set, there is little question that the plans for heavy electronics research will be carried out. These include such areas as communications, high-speed data processing and control.

The direction that some of this research may take is indicated in a study made for the Commerce Dept. by the Massachusetts Institute of Technology. Part II of the study, entitled "High Priority Research Tasks for High Speed Ground Transport," identifies 22 research programs that should be undertaken as soon as possible. Some of the titles alone in the report point to the electronic designer's role in high-speed rail transportation. These include: "Computer Control of the network"; "Communications"; and "Dynamics and control of vehicle groups".

Useful facts on high-speed rail design offered

Want information on high-speed rail transportation?

The following documents are available from the Commerce Clearing House, Springfield, Va. 22151. They should be ordered by number.

- "Report on Research Project on High-Speed Railroad Operations Within the New York Metropolitan Area in Connection with High-Speed Service Between Washington, D. C., and Boston, Mass." (156 pp.), Col. S. H. Bingham; $4. **PB-166887.**
- "Preliminary Engineering Report on Improvements to Railroad Passenger Service Between New York and Washington" (135 pp.), Louis T. Klauder & Assocs.; $4. **PB-1668879.**
- "Supplemental Report on Improvements to Railroad Passenger Service Between New York and Washington" (123 pp), Louis T. Klauder & Assocs.; $4. **PB-166880.**
- "Literature Survey of Passenger Comfort Limitations of High-Speed Ground Transports" (60 pp.), J. P. Castens, United Aircraft; $3. **PB-168171.**
- "Science and Technology in the Railroad Industry" (133 pp.), National Academy of Sciences-National Research Council; $4. **PB-166882.**

The following reports contain sections that are useful to electronic designers interested in rail transportation, even though some of the studies include other transit methods:


- "Buffeting Tests on the Hudson Tube," a study conducted for the Commerce Dept. by the Stanford Research Institute on the effect on a high-speed train when it passes through a tunnel; $2. **PB-168647.**
- "Washington-Boston Transportation Study: Feasibility and Cost of Improved Railroad Service," by MRD Div. of General American Transportation Corp., with electronic control of the hypothetical study systems; $6. **PB-166886N.**
- "A Projection of the Technology Applicable to the Future Highway System of the Boston-Washington Corridor," Cornell Aeronautical Laboratories; $7. **PB-166878N.**

Programed drill press adapted for wiring


A punched-tape controlled drill press, where the head is stationary and the table moves, has been adapted for point-to-point wire-wrap operations.

Standard Telephone & Cable, Ltd., an ITT subsidiary, says that the fixed-head not only allows for less complexity in the machine but also permits wires to be laid on top of each other. This operation, according to the manufacturer, is more difficult to perform with other automated wiring machines.

The machine, now in the advanced prototype stage, will be available on special order, the company says. ■ ■

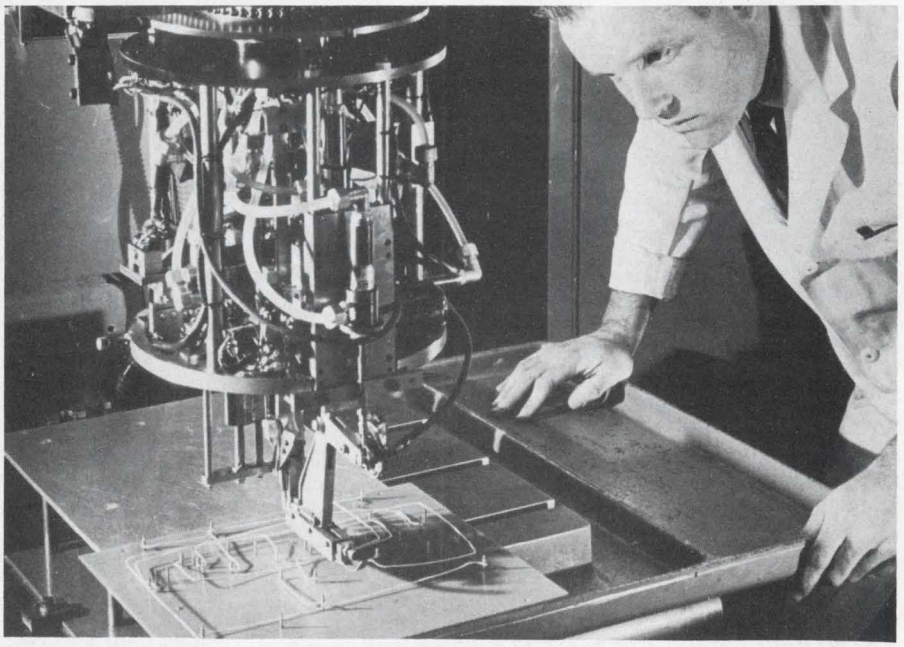

Speed Inquiry to Advertiser via Collect Night Letter ➤
ON READER-SERVICE CARD CIRCLE 214 ➤

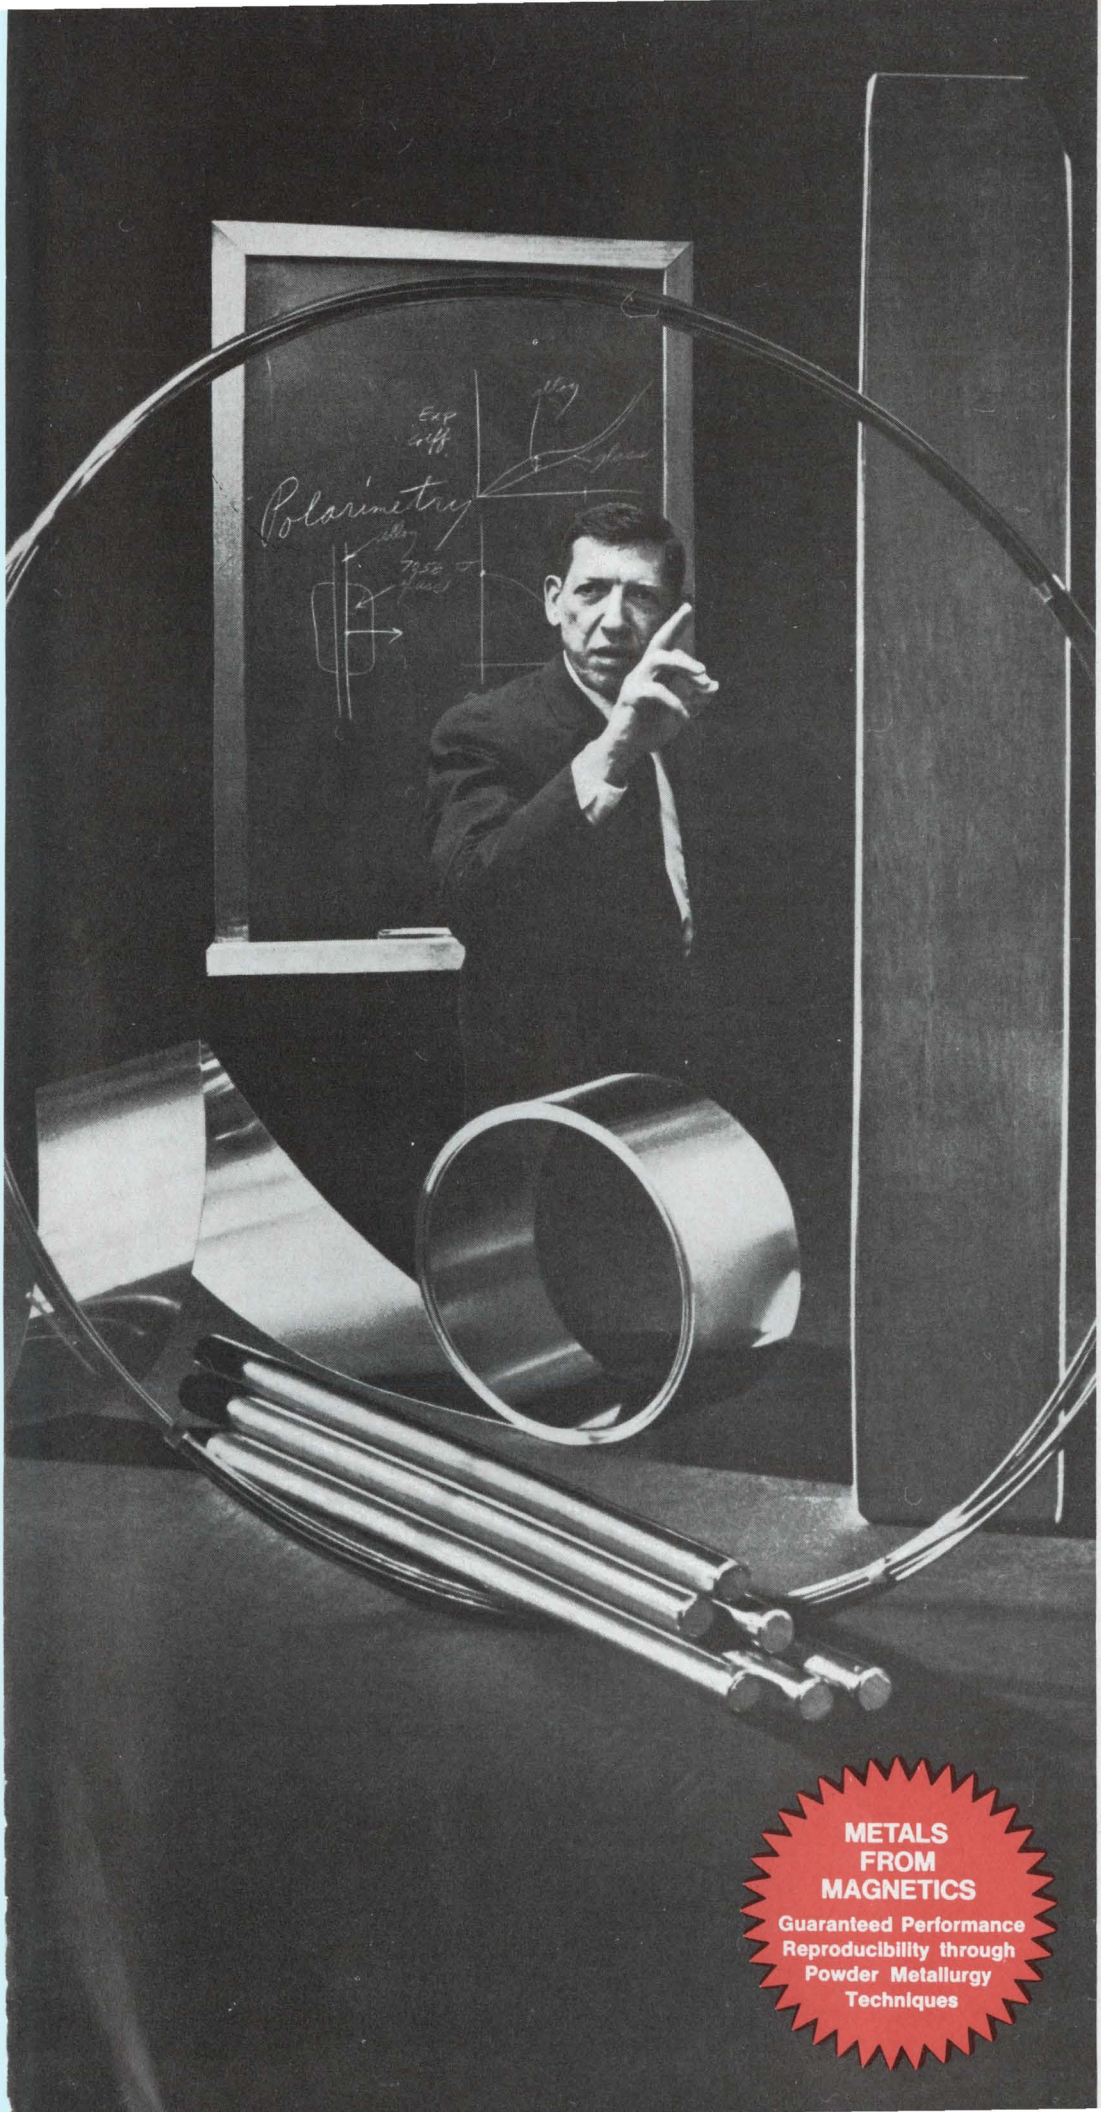

ALLOYS CUSTOM BLENDED TO YOUR SPECS

through powder metallurgy

Need a nickel alloy that will perform exactly as you want? No tramp elements, low carbon and gas content, exact performance reproducibility, uniform etching properties, excellent surface and mechanical characteristics?

Here at Magnetics Inc. we call such metals Blendalloy®. With more than 10 years' experience in powder metallurgy, we are now prepared to formulate and produce custom blended alloys to your specs—and to guarantee performance under the conditions you name.

Example: Blendalloy 52. We developed this 52% nickel controlled expansion alloy for dry reed switches and mercury wetted relays. Blendalloy 52 is made to match with precision the expansion characteristics of Corning 0120 glass. When used with other types of glass, Blendalloy 52 is modified to match any change in expansion characteristics. Dilatometry and polarimetry tests on both laboratory and production runs assure this match for both standard and modified alloys.


Magnetics Inc. produces Blendalloy metals in bar, rod, strip and wire, in lots from one pound to 50 tons or more. For information, write for our Blendalloy 52 technical data sheet. For general information, ask for our new metals capabilities brochure: *Metals From Magnetics,* Magnetics Inc., Dept. M-98, Butler, Pa. 16001

METALS FROM MAGNETICS
Guaranteed Performance Reproducibility through Powder Metallurgy Techniques

MAGNETICS inc.®

ONLY 3C OFFERS . . .


NEW MODULES, HARDWARE, ACCESSORIES ADDED TO THE EXTENSIVE I/C μ-PAC DIGITAL LOGIC MODULE LINE




New Model BT-332 TILT DRAWER BLOC houses 240 μ-PACS[tm] in only 5½" of rack panel height — pulls out, tilts down for PAC access, up to expose wire wrap terminals. Detents hold the BT-332 in any position from . . .




. . . horizontal to full vertical for convenient PAC replacement, testing, wiring, or system assembly. To further facilitate system fabrication, new mounting panels are available to adapt standard μ-PAC hardware for 19" . . .




. . . rack installation. In addition, 3C offers custom system assembly and wiring capability for the special purpose system builder or volume manufacturer using μ-PACS.




LD-331 HIGH-DRIVE LAMP DRIVER PAC contains 8 independent microelectronic lamp-driver circuits with discrete output transistors. Each driver is capable of switching up to 300 ma at 35 volts from standard μ-PAC signals.



LD-335 NEGATIVE LOGIC LEVEL DRIVER PAC contains 8 two-input AND gates, followed by level shifters. Standard μ-PAC signals (+6 V and 0 V) are converted to negative logic levels (0 V to −25 V at 60 ma per circuit).




PN-335 NON-INVERTING POWER AMPLIFIER PAC contains 6 three-input AND gates. Each gate contains two inverting amplifiers in series which provide the non-inverted output. Electrically common outputs and built in short circuit protection are standard features.



SR-335 SHIFT REGISTER PAC contains 8 prewired integrated circuit shift register stages. Up to 16 custom assembled stages can be supplied to meet customer design requirements.



TP-330 TEST POINT PAC provides convenient system trouble shooting capability without wire side probing for observation of waveform characteristics. Isolated test points for 34 PAC fingers are furnished.



AS-330 COPPER CLAD BLANK PAC kit provides a basic μ-PAC card with 5.5 sq. in of copper plate on each side for custom etching of interconnections. PAC handle and fastener are included.

μ-PACS feature 5 mc operation, high packaging density, low cost per logic function, inherent reliability, low power consumption, and noise protection in excess of one volt utilizing NAND logic with DC coupled circuitry.

Write for complete catalog of μ-PAC monolithic integrated circuit digital logic modules, power supplies, hardware, and system design and fabrication accessories.

See us at IEEE, Booth No. 3D09, 11 and 13.

3C

3C SALES OFFICES: NEEDHAM, MASS.; FOREST HILLS, N.Y.; LEVITTOWN, PA.; SYRACUSE, N.Y.; SILVER SPRING, MD.; HOUSTON, TEXAS; HUNTSVILLE, ALA.; COCOA BEACH, FLA.; DES PLAINES, ILL.; DETROIT, MICH.; WEST CARROLLTON, OHIO; LOS ANGELES, CALIF.; KENT, WASH.; ALBUQUERQUE, N.M.

COMPUTER CONTROL COMPANY, INC.


OLD CONNECTICUT PATH, FRAMINGHAM, MASSACHUSETTS 01702

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 14

Washington Report

S. DAVID PURSGLOVE,
WASHINGTON EDITOR

Deep Jeep hunts bomb

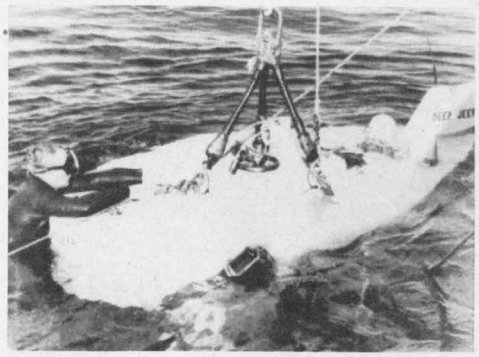

H-bomb search upsets science programs

The search for a U.S. hydrogen-bomb, missing off the southeast coast of Spain following the crash of a jet bomber, has required so much specialized equipment and so many technicians skilled in esoteric tasks that several scientific programs have been damaged. Scientists now fear that not only will their programs be unbalanced but that funds scheduled for scientific projects will be diverted to pay for the search. Many scientists contend that this happened following the search for the sunken submarine Thresher. The Navy contends that the Thresher search was charged to normal operations, and it says the underwater portion of the H-bomb search will be similarly written off. Oceanographers, however, charge that much of the Thresher bill was footed by normal oceanography operations.

Studies planned by the Defense Dept.'s Advanced Research Projects Agency and at least one phase of an Arms Control Agency field exercise, designed to spot illegal nuclear weapons, have been curtailed by the need for equipment and personnel in Spain. The major disruption most clearly linked to the H-bomb search is the postponement of acoustic-positioning and precision ocean-floor photographic experiments that were to have been made at the Tongue of the Ocean underwater range. The Naval Research Laboratory's research vessel Mizar was to have conducted the experiments. However, it has been sent to Spain to join the bomb search.

It was necessary to remove from the Mizar the carefully installed acoustic-positioning system and to change crews. The new crew consists in large part of the same crew that searched for the Thresher. The Mizar was hurriedly re-outfitted with search gear, including pingers and acoustic transponders, side-looking sonar and underwater TV.

Previously the deep-submergence vessels Alvin and Aluminaut had been diverted from other programs to search for the lost bomb.

Automatic air recon near reality

Aerial reconnaissance photo scanners that virtually "teach themselves" what to look for are approaching reality. Pattern-recognition scanners have been used for several years, but they can be programed to recognize only a few clear-cut patterns. Others, called comparison scanners, have been developed to spot differences between today's film strip and yesterday's film of the same area.

Now, however, adaptive pattern-recognition techniques are about to be applied to scanners that will be programed to recognize several general concepts and to proceed from there to spot variations in the taught patterns. The development could mean a major refitting of intelligence and reconnaissance units.

In the meantime one Army laboratory engaged primarily in developments for limited and special warfare is experimenting with novel non-electronic methods in recon work. As a starter, the lab has taught a number of pigeons to recognize the shapes and tones that most often represent trucks on an aerial photo. Pigeons peering at a slowly moving film strip peck at each truck with graphite-rubbed beaks. An officer says: "We haven't completely gone back to nature, though. The graphite dots on the film strips still are read electronically."

Capitol committees prepare to act

A few Congressional committees have completed their hearings on this year's major legislation and soon will begin the behind-the-scenes "marking-up" of bills. Other committees are well on the way toward this, the crucial point in any bill's legislative history. It is at this point—after the public hearings and before the final vote—that the letters and telegrams help most to decide a program's fate.

Here are the Congressional committees, or key subcommittees, of prime importance to the electronics industry, as well as to individual engineers or scientists.

SENATE

Appropriations is the committee that makes or breaks any program. The committee chairman is the "dean" of the Senate, Arizona's Carl Hayden. Leverett Saltonstall of Massachusetts is the ranking minority

Washington Report CONTINUED

member. The committee's chief clerk is Thomas J. Scott.

Before a program reaches the Appropriations Committee, it goes first through an "authorizing committee" that determines which programs will be authorized—and which will not—and the maximum funds that can be spent. The Appropriations Committee cannot add programs and cannot exceed set money limits. It very often reduces programs by voting somewhat less than the maximum authorization, and it sometimes kills programs by voting a "zero" appropriation.

The Senate Aeronautical and Space Sciences Committee is under the chairmanship of New Mexico's Clinton P. Anderson. Margaret Chase Smith of Maine is the ranking minority member. James J. Gehrig is the committee's staff director.
The Armed Services Committee chairman is Richard B. Russell of Georgia. Leverett Saltonstall of Massachusetts is the ranking minority member. The committee's chief clerk is Charles B. Kirbow.

Other Senate committees that delve into electronics areas to some degree are Commerce (Warren G. Magnuson of Washington, chairman) Government Operations (John L. McClellan of Arkansas, chairman) and Post Office and Civil Service (A. S. Mike Monroney of Oklahoma, chairman).

HOUSE OF REPRESENTATIVES

The House Appropriations Committee is under the chairmanship of George H. Mahon of Texas. As former chairman of the Subcommittee on Defense, he retains a strong interest in military appropriations. Frank T. Bow of Ohio is the ranking minority member. The committee clerk is Kenneth Sprankle.

The Armed Services Committee is headed by L. Mendel Rivers of South Carolina. William H. Bates of Massachusetts is the ranking minority member. The committee's chief counsel is John R. Blandford. The Science and Astronautics Committee chairman is George P. Miller of California. Joseph W. Martin Jr. of Massachusetts is the ranking minority member. The committee's executive director is Charles F. Ducander.

Other House committees that interest themselves from time to time in electronics include Government Operations (William L. Dawson of Illinois, chairman) Interstate and Foreign Commerce (Harley O. Staggers of West Virginia, chairman) and Post Office and Civil Service (Tom Murray of Tennessee, chairman).

The chairmanship of the Joint Committee on Atomic Energy alternates between the ranking majority Senator and ranking majority Representative. The present chairman is Rep. Chet Holifield of California. The vice chairman (and next chairman) is Sen. John O. Pastore of Rhode Island. The executive director of the committee is John T. Conway.

All Senators and Representatives can be reached by mail. Sample address forms are: Sen. John Doe, United States Senate, Washington, D. C.; or Hon. James Jones, House of Representatives, Washington, D. C. To reach any Congressman by telephone, call CApitol 4-3121 in Washington (Area Code 202). All elected officials urge communications not only from constituents but also from non-constituents whose field of interest is covered by a committee of which the Senator or Representative is a member.

New group pushes industry's interests

A new association, headquartered in the Capital, has been formed to promote the use of private industry resources to support essential Federal Government activities. The National Council of Technical Service Industries, as the association is called, was formed, in part, "to point up that private industry can maintain complex systems and equipments more efficiently and at a cost lower than civil service employees." The membership of the new group already includes large defense contractors.

Airlines adding radar-beacon equipment


The results of a survey by the Air Transport Association indicate that the scheduled airlines of the U.S. are rapidly fitting their aircraft with add-on elements of the FAA's new semi-automatic air traffic control radar equipment.


When an aircraft is fully equipped with the system, its transponder will respond with its own discrete code when interrogated by ground equipment installed at the FAA route traffic-control centers. This code will then be displayed on the ground controller's radar scope to identify the aircraft. The same signal will also contain data on the aircraft's altitude.

The airlines' response to the ATA survey indicates that by the beginning of 1968 some 60 per cent of the turbine fleet will be equipped to give discrete identity, while 17 per cent will also be able to report altitude automatically to the ground. By 1970 virtually all turbine-powered aircraft will be able to give discrete identity.

Cascode With FETs?

A parody on tubethinking, circa 1943

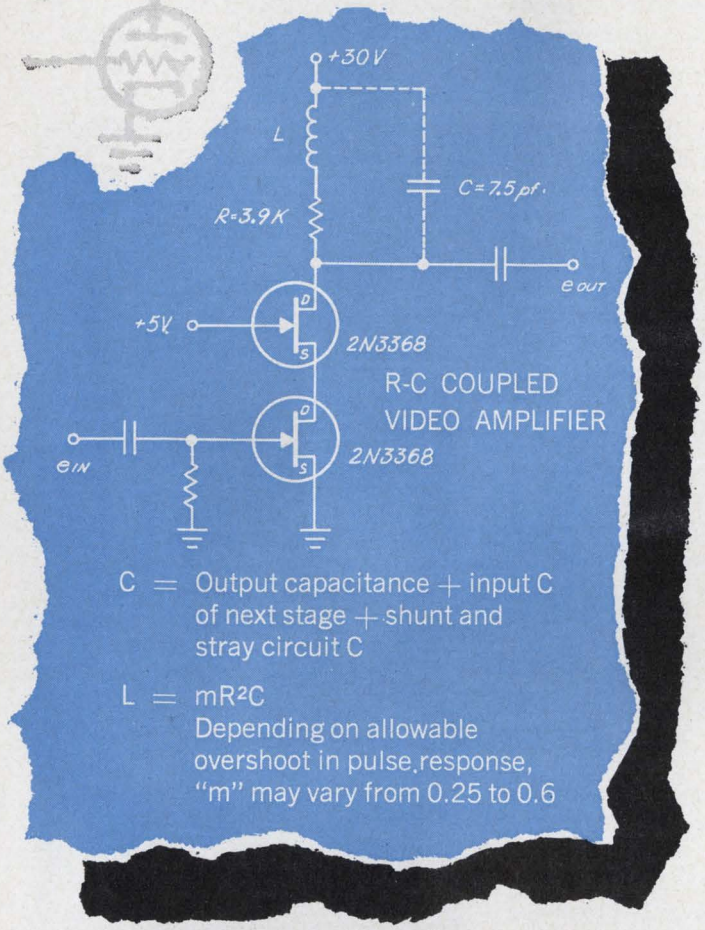

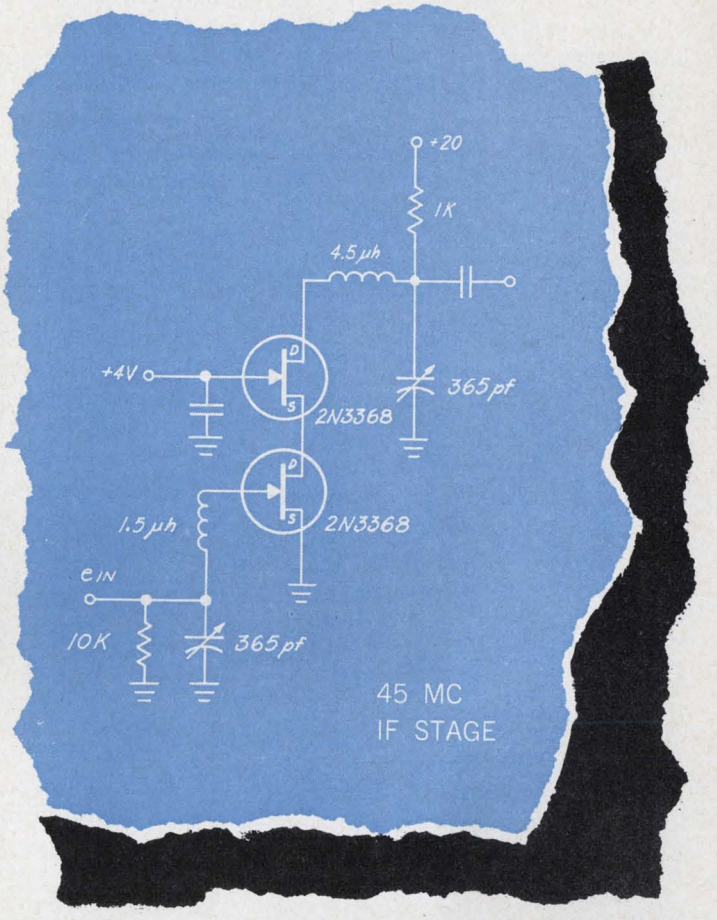


Siliconix assumes no responsibility for circuits shown, nor does it represent or warrant that they do not infringe any patents.

A single triode tube was usually avoided in wide-band circuits or pulse applications because Miller effect capacitance seriously loaded the input. Then came the cascode scheme, lower noise, practically no more input capacitance than the tube's Cgk. Using FETs in cascode, you have a striking reduction in input C. With shunt peaking, the circuit shown offers a voltage gain of 10 with a 3 db bandwidth over 6 mc.

Cascoding again with the 2N3368, we have an IF amplifier operating at 45 mc without neutralization. It has 20 db power gain and a bandwidth greater than 6 mc; for more gain cascade several stages. For more information on cascode-connected FETs, plus the ever-popular FET bibliography (72,000 now in circulation) drop us a line or circle the bingo number.

Yes, the arrow is pointing the right way; *the 2N3368 is one of 27 new N-Channel FETs from Siliconix!*



MONITOR II FET/TRANSISTOR TEST SET • Tests N-channel, P-channel, junction and MOS FETs • Go, no-go, analog readout • Compact, solid state, proven performance on our own production lines • Ideal for incoming QC or production testing • Drives digital voltmeter or printer without modification.

Siliconix incorporated

1140 W. Evelyn Avenue • Sunnyvale, California 94086

Phone 245-1000 • Area Code 408 • TWX 408-737-9948

FRANCHISED DISTRIBUTORS

ALA., HUNTSVILLE, Tec-Sel, Inc., 837-4541 • **ARIZ.,** PHOENIX, Barnhill Associates, 959-2115 • **CALIF.,** HOLLYWOOD, Hollywood Radio and Electronics, 464-8321 • LOS ANGELES, Kierulff Electronics Inc., 685-5511 • MENLO PARK, Hollywood Radio and Electronics, 322-3431 • SAN DIEGO, Kierulff Electronics Inc., 278-2112 • SAN JOSE, Weatherbie Industrial Electronics., Inc., 297-9550 • **COLO.,** DENVER, Barnhill Associates, 934-5505 • **CONN.,** HAMDEN, Cramer Electronics Inc., 288-7771 • **FLA.,** WEST PALM BEACH, Perrott Associates, Inc., 585-8647 • WINTER PARK, Perrott Associates, Inc., 647-3038 • **ILL.,** CHICAGO, Semiconductor Specialists, Inc., 622-8860 • **MD.,** BALTIMORE, Wholesale Radio Parts Co., Inc., 685-2134 • **MASS.,** NEWTON, Cramer Electronics., Inc., 969-7700 • **MICH.,** DEARBORN, Semiconductor Specialists, Inc., 584-5901 • **MINN.,** MINNEAPOLIS, Semiconductor Specialists, Inc., 866-3435 • **MO.,** ST. LOUIS, Semiconductor Specialists, Inc., 521-8866 • **N. J.,** BERGENFIELD, Technical Electronics Distributors, Inc., 384-3643 • **N. Y.,** BUFFALO, Summit Distributors, Inc., 884-3450 • NEW YORK CITY, Milgray, 989-1600 • SYRACUSE, Eastern Semiconductor Sales, Inc., 455-6641 • **OHIO,** DAYTON, Alpine Industries, Inc., 278-5861 • Semiconductor Specialists, Inc., 277-9784 • **OKLA.,** TULSA, Oil Capital Electronics Corp., 836-2541 • **PA.,** PHILADELPHIA, Simco Electronics, Inc., 299-1880 • PITTSBURGH, Semiconductor Specialists, Inc., 731-2050 • YORK, Wholesale Radio Parts Co., Inc., 755-2891 • **TEX.,** DALLAS, Sterling Electronics. 351-9921 • HOUSTON, Lenert Company, 224-2663 • **WASH.,** SEATTLE, Garretson Radio Supply, Inc., 682-8981 • **WASH., D. C.,** HYATTSVILLE, MD., Milgray, 864-6330.

CANADA: MONTREAL; Prelco Electronics, Ltd., 389-8051 • OTTAWA; Wackid Radio, Ltd., 232-3563 • TORONTO; Electro Sonic Supply Co., Ltd., 924-9251

ON READER-SERVICE CARD CIRCLE 15


Data system has automatic error detection

A new system for transmitting data between a central computer and remote points features high speed and automatic error detection and correction.

Developed by the Tally Corp., the System 311 incorporates a paper tape perforator, a reader and electronic logic circuits, and can be used to either send or receive over ordinary telephone lines. Operating at 1200 words per minute, the System 311 is reportedly the fastest paper tape data transmission system now on the market.

A major feature of the new system is its ability to recognize transmission errors, such as those caused by phone line static or fading, and to re-transmit them correctly. Equipment with this capability has been available on the market. But according to Tally officials, the combination of error correction, speed and price makes their system unique.

Parity-type error detection is used in the System 311. Either odd or even parity can be selected, depending on the requirements of the user. When a parity error is detected in a transmitted character, that character is deleted. The tape being sent then automatically reverses so that the block of characters containing the one with the error is retransmitted. If an error again appears in the same block, the process is repeated. But should an error occur in the same block a third time, that block will be sent on the fourth pass regardless of whether or not an error again occurs.

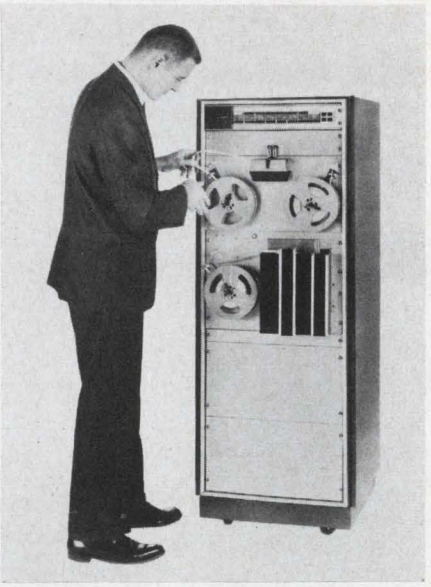

Speed of 1200 words per minute is offered by the System 311, which can operate over standard telephone lines.


Computer wires chip with discretion

An experimental computer determines how to best interconnect 80 circuits on a silicon wafer and then it connects them.

Faulty circuits are automatically bypassed in this system, designed by Dr. Sol Triebwasser at the research division of IBM. The function to be performed by the finished array, the test results of the individual circuits, the maximum connection length and other data are fed into the computer. It determines an acceptable pattern and records it on a magnetic tape. This tape controls a movable table and a light shutter that regulate a beam of light. The light polymerizes the photoresist on the wafer mounted on the table. This wafer is then developed and the interconnections are made using standard metal etching techniques.

Dr. Triebwasser said that the computer program should be capable of handling many more than 80 circuits on a wafer. This program is then a step toward producing wafers of hundreds of circuits with good yields.

Dr. Triebwasser described his system at the International Solid-State Circuits Conference, where he showed sample arrays of 80 interconnected circuits produced by the process. Each circuit contained five field-effect transistors connected as a four-input NOR gate. According to Triebwasser, the computer interconnection program is also applicable to bipolar transistor circuits.

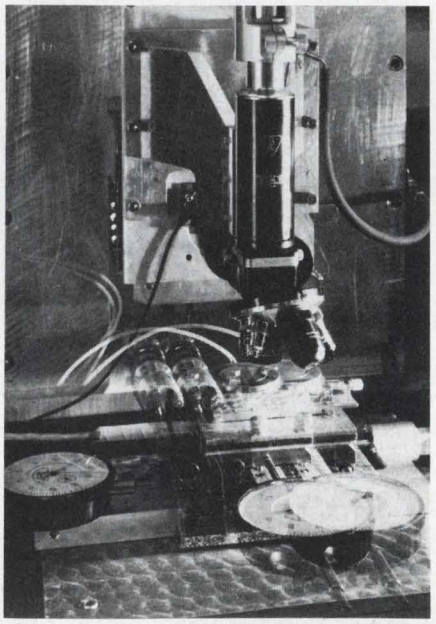

Light source and movable table that reproduce acceptable wiring on wafer.

Novel ground station records weather pictures

A rolling pin and a rubber band are two of the items used by an RCA engineer in his "do it yourself" ground station for receiving weather pictures from TIROS satellites.

Wendell Anderson built his station in the basement of his home just to prove that it could be done. The basic piece of equipment used was an old (1938 vintage) "ham" receiver. To this, Anderson added about $250 worth of ordinary electronic components. The antenna is a piece of TV-type twin-lead stretched across the roof of Mr. Anderson's home.

A small home-type tape recorder is used to record the signals from the satellite. For processing the signals onto film, Anderson uses a $15 microscope and an argon electric light bulb that together transfer the signal from the tape recorder onto an 8- by 10-inch sheet of Royal X Pan film.


The film is wrapped around a cylinder made from an ordinary rolling pin, and is cushioned for smooth rotation by a rubber band. A small ($10) electric motor rotates the cylinder, while another identical motor drives it horizontally at a very slow pace. As a result, the microscope and argon bulb register on the film the numerous lines that make up the weather picture.

ON READER-SERVICE CARD CIRCLE 250 THRU 255 ➤

SIGNETICS

INTEGRATED CIRCUIT NEWS AND APPLICATIONS

NEW INSTRUMENTATION PACKAGE TO MEASURE FLIGHT STRESS DATA INCLUDES SIGNETICS LOW-POWER IC SERIES

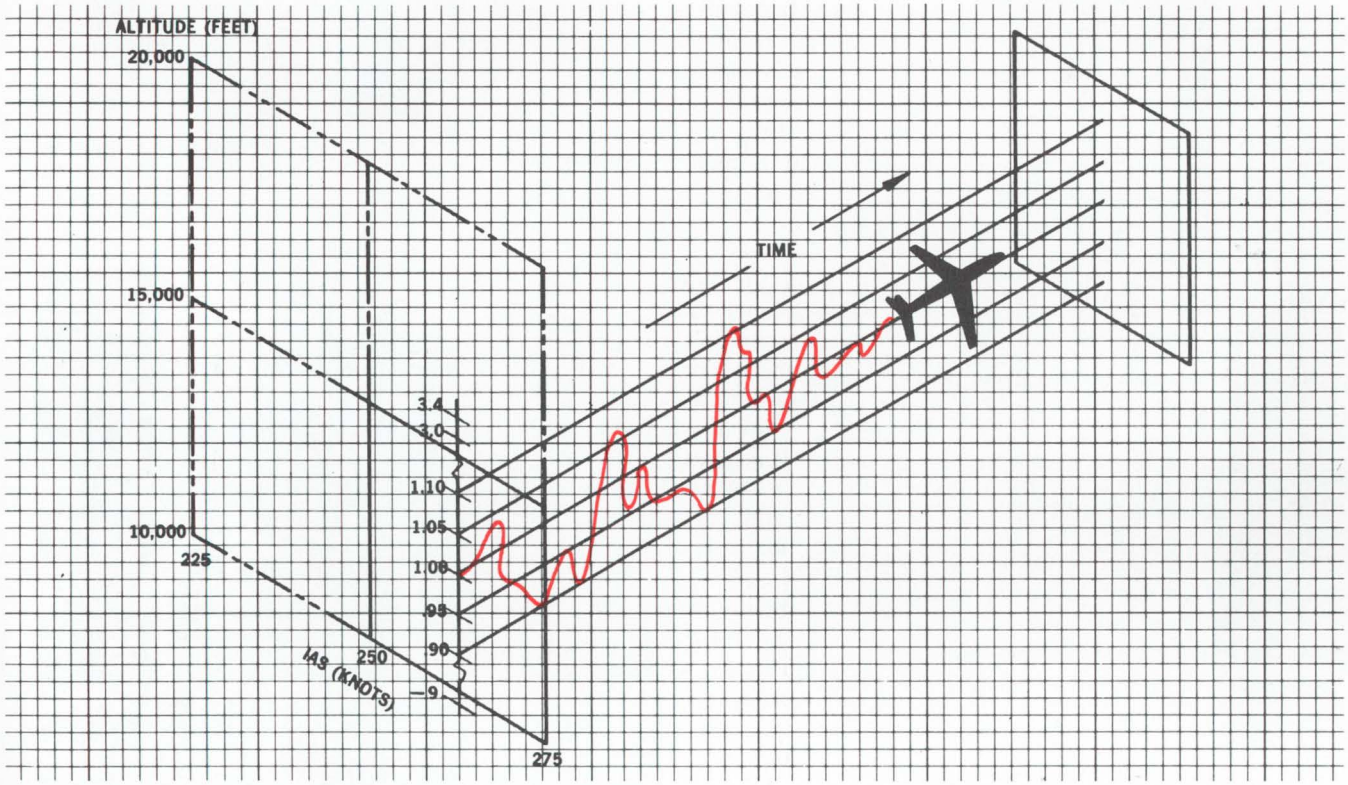

The need for an accurate, reliable statistical recorder was established by USAF's Aircraft Structural Integrity Program which began about seven years ago.

The answer comes in a new instrumentation package developed by Giannini Controls Corporation. Called DASR (Data Acquisition and Statistical Recorder), it defines accurately the G-load history of an aircraft:

1. It counts the number of times an airframe encounters a pre-selected value of G-load.
2. It correlates and records these events only at pre-selected levels of altitude, speed, time and acceleration as shown in the illustration.
3. It produces a tape record that can cover 50 hours of G-history in a 5-minute playback.

The DASR records data in digital form on magnetic tape compatible with IBM data processing equipment.

An important part of the Giannini package is the computer built with Signetics SE400 integrated circuits. These Signetics circuits were selected because they provide high speed at very low power. The feature element in the series is the SE424 five-megacycle dual binary element which operates on less than 9mW per flip flop. The entire SE400 Series operates on 20% to 40% less power than comparable elements while providing equal or better speed and noise immunity. Other elements in the series are:

SE480 — a quadruple 2-input NAND gate, each gate having the fan-out capability of the flip flop, 7 DC or 2 AC loads.

SE416 — a dual 4-input expandable NAND gate with active output pull-up for fast rise times.

SE455 — a dual 4-input driver/buffer for driving high capacitance loads and for high DC fan-out requirements.

Circle No. 250 on Reader Service Card.



Data Acquisition and Statistical Recorder (DASR).

SIGNETICS
INTEGRATED
CIRCUITS

LATEST COMMERCIAL HIGH-SPEED DATA ACQUISITION SYSTEM USES SIGNETICS UTILOGIC

The increasing application of large computers as central processors in industrial operations is making accurate, high-speed data acquisition systems more important than ever before. One of the most recent of these systems to become commercially available is the SOLAR System (Serialized On-Line Automatic Recording), designed and produced by Data Pathing Inc. of Palo Alto, California.

The basic system consists of a programmed receiver incorporating a magnetic recorder and fifteen transmitters which may be located at widely separated points and interconnected by a single pair of wires. Up-to-the-minute reports on material movement, work-in-process, machine and operator utilization, order location, inventory, etc., can be magnetically recorded at the receiver for later processing, or routed from the receiver to a central processor for immediate analysis.

The system logic is implemented with Signetics LU-Series Utilogic elements, selected for their high noise immunity, capacitive drive capability, and the ease with which they interface. The low cost per function and the very high functional density provided by Utilogic have made it economically and physically feasible to incorporate system design features that would otherwise be prohibitive. Among the self-checking features incorporated in DPI's SOLAR system:

(1) An active visual display at each transmitter which tells the operator exactly what data is wanted and the order in which to enter it via a simple ten-key board.
(2) An immediate check on transmission accuracy.
(3) A continuing check on transmitter condition which automatically removes a defective transmitter from the line and signals for the maintenance man.

To date, no Utilogic element failures have been reported in either the earliest prototypes or the first production models of the SOLAR System. One particular feature of Utilogic elements which has won DPI's unqualified approval has been a number of practical demonstrations that they are, indeed, immune to damage by accidental shorts. The type of "probe accident" or "debugging error" that commonly causes a continual loss of discrete semiconductor devices in new systems development has no effect on Utilogic.


Circle No. 251 on Reader Service Card.



SOLAR System transmitter. (18" high, 22" wide, 16" deep).



SOLAR System receiver.

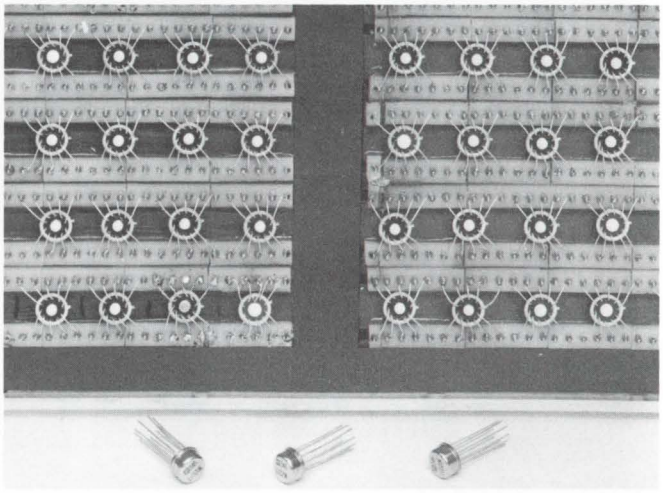

Signetics LU-Series Utilogic elements in SOLAR System logic boards. Note novel upside-down mounting technique of TO-5 cans.

See the Signetics

showcase of new products at

the IEEE show

"INNOVATION"


March 21-24, 1966

Signetics booths 2J40 and 2J42

on the second floor

of the New York Coliseum

IN PRODUCTION: ADVANCED AUTOMATIC INTEGRATED CIRCUIT TESTER

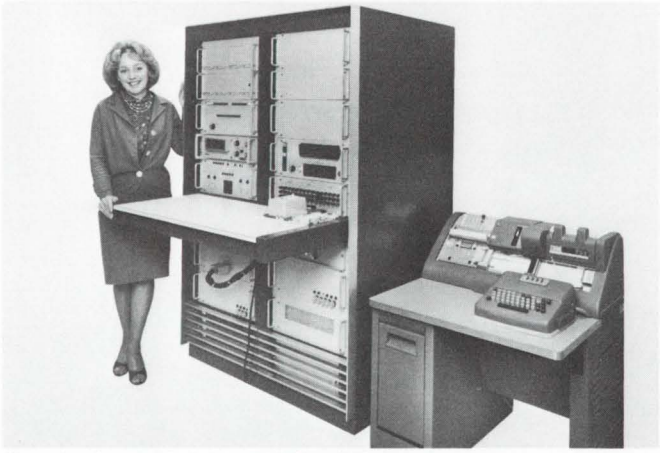

Signetics Automatic Integrated Circuit Tester.

An advanced Automatic Integrated Circuit Tester, in production by Signetics, now offers for the first time in a standard configuration an internal drum memory of 1.2 million bits program capacity and an access time of approximately 16 milliseconds. This provides a normal internal storage capability of 166 different programs of 25 tests each.

One or more test stations may be used in conjunction with the memory, so that devices of different types may be tested simultaneously and at locations away from the main frame.

The tester is supplied with facilities for testing devices with up to 16 terminals, with provision made for optional expansion of increments of 16 terminals.

The standard Model 850A is equipped to test every known integrated circuit on today's market, including some recently introduced 16-terminal devices.

The 850A is manually programmable from a keyboard supplied as standard equipment. Entry of new programs or program additions can be made at any time, even while testing is in progress. It provides Go/No-Go readout and has facilities for optional addition of DVM readout and data logging equipment.

The system design makes use of the Signetics Utilogic line of commercial/industrial integrated circuits. The drum memory uses the firm's new linear circuit, the SE505 general purpose differential amplifier.

The standard 850A is priced at $44,000, with deliveries approximately 120 days after receipt of order.

Circle No. 252 on Reader Service Card.


NEW SE100 J-SERIES DATA SHEETS PROVIDE GUARANTEED WORST CASE DESIGN LIMITS

In a move to make integrated circuit data sheets into truly workable tools for design engineers, Signetics has produced a unique set of data sheets for their SE100 J-Series of HI REL DTL circuits. The new data sheets provide clearly defined and guaranteed worst case design limits of immediate use to the systems designer.

Noise margins, speed and fan-out are guaranteed from −55°C to +125°C under worst case power supply and temperature differentials between driving and driven units.

The new SE100 J-Series data sheet frees the engineer from worry about any additional safety factors or guard bands. He gets complete specifics, down to the details of acceptance, quality assurance and environmental test methods and limits in accordance with all applicable MIL specifications.

Circle No. 253 on Reader Service Card.

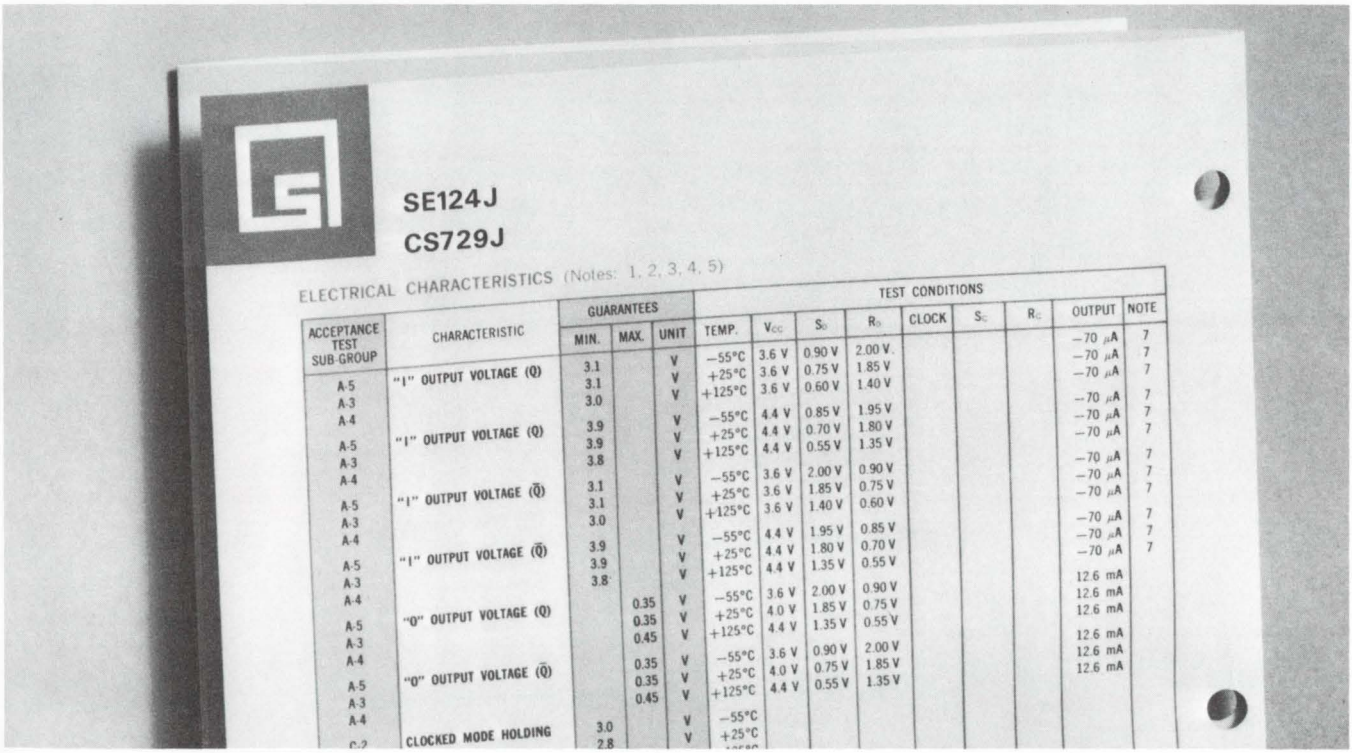

SE124J
CS729J

ELECTRICAL CHARACTERISTICS (Notes: 1, 2, 3, 4, 5)

ACCEPTANCE TEST SUB-GROUP	CHARACTERISTIC	GUARANTEES MIN.	MAX.	UNIT	TEST CONDITIONS TEMP.	V_{CC}	S_0	R_0	CLOCK	S_C	R_C	OUTPUT	NOTE
A-5	"1" OUTPUT VOLTAGE (Q)	3.1		V	−55°C	3.6 V	0.90 V	2.00 V				−70 μA	7
A-3		3.1		V	+25°C	3.6 V	0.75 V	1.85 V				−70 μA	7
A-4		3.0		V	+125°C	3.6 V	0.60 V	1.40 V				−70 μA	7
A-5	"1" OUTPUT VOLTAGE (Q)	3.9		V	−55°C	4.4 V	0.85 V	1.95 V				−70 μA	7
A-3		3.9		V	+25°C	4.4 V	0.70 V	1.80 V				−70 μA	7
A-4		3.8		V	+125°C	4.4 V	0.55 V	1.35 V				−70 μA	7
A-5	"1" OUTPUT VOLTAGE ($\overline{Q}$)	3.1		V	−55°C	3.6 V	2.00 V	0.90 V				−70 μA	7
A-3		3.1		V	+25°C	3.6 V	1.85 V	0.75 V				−70 μA	7
A-4		3.0		V	+125°C	3.6 V	1.40 V	0.60 V				−70 μA	7
A-5	"1" OUTPUT VOLTAGE ($\overline{Q}$)	3.9		V	−55°C	4.4 V	1.95 V	0.85 V				−70 μA	7
A-3		3.9		V	+25°C	4.4 V	1.80 V	0.70 V				−70 μA	7
A-4		3.8		V	+125°C	4.4 V	1.35 V	0.55 V				−70 μA	7
A-5	"0" OUTPUT VOLTAGE (Q)		0.35	V	−55°C	3.6 V	2.00 V	0.90 V				12.6 mA	
A-3			0.35	V	+25°C	4.0 V	1.85 V	0.75 V				12.6 mA	
A-4			0.45	V	+125°C	4.4 V	1.35 V	0.55 V				12.6 mA	
A-5	"0" OUTPUT VOLTAGE ($\overline{Q}$)		0.35	V	−55°C	3.6 V	0.90 V	2.00 V				12.6 mA	
A-3			0.35	V	+25°C	4.0 V	0.75 V	1.85 V				12.6 mA	
A-4			0.45	V	+125°C	4.4 V	0.55 V	1.35 V				12.6 mA	
	CLOCKED MODE HOLDING	3.0		V	−55°C								
		2.8		V	+25°C								

SIGNETICS
INTEGRATED
CIRCUITS

NEW DUAL IN-LINE PLUG-IN PACKAGE FEATURES DTL IC'S


Signetics' new SP600 series comes in a unique monolithic package. A solid epoxy block encapsulates both the circuit chip and the leads connecting it to the external plug-in pins. The new package contains two rows of pins 300 mils apart and spaced on 100 mil centers, conforming to widely accepted circuit board drill patterns.

Although designed for commercial use, the low-cost package has been subjected to mechanical and environmental stresses at levels far in excess of those required by MIL-S-19500D and MIL-STD-750.


Signetics SP600 series includes a J-K flip-flop, three multiple DTL gate packages (dual, triple and quadruple NAND/NOR), a quadruple gate-input expander, and a dual DTL line driver/buffer element.

The SP600 series circuits are now in stock at Signetics distributors.

Circle No. 254 on Reader Service Card.

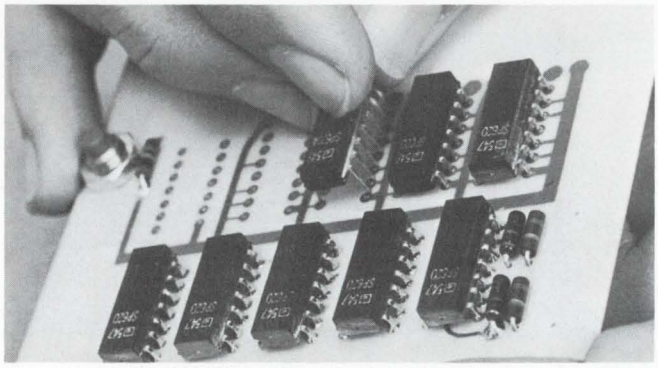

Manual Insertion of SP600 packages in circuit board.

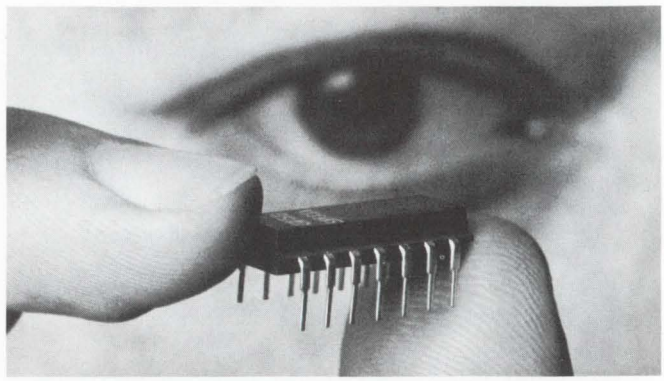

SP600 plug-in package.

NEW HIGH-SPEED TTL FAMILY FROM SIGNETICS

In early March Signetics will market a new high-level TTL family of integrated circuits: the SE800 series.

While consuming generally more power than DTL circuits, the most widely used integrated logic form at present, the new family represents a very useful design trade-off in some situations in which the speed performance of DTL may be considered marginal.

The SE800 series consists of six different gate configurations, a gate expander, and a J-K flip flop. They're interchangeable in both function and pin layout with Texas Instrument's Series 54 elements.

All elements are made in Signetics glass-Kovar 14-lead TO-88 flat package.

Circle No. 255 on Reader Service Card.

CALL A HELPFUL SIGNETICS DISTRIBUTOR—THE ONE NEAREST YOU:

AUTHORIZED SIGNETICS REPRESENTATIVES AND DISTRIBUTORS: ALA. Compar Southern, Huntsville, 539-8476; **ARIZ.** Compar Rocky Mountain, Scottsdale, 947-4336; **CALIF.** Compar Los Angeles, Glendale, 245-1172; Compar San Francisco, Burlingame, 697-6244; Jack Pyle Company, San Mateo, 349-1266; Wesco Electronics, Pasadena, 684-0880; **COLO.** Compar Rocky Mountain, Denver (Englewood), 781-0912; **CONN.** Compar New England, Hamden, 288-9276; **DISTRICT OF COLUMBIA** (see Hyattsville, Md.); **FLA.** Compar Florida, Orlando, 855-3964; **ILL.** Compar Chicagoland, Chicago 46, 775-5300; **MD.** Compar Chesapeake, Baltimore 15, 484-5400; Compar Chesapeake, Hyattsville, 927-7222; **MASS.** Compar New England, Newtonville 60, 969-7140; **MICH.** Compar Chicagoland, Livonia, 476-5758; **MINN.** Compar Twin Cities, Minneapolis, 922-7011; **MO.** Compar Ozark, St. Louis 2, 428-5313; **N.J.** Compar Philadelphia, Haddonfield, 429-1526; **N.M.** Compar Rocky Mountain, Albuquerque, 265-1020; **N.Y.** Compar Albany, Albany, 436-8536; Compar Albany, Endwell, 723-8743; Compar Albany, Depew, 684-5731; Compar New York, Clifton, N.J., 471-6090; Terminal Hudson Electronics (Distributors), New York, 243-5200; **N.C.** Compar Southern, Winston Salem, 724-0750; **OHIO** Compar Ohio, Rocky River, 333-4120; Compar Ohio, Fairborn, 878-2631; **PENN.** Philadelphia (see Haddonfield, N.J.); Western Pennsylvania (see Compar Ohio, Fairborn); **TEXAS** Compar Southwest, Dallas 18, 327-3944; Compar Southwest, Houston, 645-2135; **WASH. and ORE.** Compar Northwest, Seattle, 622-0622; **CANADA** Aero Sales Engineering Company, Rexdale, Ontario, 249-9139; Aero Sales Engineering Company, Ottawa, Ontario, 828-8560.

SIGNETICS SALES OFFICES: Eastern Regional Sales Office, 591 North Avenue, Wakefield, Mass., (617) 245-8200; TWX (617) 245-8367. Mid-Western Regional Sales Office, 212 Skyline Drive, Barrington, Ill., (312) 463-5105. Western Regional Sales Office, 8820 Sepulveda Blvd., Los Angeles 45, Cal., (213) 776-2295/2296; TWX (213) 670-4303. Metropolitan NYC Sales Office, 129 W. Mount Pleasant Ave., Livingston, N.J. (201) 992-3980.

SIGNETICS INTERNATIONAL SALES REPRESENTATIVES: FRANCE Technique et Produits, 63 Bis Rue D'Aguesseau, Boulogne Sur Seine, France. **GERMANY, ITALY, BELGIUM, HOLLAND, LUXEMBOURG, SPAIN** Sovcor Electronique, 11, Chemin de Ronde, Le Vesinet S.-&-O., France. **UNITED KINGDOM, IRELAND, SWEDEN, DENMARK, NORWAY, SWITZERLAND, AUSTRIA, PORTUGAL** Electrosil Ltd., Lakeside Estate, Coinbrook By Pass, Slough, Buckinghamshire, Great Britain. **AUSTRALIA** Corning Australia, 1202 Plaza Building, Australia Square, Sydney N.S.W. TWX: "Cornglas" Sydney, 27-3692.

SEND US THE COUPON.
WE'LL SEND YOU ALL THE INFORMATION YOU'LL NEED. FAST.

TO: SIGNETICS, 811 E. Arques Ave., Sunnyvale, California

Please send me information on the following:


- ☐ **SE400 Series**
- ☐ **Giannini DASR System**
- ☐ **LU-Series Utilogic**
- ☐ **DPI SOLAR System**
- ☐ **Advanced Automatic Integrated Circuit Tester**
- ☐ **J-Series Data Sheet**
- ☐ **DTL circuit plug-in package**
- ☐ **SE800 Series**

NAME _____

ADDRESS _____

CITY _____

STATE _____ **ZIP** _____

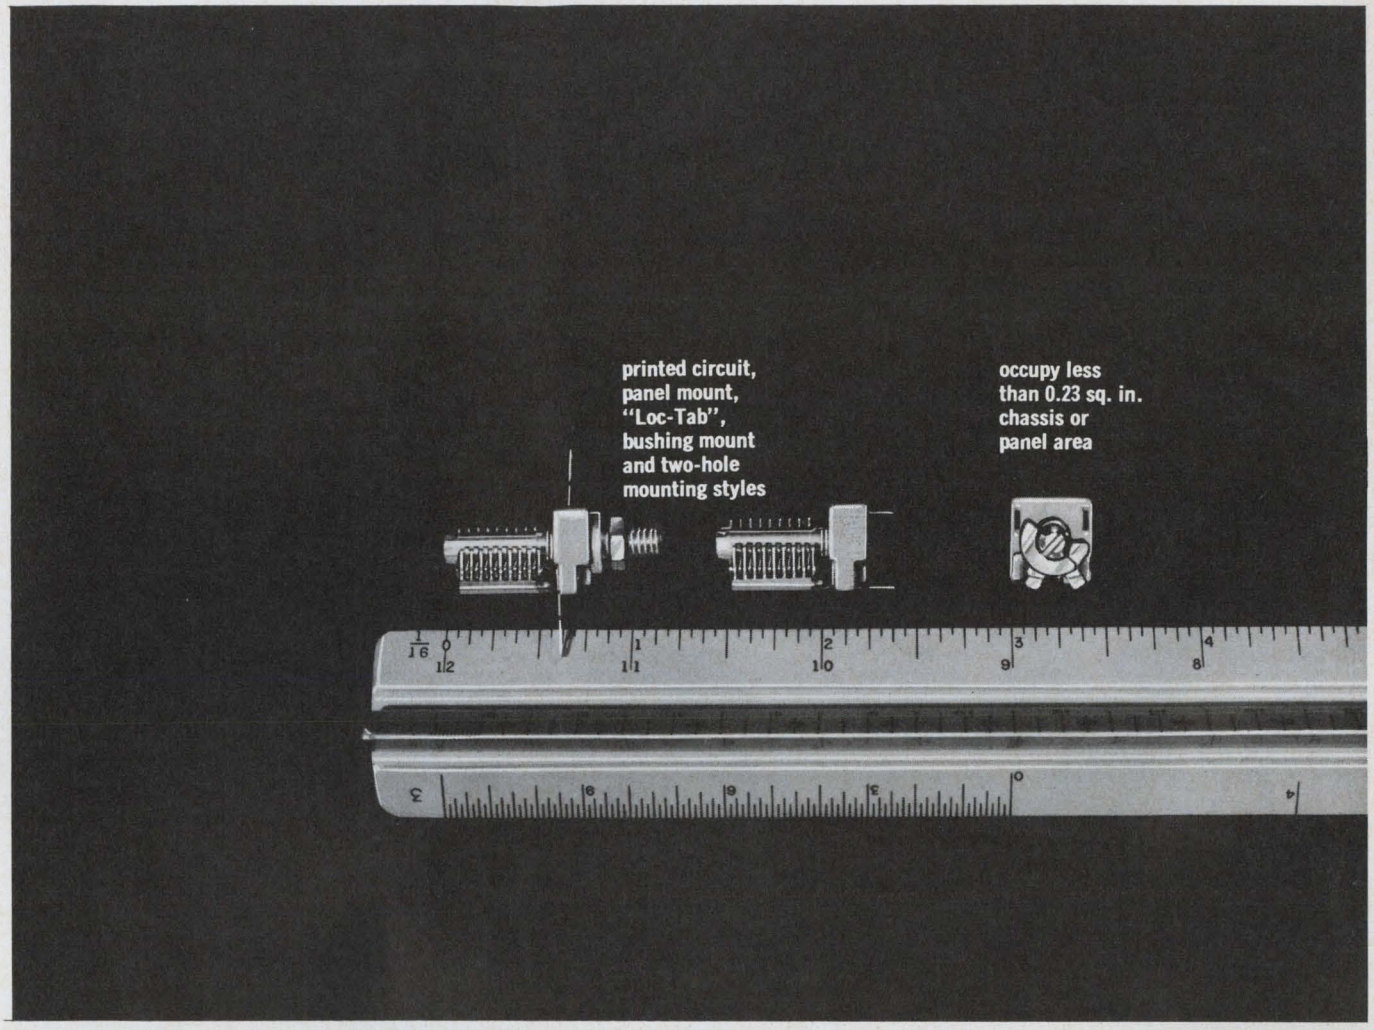


THESE TINY AIR VARIABLES SOLVE BIG DESIGN PROBLEMS!

Cut costs—improve performance—and save valuable space with these tiny sub-miniature air variable capacitors! "U" requires less than 0.2 square inch for chassis or panel mounting . . . types "UA" and "UB" require less than 0.23 square inch! Unique precision design with stators and rotors machined from one piece of solid brass, provides outstanding mechanical stability and uniformity. High "Q"—greater than 1500 at 1 Mc. High torque-to-mass ratio —2½ to 10 inch-ounces. Exceptionally low temperature coefficient—plus 45 ± 15 PPM/°C. Provides absolute freedom from moisture entrapment found in trimmer capacitors of the enclosed or solid dielectric type. All metal parts silver-plated. Ceramic is Grade L-423 steatite, or better. Exceptionally uniform delta C and voltage characteristics. Choice of wide, double-pierced or printed circuit style terminals. Single-section models available in "Loc-Tab"; 2-Hole; Printed Circuit; and #10-32 Bushing Mount Types—Differential and Butterfly models available in Printed Circuit Types.

TYPE "V" MINIATURES — Slightly larger than the Type "U" series, the "V" miniatures offer all of the design, construction and performance features of the "U"s plus higher capacity with little increase in mounting area requirement. Available in Single Section types for printed circuit or panel mounting.



"U-LC" TUNERS—Combines precision machined Type "U" capacitor with air-wound, silver-plated inductor. Offers low cost, compact tuneable L-C circuit with excellent "Q" and temperature stability!




DETAILED CATALOG AVAILABLE—In addition to the variable capacitors described above, Johnson also manufactures other electronic components. For complete specifications and current prices, write for Components Catalog 984.

E. F. JOHNSON COMPANY
3332 TENTH AVE. S.W. • WASECA, MINNESOTA 56093

ON READER-SERVICE CARD CIRCLE 16

◀ ON READER-SERVICE CARD CIRCLE 250 thru 255

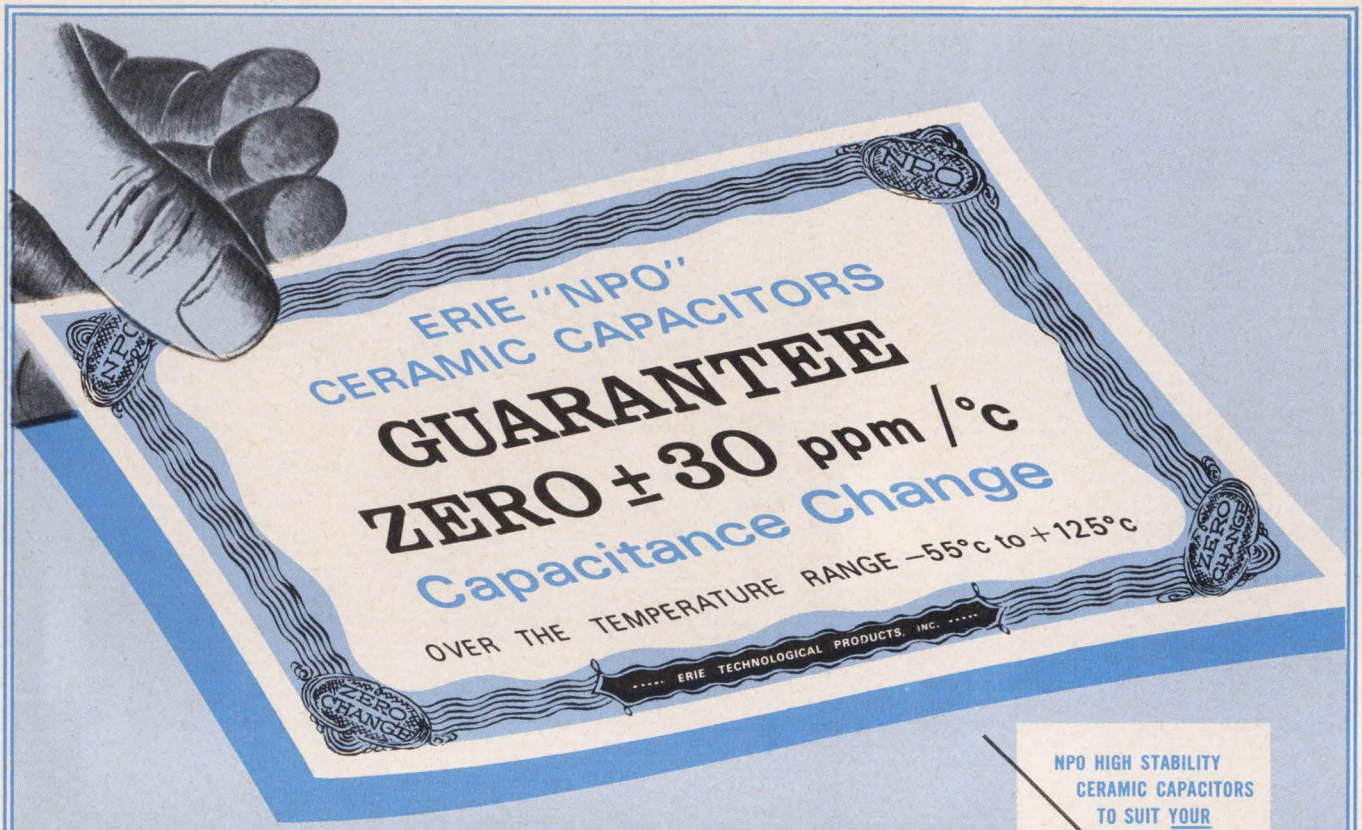


ACKNOWLEDGED as the MOST TEMPERATURE STABLE MINIATURE CAPACITORS in the ELECTRONICS INDUSTRY • • • SUPERIOR to GLASS and MICA CAPACITORS

If your circuits require capacitance stability, high Q, and close tolerance, there's only one line of miniature capacitors to consider... ERIE NPO High Stability Ceramic Capacitors. These ultra-stable ceramic dielectrics are considerably superior to glass and mica... *for ERIE produces the most nearly perfect ceramic in the industry.*


NPO (temperature coefficient) miniature capacitors are available in a variety of physical types as illustrated at right. Capacitance range and capacitance tolerance (as close as ± 1% or ± .1 pf.) to suit your circuit requirements. Units are conservatively rated... flash test 3 times WVDC, life test 2 times WVDC.

In addition to these NPO High Stability Ceramic Capacitors, Erie offers a full line of Temperature Compensating types (P100 through N5600) and General Purpose type capacitors... all produced from the most nearly perfect ceramic in the industry.

Write for information TODAY about Erie NPO High Stability Ceramic Capacitors. A helpful Erie Field Sales Engineer will be happy to discuss your specific requirements... no obligation of course.

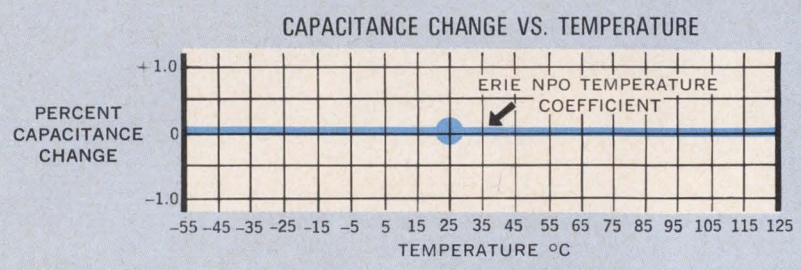

Another Series of Components in Erie's Project "ACTIVE"...
Advanced Components Through Increased Volumetric Efficiency

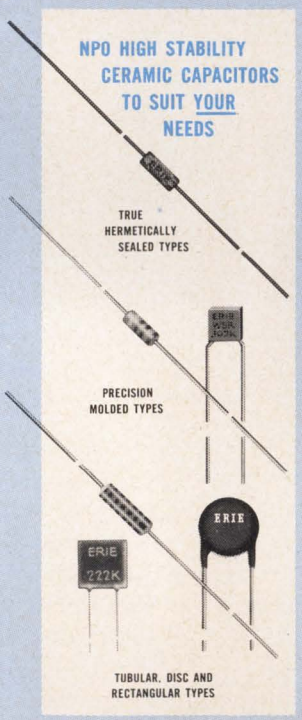

ERIE TECHNOLOGICAL PRODUCTS, INC.

ERIE

Erie, Pennsylvania

ON READER-SERVICE CARD CIRCLE 17

Automatic flaw spotter due for big radio dishes

ACME, to be tested by NASA on 85-foot tracking antenna in North Carolina, detects structural changes with a photosensor and laser.

Ralph Dobriner
West Coast Editor

ACME, an automatic surveying system designed to detect structural defects on the surface of large radio antennas, is scheduled for preliminary field tests within a year.

Under development at ITT Federal Laboratories in San Fernando, Calif., ACME, which stands for Antenna Contour Measuring Equipment, will be delivered to NASA's Goddard Space Flight Center. It will be installed at the 85-foot STADAN (Satellite Tracking and Data Network) antenna at Rosman, N. C.

The idea for ACME was born a number of years ago when NASA engineers became increasingly concerned with manufacturers' and users' ability to hold the surface tolerances of large-dish tracking antennas. These tolerances are especially critical for the fast-scanning microwave antennas used to track space vehicles near the earth. Shocks resulting from sudden surges of the antenna platform's servo motors, as well as natural phenomena—such as earth shocks, wind and temperature variations—can seriously degrade the performance of the antenna system.

Other surveying techniques tried

Previously, standard surveying techniques had been used periodically to check antenna surfaces, but this was generally a time-consuming and relatively inaccurate technique. It was then decided to switch to photogrammetry—photographing the surface of the antenna—a technique that achieved high accuracy and good results. But here, too, it takes about two weeks to get back data. NASA engineers wanted a system with a "quick turn-around time," and ACME seemed to be the answer.

The system is designed to run a check on an antenna in 20 minutes to an hour, depending on the number of points that need checking.

According to a NASA spokesman, the photogrammetric approach will still be used, with ACME as an alternate technique when quick readings are required. The equipment will ride along on the antenna structure and will be used whenever there is reason to believe that structural changes have occurred.

The ACME equipment (Fig. 1) consists of a photoelectric sensor placed at the vertex of the parabolic surface of the antenna. The sensor is mounted on a two-axis (elevation-azimuth) platform and is equipped with precision-angle encoders.


Antenna contour "bench marks," consisting of about 1100 retro-directive corner cube reflectors, will be mounted over the surface of the dish. The beam from a gallium arsenide laser source, located within the sensor housing, is reflected sequentially from the reflector targets.

Accuracy of ±5 arc seconds

A punched-tape input automatically points the platform assembly at the targets and measures the angular coordinates of each target by means of the photoelectric sensor and the angle encoders. The angular coordinates of the targets are measured relative to the vertex, with one axis parallel to the symmetry of the antenna (elevation angles) and the other perpendicular to it (azimuth angles). The system will be designed to make these measurements with an accuracy of ±5 seconds of arc.

As shown in Fig. 2, the punched-tape input, which expresses each target position in ten-thousandths of a degree, is fed into the tape reader and then into the format converter, which changes the information into normal binary code. This positional information is compared in the stepper-drive logic module with the output of a 19-bit, binary-coded, shaft-position encoder. When the difference between the two binary numbers is small enough to indicate that the photoelectric sensor is pointing at the target, and a target presence signal is obtained, the stepper motors stop. The sensor dwells on each target for about 3 seconds.

The output of the photoelectric sensor is converted from analog to digital information, and it is used with the encoder outputs to give the

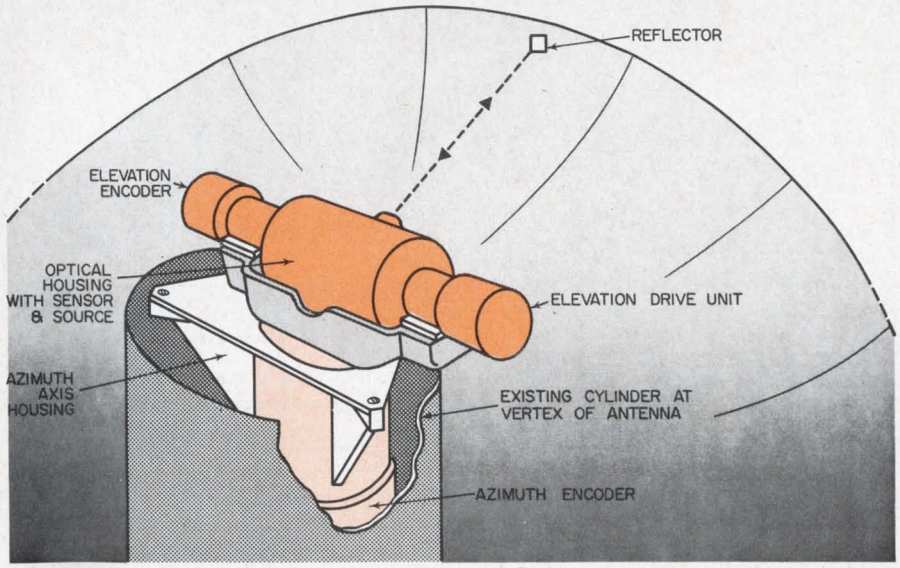


Photoelectric sensor and source, mounted on a platform at the vertex of the antenna, directs a laser beam at one of 1100 reflectors. The system is designed to detect surface deflections by measuring the angular coordinates of the targets with an accuracy of ±5 seconds of arc.

DUAL OUTPUT POWER SUPPLIES



Dual output power supplies are housed in one case 3-5/16" x 4-5/32" x 4-11/16" high. Identical or different output voltages from 1.5 to 75 are available in 1 volt increments for each of the DC outputs. The graph below furnishes maximum current corresponding to output voltage. Select the two outputs needed and telephone Acopian for all the details — **plus guaranteed 3-day shipment** after receipt of your order.

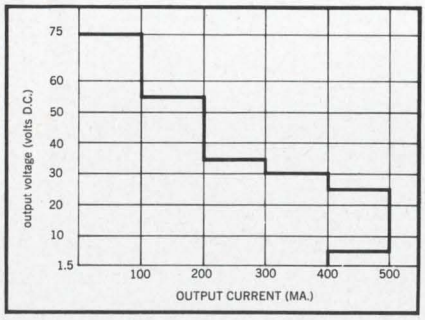

TYPICAL SPECIFICATIONS
Input Voltage: 105 to 125 VAC
Line Regulation: ±0.5 to ±0.05% (depending on model)
Load Regulation: ±1.0 to ±0.05% (depending on model)
Ripple: 5 to 1 mv (depending on model)
No additional external heat sinking required.

Write for Acopian's 16-page catalog and price list to: Acopian Corp., Easton, Penna., or call collect (215) 258-5441.

Acopian

ON READER-SERVICE CARD CIRCLE 18

(**ACME,** *continued*)

absolute position of the target with respect to the fixed reference. These binary positions are then converted in another format converter to the desired output format, and they are punched out on paper tape.


If desired, each target can be held as long as needed and the error signals from the photoelectric sensor can be monitored on a recorder for vibration analysis.

Standard star tracker used

The photoelectric angle sensor is a version of ITT's standard star tracker, consisting of a lens system, multiplier phototube, track-scan generators, signal processors and a power supply. The sensor provides two analog output signals, which are directly proportional to the angular displacement of the target from each of two orthagonal planes, whose intersection is the boresight, or null axis, of the sensor. Thus, when the target lies on this intersection, the output error signals are each zero.

A 20-inch-focal-length lens in the sensor is capable of viewing the reflector targets at a maximum distance of 40 feet (the outside perim eter of the dish) and a minimum of 5 feet from the vertex.

A NASA official said that if the field trials at the Rosman site prove satisfactory, it is planned to install ACME throughout the NASA tracking net, including its 40-foot dishes.

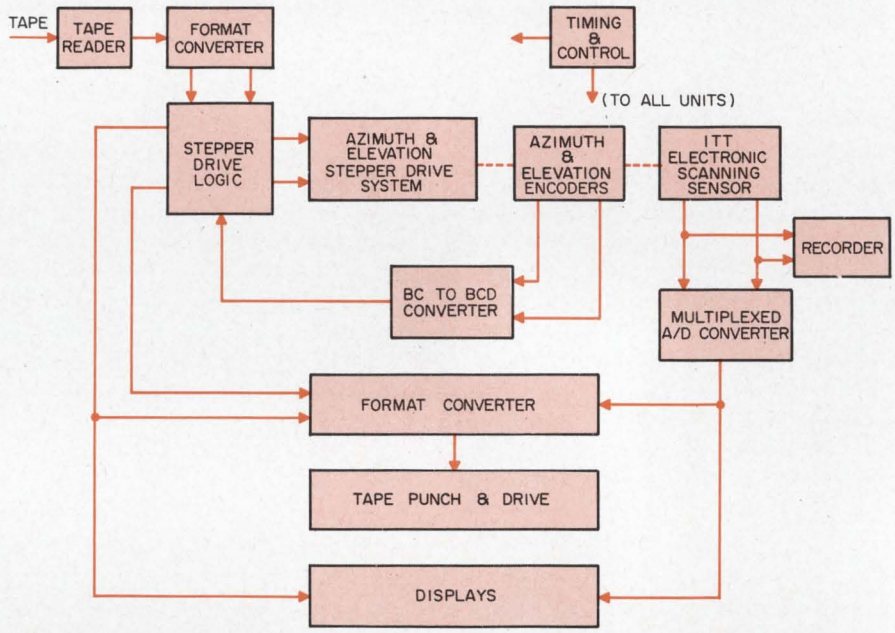


ACME (Antenna Contour Measuring Equipment) system, under development at ITT Federal Laboratories, will be installed at NASA's 85-foot tracking antenna at Rosman, N. C.

Prototype Apollo camera delivered to NASA

Engineers at the Westinghouse Defense and Space Center have delivered a prototype television camera to NASA.

This camera is the forerunner of one to be used by Apollo astronauts to send pictures back to Earth from the moon. According to the project engineers the camera can be easily converted to color operation.

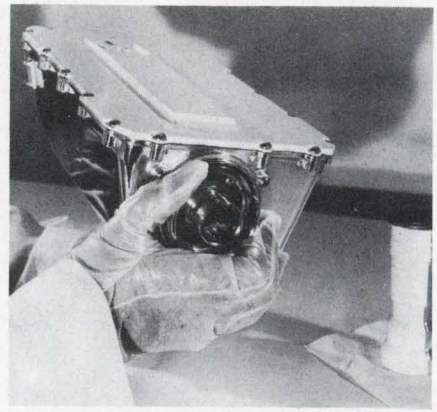

40-dB null depth in Apollo tracker


A high-gain telemetry monopulse array antenna, said to have a null depth down to 40 dB, will be used aboard sea-going vessels to track Apollo moonships.

Developed by the Cubic Corp. of San Diego, the antenna is a 24-element cross-dipole array that operates in the 215-MHz-to-265-MHz range. Reportedly, the antenna has a vswr of less than 1.2 to 1 and a gain in excess of 22 dB.

The array is capable of operating the vertical and horizontal linear modes of polarization, as well as circular polarization. The type of polarization used is remotely selectable by the operator.

According to a Cubic spokesman, actual measured radiation patterns show side-lobe levels of more than 17 dB down for the sum channel, with the difference channel having only vestigial lobes to well beyond the second side lobe in the sum channel.

The difference-channel nulls, the spokesman noted, are all more than 40 dB below the sum-channel peak. The axial ratio encountered over the frequency range for either righthand or lefthand circular polarization is less than 0.5 dB.

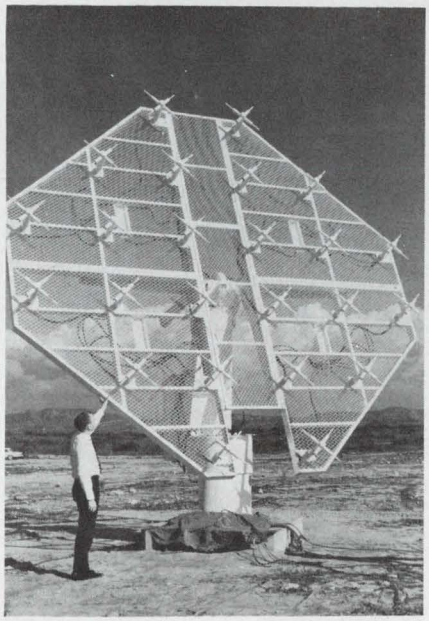

High-gain telemetry monopulse array antenna with 40-db null depths is destined for use in the Apollo tracking program. Built by Cubic Corp., the antenna has a vswr of less than 1.2 to 1 and a gain in excess of 22 db in the 215-MHz-to-265-MHz range.

Come up to the TOP!
(in wiring systems)

FOURTH FLOOR BOOTHS
4A32 & 33

See and talk to us about the latest innovations in interconnection techniques.

. . . new connective dimensions

aci
DIVISION OF KENT CORPORATION
206 Industrial Center, Princeton, N. J. 08540

Send for Bulletin E-5


Signaflo systems of "moving wire" (shielded, fixed impedance, minimum cross talk, retractile etc.) will be displayed . . .

aci SIGNAFLO SYSTEMS

that increase performance and reduce wiring costs. Let's discuss your application!


ON READER-SERVICE CARD CIRCLE 19

From the expanding line of Sigma relays . . .

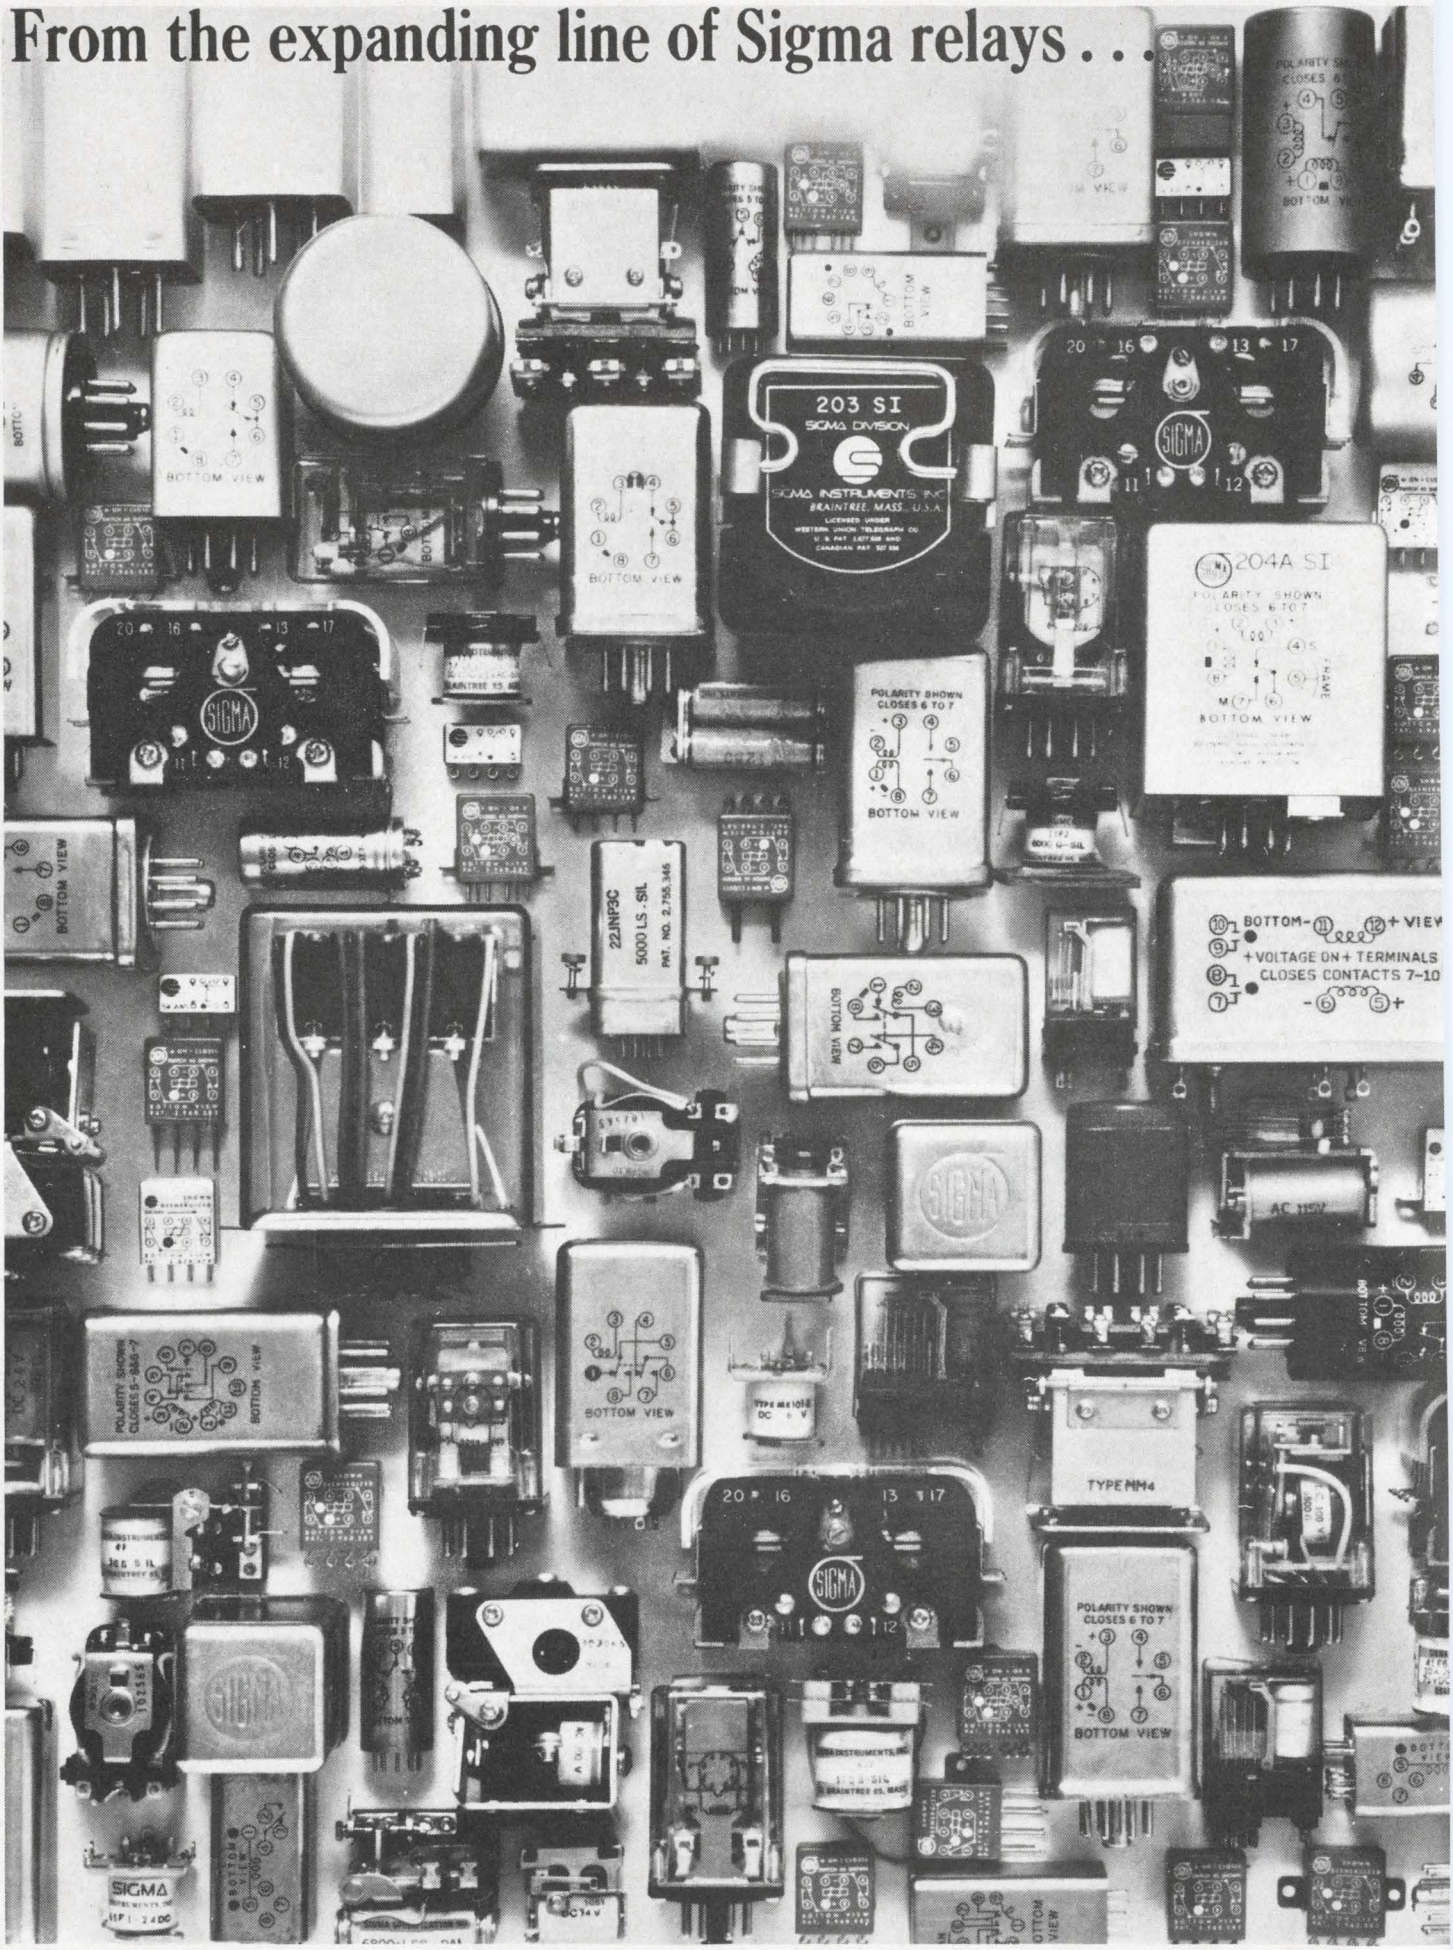





New 1, 2 and 3 pole relays for nearly every application in the 5 and 10 amp range.

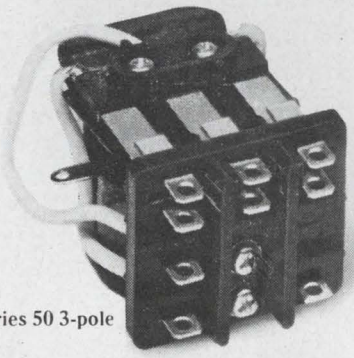

New Series 50 3-pole

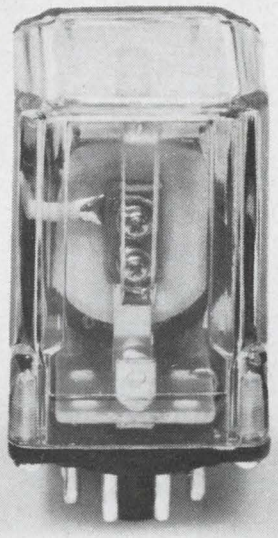

New Series 50 1-pole

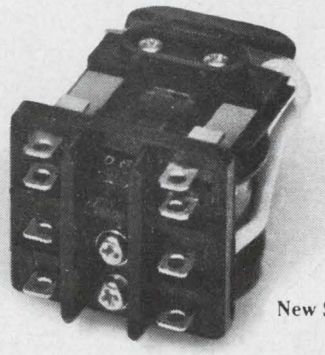

New Series 50 2-pole

Order them off-the-shelf.

You name the general-purpose industrial application you're working on and chances are new Sigma Series 50 relays will meet your requirement. This new series is designed to be versatile and it is—12 versions cover every combination of its 1, 2 or 3 poles, 5 or 10 amp AC or DC power ratings, enclosed and open types, plug-in and soldered connections.

And they're available at the lowest prices Sigma has ever offered for relays of this type.

Along with their versatility and low-cost, Series 50 relays include such quality features as: Adjustable armature hinge for precise contact alignment. Heavy-duty contact base material for improved dielectric strength and insulation resistance. Single molded plug assembly with high temperature resistant polycarbonate housing.

Series 50 relays are designed for the broadest variety of general purpose industrial applications ranging from output relays in sensing controls to photocopiers and vending machines.

They are immediately available from your local Sigma distributor at factory-low prices —or from Sigma direct.

Want more information? Write for the new 16 page Sigma Preferred Standard and Stock Relay Catalog and an up-to-date stock listing. It will help you select the relays immediately available in quantity.

SIGMA DIVISION SIGMA INSTRUMENTS INC

Assured Reliability With Advanced Design / Braintree, Mass. 02185

Sigma's line of over 100,000 relays includes Sensitive, High Performance, Pulse and Telegraph, General Purpose, Power, and Special Purpose types.

ON READER-SERVICE CARD CIRCLE 20

Sky Bus puts electronics in the driver's seat

Westinghouse electric transit system for cities runs on tracks and is controlled automatically by wayside computers at speeds from a crawl to 50 mph.

Roger Kenneth Field
News Editor

"Any community that thinks . . . it can assure mobility on schedule for large masses of people without rapid transit . . . is suffering from that 20th-century opiate of the people—the private automobile. A community may buy buses and lay highways until it is blue in the face, but will not have mobility until substantial numbers of its public-transit vehicles ride on exclusive rights-of-way."—Leland Hazard, chairman of the Rapid Transit Committee of the Port Authority of Allegheny County, Pa., in his key-note address at the recent First International Conference on Urban Transportation in Pittsburgh.

The managers of some cities have reacted to Hazard's statement by pointing out that manually controlled subway systems are far too expensive for all but the biggest cities. "Design a new subway and make it attractive and cheap," they say.

To see how one electronics manufacturer is responding to this critical transit need, and to assess the industry's role in what could become a multi-billion-dollar industry, ELECTRONIC DESIGN visited the experimental track of the Westinghouse Sky Bus in South Park, outside of Pittsburgh (see photo 1).

I went for a ride around the test track with Ray Fields, head of the Sky Bus project; Don Little, designer of the unique control system, and Dixie Howell, lead project engineer. Fields explained that the Sky Bus is for use by cities with populations as small as 300,000. The trains require no motorman or conductor, and, in fact, the whole system can run perfectly with but a single person monitoring the console of a remote central computer.

The Sky Bus is powered by two 60-horsepower dc motors in each car. Small digital computers placed at the wayside control approaching trains and monitor departing trains. Should a computer fail, the computer at an adjacent station on the line controls approaching and departing trains, and service continues uninterrupted.

A smooth, rubber ride


The cars have double sets of rubber tires that roll smoothly on concrete tracks. The designer used large thyristors to control the speed of the motors. Acceleration is smooth, yet brisk, As an experienced city subway rider, accustomed to lurches, I was pleasantly surprised at the absence of them in the Sky Bus.


The computer at the target station controls the effective dc to the motors by triggering the thyristors during a desired part of each cycle of the three-phase supply current (photo 2). This current enters the car through a set of brushes that contact the bottoms of the three-phase power rails (photo 3). The wayside computers can control the train from full speed to a crawl and can bring it to a halt within a few inches of its target alongside the platform.

In addition to accelerating the cars, the dc motors also do most of the braking. Giant open-wound resistors shunt across the armature to brake the train and bring it to very slow speeds. The final braking is done by air brakes because the shunted-motor braking effect decreases as the armature speed decreases. The air brakes, then, are needed to prevent creeping.


In a typical installation one large Westinghouse Prodac 550 computer oversees the small wayside computers, and one person monitors its main console (photo 4). A loop on the console reproduces in diagram the layout of the track, and lights give the monitor a visual indication of the positions of all trains.

Trains can leave a station every two minutes. The Prodac 550 even decides how many cars each train needs to accommodate passengers waiting on stations up the line. The

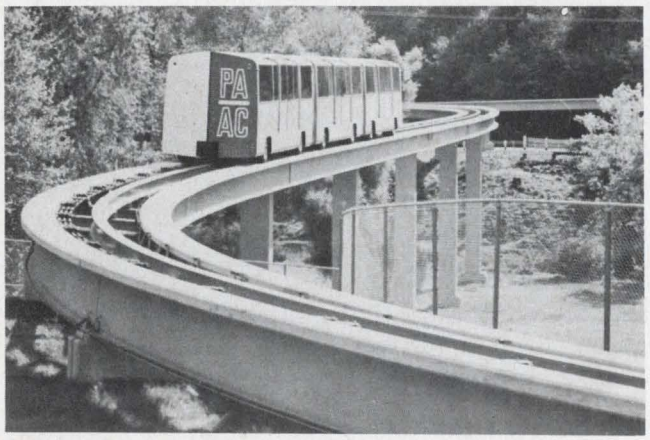


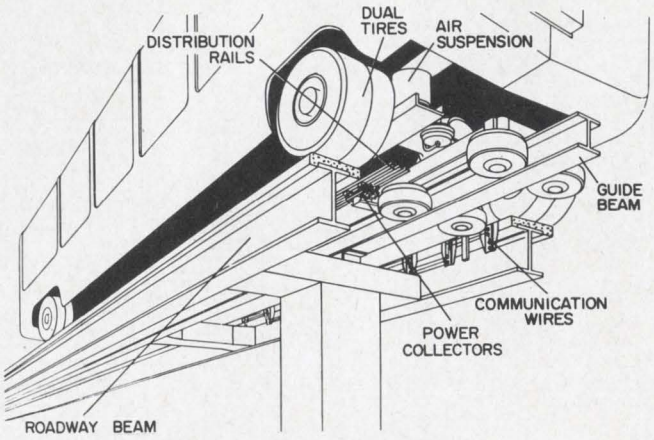


1. **The Westinghouse Sky Bus** rolls quietly through South Park controlled completely by computers. Its dual rubber tires run on two concrete tracks that are supported by steel "I" beams. Two dc motors propel each car.

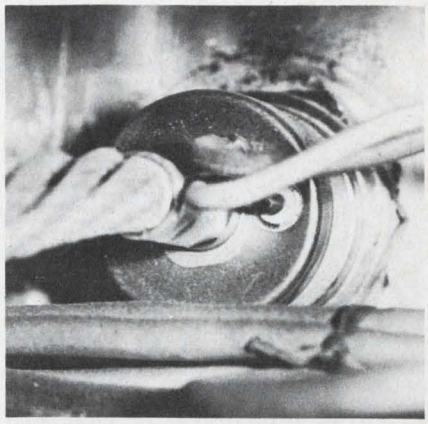

2. **One of the thyristors** that enable the computers to control train speed by regulating the effective dc power.

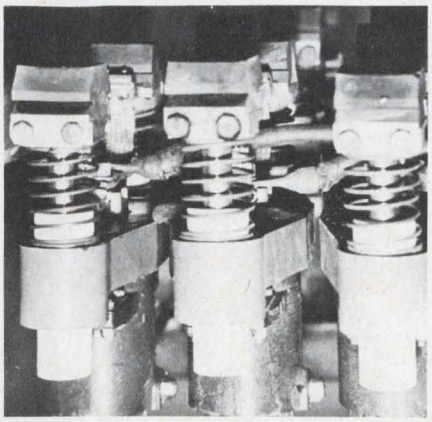

3. **Articulated pantograph,** or brushes, tap rails for three-phase power. Brushes contact rails from bottom.

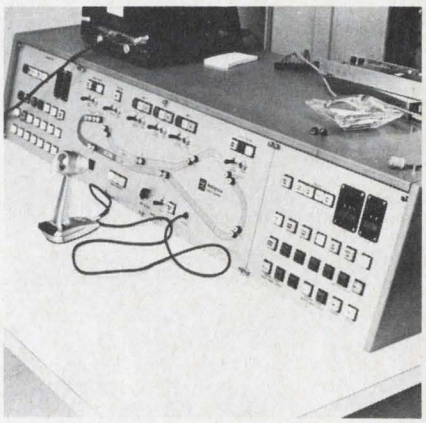

4. **Console of Prodac 550** is monitored by man who oversees train operation. Lights show train position.

Westinghouse project team has designed a special set of tracks that enables the computer to direct the coupling of these cars without a single attendant. This is why fine control of the crawl speed is important, Little pointed out.

The cars are coupled both mechanically and electrically. Each couple contains a giant connector. The connector is shielded from the atmospheric elements by a plate, and when one couple presses against another, the shield retracts. Howell pressed the plate to expose the connector (photo 5).

Fields, dressed in a dark, pinstriped suit, held a light while we crawled under the bus to get a picture of the unusual antenna that transmits information via a track wire to the nearest wayside computer. (photo 6). A transmitter aboard the train continuously informs the computers of the status of a number of sensors on the cars. These sensors measure train speed, acceleration, card load, wheel slippage, motor over-load, air-brake drag, air-brake pressure and low line voltage.

Fail-safe action provided


Fields said that the designers of the system has programmed the computer to take appropriate action for any failure. It might simply inform the console attendant of minor irregularities, but it would also pull the main power switch and apply all emergency brakes in case of a serious malfunction. Howell stressed another safety feature inherent in the design of the Sky Bus: four pairs of guide wheels, backed with steel plates, keep the cars on the tracks (photo 7).

I found the Sky Bus system aesthetically attractive. The cars, less than one-fourth the weight of standard subway cars, have clean, modern lines. The tracks and their supports do not mar the landscape, and they are not nearly as expensive as standard railroad supports. The Sky Bus can travel either overhead or on or below the ground at speeds up to 50 mph. It is silent and fume-free.


For cities, the cost factor should be important, too. Operation of the transit system requires very few people. And because there are no computers aboard the trains—they just take orders from the wayside computers—cars are not laden with expensive electronic gear.

The train I rode in worked well even with ice on the tracks.


This project demonstrates just one of a number of approaches to the mass-transit problem. Other manufacturers offer approaches that differ considerably from the Sky Bus. Their designs include alternative track material, car size, propulsion systems and track configurations. But all use electronic controls.

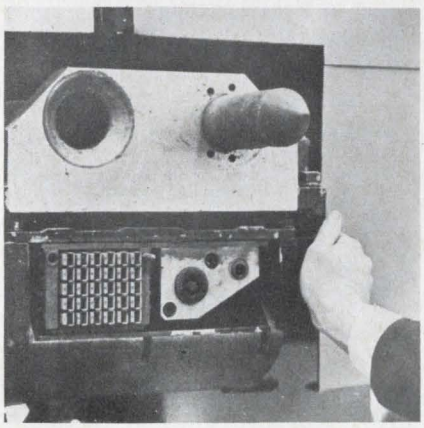

5. **Car coupler** contains large electrical connector. Dixie Howell presses plate to remove shield.

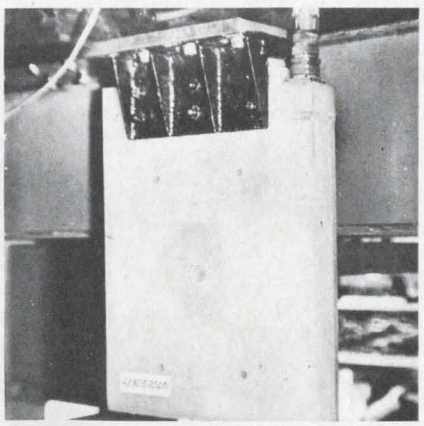

6. **Slab antenna** transmits signal via tracklength wire back to computers. Fields held light and I shot photo.

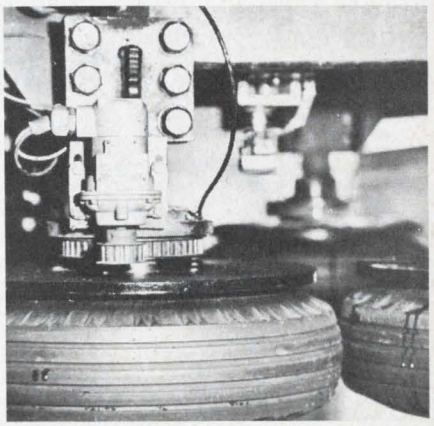

7. **Guide wheels** keep train on tracks. Gear driven odometer sends mileage to transmitter aboard car.

A design advance

Broadest line of standard silicon modular power supplies for fixed voltage applications

UP TO 60 VDC • UP TO 90 AMPS




Package G

5 Year Guarantee




Package F

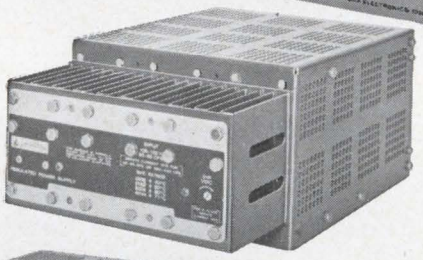

Package E



Package D



Package C



Package B



Package A

Features and Data

Meet Mil. Environment Specs.

RFI—MIL-I-16910
Vibration: MIL-T-4807A
Shock: MIL-E-4970A • Proc 1 & 2
Humidity: MIL-STD-810 • Meth. 507
Temp. Shock: MIL-E-5272C • (ASG) Proc. 1
Altitude: MIL-E-4970A • (ASG) Proc. 1
Marking: MIL-STD-130
Quality: MIL-Q-9858


Convection cooled—no heat sinking or forced air required

Wide input voltage and frequency range—105-132 VAC, 45-440 cps

Regulation (line) 0.05% plus 4MV
(load) 0.03% plus 3MV

Ripple and Noise—1MV rms, 3MV p to p

RACK ADAPTERS



LRA-5—3½" height by 2 7/16" depth. Mounts up to 4 A package sizes; 3 B or C package sizes; or 2 A and 1 B or C package sizes. Price $35.00

LRA-4—3½" height by 14" depth. (For use with chassis slides) Mounts up to 4 A package sizes; 3 B or C package sizes; or 2 A and 1 B or C package sizes. Price $55.00

LRA-3—5¼" height by 2 7/16" depth. Mounts up to 4 A, B or C package sizes; 2 D or 2 E packages sizes; or 2 A, B or C and 1 D or 1 E package sizes. Price $35.00

LRA-6—5¼" height by 14" depth. (For use with chassis slides) Mounts up to 4 A, B or C package sizes; 2 D or 2 E packages sizes; or 2 A, B or C and 1 D or 1 E package sizes. Price $60.00

PATENTS PENDING

ON READER-SERVICE CARD CIRCLE NO. 215

LAMBDA ELECTRONICS CORP.
515 BROAD HOLLOW ROAD • MELVILLE, L. I., NEW YORK • 516 MYRTLE 4-4200

from Lambda

Ordering Information

METERS–3½" Metered panel MP-3 is used with rack adapters LRA-4, LRA-5 and packages A, B and C.

5¼" Metered panel MP-5 is used with rack adapters LRA-6, LRA-3 and packages A, B, C, D and E.

To order these accessory metered panels, specify panel number which MUST BE FOLLOWED BY the MODEL NUMBER of the power supply with which it will be used.

Examples Metered Panels	For Lambda Model	Panel Model No. and Price
MP-3	LM-B2	MP-3-LM-B2 $40
MP-5	LM-B2	MP-5-LM-B2 $40

Note–F and G LM Packages are full rack power supplies available metered or non-metered. For metered models, add suffix M to the Model No. and $30 to the non-metered price.

OVERVOLTAGE PROTECTION–Externally mounted adjustable crowbar type overvoltage protection accessory for use with A, B, C and D packages–$25.

E, F and G packages available with built-in overvoltage protection. To order crowbar type overvoltage protection for E, F and G packages, add suffix OV to the model no. and $60 to the E package price and $90 to the F and G package price.

FIXED VOLTAGES–In addition to the fixed voltages listed, any fixed voltage is available up to 65 VDC at moderate surcharge.

Package A 3 3/16" x 3¾" x 6½"





Accessory Metered Panels: $40.00

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-201	0- 7	0.85	0.75	0.70	0.55	$ 79
LM-202	0- 7	1.7	1.5	1.4	1.1	99
LM-203	0-14	0.45	0.40	0.38	0.28	79
LM-204	0-14	0.90	0.80	0.75	0.55	99
LM-205	0-32	0.25	0.23	0.20	0.15	79
LM-206	0-32	0.50	0.45	0.40	0.30	99
LM-207	0-60	0.13	0.12	0.11	0.08	89
LM-208	0-60	0.25	0.23	0.21	0.16	109

Package B 3 3/16" x 4 15/16" x 6½"





Accessory Metered Panels: $40.00

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-217	8.5-14	2.1	1.9	1.7	1.3	$119
LM-218	13-23	1.5	1.3	1.2	1.0	119
LM-219	22-32	1.2	1.1	1.0	0.80	119
LM-220	30-60	0.70	0.65	0.60	0.45	129
LM-B2	2 ±5%	3.4	3.0	2.3	1.4	119
LM-B3	3 ±5%	3.4	3.0	2.3	1.4	119
LM-B4	4 ±5%	3.4	3.0	2.3	1.4	119
LM-B4P5	4.5±5%	3.3	2.9	2.2	1.4	119
LM-B5	5 ±5%	3.3	2.9	2.2	1.4	119
LM-B6	6 ±5%	3.2	2.8	2.2	1.3	119
LM-B8	8 ±5%	3.0	2.7	2.2	1.3	119
LM-B9	9 ±5%	2.7	2.5	2.1	1.3	119
LM-B10	10 ±5%	2.6	2.4	2.1	1.3	119
LM-B12	12 ±5%	2.4	2.3	2.1	1.3	119
LM-B15	15 ±5%	2.1	1.9	1.7	1.2	119
LM-B18	18 ±5%	1.8	1.6	1.5	1.2	119
LM-B20	20 ±5%	1.6	1.4	1.3	1.1	119
LM-B24	24 ±5%	1.3	1.2	1.1	1.0	119
LM-B28	28 ±5%	1.2	1.1	1.0	0.90	119
LM-B36	36 ±5%	1.1	1.0	0.90	0.85	129
LM-B48	48 ±5%	0.90	0.85	0.80	0.75	129

Package C 3 3/16" x 4 15/16" x 9⅜"





Accessory Metered Panels: $40.00

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-225	0- 7	4.0	3.6	3.0	2.4	$139
LM-226	8.5-14	3.3	3.0	2.5	2.0	139
LM-227	13-23	2.3	2.1	1.7	1.4	139
LM-228	22-32	2.0	1.8	1.5	1.2	139
LM-229	30-60	1.1	1.0	0.80	0.60	149
LM-C2	2 ±5%	4.9	4.2	3.5	2.4	139
LM-C3	3 ±5%	4.9	4.2	3.5	2.4	139
LM-C4	4 ±5%	4.9	4.2	3.5	2.4	139
LM-C4P5	4.5±5%	4.9	4.2	3.4	2.4	139
LM-C5	5 ±5%	4.8	4.1	3.3	2.4	139
LM-C6	6 ±5%	4.6	4.0	3.1	2.4	139
LM-C8	8 ±5%	4.4	3.8	3.0	2.0	139
LM-C9	9 ±5%	4.2	3.6	3.0	2.0	139
LM-C10	10 ±5%	4.0	3.5	2.9	2.0	139
LM-C12	12 ±5%	3.8	3.3	2.8	2.0	139
LM-C15	15 ±5%	3.4	3.2	2.7	1.8	139
LM-C18	18 ±5%	3.0	2.8	2.5	1.7	139
LM-C20	20 ±5%	2.9	2.7	2.4	1.7	139
LM-C24	24 ±5%	2.5	2.4	2.2	1.5	139
LM-C28	28 ±5%	2.3	2.1	2.0	1.4	139
LM-C36	36 ±5%	2.0	1.8	1.7	1.3	149
LM-C48	48 ±5%	1.6	1.4	1.3	1.0	149

Package D 4 15/16" x 7¾" x 9⅜"





Accessory Metered Panels: $40.00

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-234	0- 7	8.3	7.3	6.5	5.5	$199
LM-235	8.5-14	7.7	6.8	6.0	4.8	199
LM-236	13-23	5.8	5.1	4.5	3.6	209
LM-237	22-32	5.0	4.4	3.9	3.1	219
LM-238	30-60	2.6	2.3	2.0	1.6	239
LM-D2	2 ±5%	13.1	11.3	9.2	6.2	199
LM-D3	3 ±5%	13.1	11.3	9.2	6.2	199
LM-D4	4 ±5%	13.1	11.3	9.2	6.2	199
LM-D4P5	4.5±5%	13.1	11.3	9.2	6.2	199
LM-D5	5 ±5%	12.6	10.8	9.2	6.1	199
LM-D6	6 ±5%	12.4	10.6	8.9	6.0	199
LM-D8	8 ±5%	12.2	10.3	8.8	5.9	199
LM-D9	9 ±5%	11.3	10.0	8.6	5.7	199
LM-D10	10 ±5%	10.8	9.7	8.5	5.7	199
LM-D12	12 ±5%	10.0	9.2	8.3	5.7	199
LM-D15	15 ±5%	9.0	8.4	7.9	5.3	209
LM-D18	18 ±5%	7.9	7.4	6.9	5.0	209
LM-D20	20 ±5%	7.4	6.9	6.5	4.9	209
LM-D24	24 ±5%	6.7	6.3	5.8	4.8	219
LM-D28	28 ±5%	6.0	5.6	5.2	4.7	219
LM-D36	36 ±5%	5.4	5.0	4.7	4.3	239
LM-D48	48 ±5%	4.1	3.9	3.6	3.1	239

Package E 4 15/16" x 7¾" x 11⅞"






Accessory Metered Panels: $40.00

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-E2	2 ±5%	18.0	16.0	15.0	10.0	$269
LM-E3	3 ±5%	18.0	16.0	15.0	10.0	269
LM-E4	4 ±5%	17.0	16.0	15.0	10.0	269
LM-E4P5	4.5±5%	16.0	15.0	14.0	10.0	269
LM-E5	5 ±5%	16.0	15.0	13.0	10.0	269
LM-E6	6 ±5%	15.0	14.0	12.0	10.0	269
LM-E8	8 ±5%	14.0	13.0	12.0	9.5	269
LM-E9	9 ±5%	13.5	12.5	11.0	9.5	269
LM-E10	10 ±5%	13.0	12.0	10.0	9.2	269
LM-E12	12 ±5%	12.0	11.0	9.5	9.0	269
LM-E15	15 ±5%	11.0	10.0	9.0	8.5	269
LM-E18	18 ±5%	10.5	9.5	8.5	8.1	269
LM-E20	20 ±5%	10.0	9.0	8.3	7.7	269
LM-E24	24 ±5%	9.0	8.5	7.7	7.0	269
LM-E28	28 ±5%	8.5	8.0	7.3	6.6	269
LM-E36	36 ±5%	6.8	6.3	5.9	5.2	279
LM-E48	48 ±5%	5.0	4.6	4.3	3.9	299


Package F 3½" x 19" x 16½"



For metered models, add suffix (M) to model number and $30.00 to the price below.

Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-F2	2 ±5%	44.0	39.0	32.0	24.0	$425
LM-F3	3 ±5%	44.0	39.0	32.0	24.0	425
LM-F4	4 ±5%	44.0	39.0	32.0	24.0	425
LM-F4P5	4.5±5%	44.0	39.0	32.0	24.0	425
LM-F5	5 ±5%	44.0	38.0	31.0	24.0	425
LM-F6	6 ±5%	43.0	37.0	30.0	23.0	425
LM-F8	8 ±5%	40.0	34.0	28.0	22.0	425
LM-F9	9 ±5%	38.0	32.0	26.0	21.0	425
LM-F10	10 ±5%	36.0	31.0	25.0	20.0	425
LM-F12	12 ±5%	30.0	26.0	21.0	16.0	425
LM-F15	15 ±5%	25.0	22.0	18.0	15.0	425
LM-F18	18 ±5%	23.0	20.0	17.0	13.0	395
LM-F20	20 ±5%	21.0	19.0	16.0	12.0	395
LM-F24	24 ±5%	18.0	16.0	13.0	10.0	380
LM-F28	28 ±5%	17.0	15.0	13.0	9.5	380
LM-F36	36 ±5%	13.0	11.0	10.0	7.5	395
LM-F48	48 ±5%	10.0	9.0	7.5	6.0	425

Package G 5¼" x 19" x 16½"



For metered models, add suffix (M) to model number and $30.00 to the price below.


Model	ADJ. VOLT. RANGE VDC	I MAX. AMPS[1] 40°C	50°C	60°C	71°C	Price
LM-G2	2 ±5%	90.0	83.0	62.0	43.0	$575
LM-G3	3 ±5%	85.0	80.0	62.0	43.0	575
LM-G4	4 ±5%	77.0	71.0	61.0	43.0	575
LM-G4P5	4.5±5%	72.0	68.0	60.0	43.0	575
LM-G5	5 ±5%	68.0	64.0	59.0	43.0	575
LM-G6	6 ±5%	60.0	55.0	52.0	43.0	525
LM-G8	8 ±5%	59.0	54.0	48.0	39.0	525
LM-G9	9 ±5%	58.0	53.0	47.0	37.0	525
LM-G10	10 ±5%	56.0	52.0	44.0	35.0	525
LM-G12	12 ±5%	48.0	44.0	37.0	29.0	525
LM-G15	15 ±5%	39.0	37.0	31.0	24.0	525
LM-G18	18 ±5%	32.0	30.0	27.0	21.0	525
LM-G20	20 ±5%	30.0	28.0	25.0	20.0	525
LM-G24	24 ±5%	27.0	25.0	20.0	16.0	480
LM-G28	28 ±5%	25.0	23.0	19.0	15.0	480
LM-G36	36 ±5%	22.0	20.0	16.0	13.0	525
LM-G48	48 ±5%	17.0	14.0	12.0	9.0	575

[1] Current rating is from zero to I max.
Current rating applies over entire output voltage range.

Current rating applies for input voltage 105-132 VAC 55-65 cps.
For operation at 45-55 cps and 360-440 cps derate current rating 10%.


Today...the switch is to TECH LABS

For high quality, precision switches designed for long service life, industry turns to Tech Labs. All Tech Lab switches are manufactured for rugged service and exacting performance. They meet all applicable Military Specifications and are available in a wide range of sizes and types to fit your most demanding designs.

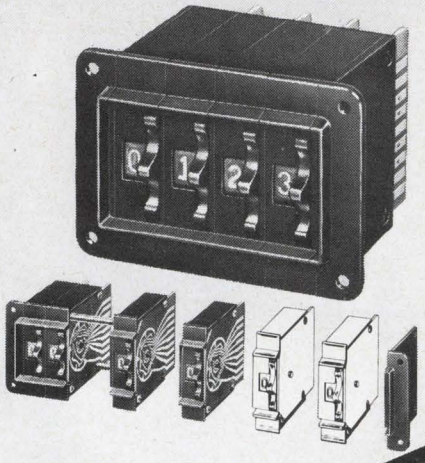


THUMBWHEEL SWITCHES

A compact, molded, printed-circuit wafer switch for limited space and in line readout. Modular type for either front or back of panel mounting: Modules ½" between center lines, height 2". Single or double pole, 10 position, binary or complementary codes, standard. Other codes available on request. Available with adjustable stops.




Type 2A: An instrument control switch of the highest quality possible with a reasonable price. This switch is a must for all applications where the rating and requirements are high. Rating 5 amp carrying. Size 1¾" by 2¼". Available in all combinations with up to 26 decks and 2 to 26 positions. Has adjustable stop. Solenoid operated if required.



Type 3A: A molded miniature switch used in military and commercial applications where space is a premium and a superior switch is required. Can be furnished with up to 8 decks, 12 positions per deck single pole, or 6 positions double pole, adjustable stop. Rating is 5 amps carrying and it can be solenoid operated and hermetically sealed. Only 1¼" diameter.


TAP SWITCHES

TECH



ATTENUATORS

We also manufacture a complete line of attenuators, both audio and RF. These include potentiometers, ladders, T-pads, H-pads, etc., in many varieties of sizes. Our attenuators are approved by the most particular users in this country.





STEPPING SWITCHES

All our switches can be fitted with a stepping mechanism and can be furnished HERMETICALLY SEALED, EXPLOSION FROOF, if desired. We have built stepping switches with 500 positions per deck.

HEAVY DUTY CONTROL SWITCHES

We manufacture a line of heavy duty control switches in various sizes, which are extremely flexible in the combinations available. These switches are particularly useful where a large number of poles are required.



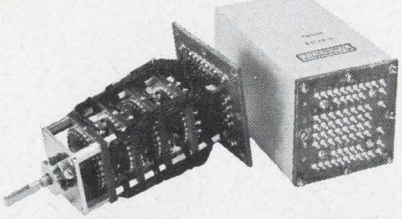

SPECIAL SWITCHES

When standard switches will not meet the requirement, we design and manufacture special switches to order. Send us your specs.



FREE!
Send today for our 24 page Switch Catalog


Telephone: 201-944-2221 • TWX: 201-947-4730

TECH LABORATORIES, INC., Palisades Park, N.J.

ON READER-SERVICE CARD CIRCLE 21

Click, whirrr

All that moves in the world's fastest printer is a motor and a fan.

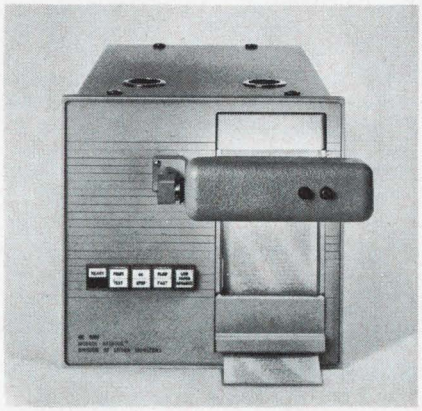

Monroe Datalog's® MC 4000 ultra high speed optical printer offers the unique reliability of only two moving parts. But reliability is only one feature. The MC 4000 records 6000 lines per minute, or any speed less that your application requires. Truly synchronous or asynchronous. Available in numeric or alphanumeric models—both 32 columns wide.

Features: character serial input, bit parallel. 6 microseconds per character data transfer time. Exceptional compactness—10½" x 10¾" x 21½". Any 4 or 6 line code with any logic level. All solid state. Cathode ray tube with fiber optics. Permanent copy option available.

And a full year's warranty. Price: $5650 for numeric model; $5850 for alphanumeric model.


For information, contact Monroe Datalog Division of Litton Industries, 343 Sansome St., San Francisco 94104. (415) 397-2813.

MONROE DATALOG
DIVISION OF LITTON INDUSTRIES

ON READER-SERVICE CARD CIRCLE 22

BURR-BROWN FUNCTION MODULES

dependable building blocks for a variety of analog systems

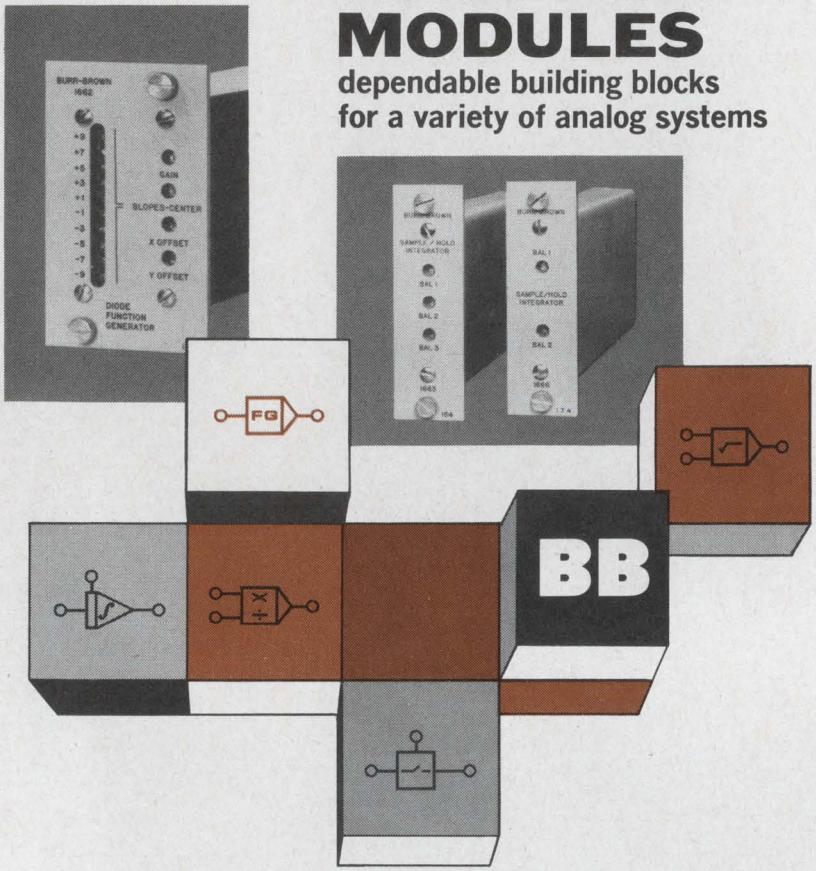


■ Whether you're building systems to control, measure, compute, test, or analyze, Burr-Brown's new analog function modules with built-in operational amplifiers give you unlimited design flexibility. And, these versatile, solid-state units have the level of accuracy and reliability to match your most critical requirements.

■ Currently, Burr-Brown is supplying twelve off-the-shelf function modules including four hybrid units designed for interface between analog and digital circuits. By combining additional operational amplifiers with selected function modules, an endless variety of economical general and special purpose systems may be developed.

FOR COMPLETE TECHNICAL INFORMATION, write, wire, or phone for six-page catalog describing Burr-Brown Function Modules and Instrumentation Amplifiers.

SEE THE NEWEST BURR-BROWN OPERATIONAL AMPLIFIERS AND FUNCTION MODULES AT IEEE BOOTH #3A26-27



MODEL	DESCRIPTION	HIGHLIGHT SPECIFICATIONS	PRICE
1661	MULTIPLIER/DIVIDER	**Transfer Function** $E_o = -\frac{XY}{10}$ or $E_o = -\frac{10X}{Y}$ switch selected **Transfer Error:** < 1%	$595
1662	FUNCTION GENERATOR	11 segment convenient front panel adjustment	$625
1663	FAST SAMPLE & HOLD/ SWITCHED INTEGRATOR	**Aperture Time:** 50 nsec **Drift in HOLD:** ±100 μv/ms **Reset Time:** 10μsec	$355
1664	SAMPLE & LONG HOLD/ SWITCHED INTEGRATOR	**Aperture Time:** 200 nsec **Drift in HOLD:** ±10 mv/sec **Reset Time:** 100 μsec	$295

OTHER MODULES AVAILABLE INCLUDE: Log Converter, Log Ratio Converter, Antilog Converter, Squaring Modules, Precision Rectifier, and Electronic Switches.

ENGINEERING REPRESENTATIVES: ALA., MADISON (205) 772-6981/ALASKA, ANCHORAGE (907) 272-5231/ARIZ., PHOENIX (602) 254-6085/B.C., VANCOUVER (604) RE 6-6377/CALIF., GLENDALE (213) 245-9501/CALIF., SAN JOSE (415) 968-1608/COLO., DENVER (303) 388-4391/CONN., MILFORD (203) 874-9222 FLA., ORLANDO (305) 423-4856/FLA., MIAMI (305) 444-1118/ILL., CHICAGO (313) AV 6-6824/MD., SILVER SPRING (301) JU 8-8134/MASS., WAKEFIELD (617) 245-4870/MICH., DETROIT (313) 353-3822/MO., ST. LOUIS (314) JA 4-4800 N.J., CAMDEN (609) 365-2450/N.Y., ALBANY (518) 436-8224/N.Y., BINGHAMTON (607) 723-9661/N.Y., BUFFALO (716) 632-2727/N.Y., NEW HARTFORD (315) 732-3775/N.Y., MT. VERNON (914) YO 8-2200/N.M., ALBUQUERQUE (505) 255-1638/N.C., BURLINGTON (919) 584-6129/OHIO, CINCINNATI (513) 761-5432 OHIO, CLEVELAND (216) 884-2001/OHIO, DAYTON (513) 277-8911/OKLA., TULSA (918) TE 5-2481/ORE., PORTLAND (503 292-8762/ONT., AGINCOURT (416) 293-7011/TEX., DALLAS (214) EM 3-1671/TEX., HOUSTON, (713) WA 8-5251 UTAH, SALT LAKE CITY (801) 466-8709/WASH., SEATTLE (206) MA 2-0177 EUROPE. Frazer & Hansen Ltd., P.O. 85, 3000 Bern 9 Switzerland.

BB BURR-BROWN RESEARCH CORPORATION
INTERNATIONAL AIRPORT INDUSTRIAL PARK
BOX 11400, TUCSON, ARIZONA 85706
PHONE: 602-294-1431 • TWX: 910-952-1111

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 23

NEWS

Computer checking computer production

An unsalable, prototype Westinghouse Prodac 50 computer has been put to work screening out wiring errors in production models of the computer.

Engineers at the Westinghouse Research and Development Center in Pittsburgh designed the Prodac 50 (Process Digital Automatic Control) to solve traffic and production problems. The prototype is now riddled with the external signs of improvements, in comparison with its trimly packaged production mates.

Each vertical panel on the computer contains 16 cards, with 16 hand-soldered connections on each card. There are 256 chances for error during the wiring procedure, according to Bates Murphy, head of the Westinghouse computer engineer team.

Even though the wirers receive step-by-step intructions, the contact pins play tricks with their eyes after a few hours of work. Formerly another employee spent three days checking to see that every connection was properly made. But the checker had no way of knowing if extra connections had been made by error.

Now the original version of the Prodac 50 checks all connections and reports any that have been overlooked. In addition it reports all extraneous ones. The total time for a complete check has been reduced to under one-half hour, including hook-up time.


Radio opening supply 'chutes in Vietnam

One of the newest Air Force developments for achieving highly accurate parachute supply drops in Vietnam is the 'chute popper—a system that enables a ground observer to open a parachute by pushing a radio button.


The 'chute popper was designed to supply troops in small, remote areas that might be heavily surrounded by Viet Cong guerrillas. If the drop is off target, the parachutes are not opened, and the supplies are destroyed on impact.

A small digital-control unit in the


when the decision calls for precision

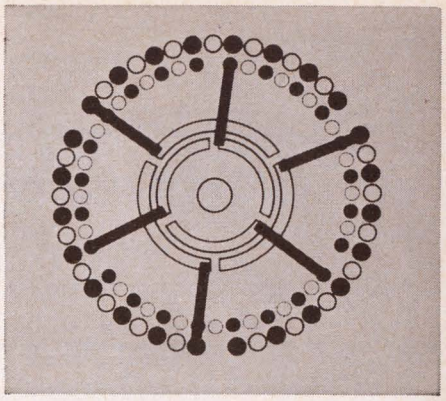


SWITCH to Hi-Q precision instrument switches!

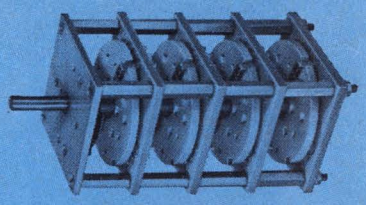


#18 Series Switch available one to eight poles per deck. Meets MIL-S-3786-B.




This special switch and resistor assembly illustrates engineering to specific need.

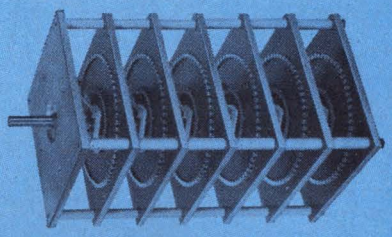


Typical type CES six deck, single pole per deck multiple position switch.



CES type switch with terminal boards. Available 1¾″ to 8″ square. Up to 144 shorting positions.

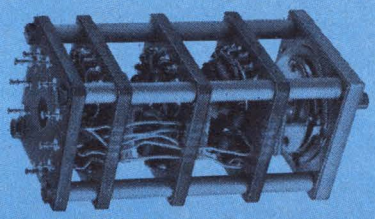

Special design incorporating resistors and rear terminals to meet customer needs.



#18 Series three deck-three pole per deck switch with terminal boards.

Hi-Q precision instrument switches readily fulfill standard, special, and military requirements at attractive prices through the use of modular stock units from which an almost unlimited series of configurations may be assembled...and *minimum delivery time is guaranteed!*

This kind of flexibility is typical of the engineering precision found in every feature—brush blades lapped and edges stoned; insulating parts custom drilled to critical tolerances; contacts of homogenous alloys for minimum EMF, positive metal-to-metal wiping, and low electrical resistance; maximum contact wiping surface to distribute frictional wear and promulgate longer life. For installation flexibility, all units are available with either solder pot or turret type terminals.

The terminal board switch is a further indicator of the advanced engineering you may expect from Hi-Q. The use of terminal boards facilitates modular wiring harness design and reduces overall assembly costs.

Whatever your product, if design decision requires precision instrument switches, contact Hi-Q and see what they have to offer. It's quite probable that you won't find a better answer anywhere.


Hi-Q® DIVISION

AEROVOX CORPORATION
1100 CHESTNUT ST.
BURBANK, CALIF.

VISIT HI-Q IEEE BOOTHS 2J48-50
ON READER-SERVICE CARD CIRCLE 24

a new recording concept

[AND HERE'S WHAT IT WILL DO]

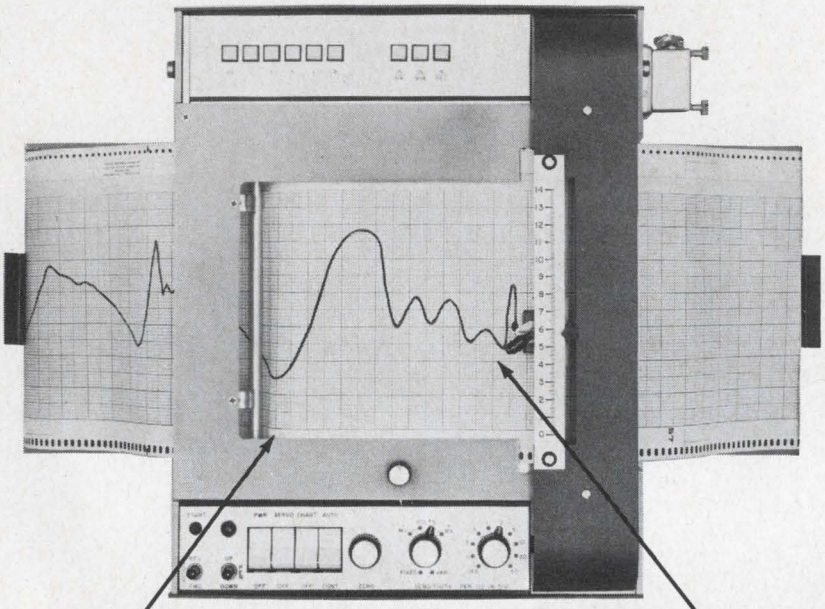


THE AXIS PERFORMS AS

- A STRIP CHART
- X For X-Y
- T-Y (Sequencing Chart)
- PROGRAMMING CHART
- PROGRAMMABLE CHART
- PULSE CHART DRIVEN


THIS AXIS IS the highest quality servo available in any type multi-range potentiometric recorder today.

Dollar for dollar, this new OMNIGRAPHIC$_{TM}$ RECORDER will deliver more functions, more features and more conveniences than any other recorder ... or any other **two** recorders on the market today. Examples: Continuous or automatic advance feed for recording on Z-fold continuous 8½" paper or on a 7" x 10" paper grid with perforations for easy tearing to 8½" x 11" file size; push button speed control provides 18 selections from 2"/sec. to .05"/hr., or a 144,000:1 range; .15% accuracy; ⅓ sec. f.s. pen response; 20 voltage ranges; and infinite input resistance.


The OMNIGRAPHIC$_{TM}$ RECORDER is unique. It is a new concept in graphic recording. The cost is far less than you may imagine.




Ease of loading



Z-fold paper



Push button selection



Tears to std. chart size

houston **OMNIGRAPHIC** corporation

a subsidiary of houston instrument corporation
4950 Terminal Ave. / Bellaire, Texas 77401
(713) 667 7403 / cable HOINCO / TWX (713) 571 2063

IN EUROPE: Houston Instrument N.V. Keizersgracht 450, Amsterdam, Holland, Tel. (020) 238138

ON READER-SERVICE CARD CIRCLE 25

('chutes, *continued*)

back pack of a standard Army field telephone is used to activate the 'chute popper or Ground-Controlled Parachute Deployment System, as it is officially called. By pushing a button on the control unit, the ground observer transmits a radio signal to a command receiver on the parachute harness. The receiver, in turn, activates an explosive charge, which blows apart a line that keeps the parachute from inflating.

The same field telephone unit is used to get in touch with the aircraft and guide the drop from the ground.

According to officials of Canoga Electronics of Chatsworth, Calif., developers of the 'chute popper, the device operates on a digitally programmable frequency to insure that it will not be activated by any other electronic signal.


Electronics in medicine still challenges engineers

"You're just going to have to learn new terms" said Dr. S. Fine of Northeastern University to a panel on Biomedical Electronics at the recent international Solid State Circuits Conference. Dr. Fine was talking about the many problems faced by the engineers and doctors engaged in the growing field of biomedical electronics.

L. D. Wechsler of General Electric maintained that many of the bio-medical electronics problems that exist today can be attacked with existing electronic technologies and that there is a definite need for many more electronic specialists to work in this area. Problems involved in pattern recognition, ultrasonic and feedback control of prosthetic devices (artificial arms, legs, etc.) are the domain of the electronic specialist and he already has the tools needed to solve them, according to Weschler.

In addition to the problem of reeducating doctors and engineers, several other problems face workers in this field:

Cheaper devices are needed to encourage wider acceptance and use of electronic instruments, especially in medicine. However, quality and reliability should be considered instead of cost, in the opinion of W.

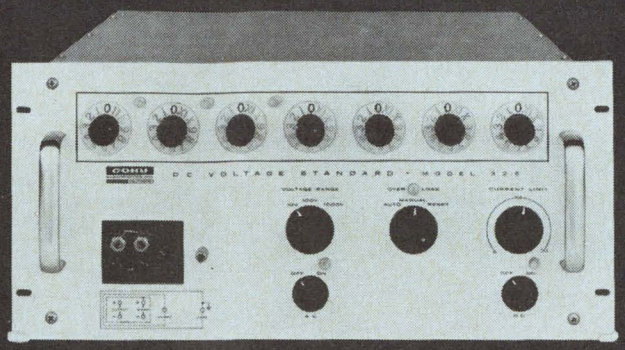

Meet the DC voltage standard with:

STABILITY WITHIN 15 PPM

...for 7 days, 25 ppm for 6 months. Recorded stability history available.

0.003% ACCURACY

...ensured by temperature-controlled precision Zener reference.

IMMEDIATE DELIVERY

...the COHU Model 326 is off-the-shelf...like the entire family of COHU DC voltage standards.

...and voltages from 0 to 1222.2221 in 3 ranges; steps as small as 1 μv.

Price: $2490.00 F.O.B. San Diego, additional export charge.

COHU ELECTRONICS, INC
SAN DIEGO CALIFORNIA


Box 623
San Diego, Calif. 92112
Phone 714-277-6700


Visit our Booth 3F02
at IEEE Show,
March 21-24

ON READER-SERVICE CARD CIRCLE 26

CASE FOR THE MAN FROM E.A.G.L.E.


STROKE... STROKE... STROKE...






What sounds like a helmsman's cry is really the objective of a leading drug manufacturer. To operate his compacting equipment for a preset number of strokes, index and reset, the man from E.A.G.L.E. suggested the beautifully simple system shown at left. START button activates a Cycl-Flex® counter which energizes an oscillating cylinder. After correct strokes, counter shuts off the cylinder and resets. HZ170 Series Cycl-Flexs are available in 40 and 80 count ranges. They have famous plug-in feature for removal and replacement in seconds. Full details are in Bulletin 725, for a copy use Reader Service Card, circle number 871


IN WINE THERE IS TRUTH...






Although Pliny the Roman lived nearly 2,000 years ago, he must have known the vintner for whom the man from E.A.G.L.E. developed the system at the left. Nature's gently programmed portion in the work of wine making must be aided by exacting man-made blending techniques and quality procedures. To control these, Cycl-Flex HG100 timers are used as follows: the first timer fills the main vat from various pressings to create desired blend. During its adjustable "OFF" period, a second timer draws a precise sample. HG-100 series offer ranges from 60 seconds to 30 hours, features plug-in designs. Complete details are in Bulletin 321, for a copy use Reader Service Card, circle number 872

POSITION IS EVERYTHING...

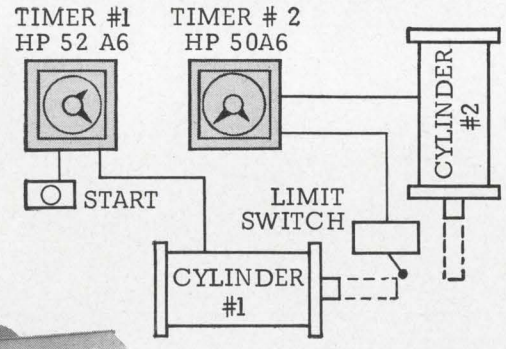



At least, that's what a machine tool manufacturer told the man from E.A.G.L.E. It seems he wanted to position a workpiece automatically within a jig. The action must be positive and reproduceable as the pieces vary in size. The man from E.A.G.L.E. suggested the system at the left. Push button starts timer #1 which permits cylinder #1 to advance to a preset position, tripping the limit switch which activates timer #2. Cylinder #2 is then extended into the desired position by timer #2. Although interconnected, both timers have separate dial adjustments to accommodate various sized workpieces. HP5 dial ranges extend from 5 seconds to 60 hours. They also offer famous plug-in design. Interested in the details? Write for Bulletin 125, use Reader Service Card, circle number 873

Ask the man from E.A.G.L.E. to open his "showcase" of ideas for you. Many of these ideas may help solve your process control problems. Want our complete catalog? Use the handy Reader Service Card, circle number 877 or write: Eagle Signal Division, E. W. Bliss Company, Federal Street, Davenport, Iowa 52803.

BLISS | **EAGLE SIGNAL**


A DIVISION OF THE E. W. BLISS COMPANY

Visit the Man From E.A.G.L.E.
Booth 4M33-4M34 IEEE Show March 21 to 24

CASE FOR THE MAN FROM E.A.G.L.E.

UNDERCOVER OPERATOR

22AP Plug-in General Purpose Relay




. . . the epitome of relay craftsmanship and design. Versatile to the Nth degree on loads to 10 amps. Available in 8- and 11-pin styles for AC, DC and plate circuit requirements. Features include: forms to 3PDT plus specials on request; standard units have gold-plated contacts for longer shelf life; lower pull-in voltages (DC: 70% of nominal, AC: 75% of nominal); AC operating voltages 0.5 to 250, DC 0.2 to 130 in current ranges from .005 to 10 amp. Complete information is in our new relay bulletin. For your copy, use Reader Service Card, circle number 874

SPECIFICATIONS

- *Contacts: SPDT, DPDT, 3PDT*
- *Contact Rating: 5 and 10 amps.*
- *Pull-in: 22 milliseconds average*
- *Drop-out Speed: 12 milliseconds average*
- *Size: 1 3/8" x 2 1/8" x 1 3/8"*
- *Weight: 3 ounces*

POWERFUL PARTNER

25PS Medium Power Relay




. . . toss your toughest medium-power-handling assignments to this workhorse. 25PS types carry loads to 20 amps. on a fast duty cycle in a breeze. UL listed. Features include: rugged 3/8" diameter silver cadmium oxide alloy contact; lower pull-in voltages (DC: 75% of nominal, AC: 76% of nominal); AC operating voltages 4 to 250, DC 1 to 130 in current ranges from .02 to 10 amp. For full technical information on this and other Eagle Signal general purpose and medium power relays, use the Reader Service Card, and circle number 875

SPECIFICATIONS

- *Contacts: SPDT*
- *Contact Rating: 20 amps. 115/230 VAC 60 cycle resistive • 1 HP @ 115/230 VAC motor-inductive*
- *Pull-in: 50 milliseconds max.*
- *Drop-out Speed: 30 milliseconds max.*
- *Size: 2 1/4" x 1 9/32" x 1 13/16"*
- *Weight: 3 ounces*

RELAY DESIGNERS' RELAY

25AA Open Frame General Purpose Relay



. . . and boy what a relay it is! Versatile, dependable, economical. You'll find hundreds of uses for these 5 or 10 amps., UL listed high-reliability types. Standard units have gold-plated contacts which permit longer shelf life. Other significant features include: lower pull-in voltages (DC: 70% of nominal, AC: 75% of nominal). AC operating voltages 0.5 to 250, DC 0.2 to 130 in current ranges from .005 to 10 amp. Detailed specifications on these and other Eagle Signal general purpose relays are given in a new technical bulletin. For your copy, use Reader Service Card, circle number 876

SPECIFICATIONS


- *Contacts: SPDT, DPDT, 3PDT*
- *Contact Rating: 5A and 10A @ 115 VAC•5A-1/10 HP @ 115 VAC, 1/6 HP @ 230 VAC•10A-1/6 HP @ 115 VAC, 1/3 HP @ 230 VAC*
- *Pull-in: 22 milliseconds average*
- *Drop-out Speed: 12 milliseconds average*
- *Size: 1 7/8" x 1 9/32" x 1 1/2"*
- *Weight: 2 ounces*

Ask the man from E.A.G.L.E. to open his "showcase" of ideas for you. Many can help solve your process control problems. Want our complete catalog? Use the handy Reader Service Card, circle number 878 or write: Eagle Signal Division, E. W. Bliss Company, Federal Street, Davenport, Iowa 52803.

BLISS EAGLE SIGNAL

A DIVISION OF THE E. W. BLISS COMPANY

Visit the Man From E.A.G.L.E.
Booth 4M33-4M34 IEEE Show March 21 to 24

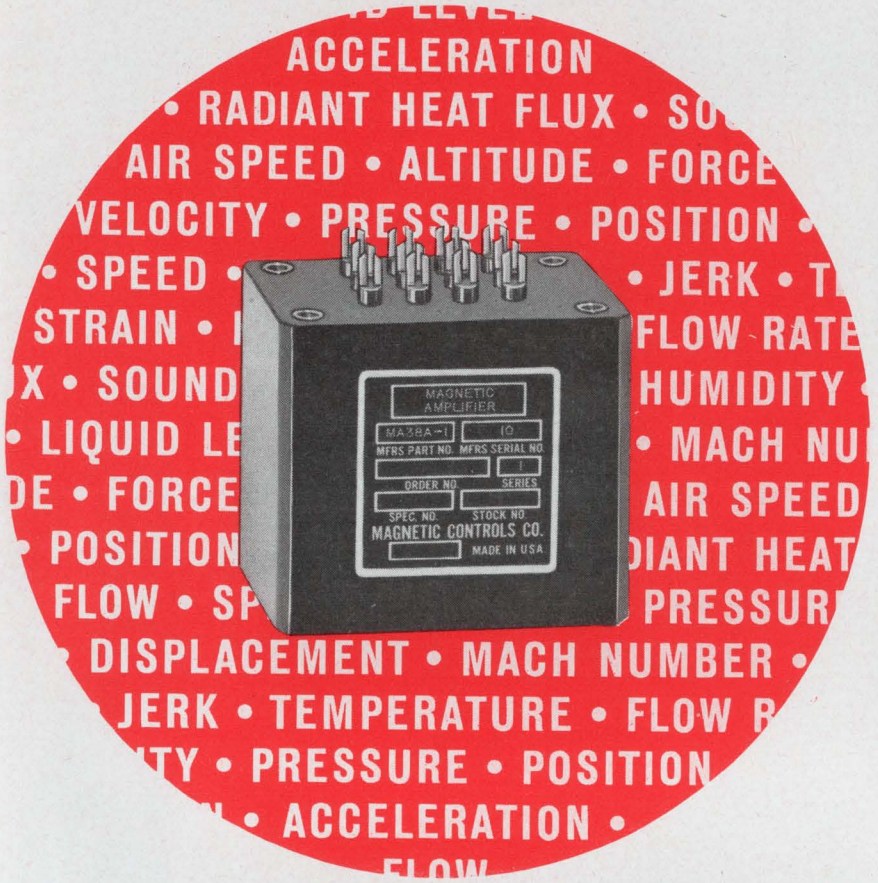

Can you use a truly Universal Amplifier?

A signal from any transducer can drive this all-purpose amplifier to give an alarm or to function as a control device. A two-stage single ended magnetic amplifier, the MA-38, exhibits extreme sensitivity through three isolated control windings. Two of these windings are identical for control functions and one for feedback or bias control. A change of as little as 1.0 microamperes will result in an output change from 0.5 to 5.0 volts ■ The two control windings may be connected in series for increase gain from one signal source or may be connected to two signal sources either of which may control the amplifier ■ Used with a 400 ohm relay, it can be used to operate a high gain switching device or with a reactor unit to provide proportional control. Units priced from $98.00.

SPECIFICATIONS

Input	115 V ±10%; 60 cps ±5%
Input Voltage	0.5 VA
Output	5.5V Minimum
Temperature Range	−40°F to +185°F
Dimensions	1.53 x 2.28 x 2.16 inches
Control Winding Resistance	450 ohms—each winding

SYSTEMS DIVISION

MAGNETIC CONTROLS COMPANY

6414 CAMBRIDGE ST., MINNEAPOLIS, MINNESOTA 55426

ON READER-SERVICE CARD CIRCLE 29

(Biomed, *continued***)**

Greatbatch of the State University of Buffalo. Dr. O. H. Schmitt of the University of Minnesota felt that while neither quality nor reliability should be sacrificed for price advantage, the cost factor should be raised in importance because of its impact on the availability and utilization of needed devices.

Power supplies for prosthetic devices such as "pacemakers" (heart stimulators) present problems in both size and the need for recharging of batteries. To demonstrate this, Greatbatch said that if the size of the electronic portion of a pacemaker were halved, the size of its power supply would only be reduced by 5% and this power supply is many, many times the size of the electronic package. Studies are presently being made to determine the suitability of nuclear power in place of batteries. An aspirin-sized pill of plutonium-238 could keep a pacemaker going for 60 years, according to Greatbatch.


A member of the audience stated that a new probe is needed that will operate reliably without the need for insertion into an organ, which results in tissue destruction. This new transducer must be able to adhere to any body surface.

Braille devices aid blind engineers

Electrical measurements can now be made by blind engineers, according to T. A. Benham, professor of engineering of Haverford College.


Benham has designed a braille meter face with which the sightless can read a variety of instruments. It uses a nulling technique.

Its application to the Wheatstone

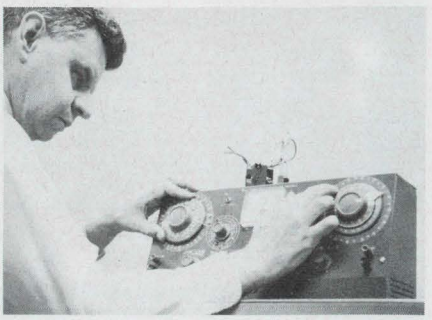

1. **T. A. Benham** operates a Heath Impedance Bridge that he fitted with Braille-readout dials.

THESE CON AVIONICS POWER SUPPLIES COSTS $200 LESS THAN THE GOING RATE. WHAT DO YOU TRADE OFF WHEN YOU BUY THEM?

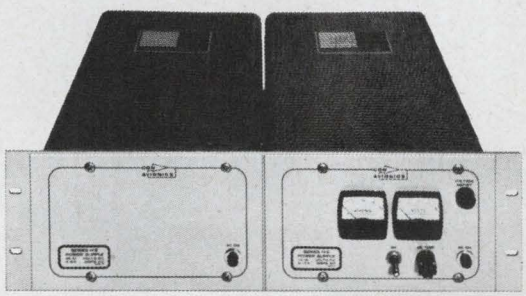

This rack holds two HS power supplies. Each power supply is rated at 12 volts, 20.5 amps.

NOTHING.

You certainly don't trade off quality. Our power supplies are guaranteed unconditionally for five years. They have an M.T.B.F. of 35,000 hours, calculated according to Mil Handbook 217. Silicon transistors are used exclusively.

The secret in manufacturing these units for $200 less than the going rate is designing **systems** power supplies right from the start. (Most other manufacturers just warm over their designs for lab supplies.) So our way, with a lot of value analysis and some new techniques, we're able to pack a lot of value into just 5¼" of panel height.

If you buy systems power supplies it could very well be worth $200 to you to have Con Avionics' data available.

PARTIAL SPECIFICATIONS

INPUT: 105-125 VAC, 47-63 cps
REGULATION: (Line and load combined) ±0.05%
RIPPLE: 1 mv RMS max
RESPONSE TIME: 25 microseconds
TEMPERATURE COEFFICIENT: 0.015%/°C or 18 mv/°C., whichever is higher
TEMPERATURE: 75°C max.
M.T.B.F.: 35,000 hours
GUARANTEE: 5 years, unconditional

The entire voltage range between 0 vdc and 51.0 vdc is covered in 42 models.
Currents range from 5.5 amps to 46.0 amps.
Wattages from 55 to 816.

A DIVISION OF CONDEC CORPORATION

CONSOLIDATED AVIONICS

800 SHAMES DRIVE / WESTBURY, L.I., NEW YORK / (516) ED 4-8400 TWX: 510-222-6151

See Us at IEEE Booth 1A26

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 30

The First 3/4" Lighted Pushbutton Switch With 6 Pole Double Throw Capacity and Plug-In Convenience



USECO introduces ORCON*



New Breakthrough in Switch Design. ORCON is the first lighted pushbutton switch that matches the needs of today's technology in design versatility, operational flexibility and ease of maintenance. Here's why:

- **25% Smaller — only ¾" Diameter.**
- **Multicircuit capacity — 2 pole double throw through 6 pole double throw — other variations available.**
- **Plug-in convenience — optional connector simplifies installation and maintenance.**
- **Isolated self-aligning contacts — for increased reliability.**
- **Independent light circuit — accepts incandescent or neon without lens modification.**
- **Operating action versatility — choice of four actions.**
- **"Customized" to your exact requirements from standard options.**

Developed by USECO engineers for Computer and Data processing equipment, Tape Recorders, Telemetering Devices, Control Panels, Broadcasting Consoles and Business Machines, ORCON's advanced features are adaptable to an expanding variety of new applications, and are available for immediate delivery. Please contact us with your specific needs.



For complete information send for the illustrated technical brochure today. USECO DIVISION, 13536 Saticoy Street, Van Nuys, California. Phone (213) 786-9381.

*USECO TRADEMARK, PATENT PENDING

USECO® DIVISION OF LITTON INDUSTRIES

ON READER-SERVICE CARD CIRCLE 31


(Braille devices, *continued*)

bridge (see photo 1) uses this technique directly. Instead of nulling a galvanometer until its pointer is undeflected, the blind engineer nulls an audible tone. This is accomplished by turning a dial that points to a set of raised dots. By feeling these dots with his fingers the engineer can determine the value of the "reading."

Benham has also made other Braille-readout devices. A standard Simpson meter is now available with a Braille face (see photo 2). The blind engineer can operate the Simpson on all the scales of the normal meter. Again; he must null the sound that emanates from the top of the meter by moving a pointer. He then feels the value on the Braille face.

The blind engineer can even read punched tape from a computer with a device that converts the hole matrices into a Braille code (see photo 3).

Benham does this work in a program called "Science for the Blind" in Haverford, Pennsylvania.

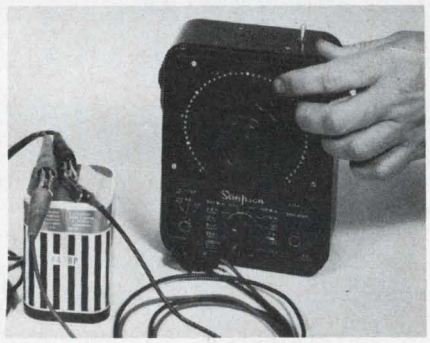

2. **The face of this special Simpson meter** is read by a blind person.



3. **Punched-tape reader** converts hole matrices to Braille.

A PROBLEM SOLVER RECTIFIER... FOR FREQUENCIES TO 100 KC

INTERESTED?

Read on and learn how fast recovery rectifiers helped one designer


CASE HISTORY

George had a problem--the bridge rectifiers in a 30 KC static inverter power supply were running much too hot. This perplexed him since the bridge output current of 1 Amp was within the rating of these rectifiers, 1N3189s. Although crowded for space, George decided to try larger stud mounted 1N1124As. No help! They also ran hot and in addition reduced output voltage and operating efficiency.

What George needed was a fast recovery rectifier to eliminate the severe reverse recovery losses at this frequency. Such losses cause conventional diodes to overheat and drop their output voltage. The solution ...UNITRODE UTR22s which have recovery times of 100 nanoseconds in the standard 1 Amp to 30 volt test circuit. In contrast the 1N3189 has a typical recovery time of 2 microseconds; a stud mounted 1N1124A is even slower.


In addition, George picked up some other bonuses--much smaller size, lighter weight, higher thermal efficiency and increased reliability because of the unique Unitrode monolithic construction.

P. S. Note the Unitrode 50 watt surge zeners (the same small size as the UTR 22) used to protect the expensive power transistors from burnout due to voltage spikes.

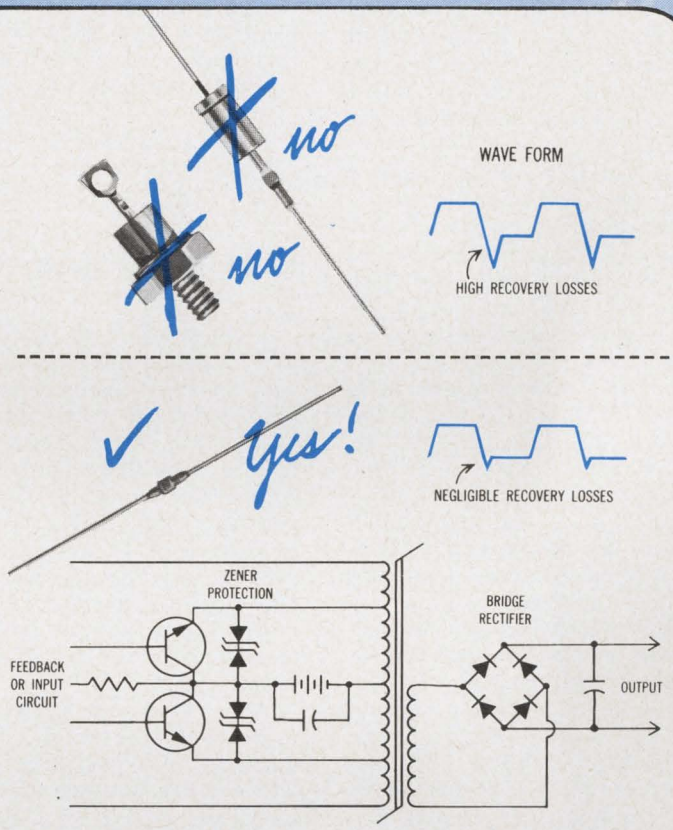

YOU CAN HELP YOUR DESIGNS TOO.
Contact the factory, call your local COMPAR office, or circle the reader service number on this magazine's reply card. All will insure your receiving data sheets and samples of Unitrode Fast Recovery Rectifiers (including the new 50 nanosecond UTX series) plus information on other Unitrode devices immediately.

REPRESENTATIVES IN PRINCIPAL CITIES THROUGHOUT THE WORLD



UNITRODE®
"better always/by design"

UNITRODE CORPORATION
580 Pleasant Street, Watertown, Mass. 02172 Telephone (617) 926-0404
TWX (710) 327-1296

See us at IEEE Booth No. 2J30.
Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 32

Letters

MOS FETs are fast enough for RF, semiconductor manufacturer asserts

Sir:

We commend you for an excellent article on MOS FETs in the Jan. 18, 1966 ELECTRONIC DESIGN issue (p 22). This was a most difficult task, because each manufacturer, naturally, would be biased in his approach. However, in all fairness to the industry, we desire to go on record in correcting a few narrow viewpoints reported in the article.

In particular, we respond to the quotation of Mr. Recklinghausen of H. H. Scott [who prefers junction FETs for RF applications]. KMC Semiconductor Corporation was the first company to announce commercially available 200 and 450 MHz operational MOS transistors. These devices have transconductance cutoff frequencies of 1200 and 1500 MHz, respectively. These are *n*-channel, full gate, depletion MOS transistors. We also manufacture *p*-channel enhancement devices. The noise figure and power gain are comparable to the best silicon bipolars on the market. A high transconductance vhf geometry MOS has been used in broadband circuits in the range of 30 to 220 MHz and in narrow-band circuits over the frequency range of 2 to 220 MHz. Other RF applications include single-ended and balanced mixers, oscillators and IF amplifiers. During 1965 prototype sampling totaled 5000 transistors for RF designs. The field returns due to mishandling (the solder iron and electrostatic damages) were approximately one-half of one per cent. MOS transistors in the vhf range will improve CATV performance.

Present reliability data on operating (150 MW) and storage (200°C) life indicate a MTBF of better than 40,000 hours. Techniques on surface stabilization have been responsible for this reliability.

Microwave mixer diodes and germanium mesa transistors are prone to pulse burnout and electrostatic damage. However, present-day equipment incorporates these devices. Tunnel diodes required an education in handling, which is true of any new device.

In summary, the MOS transistor is fast enough for RF performance, and the electrostatic problems are being solved. With regard to its frequency response, McIntosh of Westinghouse Research Labs predicts 10 GHz operation with a MOS design. Eventually the MOS will surpass the bipolar transistor and electron tube in frequency response.

PAUL E. KOLK
Vice President of Engineering
KMC Semiconductor Corp.
Long Valley, N. J.

Recklinghausen replies

Sir:

I fully grant to Mr. Kolk that KMC Semiconductor Corporation was the first company to announce vhf field-effect transistors. I also grant that MOS transistors can have a noise figure and power gain comparable to silicon bipolar transistors. I feel, furthermore, that a prediction of 10 GHz operation for MOS transistors may be possible in the future. However, I feel that more advantageous results, including shf, can be obtained with junction-type FETs.

As a figure of merit, the best measure is the ratio of transconductance to capacitance. The insulating layer between the gate and the active region of a MOS can be thought of as an element that either increases the interelectrode capacitance or decreases the effective field applied to the channel. This reduces the high-frequency figure of merit for an MOS transistor.

Our experience with junction field-effect transistors, totalling over 20,000 units, has shown the noise to be lower than the best silicon bipolar transistor in the FM broadcast band. The junction field-effect transistors used by us have also successfully withstood assembly-line handling without any precautions or additional education. They have even withstood such mishandling as misinsertion in sockets, with applied power.

In our usage of junction-type field-effect transistors we do not have to worry about RF performance or any electrostatic problems.

DANIEL R. VON RECKLINGHAUSEN
Chief Design Engineer
H. H. Scott, Inc.
Maynard, Mass.

A further defense of engineer licensing

Sir:

I read with interest your editorial "The Engineer's License—Is It Worth It?" (Nov. 8, 1965, p. 18).

When you use the term "license," I must assume you are speaking of the stationary engineer, who receives a license to perform a prescribed task by paying a fee. The engineer is registered as a professional, capable of exercising judgment based upon a suitable education, both formal and informal, including experience. The purpose of engineering registration is to protect the public and, we hope, nothing else. I feel that in my professional life I have had a greater effect on the health and well-being of more people than a dozen average medical doctors, and I think this is not unusual for a Professional Engineer.

In my opinion, many of the people who consider themselves electronic engineers are primarily technicians who should not be allowed to make engineering decisions, until they have satisfied the broad requirements of a Professional Engineer.

Take, for example, your magazine, which persists in using the symbol for an electrical contact to represent a capacitor. There are many standards in the United States, and all agree upon the proper symbol for a capacitor. Any technician in the field has the right, when examining devices or working on equipment, to assume that the drawings for this equipment have been prepared in accordance with existing national standards. Consider, then, the unfortunate man in the field who assumes that this device shown as a pair of parallel lines is a harmless switch contact, when in reality it is a lethally charged capacitor.

The Professional Engineer has included in his training a knowledge of ethics, economics and regard for public safety, in addition to his theoretical technical knowledge. This training allows him to use the efforts of the technician in preparing devices and systems which, in addition to being technically feasible, are safe an in accordance with generally accepted principles of workmanship, etc.

I cannot speak for the engineering examinations in all states; however, it is my understanding that the Illinois examination is typical of that given in many states and far from being obsolete. It is

we trimmed this



from this new



trimmer

ACTUAL SIZE

LOW COST, HOT MOLDED TRIMMERS!

CLAROSTAT
SERIES 371

Now Clarostat bring you a hot-molded trimmer rated at .375 watt at 70 C and priced a nickel a unit under anything even comparable in performance. The Series 371 potentiometers feature hot-molded elements for infinite resolution, longer life and low internal noise. Just ½" in diameter,




these quality pots eliminate bushings (passing the savings on to you) and are available with either wire leads or solder lugs. Rated for 350 VDC, the resistance ranges are from 100 ohms to 1 megohm. Clarostat Series 371 Trimmers are available from stock now for immediate delivery.

CLAROSTAT


CLAROSTAT MFG. CO., INC. DOVER, NEW HAMPSHIRE

VISIT CLAROSTAT IEEE BOOTH 4M14


ON READER-SERVICE CARD CIRCLE 33

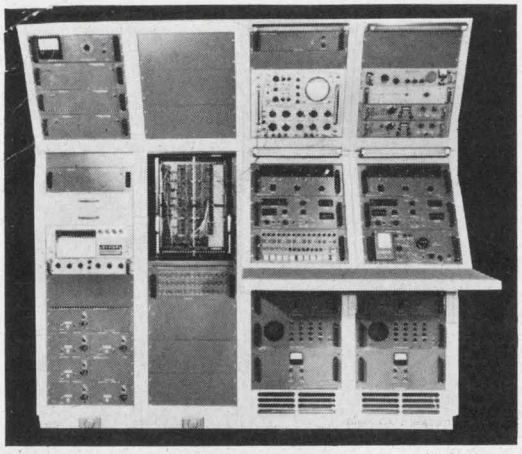

U. S. Navy (AUTEC) Master Timing System

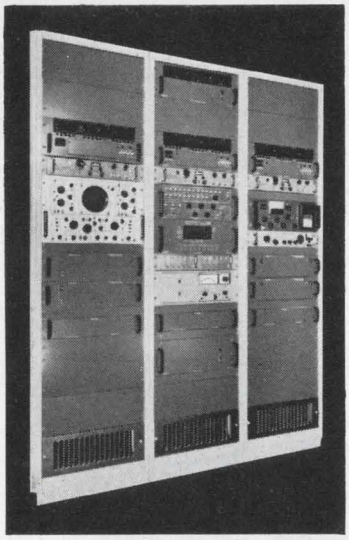

NASA Mississippi Test Facility (MTF) Master Timing System

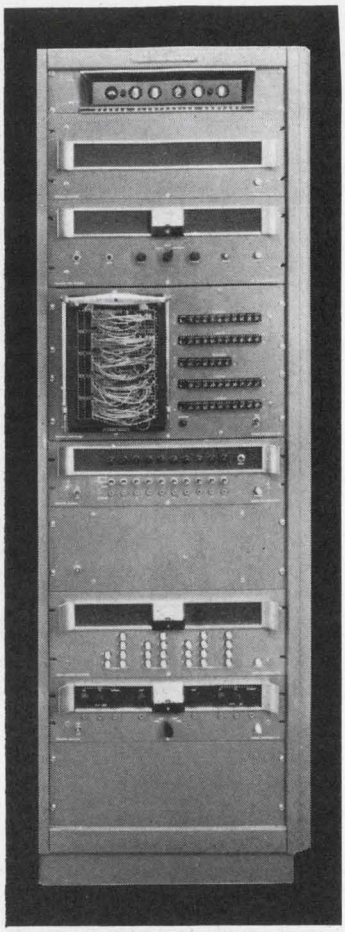

NASA Wallops Island Terminal Time Systems

Hyperion

the name for Precision Time Indexing and Automatic Search Equipment and Systems

Hyperion's Timing Equipments are being used on many major Range Facilities including NASA, Mississippi Test Facility (MTF), U. S. Navy Underwater Range (AUTEC), NASA, Wallops Island, etc.

Hyperion's Technical Staff represents 100-man years of technical experience in the field of Precision Timing and a broad background in the field of Ultra-Stable Oscillators, Automatic Time Synchronization with LORAN-C, VLF, and WWV Time Transmission Equipment, Precision Time Equipment includes Precision Time Code Generators and Countdown Clocks, and Fully Automatic Tape Search Equipments for Ground and Airborne environments.

Write or call Hyperion for your precision range time indexing and search requirements

Hyperion

INDUSTRIES CORPORATION

• DIGITAL PRODUCTS DIVISION
134 COOLIDGE AVENUE, WATERTOWN, MASSACHUSETTS 02172
TWXN: 617-924-9272 TEL: 617-WA6-0140

ON READER-SERVICE CARD CIRCLE 34

prepared twice a year, to include a wide variety of subjects, necessary for a knowledge of engineering.

No doubt there will be incompetents who manage to pass this examination. In my years of observing members of this profession, I find these incompetents typically are those who are specialists in a very narrow field.

W. B. JARZEMBSKI, P.E.
Director of Product Engineering
Appleton Electric Co.
Chicago, Ill. 60657

Sir:

Maria Dekany's Nov. 8 editorial espousing liberalism ("The Engineer's License—Is It Worth It?") should be reviewed with a questioning attitude.

The public must be protected, and licensing by law is an accepted method. The purpose of the laws is not as stated in the editorial. High standards and ethical practice are secondary results.

All engineers—although they may be considered specialists by their contemporaries—are not necessarily professionals. It is conceivable, from the standpoint of public responsibility, that many are incompetent.

Very few designs or systems in which the public is involved are so "pure" that they can be evaluated by a specialist in one field only.

A doctor of medicine must be knowledgeable in a great many phases of medical practice. He can, if he chooses, be a specialist.

Professional engineers are likewise obligated.

RAY SUMMERER
Grand Blanc, Mich.


The editorial did not advocate liberalization of the examination required to obtain the license. Rather it urged improvements in the examination. The suggestions were based on a survey of working engineers and consultants, and it reflected the opinion of the majority.

Nor are working engineers alone in calling for improvements. A group of illustrious educators indicated their support of this goal at the annual meeting of the Association of the Engineering Colleges, held in Buffalo, N. Y. Prof. R. C. King, chairman of the State Board of Examiners of Professional Engineers and Surveyors, said: "Part III of the examination should be increased from four to eight hours, since it is considered to be of major importance. A longer time would allow broader coverage, giving op-

down with "specials"!!


who needs 'em with Ohmite's big variety of *stock* GPR relays

MOUNTING AND CONNECTING VERSATILITY

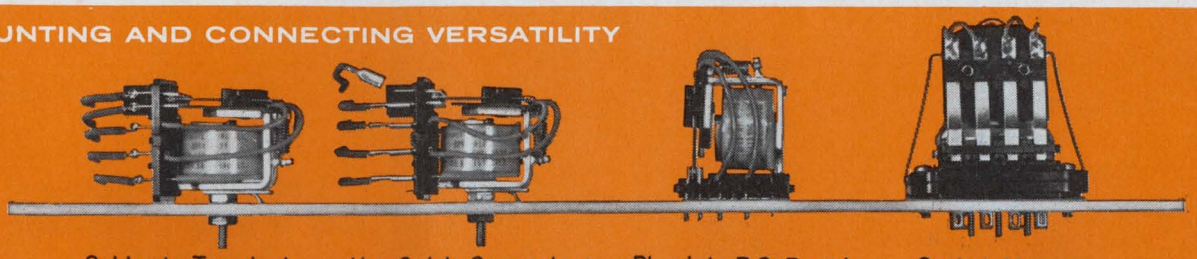


Solder to Terminals | Use Quick-Connectors | Plug into P.C. Board | Socket Mount

VERSATILE ENCLOSURES

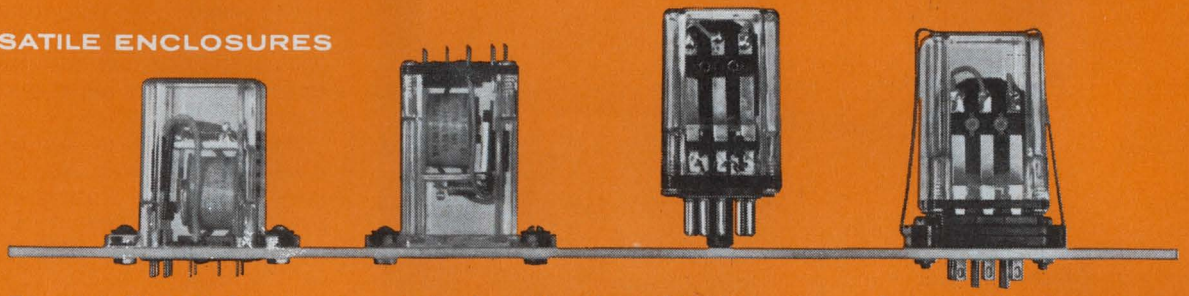

Terminals Through-Chassis | Terminals Above Chassis | Octal Style Plug | Socket for Std. Terminals

EXCLUSIVES AND OTHER VARIETIES

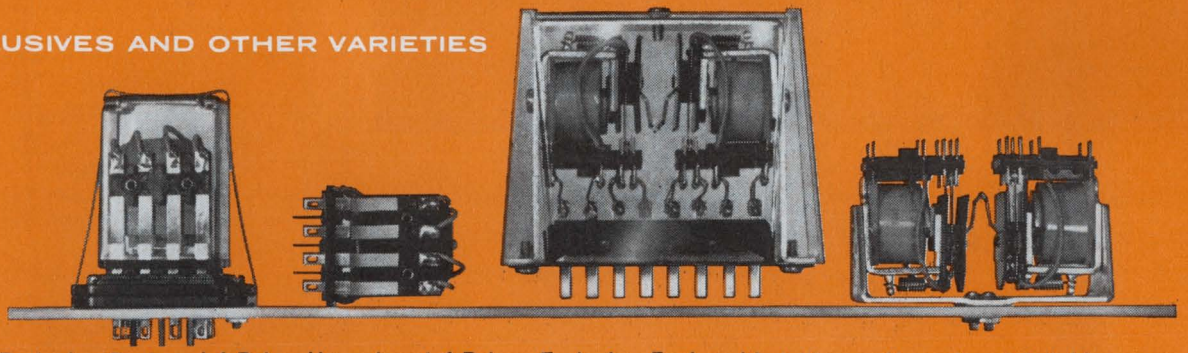

Exclusive Enclosed 4-Pole | Unenclosed 4-Pole | Exclusive Enclosed Latching | Unenclosed Latching

■ All these and other physical variations are stocked for a variety of general purpose and specialized electrical functions such as plate circuit, thyratron, and indicator-light types. Both unenclosed and enclosed relays fit the same SOGPR socket. And don't forget, dual-purpose terminals (for soldering and quick-connectors) are standard on all unenclosed and most enclosed relays. Many models UL and CSA listed.

Contact Combinations—Up to 4PDT.

Contact Ratings—Two ratings: fine-silver contacts, gold-flashed, 5 amps resistive at 115 VAC or 32 VDC: silver-cadmium, 10 amps.

Coil Operating Voltage Range—Up to 230 VAC 60 cycles, or 110 VDC.

Coil Wattage—1.4 Watts DC: 1.6 watts (2.0 volt-amps) AC, except 2.4 watts (3.7 volt-amps) for 4-pole AC relays.

Insulation—Tested at 1500 VAC between terminals and ground.



Yours for the asking... Catalog 700 showing all Ohmite relay lines.

RHEOSTATS • POWER RESISTORS • PRECISION RESISTORS • VARIABLE TRANSFORMERS • RELAYS
TAP SWITCHES • TANTALUM CAPACITORS • SEMICONDUCTOR DIODES • R.F. CHOKES

OHMITE MANUFACTURING COMPANY
3643 Howard Street • Skokie, Illinois 60076
Phone: (312) ORchard 5-2600

ON READER-SERVICE CARD CIRCLE 35

how to get your A-D Converter "made to order" from TI



For your choice of more than 10,534 TI converters, just select the input/output functions that meet your requirements. Then you get an A-D Converter composed of carefully engineered, field-proven functional modules that exactly fit your job . . . "made to order" from TI.

With Series 846 Converters, you'll get speed as high as 69,000 conversions/sec including built-in sample and hold. You'll get accuracy to 0.025% of full scale and high input impedance (100 megohms) for single-ended or differential units. And for low-level conversion, you get high common-mode rejection.

You can also have your choice of TI Multiplexers from 32 different models. Multiplexers can be furnished to accommodate 10 to 160 channels at sampling rates to 50,000 channels/sec. Four channel-select versions are offered: addressable, addressable/sequential, sequential or direct channel-select.

When you need an A-D Converter or Multiplexer, choose one of the "made to order" instruments from Texas Instruments. For more information, contact your nearest TI Authorized Representative or write directly to the Industrial Products Group in Houston.

INDUSTRIAL PRODUCTS GROUP

TEXAS INSTRUMENTS
INCORPORATED
P. O. BOX 66027 HOUSTON, TEXAS 77006
118 RUE du RHONE GENEVA, SWITZERLAND

751

ON READER-SERVICE CARD CIRCLE 36

portunity to examine the candidate on a wide range of specialities and, in general, add flexibility to the examination."

Engineers in New York State who would like to make their opinions known to the board can write to Newell L. Freeman, Secretary, State Board of Engineering Examiners, University of the State of New York, State Educator Dept., Education Building, Albany, N. Y.

In other states, get in touch with State Board of Engineering Examiners.

THE EDITORS

Another advocate of a new transistor code

Sir:

To renew an old controversy about transistor coding, let me suggest a hypothetical situation. Let's imagine ourselves about ten years in the future.

A new transistor, designated the 2N35564, has been recently introduced. This *npn* germanium device has a minimum current gain of 500, a C-E breakdown of 1000 V, a cutoff frequency of 10 GHz, is capable of dissipating 100 watts and is packaged in a stud-mounted TO-43 case.


Now let's consider what useful information is revealed by the type number of this amazing device. All we find is that this high gain, high voltage, high frequency, high power transistor had been registered just after the 2N35563, and just before the 2N35565.

The fact is that we have accepted and are existing with an inferior system of transistor coding, simply because it was an extension of an equally inferior system of diode coding. There is still some confusion about the properties of many popular types.

I believe that a parameter or characteristic coding system for semiconductor devices will benefit the majority of people concerned with these devices.

Let's standardize and implement such a system now. We should be able to distinguish an *npn* from a *pnp*, a silicon from a germanium, a high gain from a low gain, a unijunction from an SCR or from a FET, a signal diode from a rectifier, a tunnel diode from a unitunnel and a 5-V Zener from a 9-V Zener.

GEORGE ROY SKOBLIN
Kearfott Div.
General Precision
San Marcos, Calif.

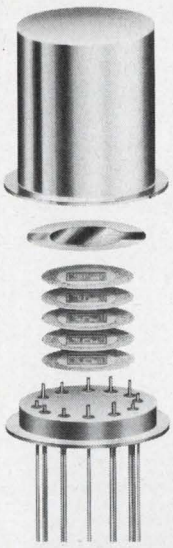

REEVES-HOFFMAN

"chips" away at the space problem with new


COLD-WELDED CRYSTALS


Reeves-Hoffman's newest series of crystals, packaged in cold-welded TO-5 transistor cans, are designed for operation at frequencies from 3 to 125 MHz. Frequency tolerance over the temperature range from —55°C to +105°C is ±0.004%. (Upon special request, ±0.0025% can be provided.) Shock and vibration ratings exceed the requirements of MIL-Spec 3098D. Aging at 65°C is 6 parts in 10^6 per year.

Cold welding eliminates solder and attendant flux and heat, removes undesirable damping and corrosion, solves problems of thermal isolation. Leak rate is better than 10^{-9}cc of helium per second. The results: substantial increases in the reliability and stability of crystal units, oscillators and filters; further opportunity for miniaturization.


For example, by using microminiature circuitry "chips," it is possible to produce a cold-welded crystal oscillator that occupies the space normally used for the crystal alone. The oscillator shown at left, for example, is in the A-4 holder shown below. Can this new micromodule technique solve space problems for you? We invite your inquiry.

IEEE Booth 1B02

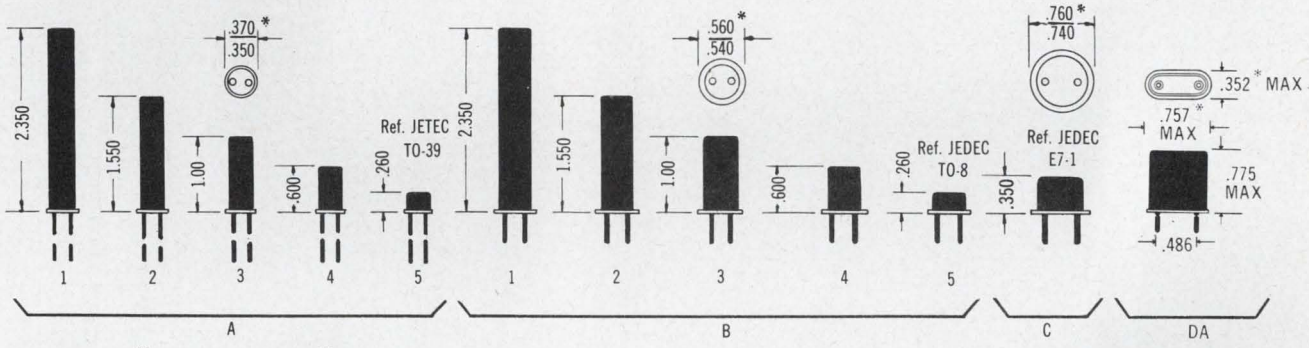

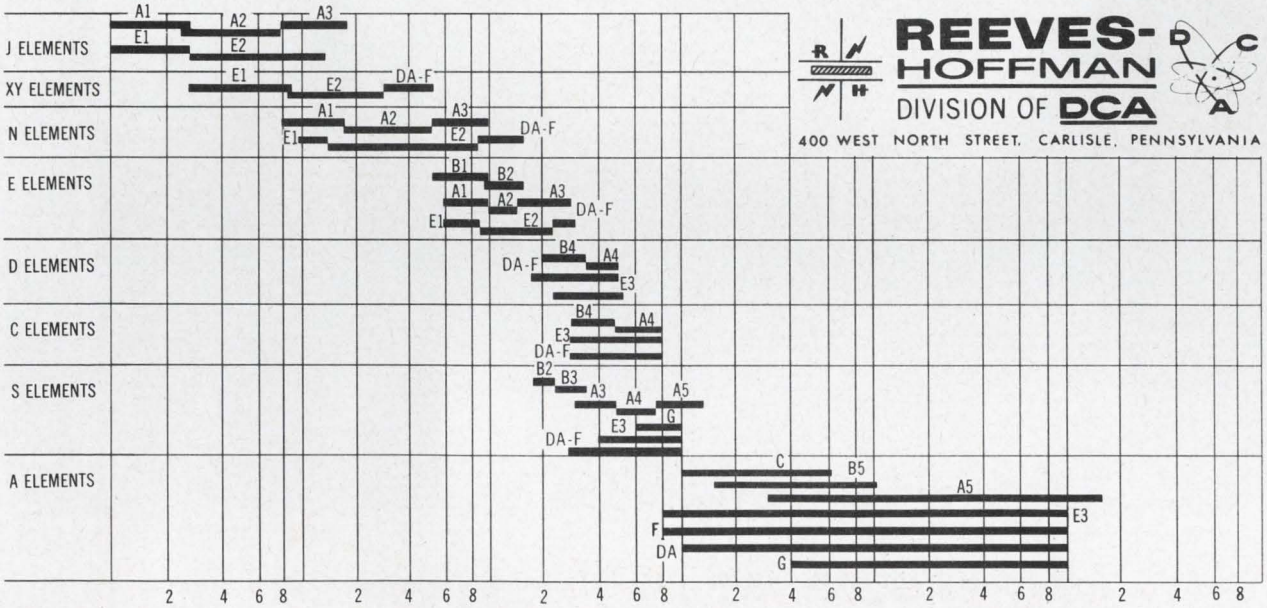


REEVES-HOFFMAN
DIVISION OF DCA
400 WEST NORTH STREET, CARLISLE, PENNSYLVANIA

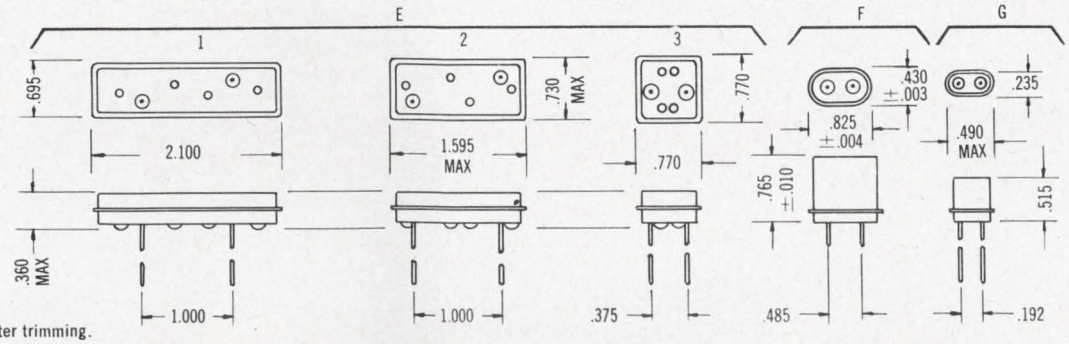

*Dimensions after trimming.

CW-166

ON READER-SERVICE CARD CIRCLE 37

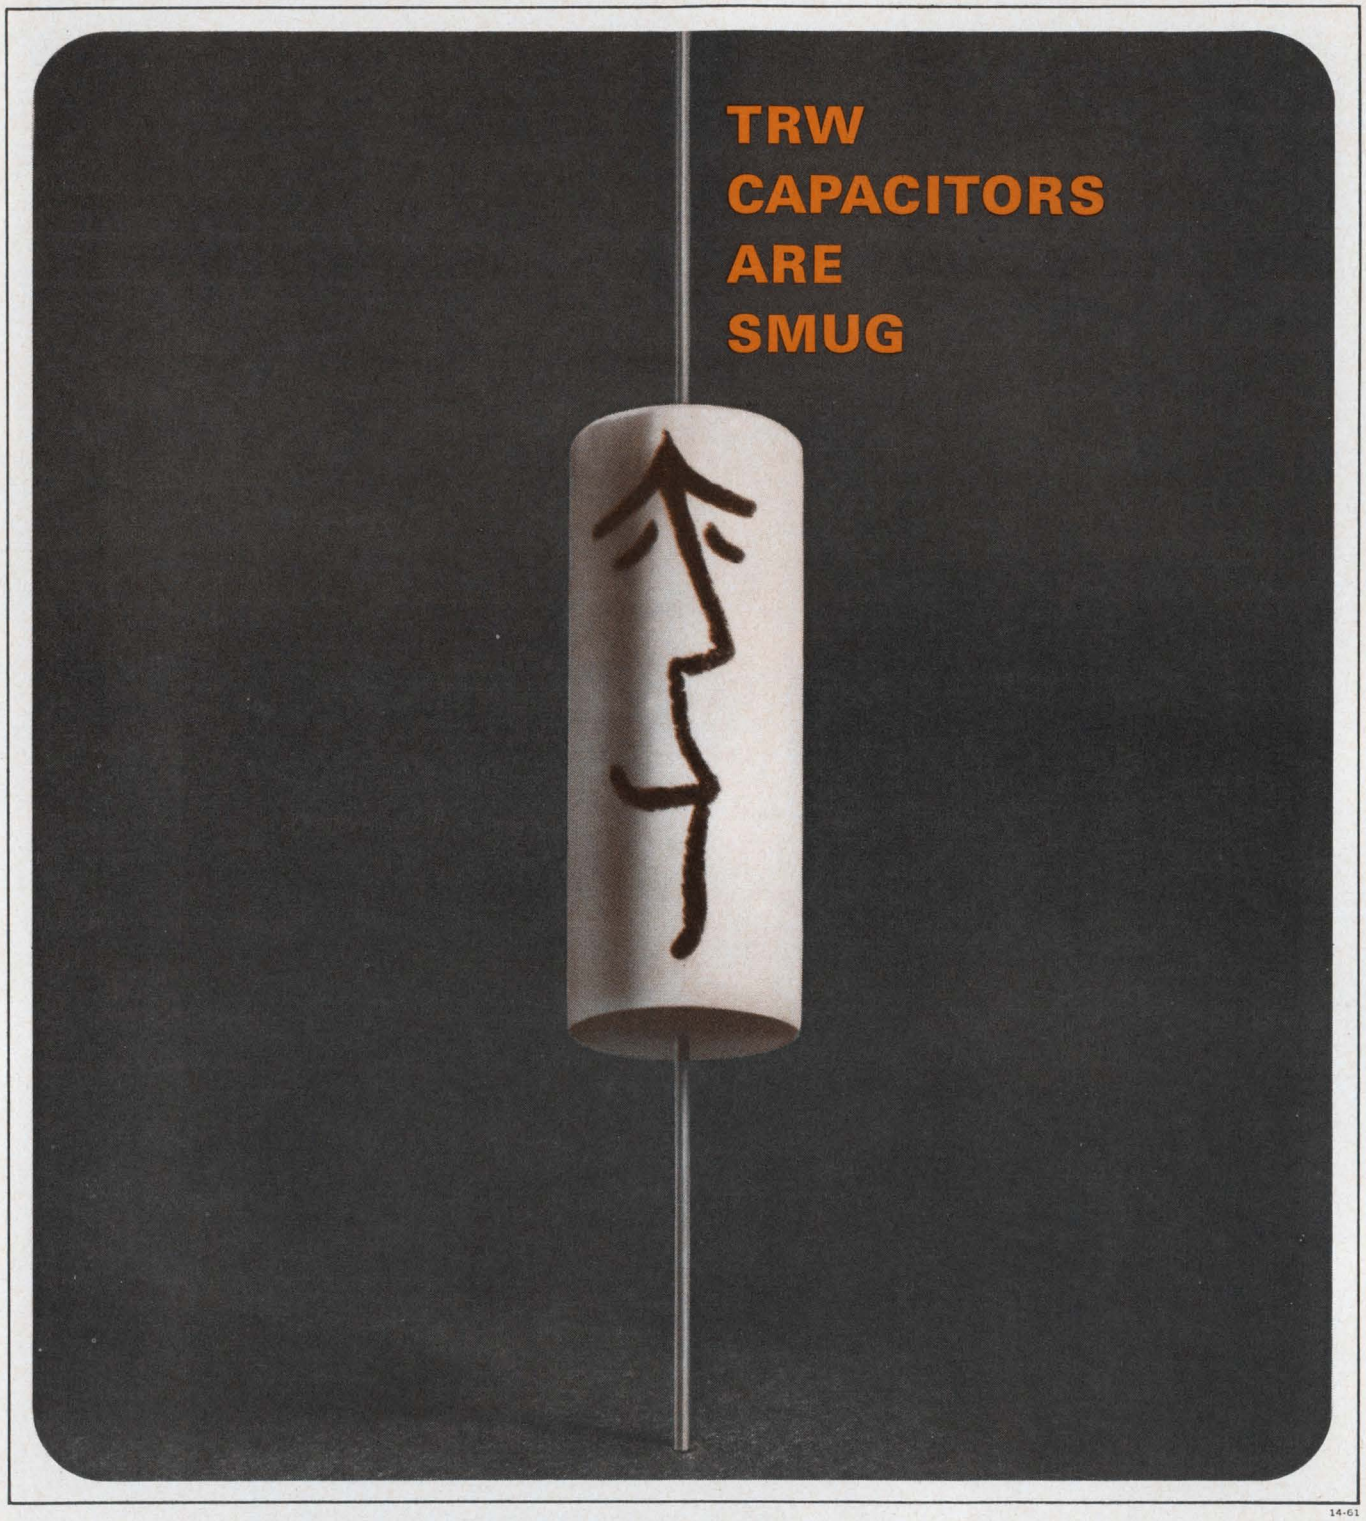

. . . especially our new metallized polycarbonates!

TRW has now extended its leadership in film capacitors to include metallized polycarbonate types. Two features of the X463UW are outstanding. Precise processing assures low TC through temperature ranges to 125° C. Metallized construction reduces size to less than one half that of film-foil designs. Other features of the line include:

- Capacity range from .01 to 10.0 mfd
- Low dielectric absorption
- Available in tolerances to ± 1%
- Humidity resistance per MIL-C-27287

For full information contact: TRW Capacitors, Box 1000, Ogallala, Nebraska. Phone: 308-284-3611 • TWX: 910-620-0321.

TRW CAPACITORS

ON READER-SERVICE CARD CIRCLE 38

Co-Publishers
James S. Mulholland, Jr.
Robert E. Ahrensdorf

Editorial Director
Edward E. Grazda

Editor
Howard Bierman

Managing Editor
Robert C. Haavind

Technical Editors
Joseph J. Casazza
Rene Colen
Maria Dekany
Richard Harnar
Mark B. Leeds

News Editors
Frank Egan
Roger K. Field
Alfred Rosenblatt

West Coast Editors
Ralph Dobriner
Peer Fossen

New Products Editor
Patrick Cook

Washington Editor
S. David Pursglove

Editorial Production
Dollie S. Viebig
Anne T. Lombardi

Art Director
Clifford M. Gardiner

Art Assistant
William Kelly

Technical Illustrators
Lewis D. Hill
Leonard P. Levenson
Cheh Nam Low

Production Manager
Thomas V. Sedita

Asst. Production Manager
Helen De Polo

Production Assistants
Carl Merkin
Bernard Wolinsky

Circulation Manager
Nancy L. Merritt

Reader Service
Diane Pellechi



It's the engineer's job to bring order out of chaos

Why is the electronic design engineer forced to use non-uniform and often incomplete specification sheets for components, instruments and other equipment? Why does he have to operate with a meaningless transistor coding system? Why does he have to look forward to the same type of coding for microcircuits? Why is he forced to make up his own specification sheets or call in competitive salesmen if he wants to obtain all the design data he needs on devices and equipment? These were some of the questions we asked in our survey of engineering societies, trade associations and working engineers (see page 86).

There were good reasons for asking these questions. Problems of uniform test procedures, standard specifications, and meaningful coding systems are not unique to the electronics industry. In the metals field, for example, similar problems existed. As the number of processes and alloying techniques grew, engineers were not fully aware of the variety of metals available, and they found it hard to predict what they would receive when they ordered. Thus, they weren't able to design intelligently. Despite the seemingly impossible task of bringing order out of this chaos, the job was done. Manuals were written to describe the processes in use, their effects on properties, and the effects of different alloying agents.

Our industry's failure to achieve similar results must be blamed, to a great extent, on the engineer himself. Manufacturers can not come up with new specification ideas, uniform test procedures for similar devices, or standardized spec sheets without active participation by engineer-users. And here is where the trouble lies. Most engineers do not communicate effectively with manufacturers, even though several channels exist.

The designer complains to his peers, and to his superiors, but he generally doesn't use the right avenues to his suppliers. Complaints to salesmen may occasionally filter back to the manufacturer, but, if they refer to non-competitive industry-wide practices, little action results.

The answer, we believe, lies in the attitudes we found engineers to have toward technical societies. They are looked upon as "clubs for engineers," where members can get together at least once a year and exchange information. Most engineers have little interest in the policy-making machinery of technical societies. Yet these societies do have subcommittees that work closely with trade associations or other manufacturer groups. Engineers *should* get involved with these groups, attend meetings, voice their complaints. Societies usually welcome worthwhile suggestions from members.

If these attempts are made without success, then it is time to consider opening new channels of communication. Perhaps another organization could be formed to establish requirements for uniform data for design.

In any event, the engineer can not abdicate his responsibility to bring order out of chaos.

MARIA DEKANY

LITTON ELECTRON TUBES


Whatever your requirement in microwave tubes, display devices or accessory equipment... there's an answer in our hundreds and hundreds of tube types spanning the 1-meter-to-4-millimeter frequency spectrum and the milliwatts-to-megawatts range. Here's a short look at a few Litton solutions.



Traveling Wave Tubes 400 to 11,000 Mc • 10 mW to 10 kW • small signal gains 33 to 70 db • light as 7 oz. • pulse & CW • augmenter, beacon, ECM, white noise and intermediate power amplifier types.




Magnetrons 406 to 34,900 Mc pulse • 350 to 10,475 Mc CW • 100 W to 2 Mw pulse 1.0 to 400 W CW • miniatures • coaxial • tunable • fast tuning • white noise Barratron® tubes.




Accessory Equipment microwave power sources for use with magnetrons, M-BWO's, floating drift tube klystrons • 350 to 80,000 Mc • 0.1 W to 2 kw peak • water loads • dry loads • TWT amplifiers • focus coil supplies • differential thermopiles • radiation shields • transitions • sockets • filament controllers • solid state TWT power supplies • **Advanced Devices and Investigations** electrostatically focused klystrons • Dematron® distributed emission crossed-field amplifier • Bimatron® injected beam crossed-field amplifier • Bidematron® high-gain, high-power amplifier • electron optics studies • ion propulsion • slow-wave structure studies • millimeter wave generation • low noise research • plasma physics • quantum electronics • solid-state devices • light amplifiers • neutron sources • ceramic-metal bonding.




M-Type Backward Wave Oscillators 500 to 11,00 Mc • 100 to 500 W • voltage tunable • CW and pulse • liquid and conduction cooled.

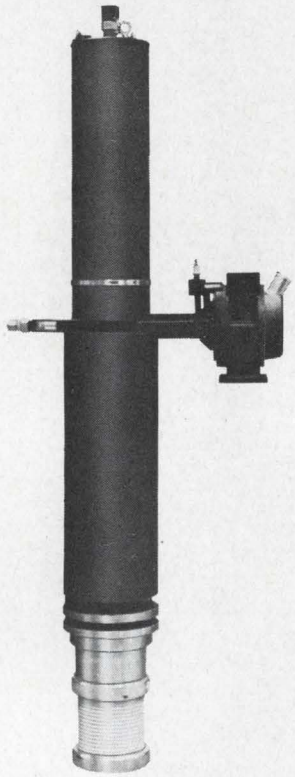

Amplifier Klystrons 400 to 11,000 Mc • 20 kW to greater than 30 Mw pulsed • 2 W to 75 kW CW • fixed tunable and broadband • solid beam, cathode pulsed, mod-anode, hollow beam, electrostatically focused.

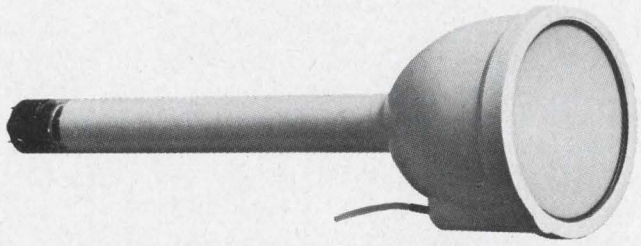

Display Devices Micropix® high-resolution cathode ray tubes • Printapix® CRTs for electrostatic printing • Pipix® fiber optic direct film recording tubes • Composipix® character writing tubes • flying spot scanners • electronic printers • video amplifiers • power supplies • other CRT operational accessories.

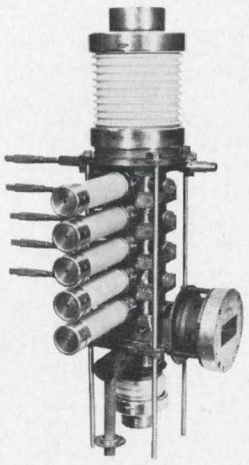

LITTON INDUSTRIES ELECTRON TUBE DIVISION

San Carlos, California / Williamsport, Pennsylvania / Canada: 25 Cityview Drive, Rexdale, Ontario / Europe: Box 110, Zurich 50, Switzerland

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 39

IEEE USA

brings the year's biggest show into focus
for engineers all over the country.





New York Coliseum . . . home of the electronic industry's biggest event.

What is IEEE USA?

This special section brings the 1966 IEEE International Convention to design engineers all over the United States. Those who will not be attending in person can tour the Show through these pages. Those who will be on hand in New York, March 21-25, will find this section an invaluable aid in planning their activities in advance.

For those who can't attend

If you're not planning on being at the Show, the following sections of IEEE USA will bring the Show to you:

- **Tour of the exhibits.** New products to be shown are arranged by show area (Components, page 110; Systems, page 158; Instruments, page 142; Heavy Machinery, page 129; Production Materials, page 174).

- **Product trends.** New product trends and their significance to the designer are given starting on page 78. Five design areas are covered: Communications, Consumer Electronics, Microwaves, Digital Equipment and Industrial Electronics.

- **Technical program highlights.** A representative cross-section of the technical papers are highlighted starting on page 68.

- **Technical paper order form.** A convenient order form is provided for the proceedings of the technical sessions. You'll find the form in the Planning Guide, which is inserted after page 96. A list of the technical papers, by subject, starts on page 94.

For those who will attend

If you are going to the Show, the following sections of IEEE USA will help you make plans in advance so that your time at the Show can be spent more efficiently:

- **Planning guide.** This booklet, inserted after page 96, provides a "walk-through" of the exhibit areas, pinpointing the booths where new products will be found. Complete descriptions of the new products can be found in the "Touring the Exhibits" section of IEEE USA.

- **Tour of the exhibits.** New products to be shown are arranged by show area (Components, page 110; Systems, page 158; Instruments, page 142; Heavy Machinery, page 129; Production Materials, page 174).

- **Technical sessions by specialty.** A list of technical papers, divided according to specialty, starts on page 94. Highlights of some of the papers are given starting on page 68.

- **Technical paper ordering form.** Save yourself the trouble of carrying technical session proceedings back from the Show. Order the ones you want by using the form contained in the Planning Guide.

For everyone

As an added feature, IEEE USA contains a timely article on engineering societies and their value to practicing engineers.

CONTENTS

Technical paper highlights, as seen through the keyhole. 68

Product trends at this year's Show, and what they mean to 78
the designer. Here's how it looks in five design areas.

EE societies—are they doing enough? See what the 86
engineers themselves think about it.

When, where and what to hear—Here's the complete 94
scorecard of technical papers by specialty. Time and
place is included for each paper.

IEEE USA Planning Guide takes you on a walk . . . . . between 96 and 97
through the exhibit areas, pinpointing booths where
new products will be found.

How to use the Planning Guide, including details on 96
the money-saving discount coupons.

Touring the exhibit areas—a rundown of the new 108
products to be found at the Show.

Components 110

Heavy Machinery 129

Instruments 142

Systems 158

Production materials 174

Cover: Unified S-band antenna for Apollo moon missions. Built by Collins Radio Co., the antenna will be used with the Apollo tracking/communication system. Space communications is covered in technical sessions 27 and 67.

Here are some technical paper highlights

as seen through the 'keyhole.' A complete index of program papers by specialty starts on p 94.

With over 300 papers and more than a dozen panel discussions, this year's technical program again offers something for everyone and a lot for most. Representatives from industry, Government and the academic world will cover subjects as esoteric as "Ultrasound Analysis of Implanted Cardiac Prosthetic Valves" and as practical as "The Design of High-Performance, Active RC Bandpass Filters."

Even a cursory analysis of such a large and diverse program is impractical. So, instead, here are some of the broadly applicable technical areas and highlights of typical papers within those areas:

Communications

For those interested in communications and related topics, the papers span the range from deep-sea diver communications and their problems to interplanetary spacecraft telecommunications systems. Commercial broadcasting, telephone and



Mariner IV completed its flight to the vicinity of Mars on July 14, 1965 and sent back photographs and other measurements of the "red" planet. Its 10-watt telemetry transmitter spanned the unprecedented distance of 300 million kilometers in telemetering the data back to earth. (paper 67.2)

telegraphy are covered, too, along with a host of other topics.

Progress in deep-space probes

A review of the progress in developing interplanetary spacecraft telecommunication systems will be presented by G. A. Reiff of NASA. He will describe the systems and techniques used for the Pioneer and Mariner space vehicles, which have contributed greatly to our knowledge of multimillion-mile radio communication.

The NASA representative feels that if performance in this field continues to increase at the same rate that it has in the last six years, it will soon be possible to transmit large quantities of information from the surface of Mars or to communicate with spacecraft flying in the vicinity of the outer planets. The proposed installation of 100-kw transmitters and 210-foot antennas at ground sites is expected to advance the present capability.

Interplanetary Spacecraft Telecommunication Systems (67.2, Fr. a.m. SN)

Man-made noise analyzed

Unintentionally generated man-made radio noise will be analyzed quantitatively in a paper by E. N. Skomal. The analysis is based on the statistical properties of two electrical noise models, one covering the frequency range of 10 Hz to 20 MHz, and the other from 100 to 500 MHz. A comparison of the theoretical results with available experimental data show the two to be in agreement.


The proposed mechanism of noise generation for the higher frequency interval assumes that the man-made noise arises from randomly occurring narrow pulses. In the model for the higher frequency interval, it is assumed that the noise pulses form a train of independent events having an average frequency of occurrence, v. For both models the attenuation is assumed to be that applicable to radio transmission over irregular terrain from low antenna heights.

Analysis of the Frequency Dependence of Man-Made Radio Noise (65.5, Fri. a.m. T)


Modular vs. integrated UHF converter

A comparison of the modular and integrated approaches to UHF converter design will be given by H. M. Weil and F. S. Coale. The modular design, using separate components connected by RF connectors and cables, is less expensive in small quantities, and is easier to test and repair. But, the authors point out, various frequency and impedance problems can often occur at the interfaces between components.

An integrated design would use only one assembly, with one component integrated to the next without connectors. Optimum impedance levels and appropriate reference planes could then be chosen. A telemetry converter designed by the authors is described as representing a first step toward complete integration. The converter em-

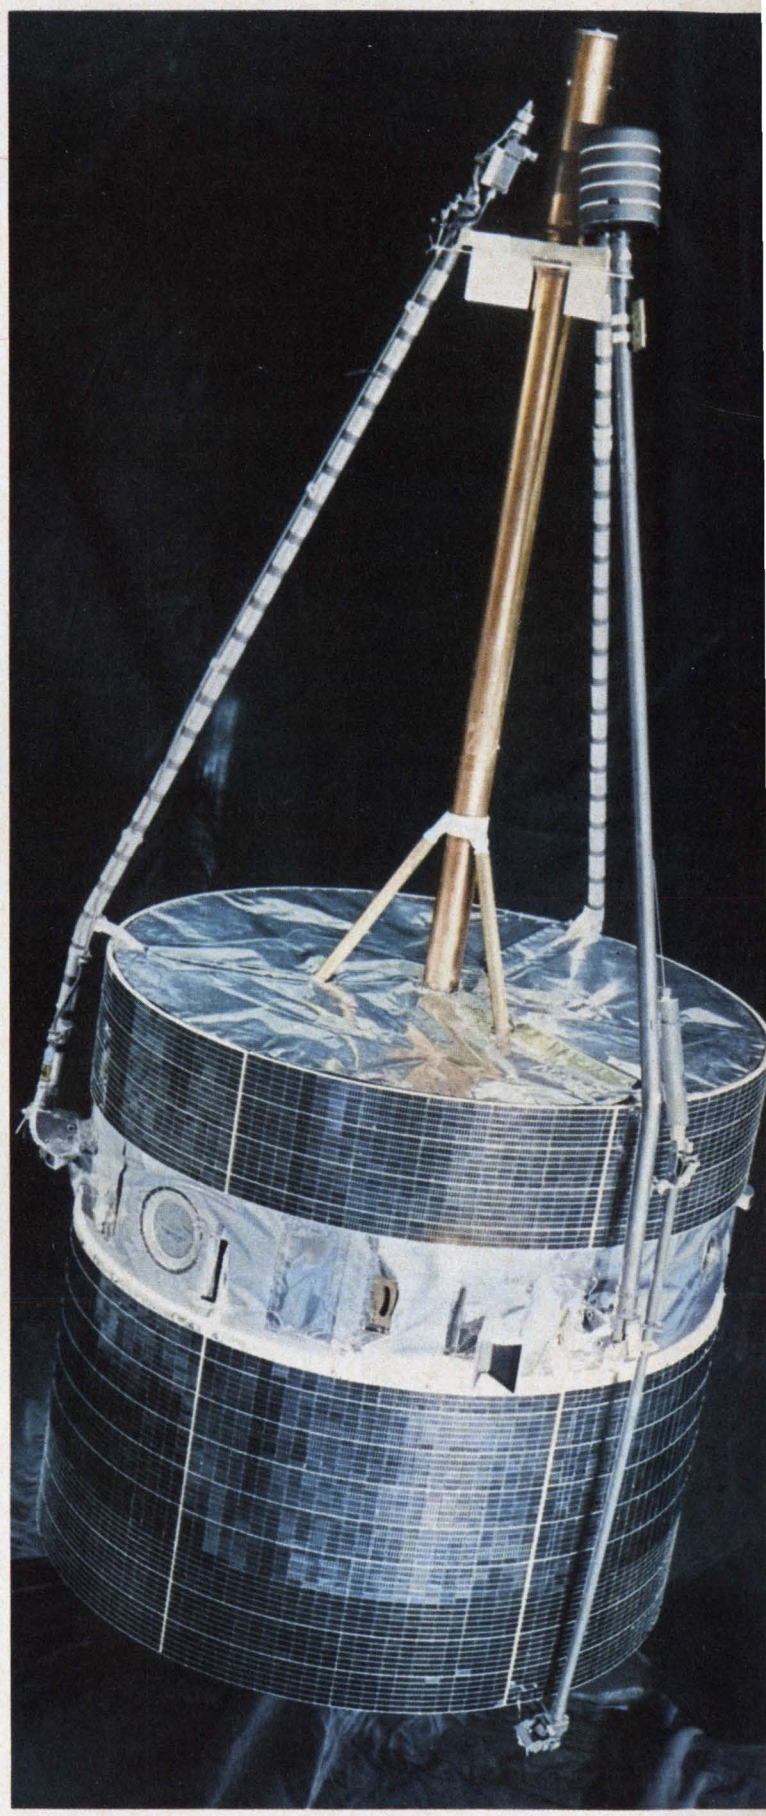

Pioneer VI space vehicle was launched on Dec. 16, 1965 to provide data on interplanetary environments. Its electronic equipment is powered by 10,368 individual solar cells. (paper 67.2)

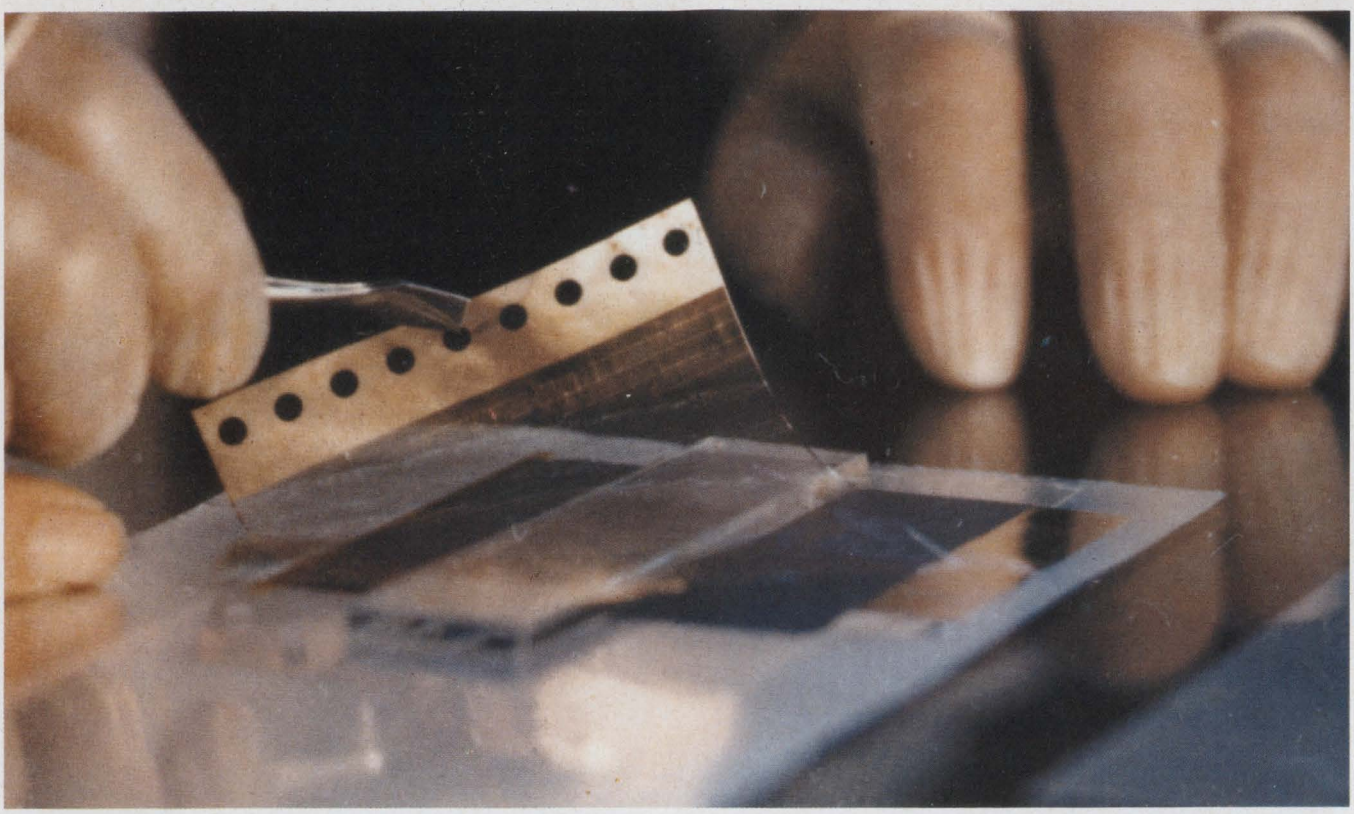

Thin-film polycrystalline solar cells are now under development at RCA Laboratories. (paper 77.2)

ploys an integrated microwave frequency translator that converts the 2.2-to-2.3-GHz telemetry band to the 215-to-315-MHz band.
A UHF Telemetry Converter Employing Integrated Microwave Circuits (45.3, Wed. p.m. R)

Control Systems

The papers to be presented on control systems and related subjects strike a balance between theoretical advances and innovations, and practical developments. Optimal control and stability, new motor designs for servo systems, and advances in process-control components are some of the topics that will be covered.

Sleeve induction motor offers advantages

The two-phase servomotor has proved to be a reliable power source in a wide variety of servo systems. However, inertia effects have prevented its use in certain critical applications and have necessitated compromises in others. On Tuesday, D. E. Wiegand of the Argonne National Laboratory will describe how these inertia effects can be reduced by at least an order of magnitude. This can be done by replacing the squirrel-cage, or solid-iron rotor, or the typical two-phase servo motor with a thin sleeve of lightweight metal revolving in the annular gap between the stationary outer and inner core members.

Since the low inertia of such a sleeve motor is obtained at the expense of increased real and reactive power requirements, Wiegand will describe how design trade-offs between these quantities can best be made.
The Sleeve Induction Motor for High-Performance Servomechanisms (22.3, Tues. a.m. N)

Systems methods solve man-machine loops

The single-loop feedback system with a human in the loop is the most commonly occurring configuration in practical manual-control systems. In addition, this configuration is often a component in more complicated systems. The state-of-the art in applying closed-loop-systems engineering principles to human-control systems will be presented by D. T. McRuer, E. S. Krendel and D. Graham.

Based on experimental data collected over the



Unique control system has been in operation for more than a year in this battery-powered mail truck. (paper 14.1)

past 20 years, the three have established a mathematical servo model describing human operation and adaptation for single-loop tracking with a visually presented, random-appearing forcing function. This model characterizes the predominant majority of all the experimental results. The use of the model in predicting the performance and dynamic response of practical man-machine systems will be explained.
The Analysis and Synthesis of Manual Closed-Loop Control Systems (69.2, Fri. a.m. R)

Novel unit controls electric vehicle

A control system for switching two dc motors from a parallel to a series connection and simultaneously switching two batteries from a series to a parallel connection will be described by T. R. Kelley of the I-T-E Circuit Breaker Co. The control has been tested successively for more than a year in a U.S. Post Office delivery truck. Its purpose is to switch the vehicle's two batteries from parallel (for starting) to series (for high speed) and at the same time switch the fields of the vehicle's dual-field dc motor from series (for higher starting torque) to parallel (for high speed).

The I-T-E unit uses two chopper circuits, with their relative conduction angles controlling the switching. The conduction angles, in turn, are controlled by the vehicle's accelerator pedal. Germanium power transistors are used in the choppers, but according to Kelley, SCR or other chopper types could be used.
A New Control Concept for Electric Vehicles (14.1, Mon. p.m. N)

Test Equipment and Techniques


Papers on test equipment and test and measuring techniques are sprinkled throughout the technical program. Anyone with an across-the-board interest in the subject should examine the technical program carefully.

Single-shot transient analyzer aids EMC

Several methods exist for analyzing complex waveforms that are periodic. However, frequency analysis of single-shot transients has for a long time been a relatively tedious task. A new and faster method for performing such an analysis will be described by D. W. Moffat and P. Slysh of General Dynamics/Convair.

The two will describe a Waveform Synthesizer, developed as an aid in electromagnetic compatability measurements. The synthesizer is an electromechanical function generator into which selected points of a waveform can be set. With these points, the instrument then generates sinusoids for the component parts of the spectrum.

Both the imaginary and real parts of the spectrum are generated and then processed to give the absolute magnitude, which is plotted in a continuous envelope. After the settings are made, analysis is completed in 15 seconds.

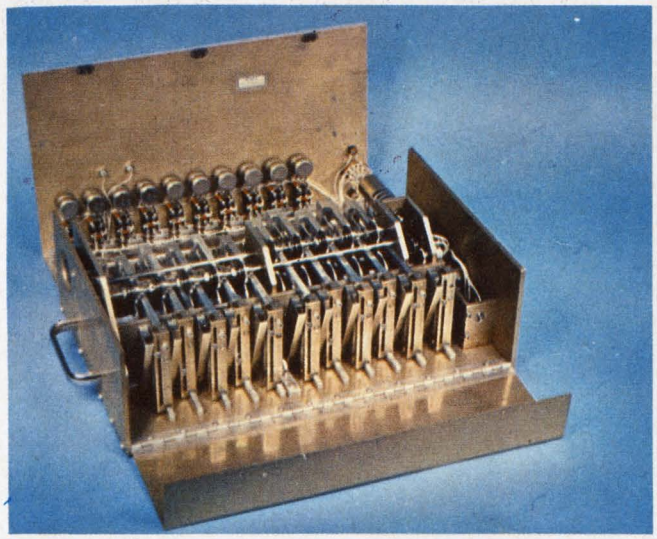

Single-shot transient analyzer permits easy analysis of complex transient waveforms. The analyzer was developed by General Dynamics/Convair for use in electromagnetic compatability measurements. (paper 65.2)

Other possible approaches to the analysis of single-shot transients will also be described. These include two all-mechanical methods and a computer-aided method.
Single-Shot Transient Analyzer (65.2, Fri. a.m. T)

VAST will test 85% of Navy black boxes


The requirements for shop space, personnel skills and test equipment in the avionic ships aboard U.S. Navy aircraft carriers have been constantly increasing. On Thursday, Capt. A. J. Stanziano of the Bureau of Naval Weapons will describe how the Navy expects to counteract this trend with its Versatile Avionic Shop Test (VAST) System, presently under development.

When completed, VAST will be a computer controlled automatic checkout system, capable of testing 85% of the avionics black boxes in the Navy's inventory. Building blocks that can be programed in various combinations will provide all required test stimuli and measurement capabilities.

According to Captain Stanziano, widespread use of microelectronic equipment will ease the problems in the avionics shops considerably. However, the Navy estimates that microelectronics will not have this impact for quite some time to come. So by early 1968 the first installation of a VAST system on an aircraft carrier is expected.
VAST—A Computerized Test System for Carrier Based Avionics (59.2, Thurs. p.m. T)

Fiber optics speeds transient recording

For the successful recording of ultra-fast transients, CRT voltages as high as 24,000 V and photographic systems with F1 lenses and 10,000-speed film are often necessary. But with a new technique, to be described by F. L. Katzman of the Fairchild Camera and Instrument Corp., the lens optics can be eliminated and the rquirements on the CRT reduced considerably.

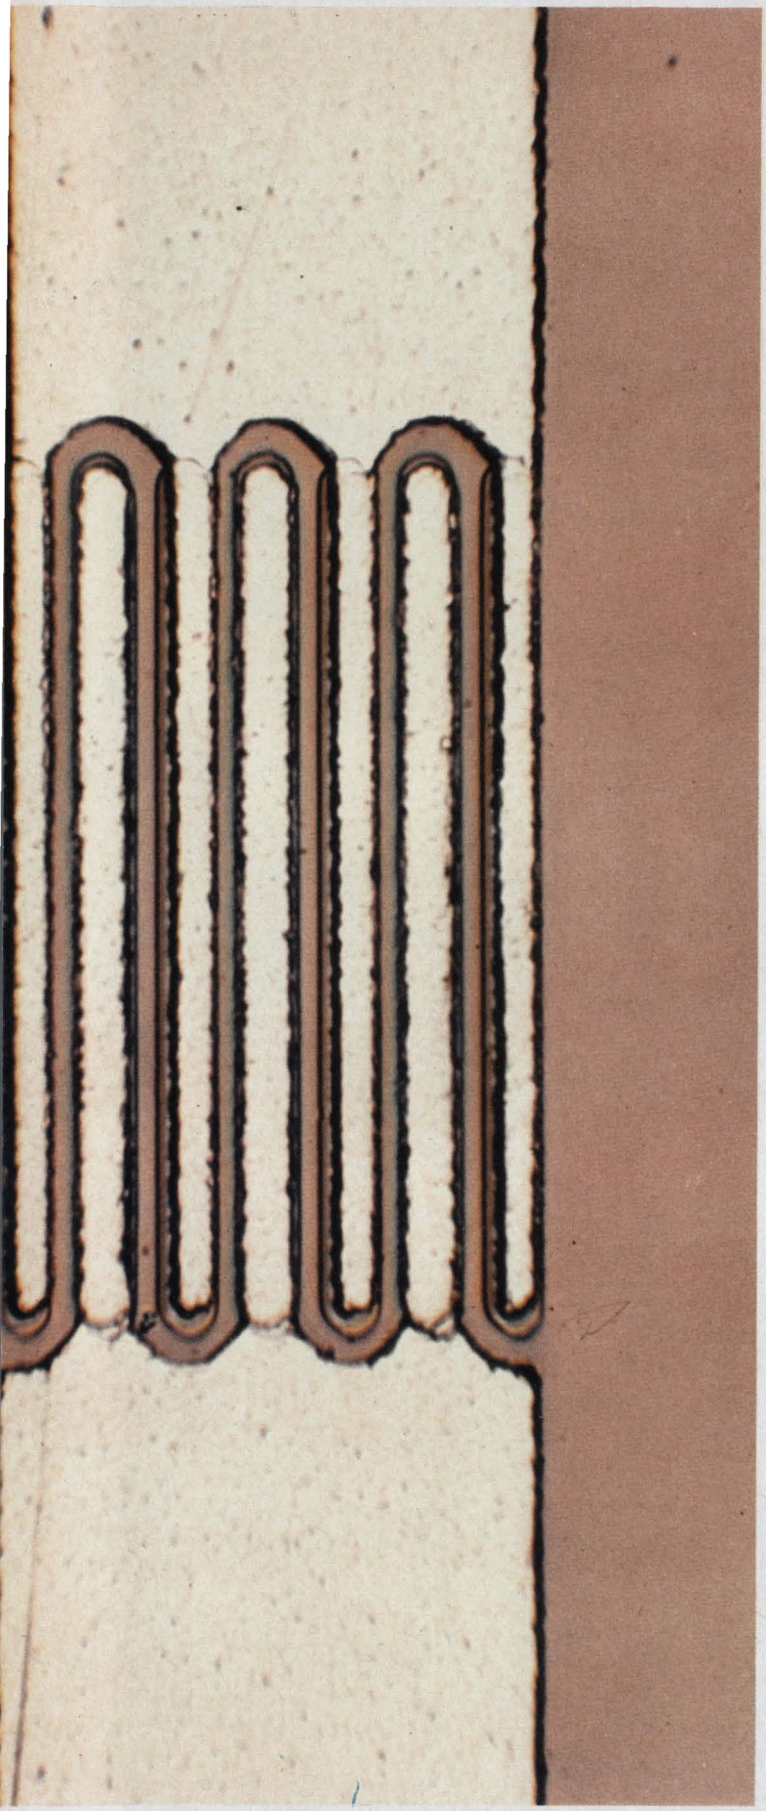

PIN switching diode was developed by Texas Instruments for use in IC microwave phased array radar. Over 12,000 such diodes will be required in a system now under development by the company. (paper 45.1)

The technique uses fiber-optic recording by means of a fiber-optic face plate in contact with the CRT. Improvements in light-gathering power of over 40 to 1 have been achieved. With this high efficiency, compromises can be made in the CRT design. Improved sensitivity and resolution can be built in at the expense of light output.
Improved Ultra Fast Transient Recording by Fiber Optics Cathode-Ray Tube (23.5, Tues. a.m. G)

Microelectronics

There has been considerable activity in microelectronics since last year's IEEE Convention, particularly in integrated-circuit technology. Much of this activity will be brought into focus by this year's technical program. A number of papers deal exclusively with integrated-circuit topics. And a considerable number of others reflect the present impact of ICs, even though a paper may deal primarily with some other topic.

LSI is coming

On Wednesday, Dr. Richard Petritz of Texas Instruments will present an analysis of the logical goals, areas of strength and possible applications of large-scale integration (LSI) techniques. According to him, LSI approaches to complex circuitry will have the most profound effects yet experienced in solid-state electronics.

Array technology has reached the point where connections present greater cost and reliability problems than the components themselves. So additional effort must be directed to the connections, to take full advantage of progress over the last five years in component fabrication. Dr. Petritz will also point out that MOS arrays are going to get faster—25 to 50 ns—when the full potentials of complementary switching pairs are employed.
Large Scale Integration—LSI (42.3, Wed. p.m. M)

Computer aids IC design

Because of the high cost of masks in integrated-circuit manufacturing, it is advantageous to forecast circuit performance before the circuit is fabricated. Robert Mammano of ARINC Research Corp. suggests an approach that will greatly improve the chances for obtaining a successful set of fabrication masks on the first try. This method uses a general-purpose computer and should result in substantial savings, particularly in the design of custom circuits.
Integrated Circuit Design Analysis by Digital Computer (52.3, Thurs. a.m. T)

Progress in phased-array radar

One per cent of the components in a radar are responsible for 50 per cent of the failures. The remaining 99 per cent of the components have already been made solid state. Tom Hyltin of Texas Instruments will deliver a report on efforts

to substitute solid-state components for those tubes and moving parts that perform microwave generation and reception and antenna scanning. With the use of phased arrays, power requirements can be substantially reduced, thereby bringing the component requirements within the realm of integrated circuitry. This work is being done at Texas Instruments under Air Force contract AF 22(615)-2525.
Microwave Integrated Circuits in Phased Array Radars (45.1, Wed. p.m. T)

Topics at Random

Because the technical program covers such a wide variety of engineering interests, some of the papers cover a miscellany of topics. Here are some that fit the category:


CdS film transducers hold promise

Investigation into the use of cadmium sulfide (CdS) films to high-efficiency, electromagnetic-to-acoustic transducers at microwave frequencies will be described in a paper by D. K. Winslow and H. J. Shaw, both of Stanford University. The two will also cover their investigations into the use of multiple-film assemblies, in which quarter-wave films of various materials are used to transform acoustic impedances for the purpose of increasing conversion efficiency. Experiment using these techniques has produced conversion losses as low as 4.5 dB at 800 MHz and 5 dB at 1600 MHz.

Based on their work, the two Stanford representatives will cover details of the vacuum-deposition techniques for CdS film; formulation of the problem and calculations that yield transducer conversion loss as a function of frequency for multilayer films, and the comparison of calculated and measured conversion loss as a function of frequency from 500 to 4000 MHz.
Multi-Layered Film Microwave Acoustic Transducers (37.1, Wed. a.m. R)

Electronics dives deep

Deep-diving vehicle sensors, displays and controls, and the critical role they play in undersea

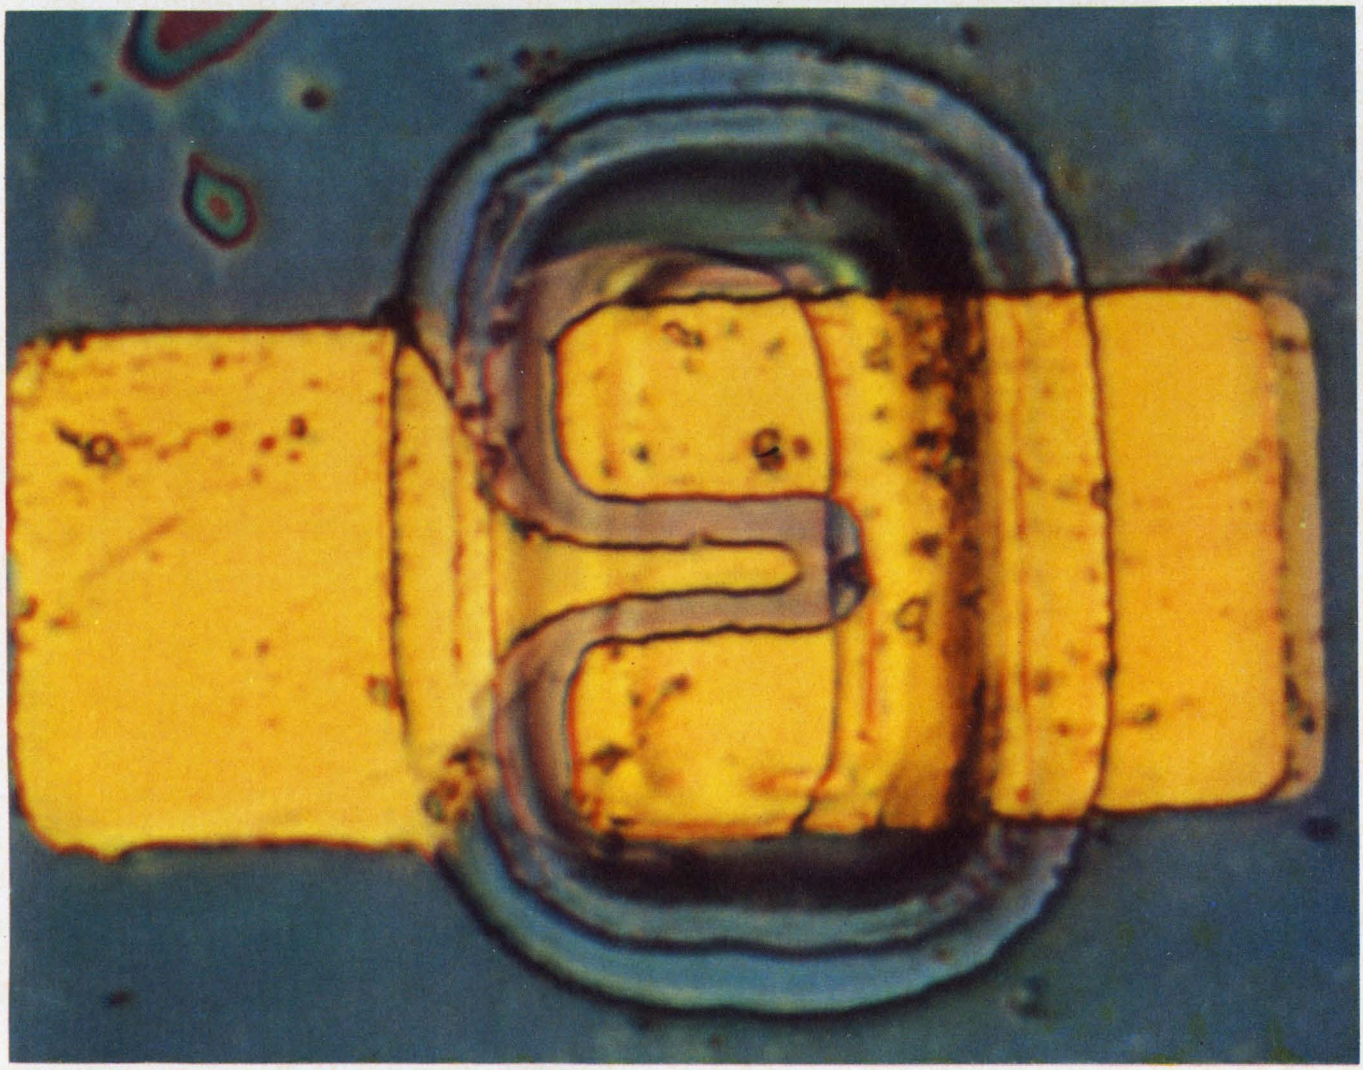

Schottky barrier diode will serve as a balanced mixer in the phased array radar being developed by Texas Instruments. The diode is formed in epitaxial packets in high-resistivity silicon substrates. It will be used to convert an incoming 9 GHz signal down to a 500 MHz IF frequency. (paper 45.1)

search-and-rescue operations, will be discussed by Joseph A. Cestone of the U.S. Navy's Special Projects Office.

He will describe a typical form of undersea search-and-rescue vehicle and cover its operation in both types of missions. Terrain clearance, hover and attitude control are the most difficult control functions, according to Cestone.

Test programs for the Trieste II, Aluminaut, towed unmanned vehicles and a lowered test capsule will be described, along with the instrumentation systems they use.

Sensor and Navigation System for the Deep Submergence Program (43.3, Wed. p.m. S)


Plasma amplifier advances

Theory of operation and potential advantages of the beam-plasma amplifier (BPA) will be reviewed in paper by P. Chorney of Microwave Associates. Amplification of greater than 50 dB has been obtained at S-band frequencies with the use of beam-plasma amplifiers. Experiments have also shown the BPA to be capable of handling high power levels efficiently: Outputs as high as 22.5 Kw have been obtained at 35% efficiency.

Beam-plasma amplification is attractive for millimeter waves, since there is no need for metallic interaction with very tight mechanical tolerances. Recent results of experiments in this area will be covered.

Some problems remain before BPAs can become practical and their full potentialities realized. These problems, together with those already solved, will be discussed.

Recent Advances in Beam-Plasma Amplifiers (34.3, Wed. a.m. R)

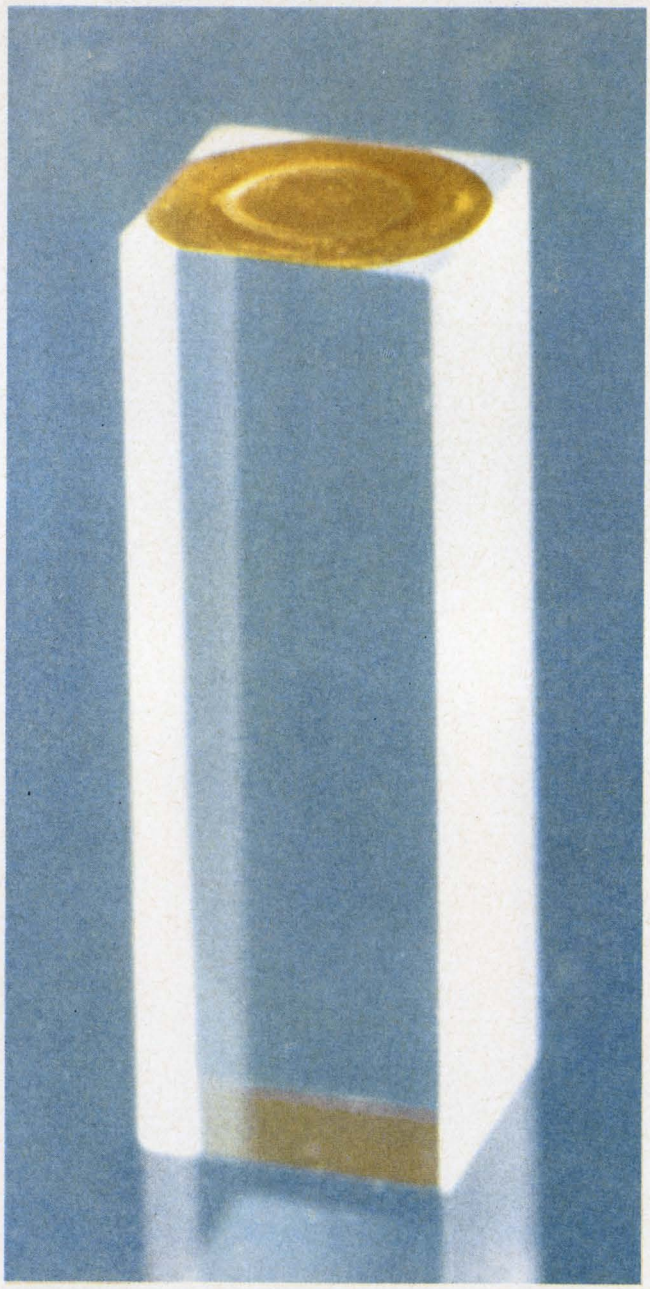

Multiple thin films deposited on single-crystal sapphire rod function as efficient acoustic transducers at microwave frequencies. (paper 37.1)

SCRs used in mobile power systems

Radio-frequency interference and self buildup problems of mobile power systems—and the ways in which silicon-controlled rectifiers can be used to solve these problems—will be discussed in a paper by W. K. Volkmann of the General Electric Company. Several SCR regulator circuits suitable for use with 28-volt dc mobile power generating systems will be described.

According to Volkmann, the regulators permit self-buildup from residual voltage without a battery and also generate negligible radio noise. In addition they are simple, small and economical in cost. Auxiliary circuits for buildup are eliminated, and radio noise suppression circuits are reduced.

SCR Voltage Regulator for Mobile Power Generation (14.4, Mon. p.m. N)


Pulse-compression systems compared


In choosing a pulse-compression system for a particular application, a designer is often faced with the questions:

- How does his system compare with other pulse-compression systems.
- How does his system perform when overlapping signals occcur.
- What will be the effect on the system if it is preceded by a nonlinear device.

A computer technique for answering these questions will be described and evaluated in a paper by R. W. Klassen of the Martin Company. He will discuss how digital-computer simulation of three-pulse compression systems (two-phase-shift-keyed and one frequency-shift-keyed) was used to compare system performance. Logarithmic amplifiers were used at the input of each system to reduce the dynamic-input range, and decreases in peak-signal amplitude and varying amounts of overlap were processed. The performance of two of the systems is evaluated under conditions of CW interference.

Comparison of Frequency Shift Keyed and Phase Shift Keyed Pulse Compression Systems (20.2, Tues. a.m. S)

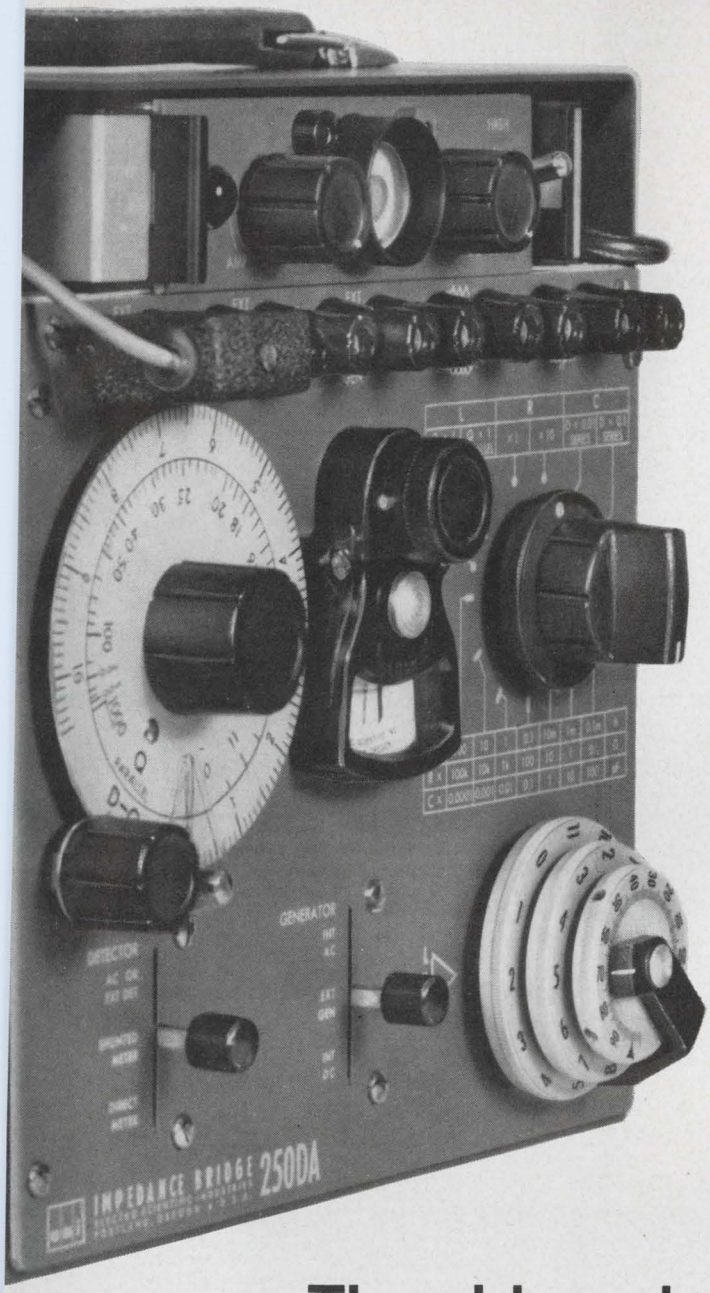

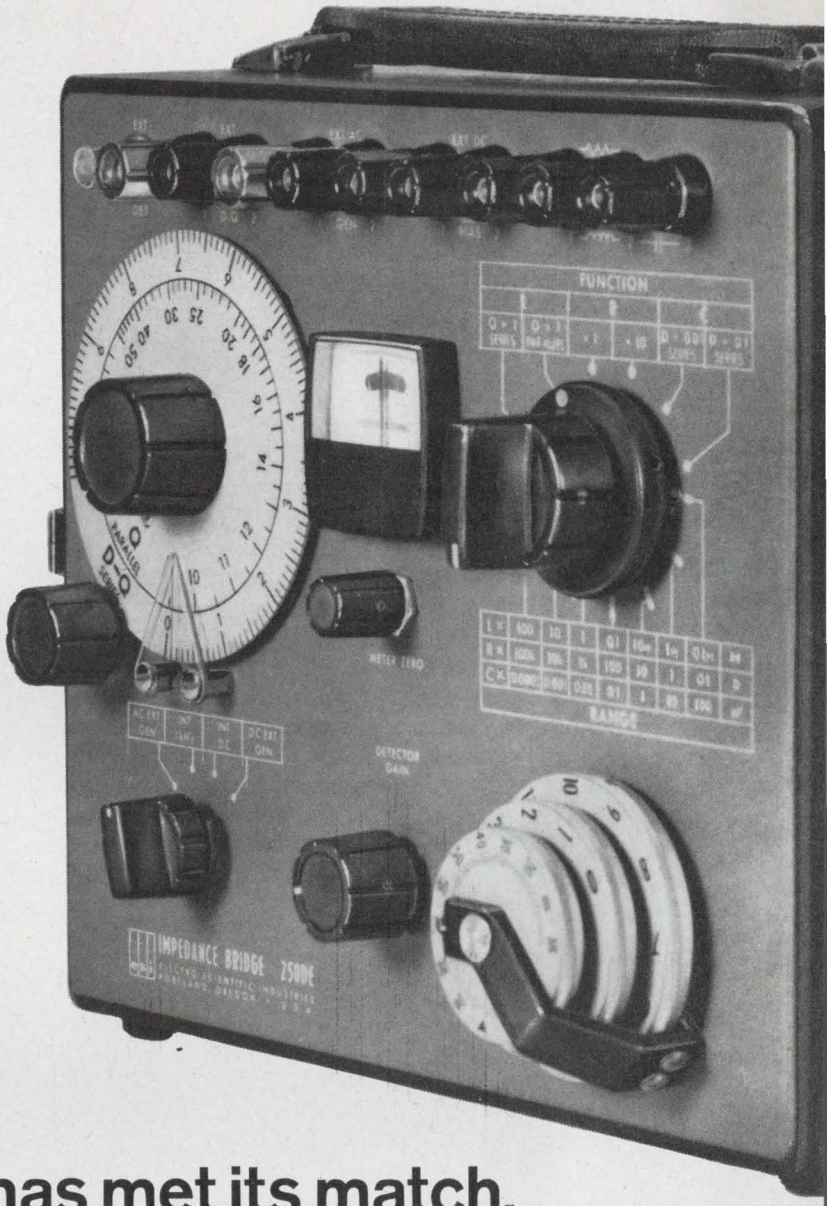

The old master has met its match.

For more than twelve years, our 250 DA Universal Impedance Bridge ruled supreme in its field. No instrument could match its measurement performance.

Now along comes a serious challenger—our new 250 DE. It has all of the reliability and accuracy of the classic model. As you can see, they look alike from the outside.

But inside, we've made many improvements. The new 250 DE is completely self reliant on its four flashlight batteries. It has a new solid-state detector with greatly improved sensitivities: better than 20 microvolts on DC, 10 microvolts on AC. For simplicity, there is a single meter null detector on the front panel. And for versatility, some useful front terminals have been added.

Why did we improve on the old master when it has delighted so many thousands with its performance in countless plants, laboratories and schools? Well, we figured eventually somebody would make a truly portable impedance bridge even better than the 250 DA. And we wanted it to be us. ESI, 13900 NW Science Park Drive, Portland, Oregon (97229).

250 DE Portable Universal Impedance Bridge Specifications

Range: Resistance: 0 to 12 Megohms
Capacitance: 0 to 1200 Microfarads
Inductance: 0 to 1200 Henrys

Resistance: 0.1% + 1 dial division

Capacitance: 0.2% + 1 dial division

Inductance (Series and Parallel): 0.3% + 1 dial division

Sensitivity: Better than 20 microvolts DC, 10 microvolts AC

Frequency: 1kc internal (External terminals provided.)

Batteries: 4 D size flashlight batteries provide 6 months of normal service.

Weight: 12 lbs. Price: $470.00

Note: The 250 DA features exactly the same accuracy specifications as the 250 DE. However, the 250 DA is AC line-operated. Price: $495.00.

Electro Scientific Industries, Inc. esi®

See ESI at IEEE. Booth nos. 3A 48-49-50


ON READER-SERVICE CARD CIRCLE 239



Type 01-700

Type 01-370

Type 04-590

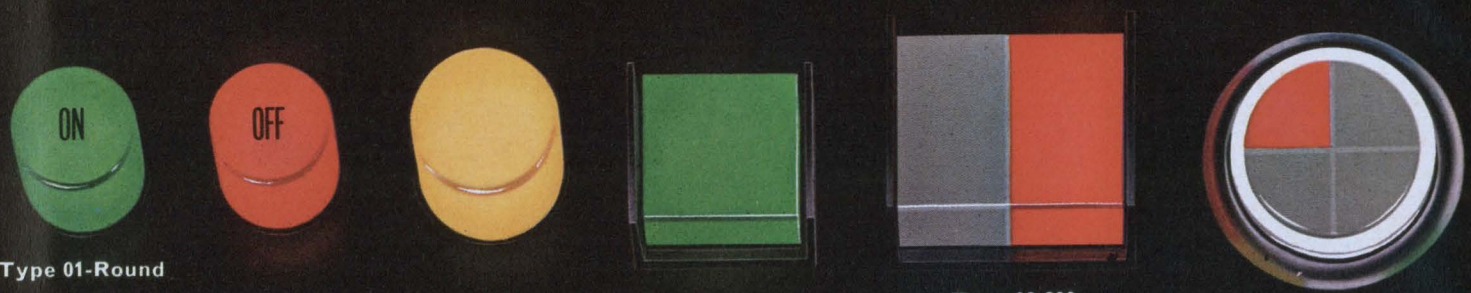


Type 01-Round

01-600

Type 02-800

Type 44
Splashproof

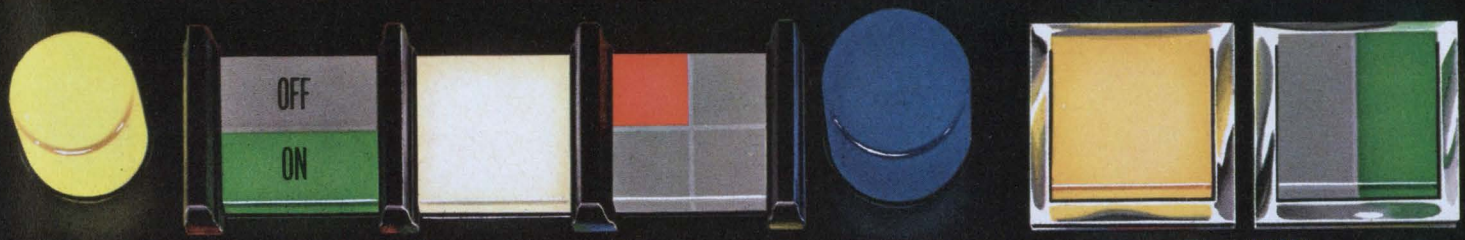

Barrier Mount

Type 04-570



Type 01-Square

Multi-Switch Mechanical Interlocks



Multi-Station Key Boards



Subminiature
Neon




Type 01-800

YOU CAN IMPROVE YOUR CONTROL AND PRODUCT APPLICATIONS WITH NEW DESIGNS, TECHNIQUES AND INNOVATIONS IN LIGHTED SWITCHES FROM

LICON®

SWITCHES

THE GOOD LOOKING SUPPLIER LINE THAT KEEPS AHEAD OF THE FIELD.

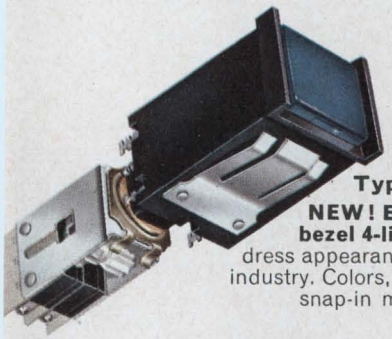

Type 04-590
NEW! Extruded bezel 4-lite Finest dress appearance in the industry. Colors, legends, snap-in mounting.




NEW! Sub-miniature Neon switch for rapid computer indication. Longest possible bulb life.



Type 01-370
NEW! Slide-base long-life bulb 1-lite push button switch. Plunger action.



Type 44
NEW! Splashproof water-sealed 4-lite switch. Snap-on switch module. Available in projected or screen colors, engraved legends.

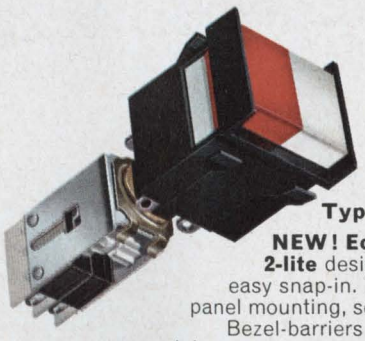

Type 02-800
NEW! Economy 2-lite designed for easy snap-in. Front-of-panel mounting, servicing. Bezel-barriers for horizontal or vertical dress mounts.



Type 01-700
NEW! Economy 1-lite Screw-in mounting, front-of-panel bulb servicing.

WRITE FOR LATEST LICON LIGHTED SWITCH CATALOG

LICON
DIVISION ILLINOIS TOOL WORKS INC.
6615 W. IRVING PARK ROAD • CHICAGO, ILLINOIS 60634

"Remember, you're never more than a few feet away from a product of ITW"®

ON READER-SERVICE CARD CIRCLE 216

What are the product trends at this year's Show—and what do they mean to the designer? Here's how it looks in five major design areas.

Large sampling of digital equipment at IEEE Convention

Digital systems and instruments designed to help automate or otherwise simplify the engineer's tasks are very much in evidence at this year's IEEE show. From a general-purpose digital computer to a high-current switching transistor—and everything in between—the electronic designer has a multitude of new tools to choose from.

Nowhere is the impact of digital technology more apparent than in the field of instrumentation. Digital voltmeters, counters and other measuring instruments abound at the Coliseum. Integrated circuits are seeing wider use in the instruments being exhibited.

Instruments use plug-ins, ICs

Plug-in versatility is featured in the Hickok DMS-3200 Digital Measuring System. All-electronic and fully-transistorized, the DMS-3200 consists of a basic digital-readout unit that can be adapted for use as a DC voltmeter, a 1-MHz counter, an ohmmeter, a capacity meter, or in any of several other measurement functions, by inserting the appropriate plug-in unit.

Two digital counters and a digital voltmeter from Monsanto feature integrated circuitry and compact size.

A portable data-logging system by Electro-Instruments provides automatic measuring and recording in a package that the manufacturer says is suited for small R&D organizations, short-run production lines, etc. The system is built around the Model 620-2 integrating digital voltmeter, and can be expanded to include analog signal scanning, pressure scanning and other functions.

Working computer system displayed


Honeywell's Philadelphia division is exhibiting a working model of its H20 general-purpose digital computer and associated instrumentation. The H20 model represents a system designed for use by electronic-component manufacturers and by research laboratories. With a random-access core memory capacity of from 2,048 to 16,348 20-bit words, the H20 computer has 8,192 directly accessible memory locations with a 6 rms memory cycle time.

For those who want to retrieve data stored on punched paper tape, Ohr-tronics is offering its Series 119 paper-tape readers. These units can read up to eight channel punched paper tape, bi-directionally, at speeds up to 30 charac/sec.


Some new microelectronic logic packs have been added to the product line of the Computer Control Co., Inc. The four new packs consist of a shift



Measuring and recording are accomplished in a portable package by Electro Instruments.

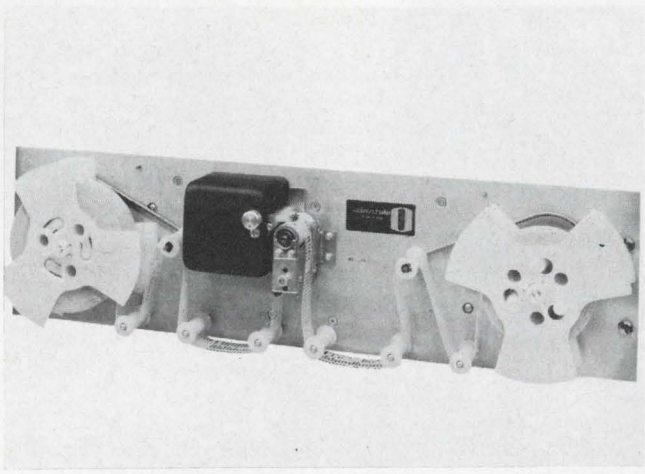

Ohr-Tronics paper tape readers can handle tapes of up to 8 channels at speeds of 30 charac/sec.

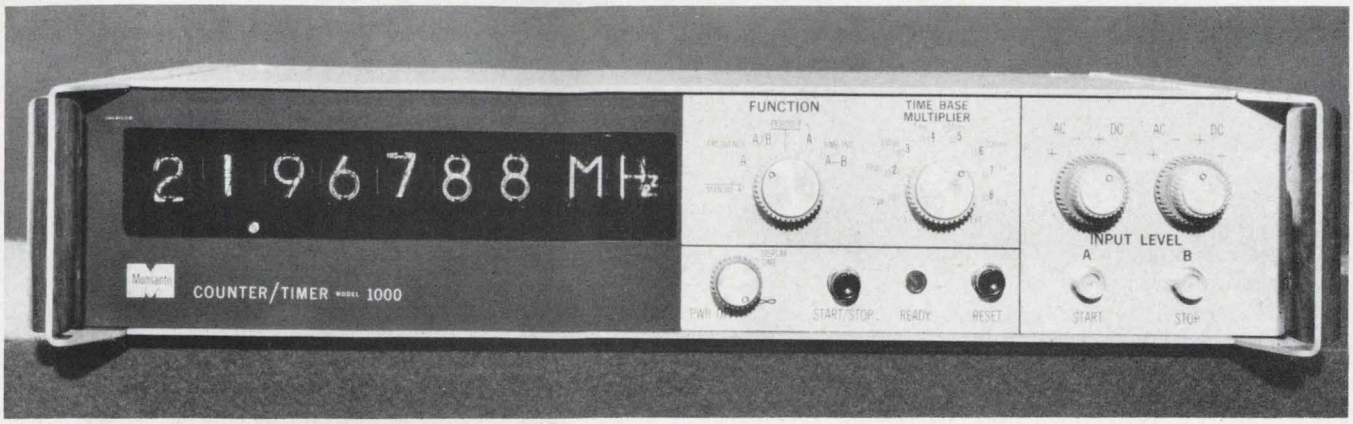

Integrated circuits help shrink the size of Monsanto's new digital counter/timer.

register, negative logic level driver, a non-inverting power amplifier and a lamp driver. In addition 3C has introduced three auxiliary micro-packs that permit tailoring by the user for his individual requirements.


Memories get dynamic test

Also from 3C comes a memory exerciser with 150 ns to 1.5 ms cycle time. The all-solid-state exerciser, Model 3601, has a capacity of 65,536 addresses, word lengths up to 80 bits and a ± 6 volt output amplitude.

Fairchild Semiconductor is showing two new PNP high current (up to 300 mA) switches. These two devices, 2N3644 and 2N3645 are said to offer high beta and high breakdown voltage. The manufacturer says that these devices are ideal for use as line drivers in memory applications.

Communications and the design engineer at IEEE

The trend for communication equipment is toward smaller, more reliable and more complex systems. The military remains the prime user of communications equipment with the emphasis being shifted to tactical systems for field use as a result of the Vietnam war.

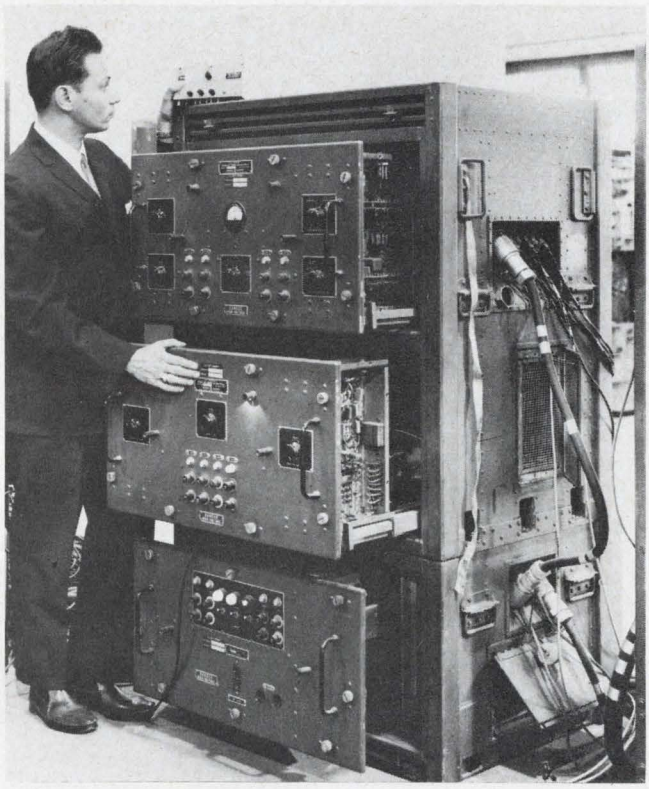

1. **AIL's experimental microelectronic MTI** being compared to existing operational equipment.

Military equipment & microelectronics

One example of this type of equipment is the AN/PRC-66, being produced by Collins Radio of Canada, Ltd. under contract to the U.S. Air Force. The PRC-66 is a hand-held transceiver that enables the operator to communicate over any one of 3500 channels in the 225.00 MHz to 399.95 MHz frequency range. An all-solid-state unit making extensive use of hybrid integrated circuits, the PRC-66 is being evaluated by the Air Force and the Marine Corps.

The concept of microminiaturization with hybrid circuits has been widely exploited through military funding. Airborne Instruments Laboratory, a division of Cutler-Hammer, will demonstrate their capabilities at the show with their Microelectronic MTI, a radar receiver subsystem developed for the Rome Air Development Center. This particular unit demonstrates the drastic reductions in size and weight that can be accomplished with microelectronics.

The heavy involvement of the military in integrated circuits has not been duplicated to any large extent in commercial applications, though it is a good indication of things to come. Because it is a still fast-moving technology, most major system houses have been unwilling to make major commitments with their own funds. However, many have or are setting up in-house facilities and will be looking for possible applications in nonmilitary areas. At the show a number of manufacturers will be displaying their capabilities along this line. Microwave Associates, for example, will be showing its MA9E4, which is a 200 MHz linear amplifier with 60 dB gain, a 6 dB noise figure and 30

MHz bandwidth in a hybrid package. Also shown will be their MA963 hybrid pulse amplifier, operating at 100 MHz with 90 dB of gain and a 5 dB noise figure.


Broadcast systems

Development of telecasting systems with all-solid-state components has long been under way, particularly for remote pick-up and portable-studio-to-transmitter applications. Microwave Associates will also be discussing its improved versions of all-solid-state portable TV transceivers—the MA2A and the MA7A, operating at 2GHz and 7GHz, respectively. The microwave carrier frequency is obtained by varactor multiplication of the 350-to-500 MHz output of a high stability Colpitts oscillator. The obvious advantage of these transceivers is portability, in that one person can carry the entire unit; low power consumption, and increased reliability. Also claimed is a great improvement on color fidelity over existing systems.

Test equipment

A major complaint among communications engineers is a lack of adequate test equipment. This problem can be broken down into two parts: one is the lack of accuracy in existing equipments and a need for even greater accuracy; the other is a lack of simple test equipment in the face of increasingly complex measuring methods.

One of the new products at the show that should help to resolve the problem of simplicity is Hewlett-Packard's new Vector Voltmeter (Model 8405A). This is a dual channel wideband RF millivoltmeter and phasemeter that operates over the 1MHZ to 1GHz frequency range. By means of two pencil probes, voltages at any two points on a circuit can be measured. An integral phase-lock system operates on the signal from the first probe and provides a reference to which the phase angle of the second signal can be compared. A front-panel meter provides direct readout of this phase information, with a resolution of 0.1 degree. With sensitivities as low as 300 microvolts, the voltmeter will greatly simplify gain, phase, stability and vswr measurements over this frequency range.

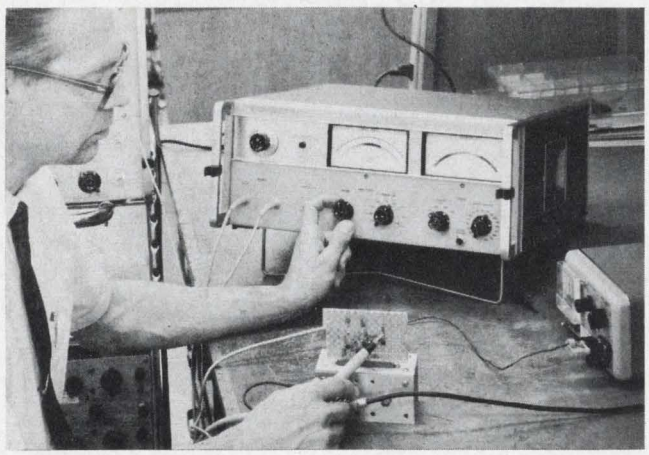

2. **Hewlett-Packard vector voltmeter** is used to provide voltage and relative phase measurements at a glance.

As a sidenote, the use of a sampling technique for this instrument should indicate the extent to which digital circuits will be used in analog equipment in the future.

This increased need for test equipment, especially in the 100-to-1000-MHz range, is accentuated by some of the equipment that is being introduced by Anzac Electronics, Inc. A manufacturer of high-frequency and microwave components, Anzac will also be demonstrating a sweep converter to convert the output of a 1-to-2-GHz sweep generator into a 5-MHz-to-1-GHz signal. The maximum power input is 100 mw for an output level of 5 milliwatts. Spurious signals are at least 20dB down. The converter, which uses a vacuum-tube oscillator, also has a detected output that can be used to level the output signal by controlling the sweep generator output. The equipment was originally built to satisfy Anzac's internal needs and was then deemed a worthy product for this growing and unfulfilled market. Anzac will also be showing its RB-3 Standing Wave Ratio Bridge (an improved version of the RB-2), which works over the frequency range of 2MHz to 1GHz with a directivity of 48 dB and 60dB of isolation. With these specifications, VSWR measurements as low as 1.01 may be easily made. If some derating is allowable, the bridge may be used up to 1500 MHz.

Half-price ICs for industrial users!

This year, the IEEE show is likely to appear like one big discount store for industrial electronic equipment designers! Integrated circuit manufacturers are all rolling out the red carpet, arrayed with ID devices selling at half the price of their military/space counterparts.

The catch? There really is no catch. Three factors add up to these low prices:

- Packaging economy—devices in plastic encapsulation, in TO cans or plug-in flat packs, all designed for production-line efficiency.
- Specification economy—devices that exhibit temperature ranges narrower than the military or space requirements call for, but well within industrial needs; some devices exhibit other "sub-mil" specifications.
- Functional economy—recent developments packing more complex circuits in the same 14- or 16-lead packages, allowing 5 to 1 or more circuit complexity, will be available in industrial lines as well as military/space.

As an example, Texas Instruments has available 50 digital type and 5 linear type ICs at prices in the range of 50% lower than Mil types. Indications are that other makers are in a similar push.

Device marketers have noted recently that many designers of industrial electronic products have not been aware of the availability of these sophisticated devices at prices they can afford to pay. As they become more aware of what they can do with the units, they are besieging manufac-

ON READER-SERVICE CARD CIRCLE 246 ➤

The best thing that's happened to capacitors since metal joined film!



NEW PAKTRON® MF

CAPACITORS OF METALIZED MYLAR®*

itw PAKTRON

DIVISION ILLINOIS TOOL WORKS INC.
1321 LESLIE AVENUE • ALEXANDRIA, VIRGINIA 22301


"Remember, you're never more than a few feet away from a product of ITW" ®

*A DuPont Registered Trademark

PAKTRON® MF CAPACITORS OF METALIZED MYLAR®*...PROVIDE GREATER VALUE!



• Superior performance • High reliability lead assembly process • Epoxy coated for superior environmental protection • Radial leads for efficient P.C. board use

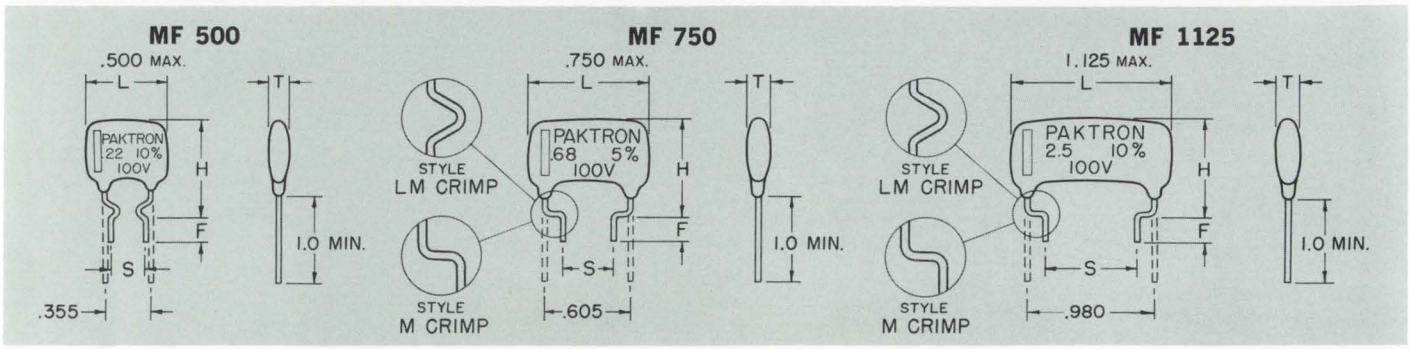

STANDARD VALUES AND SIZES:

MF 500

VALUE MFD.	T DIM. IN. MAX.	H DIM. IN. MAX.
.1	.200	.440
.12	.220	.470
.15	.250	.550
.18	.270	.610
.22	.300	.660

MF 750

VALUE MFD.	T DIM. IN. MAX.	H DIM. IN. MAX.
.22	.250	.550
.33	.300	.660
.47	.350	.690
.50	.360	.700
.68	.400	.740

MF 1125

VALUE MFD.	T DIM. IN. MAX.	H DIM. IN. MAX.
.68	.300	.600
1.0	.350	.660
1.5	.400	.720
2.0	.450	.770
2.5	.500	.820

NOTE: H Dim. shown for M style crimp or long lead, add .075 for H Dim. with LM style crimp.

STANDARD CRIMPS:

MF 500

STYLE	S DIM. ± .032	F DIM. +.01 −.04
M	.250	3/16
LM	.250	or
LM	.312	5/16


MF 750


STYLE	S DIM. ± .032	F DIM. +.01 −.04
M	.312	
M	.375	3/16
M	.400	or
M	.437	5/16
LM	.500	
LM	.562	


MF 1125

STYLE	S DIM. ± .032	F DIM. +.01 −.04
M	.625	
M	.718	3/16
M	.843	or
LM	.937	5/16

PERFORMANCE CHARACTERISTICS

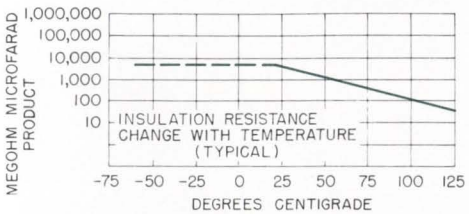

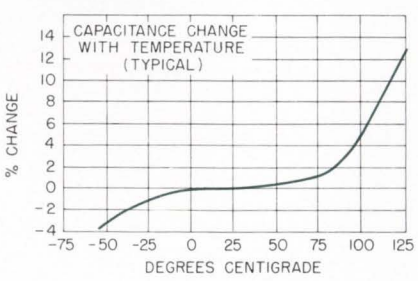

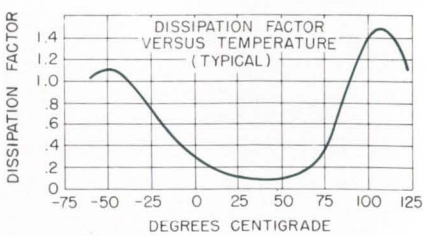

SPECIFICATIONS

PHYSICAL • Case high grade epoxy, marked: Paktron, value, voltage, tolerance and ground bar • Leads #20 heavily tinned, 5 lbs. Pull min., solderability exceeds EIA std. RS 178

ENVIRONMENTAL • Thermal life exceeds 500 hrs. @ 85° C 150% W V DC • Temperature range −55°C to +85°C 100 W V DC • Derate linearly from +85°C to 50 W V DC at +125°C • Moisture resistance exceeds EIA std. RS 164 Paragraph 2.3.8

ELECTRICAL • Tolerance ± 5%, ± 10%, ± 20% standard, others available on request • Dissipation factor less than 1%@+25°C, 1KC • Insulation resistance 3 x 10^4 megohm x microfarad, 2 minutes at W V DC • Temperature stability, from −25°C to +85°C, less than 3% deviation from 25°C value • Dielectric strength, 200 V DC, 1 min.@+25°C.

REQUEST MORE DETAILS AND ASK FOR FREE SAMPLES

*DuPont Registered Trademark

PAKTRON
DIVISION ILLINOIS TOOL WORKS INC.
1321 LESLIE AVENUE • ALEXANDRIA, VIRGINIA 22301

turers for more information. So we can expect representatives at the show to be well armed for the onslaught.

Transistors, SCRs in same push

Germanium transistors, thought by many to be passé, are very much alive for the industrial application area. Motorola Semiconductor has recently begun a new push of its germanium lines, accompanied by appreciable price cuts of between 14% and 91% on 29 types. The cuts were said to have been brought about by an improved manufacturing process. Low-cost plastic cases are also a key to several companies' germanium lines, including new types from Texas Instruments.

Higher power and, again, more plastic packages are the headliners in silicon-controlled rectifiers this year. Westinghouse has extended compression bonding to high-power units, to 70 amps and 1200 volts. General Electric will also be increasing power-handling capabilities of its SCRs. Manufacturers are looking for growth in speed control applications in large motors, including traction units for rail transit systems that are receiving more attention from industry and government.

In other areas for the industrial market:

- Many other component manufacturers are continuing their push of low-cost items, some at sub-Mil—but perfectly acceptable industrial—reliability ratings.
- The continuing trend in automation of industrial processes is being aided by ICs, advances in direct digital control and hybrid computer systems. B & F Instruments is showing a system, for example, that receives 100 inputs from remote strain-gage rosettes and computes and prints out in real time the stress, shear and stress angle at a rate of one second per data point.
- Production-line equipment manufacturers will be showing more automation. The Weltek Div. of Wells Electronics is showing an automatic welding unit for production-line integrated-circuit installation.
- Light-activated silicon controlled switches for industrial applications are a relatively new item. General Electric is introducing one as "the lowest cost on the market."

Semiconductors make strides in consumer equipment

One of the spotlights at this year's IEEE show will be on trends in consumer products set by solid-state devices. The applications involved range from large power and control systems down to tiny, light-operated audio units. Common to many of these achievements is the use of inexpensive packages for the semiconductors.

This greater emphasis on the consumer market is evidenced by engineering activity figures and growth rates. In 1960 only 20% of the total developmental effort was devoted to the industrial and consumer markets (with consumer interests getting the lion's share); 80% went to military and defense needs. In 1965, this latter figure dropped to 40%, the consumer effort went to 50% and the industrial rose to 10%.

In 1966, all indications point to further increases in the latter two, with the military programs accordingly dropping off (5 to 10%). In terms of growth rate (volume and dollars of sales), the combined consumer-industrial figure has steadily climbed the past 5 years, while the military portion has been decreasing and leveling off. The two will be just about equal in '66, but this is largely due to the limited war in Vietnam. 1967 should witness the eminence of the industrial-consumer trend for the first time in modern electronics history.

Judge a device by its cover

Every major type of semiconductor is now available in a low-cost (usually plastic) package. These include SCRs, power and other bipolar transistors, diodes, unijunction transistors, FETs and integrated circuits and are a major reason for the thrust into the consumer market.

Representative of this trend are TV sets incorporating 15 ampere-rated rectifiers in a lead-mounted plastic package, automotive electrical assemblies containing epoxy diodes and communications equipment using plastic FETs. In some cases the performance of these units exceeds that of their metal-encased counterparts. What's more, the trend towards line-operated capabilities in semiconductors will also be evident; many devices are replacing traditional components (vacuum tubes, for example) in consumer products on a one-for-one basis. Typical of the applications here are pre-amps, citizen-band transmitter stages, antenna disabling systems and TV deflection circuits.

More power to thyristors

Solid-state achievement in consumer power and control systems will also be apparent at the show. Typical of these will be units employing new thyristor devices (SCRs Triacs, etc.) and power transistors, both with high-power ratings.

These semiconductors are now capable of handling in excess of 1200 amperes at 1800 volts (peak), thanks to technology improvements in heat removal. In effect, a double-heat sink design is employed to both remove heat quickly and store it (for gradual dissipation) where it cannot harm the semiconductor component. This method solves the problems associated with high thermal resistances and heavy inrush currents. It helps point the way to solid-state takeovers in motor applications (blenders, washing machines, machine tools), welders, dimmers, timers and power-control systems and sub-systems, in general.

New gains with FET amplifiers

Field-effect devices are also contributing to the semiconductor role in establishing product trends in consumer equipment. FETs and MOS units (discrete and integrated) are setting the pace by

opening up new applications and improving on the functional ability of traditional devices here. Most of the headway in amplifiers has been made by FETs; MOS semiconductors are making their presence felt more so in switching applications.

The relatively new breed of large-signal linear voltage amplifying junction FETs (devices with high BV_{ds} ratings and closely specified bias points) is capable of outstanding performance in audio equipment. These and other FETs are also being employed in high-frequency amplifiers, low-noise systems, mixers, agc networks, FM receivers, IF strips, video amplifiers and modulators.

Discrete MOSs and integrated MOS circuits (arrays) are making strides in RF amplifiers, scratch-pad memories, choppers, calculators, addressable memories and VHF tuners.

Let there be light

Semiconductors are casting still another new light on consumer products. Show attendees may observe a number of displays involving light-emitting diodes (LED) and other optoelectronic devices. These units can be of use in communications, indicating, printing, photographic and tape-recording systems.

LEDs are capable of creating visible light beams of green and red hues. These beams are then modulated at a high-frequency rate ($\geq$1 MHz) to form highly-directional communications links. For example, in one exhibit, integrated circuit amplifiers will be used to process the light signals in establishing an audio system.

Don't be too surprised if you stumble across consumer equipment containing integrated circuit portions. Linear ICs are being used in video and IF stages, synchronization networks and other types of signal-processing systems.

Microwave companies look for greener pastures

Diversification and improvements in devices, rather than breakthrough, characterize the microwave segment of this year's exhibition.

Many companies are venturing into new areas, with the solid-state industry attracting most. This trend is partly explained by the approaching dateline for telemetry systems to convert to the higher L and S bands, and partly by the desire to be able to use in-house components for any systems they build, according to spokesmen of interested companies.

As an example of diversification, Scientific-Atlanta—a company that is better known for its test equipment and telemetry systems—became active in ferrite devices.

The first product from the new laboratory is the 223-1A reciprocal phase-shifter. This latching, digital ferrite device is being shown at the IEEE Show. Its reciprocity permits phased arrays to transmit and receive without switching back and forth between transmitting and receiving elements. In addition the latching design needs low drive power: The 223-1A uses less than 50 μjoules. It covers the range of 5.4 to 6 GHz with a reciprocity of about 1° and a switching time of less than 1 μs. "Our diversification serves a definite purpose," says Howard Crispin, marketing manager of antenna instrumentation; "we want to develop the capability to provide complete systems for our customers."

The YIG-device area also welcomes a newcomer: Microwave Associates, Inc., is showing the first YIG filters of its new production setup.

The MA9A11 YIG filter covers the range from 4 to 8 GHz with four sections. It has an 80-dB off-band rejection and a 4-dB insertion loss in the band, which is 25-30 MHz wide. The tuning linearity is 1% with a sweeping rate of 100 Hz. The voltage is from 0 to 12.

A second filter, type MA9A5, covers the range from 2 to 4 GHz in two sections, with an off-band range rejection of 50 dB and an insertion loss of 2 dB. The band is somewhat wider: It spreads from 30 to 40 MHz. Its tuning linearity and power requirements are the same as those of the MA9-A11.

The filters are available in a package that includes the drive source. The saturation level of both filters is above +10 dBm.

Better instrumentation and components are apparent in the first spin-tuned magnetron on view—the DX 290 of the Amperex Corp.—which operates around 16 GHz with a bandwidth of about 5%. The device has a peak power of 65 kW, a duty cycle of 0.001% and a tuning rate of 2 HMz/μsec.

Eimac, a division of Varian, brings to the show a new 5-cavity, electrostatically focused reflex klystron that is only 6-1/8 inches long, including the tuners, and weighs only 5 pounds. The klystron operates in S-band, around 2100 MHz, with a maximum efficiency of 40%. Electrical and mechanical tuning permit the coverage of either a narrow band or a wide band. In narrow-band operation, the output power is 200 watts, with an efficiency of 40% and a gain of 30 dB. In wide-band operation, the output power is 196 watts, with a gain of 27 dB and an efficiency of 36%.

An overlay transistor, built by the Vector Div. of United Aircraft Corp. and designed to operate as a class-C amplifier, is intended for telemetry systems. The 2N4012 operates at 1.6 GHz, with an output of 2.5 watts and a conversion gain of 4 dB. "The strong interest of telemetry-system people in high-frequency and high-power semiconductors gave us impetus to develop this device," says John Millet, manager of technical publications at Vector.

The precision insertion-loss measurement set (PILMS), which was introduced last year, now has a direct-reading panel and operates with batteries, according to its manufacturer, De Mornay Bonardy. Other improvements on the device include the extension of the dynamic range to 30 dB. Also, in the 0-to-1-dB range, the absolute accuracy is down at 1/7000th of a dB. Last year these figures were 25 dB and 1/5000th of a dB, respectively.

ON READER-SERVICE CARD CIRCLE 217 ➤
SEE US AT THE IEEE #3K19, 3K20 ➤

Accuracy ±0.0025%. Maximum meter resolution, 0.1 ppm. Fourteen pounds later you have the new solid-state Fluke 885 DC Differential Voltmeter, the first truly portable laboratory standard. Peak-to-peak reference stability is 15 ppm for 60 days. Use the Fluke 885 as an isolation amplifier. Grounded recorder output is so well isolated that a short-circuit at the output produces no voltmeter reading error. Ground loops are completely eliminated when the battery powered Model 885AB is used.

Other Specifications: Range, 0 to 1100 Volts. Null sensitivity, 100 microvolts full scale. Line regulation better than 2 ppm. No zener oven, less than 30 seconds warm-up time. Cabinets can be half rack or full rack mounted with optional mounting kits. Price of the Model 885A line cord version is $1,195. The battery powered Model 885AB is $1,325.

FLUKE

FLUKE • Box 7428 • Seattle, Washington 98133 • Phone: (206) PR 6-1171 • TWX: (910) 449-2850

Model 885A reading precise voltage from Model 332A Voltage Calibrator on 10V range



Leader in...
CONTROL INNOVATION

easy to mount
easy to wire

NEW GENERAL ELECTRIC CR120 TYPE H RELAYS GIVE YOU 9 MOUNTING METHODS–4 PLUG-IN, 2 TRACK-MOUNTED FORMS

General Electric's new CR120 Type H general purpose relay line incorporates mounting and wiring innovations which give you the ideal relay for many electronic and electrical applications such as machine tools, air conditioners, photoelectric switches, office machines and packaging machines.

MOUNTING FLEXIBILITY

You can choose from a variety of mounting arrangements — stud or screw-mounted open relays, front- or back-mounted relays with dust covers or plug-in relays.

Back-mounted relays with dust covers are offered with plastic mounting channel for easy snap-in installation.*

Two types of plug-in arrangements are offered. A unique General Electric front-wired socket gives you the smallest, lowest cost relay-socket combination yet manufactured that meets UL creepages and clearances for 150 volts. And these sockets give you the added flexibility of push-mounting in a special G-E mounting channel.* Wiring is simplified by .110″ terminals for either flag-type push-on terminals or solder connection. The front-wired socket will accept 5- or 10-amp double-pole, double-throw relays.

Back-wired sockets provide .205″ terminals. These sockets meet UL creepages and clearances for 150 volts and will accept 5- or 10-amp relays with up to three-pole, double-throw contacts. Tube-type plug-in relays (octal or 11-pin) are also offered.

All relays have molded-in terminals, solid one-piece armature assembly and reinforced construction. Five-amp forms have .110″ and 10-amp forms .205″ terminals.

EXTRA CONVENIENCE

Now you can order relays with two terminals on each side of the coil and two on the common side of each double-throw contact. This simplifies wiring by eliminating the need to put two wires on one terminal. It is particularly helpful when you are wiring the relays in series.

Manual operators and neon indicating lights are available for your special applications. An exclusive manual operator for all relays with dust covers, except back-mounted forms, permits manual relay operation during check out and testing.* Indicating lights give you quick visual indication of coil circuit condition. Sensitive 3-amp relays and latched forms are also available.


For more information, contact your G-E Sales Engineer or Distributor. Or write for publication GEA-7882 to Section 811-58, General Electric Co., Schenectady, N. Y.


CONSTRUCTION INDUSTRIES DIVISION

* Features not offered by any other manufacturer of general purpose relays.


Progress Is Our Most Important Product

GENERAL ELECTRIC

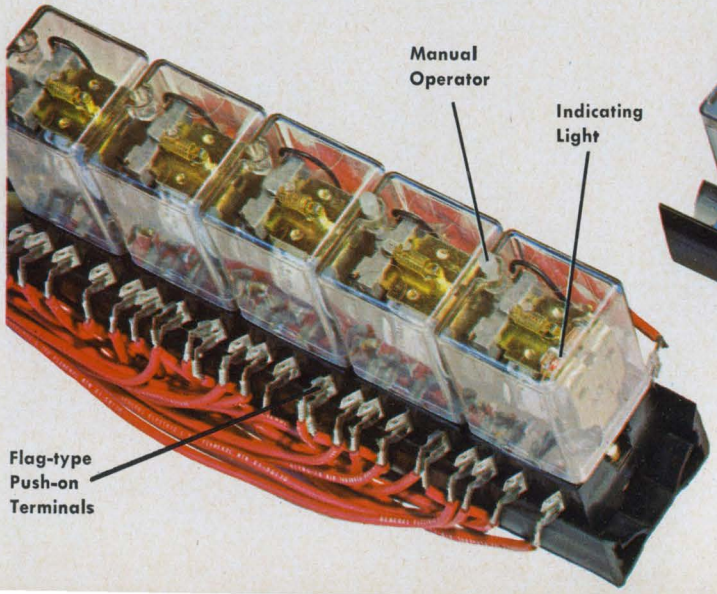

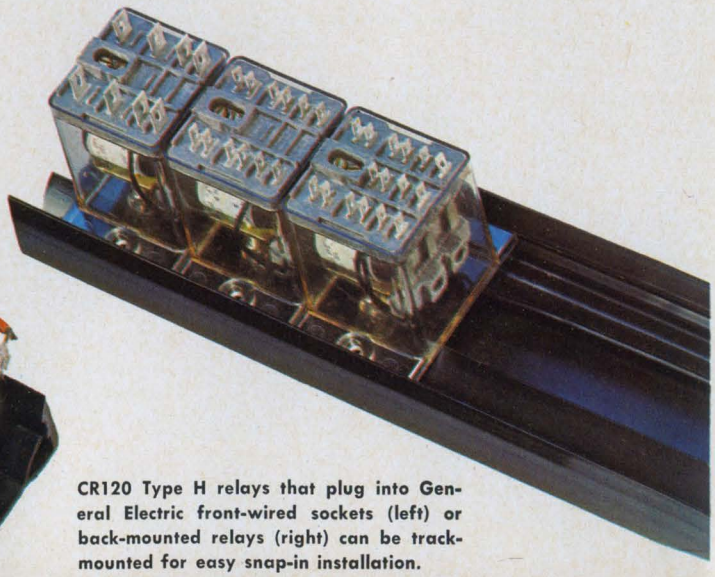

CR120 Type H relays that plug into General Electric front-wired sockets (left) or back-mounted relays (right) can be track-mounted for easy snap-in installation.

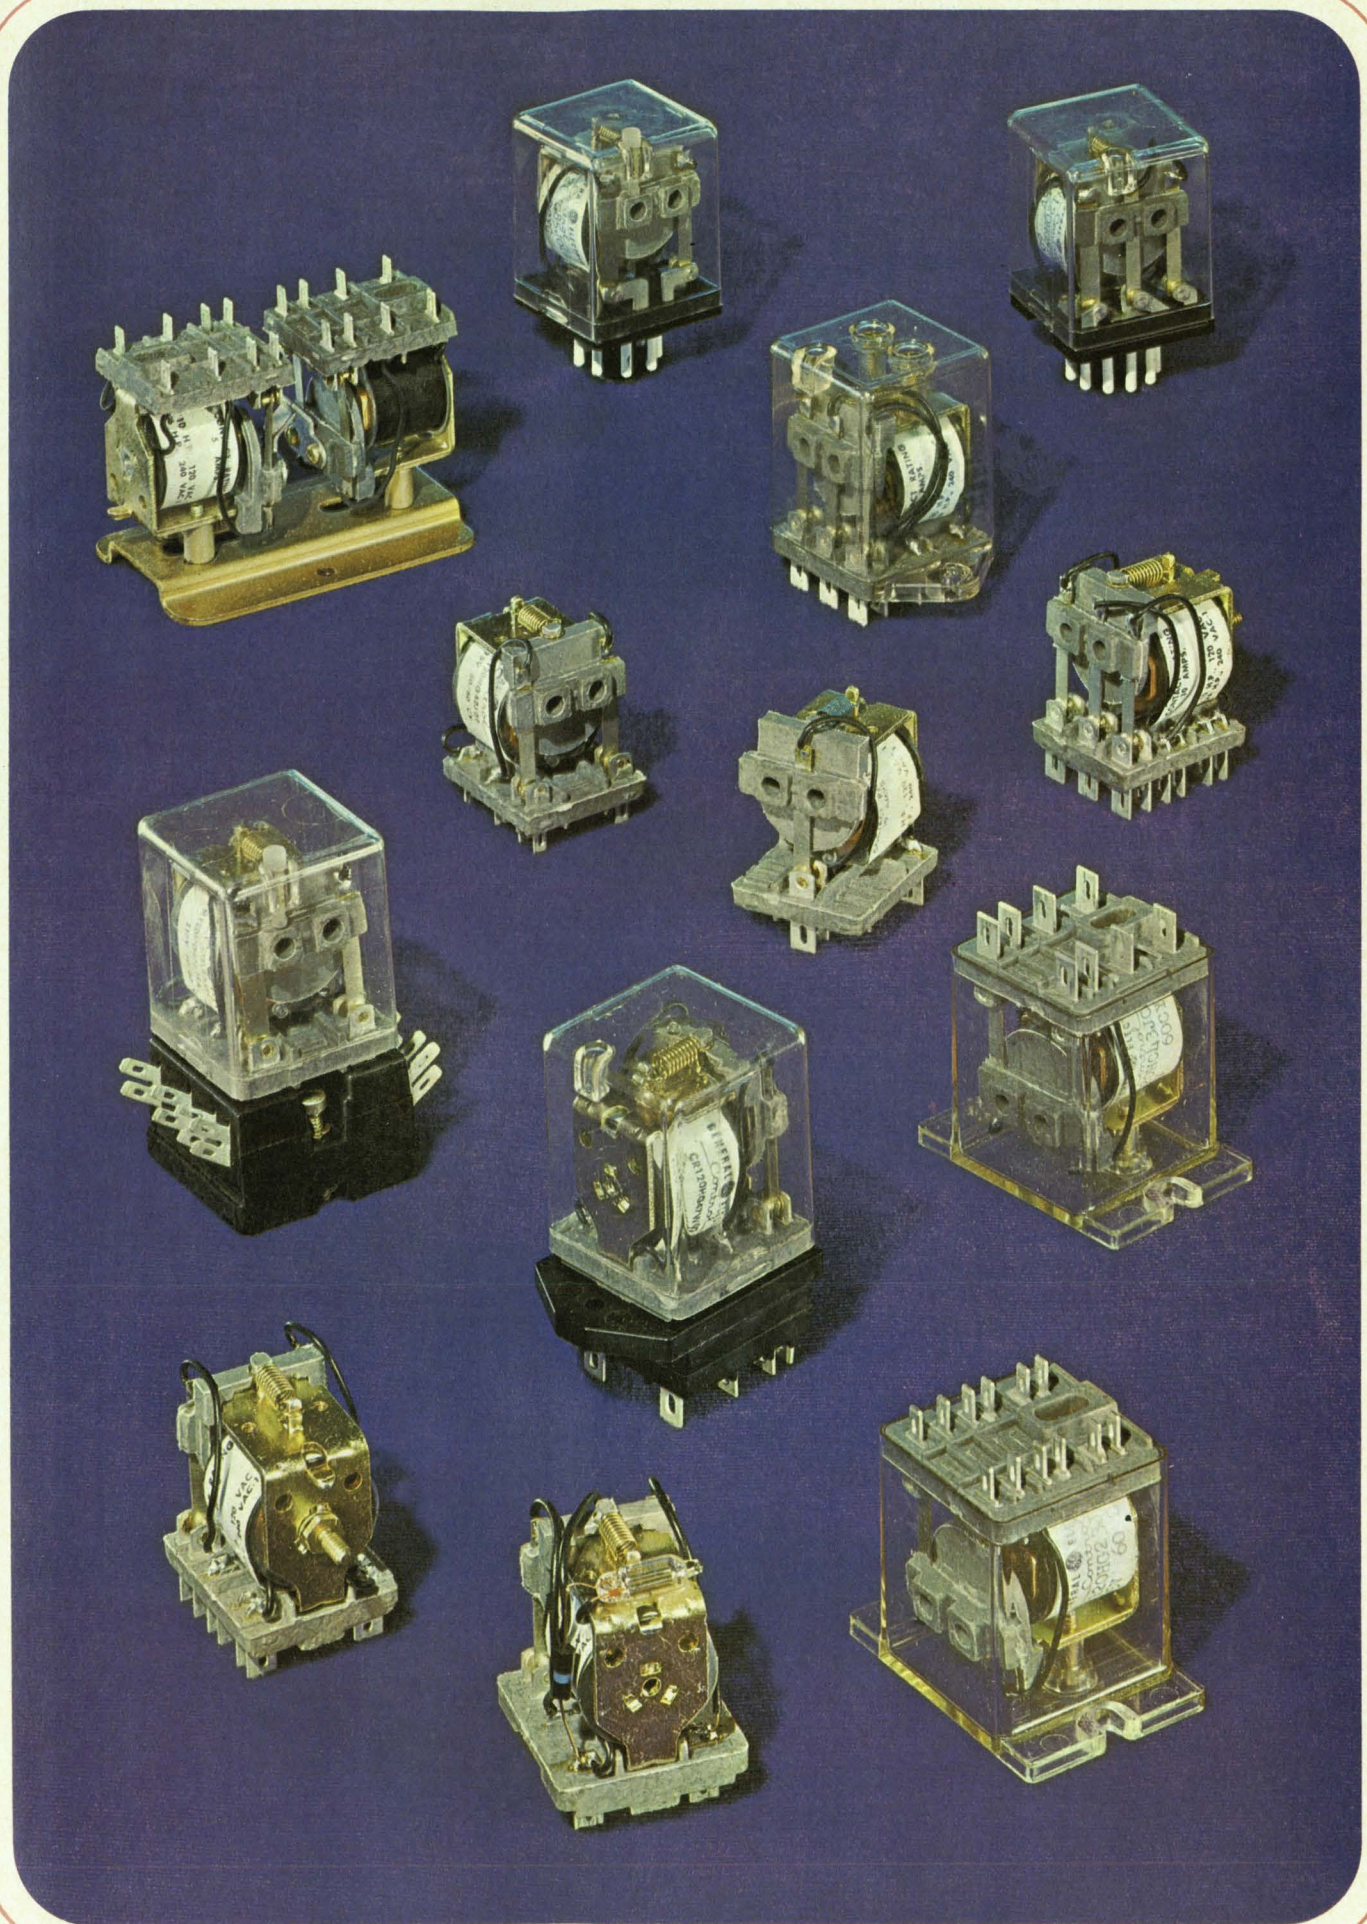

ON READER-SERVICE CARD CIRCLE 40

EE societies—are they doing enough?

Electronic Design's survey shows engineers feel a need for further standardization of products and for personal recognition and job stability.

Maria Dekany
Technical Editor

Professional EE engineering groups in the country—the many societies and the two trade associations—are of valuable assistance in helping engineers communicate with one another. But many members feel that isn't enough.

An ELECTRONIC DESIGN sampling of engineer opinions across the country shows a need for expanded efforts in two other areas in which professional groups can help the engineer:

-Communication between engineers and manufacturers. Needed are uniform testing and specification for similar devices, so engineers can make an intelligent appraisal of what they are buying.

-Communication between engineers and employers and engineers and the public, to help engineers achieve greater professional recognition. Needed in some companies are adequate work space for engineers in place of "bullpens"; treatment of engineers as trusted professionals instead of time-clock hirelings, and job security to end the mill-like hiring and firing practices.

Among the comments of engineers in the ELECTRONIC DESIGN survey were these:

"Yes, uniform testing and specification among manufacturers are needed. But you are asking for utopia!"

"The plight of engineers reminds me of the 'Grapes of Wrath'—chasing around the country for jobs. Besides demeaning the profession, it results in waste and inefficiency."

"To put a stop to hiring and firing of engineers in the defense industry, engineers should publish a monthly scoreboard of engineers fired and hired by individual companies. After a while notoriously bad records will make hiring extremely difficult for the offending companies."

"If engineers are treated just as any other employee in the company, they should behave as such and form unions for their protection. But engineers are not joiners, and unions are below their imagined professional status."

Internal communication stressed


Most professional engineering societies consider themselves purely technical organizations, whose only role is that of communication within the engineering profession. They distribute technical information, establish standard symbols, notations and terminology, and in general serve the scientific community by organizing meetings and discussions and providing a forum for new technical developments.

The accompanying table lists 17 engineering and scientific societies that serve the electronic and electrical industry and have members from these fields. They handle the job of communication among engineers very well.

But what of communication between engineers and manufacturers?

Consider the seemingly easy task of buying a power supply. Since many manufacturers make them, the engineer-buyer wants to compare and find the best supply for his application.

Let's say that the peak ripple is of critical interest. Most manufacturers specify the ripple as an rms voltage at the load, like 15 mV, which cannot be used to find the peak value. In addition, one company may specify the recovery time (maybe without even including the rise time for the load transient), and another may use the

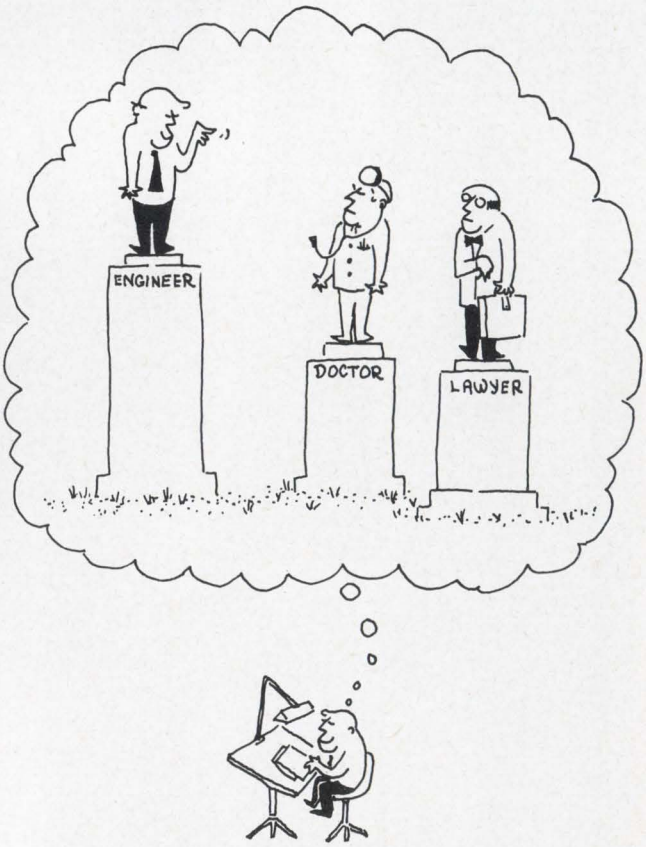

response time. So specification sheets are not much help for the conscientious engineer.

He has two alternatives: He can call up the salesman of each company, or he can make up his own specification sheet and have the companies fill in the needed information. In either case the lack of uniform specifications and test procedures wastes many engineering manhours.

This problem is not confined to power supplies. It exists in antennas, transistors and relays, to name just a few other areas.

A look at the IEEE

But what can the engineer do? Can he call upon an engineering organization that would formulate standards and then convince the manufacturers to adapt the standards? Let's examine the largest engineering society of all, the Institute of Electrical and Electronics Engineers, better known as IEEE.

It is a non-profit organization, like practically all the others. Its announced aims are scientific, literary and educational. The IEEE is presently involved in a court action to obtain an accurate determination of the limitations imposed by the nonprofit operation. Therefore it is not clear whether it operates in this sphere of influence because of the nonprofit nature or because of other considerations. But the fact remains that the IEEE tries not to get involved in controversial engineering problems. For example, on the need for a meaningful transistor registration, the IEEE's comments were as follows (this letter is in reply to ELECTRONIC DESIGN's article on transistor coding, Nov. 9, 1964):

> Sir:
>
> In response to your request for possible participation of the IEEE in attempts to change the present system of transistor registration, I have contacted Jack Hilibrand of our Semiconductor Device Subcommittee and Sorab K. Ghandhi of R.P.I., who has been in charge of most of the symbols-work in IEEE's Solid-State Device Committee in the past few years.
>
> It seemed appropriate to do this since IEEE has collaborated to some extent with JEDEC committees, EIA and other national standards organizations. Professor Ghandhi, in particular, informs me, however, that IEEE has never gone this far in the transistor field and this is primarily a JEDEC matter.
>
> The Solid-State Device Committee deals primarily with basic standards in terms of definition, symbols for basic terms and methods of testing for new devices. Once devices get into industrial use, their handling is almost entirely a matter for the industry-oriented standards organizations. However, thank you again for giving us the opportunity to comment on this matter.
>
> **W. CRAWFORD DUNLAP**
> Chairman
> Solid-State Devices Committee
> IEEE
> Waltham, Mass.

The IEEE also has a Standards Committee. Its function is to define terms, conditions and limits that characterize the behavior of electronic and electrical equipment. When the chairman of the committee was asked about the possibility of extending this function to establish uniform testing and specification, he replied: "Even though there is a definite need for such standards, we feel that it should be the problem of the Electronic Industries Associates (EIA)."

In fact, the EIA does perform some standardization work, but much depends on organizations like the IEEE.


ASA's performance is limited

But how about organizations like the American Standard Association (ASA) and American Society for Testing and Materials (ASTM).

According to the ASA's electrical engineering department, the association's main function is the coordination of work by other societies and the provision of systematic means to avoid duplication. It is a federation of more than 150 societies and trade associations. However, the association does not have the prerogative to suggest or to establish new standards on its own, except in very rare cases. The association accepts standardization proposals from organizations like the IEEE, the EIA and ASTM.

The association has sectional groups, each is sponsored by the leading organization in a particular field. These study a proposed standard before it is submitted to all members. The sponsor of any sectional group finances the operation, takes care of administrative duties and, at the same time, provides guidance and leads the effort of the group. For example, there is an electronic sectional group that studies standards for transistors and other electronic devices. It is sponsored by the EIA, and its members represent users and producers in equal number. According to an ASA official, this group is now inactive:

"There is nothing in the works, but our hands are tied. These groups are independent; their performance is mainly determined by the desire of

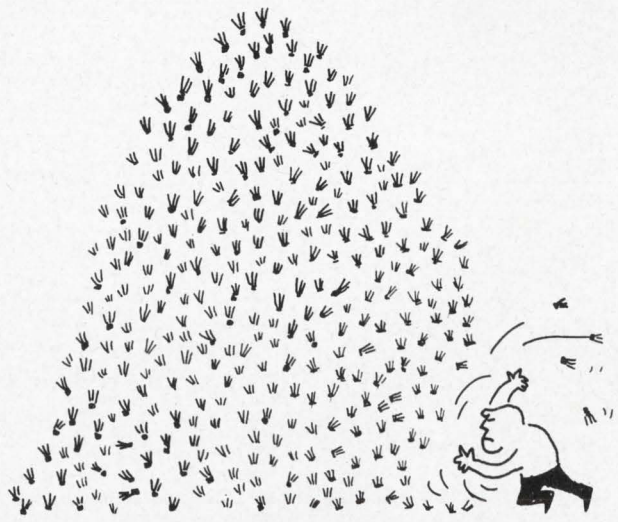

List of EE Societies

Organization	Members	Areas of activities	Membership grades	Annual dues	Services
Institute of Electrical and Electronic Engineers (IEEE) Headquarters: 345 East 47th St., New York City, N.Y.	157,000	Information exchange in the disciplines of electrical engineering, electronics and allied fields	Student Associate grade Member Senior member Fellow grade Honorary members	$3 entrance fee (except students) $15	Journals, meetings and special courses
American Association of Engineers (AAE) Headquarters: 8 South Michigan Ave., Chicago, Ill.	1000	Professional aspects of engineering	Member Associate member	$20-25	Publication
Engineers Joint Council (EJC) Headquarters: 345 East 47th St., New York City, N.Y.	Federation of 38 professional eng. societies	National issues versus engineering Technological manpower of the USA, employment situation, salaries			Publications
American Federation of Information Processing (AFIPS) Headquarters: 211 East 43rd St., New York City, N.Y.	Over 25,000 through the federation of IEEE and ACM	Representation of the USA in international affairs Public relations for computer society			Orientation seminars, conferences
American Institute of Aeronautics and Astronautics (AIAA) Headquarters: 1290 Avenue of Americas, New York City, N.Y.	36,000	Aerospace systems	Member Associate fellow Fellow Honorary fellow	$20	Journals, meetings, career information, courses
Society of Automotive Engineers (SAE) Headquarters: 485 Lexington Ave., New York City, N.Y.	26,000	Self-propelled mechanisms, including space vehicles, engines	Junior Associate Member	Depends on age, ranges from $10 initiation fee & $12 dues to $25 initiation fee and $30 dues	Journals, handbooks, employment service
Radio Technical Commission for Aeronautics (RTCA) Headquarters: 15th and Constitution Ave., N.W. Washington, D.C.	118 agencies from industry and government	Performance standards for systems in aerospace telecommunication			Annual meetings
Association for Computer Machinery (ACM) Headquarters: 211 East 43rd St., New York City, N.Y.	15,000	Computer design and data processing	Members Student Corporate membership Academic membership	$18 $5 $500 $100	Periodicals, lectures
Society of Packaging and Handling Engineers (SPHE) Headquarters: 14 E. Jackson Blvd., Chicago, Ill.	1500	Industrial and commercial product protection, packaging and materials, transportation	Junior member Associate member Professional member Corporate member	$10 $25 $25 $175	Employment service, meetings and technical publications
Society for Professional Engineers (NSPE) Headquarters: 2029 K St., N.W. Washington, D.C.	Above 54,000	Professional, economical and social aspects of engineering	Professional Engineer-In-Training	$16 plus dues for local and state chapters	
American Institute of Physics (AIP) Headquarters: 335 East 45th St., New York City, N.Y.	Federation of 25 societies in the field of physical sciences	Application and advancement of the science of physics	Only through the member societies		Distributes journals of its member societies
National Association of Power Engineers (NAPE) Headquarters: 176 W. Adams St., Chicago, Ill.	12,000	Power safety, air and water pollution	Member Associate member	Determined by local chapters	Employment service, educational courses, journals
American Association for the Advancement of Science (AAAS) Headquarters: 1515 Massachusetts Ave., N.W. Washington, D.C.	94,000 individual members and 250 scientific societies	Cross-fertilization of all fields of science Public awareness of science	Member Fellow	$25	Awards, seminars
Instrument Society of America (ISA) Headquarters: Penn-Sheraton Hotel, Pittsburg, Pennsylvania	16,000	Telemetry, automatic control, data acquisition processing and display, measurement and precision standards	Senior member Member Associate member Student member	$15 $15 $10 $3	ISA journal, discount on ISA publications, meetings, courses

Organization	Members	Areas of activities	Membership grades	Annual dues	Services
American Standard Association (ASA) Headquarters: 10 East 40th St., New York City, N.Y.	Federation of 150 technical societies and trade associates	Coordination and promulgation of standards			
American Society for Testing and Materials (ASTM) Headquarters: 1916 Race St., Philadelphia, Pa.	13,500	Evaluation of all materials used in the electrical and electronic industries	Member Associate member Student member	$20 $10 $3	ASTM Standards
Society for Nondestructive Testing (SNT) Headquarters: 914 Chicago Ave., Evanston, Ill.	4,700	Establishment of nondestructive test methods	Member Sustaining member Corporate membership	$15 $25 $100	Journals

the sponsor and the members to accomplish something."

According to the same ASA official, the sponsor and the members of the transistor and electronic-devices group appear to be quite satisfied with the standards already established by the EIA. Joseph Werner, the past secretary of the group (who was also the secretary of the JEDEC Semiconductor Device Council till January, 1966) says:

"The semiconductor industry is too volatile; it is moving too fast and changing from day to day. There is no time to go through the ASA, which takes about a year to a year and a half. JEDEC is doing a good job in this area."

The committees of JEDEC, according to Werner, are even doing some of the work that should have been done by the standard committee of the IEEE —establishing symbols and definitions for the semiconductor industry.

"The semiconductor field is in a sorry state as far as definitions go," he says. "Much more work is needed to establish the language of communication between the user and the producer. And this is the responsbility of the IEEE."

The ASA sometimes initiates its own investigation and establishes standards. If there is no outside organization active in an area and the association receives requests for standards, it may form its own committee and do the necessary work. For example, at present two subcommittees are in the process of developing standards for relays and RF connectors—that is, they are involved in defining terminology, specifications, methods of testing, physical dimensions and so on. If any engineer has any constructive comments or suggestions about these two devices, this is the time to tell the ASA.

When a proposal, developed either "in house" or submitted by an outside organization, has been accepted by the responsible ASA committee, it is submitted to the membership for approval.



Testing of materials achieved

The American Society for Testing and Materials, another large organization, investigates the fundamental properties of materials used in the electronic and electrical industries. It establishes basic test procedures for ferrite cores, insulators, insulated and bare wire cables, and semiconductor materials, among others. This society appears to be the closest to meeting the engineer's needs so far as materials are concerned: Anybody can suggest the need for standards at meetings—visitors, nonmembers and members alike.

Examination of the work and functions of the larger technical societies makes it clear that all have very limited activities in areas where the most work is needed: uniform testing and specifications of devices for the design engineer. Most of the societies consider these areas the domain of industry-oriented organizations—the trade association. The nontechnical problems of the engineering profession are clearly outside their areas of interest.

Two major trade associations

There are two significant trade organizations in electrical and electronic engineering: EIA and NEMA (National Electrical Manufacturers Association.

NEMA handles mostly electrical devices—devices that consume 60-cycle power. This includes equipment used to generate, transmit and distribute power; appliances, and materials that go into devices.

EIA deals with passive electronic devices—like resistors, inductors and so on—and with equipment used in the electronic industry.

The Joint Electron Devices Engineering Council (JEDEC) is co-sponsored by both NEMA and EIA. It handles all activities in the areas of semiconductors and other electron devices.

These trade associations do not have individual members. NEMA has only manufacturer members; EIA has, in addition to manufacturers, representatives of users on the management level.

How do these organizations help the engineer-

user in his work? Can an engineer submit suggestions as an individual? He can.

Engineer suggestions are welcome

EIA has more than 200 engineering committees, staffed by member and non-member companies and by representatives of the Federal Government. When member companies suggest standardization in a certain area, it is reviewed by the engineering department of EIA, and if it is considered worthwhile, a committee is set up to formulate a proposed standard.

Any engineer can submit suggestions. Proposals on equipment and passive devices can be submitted to Jean Caffiaux, Manager, Engineering Department, Electronic Industries Assoc., 2001 Eye St. N.W., Washington, D. C.


Those who are interested in the development of a transistor coding system, for example, can write to Everett Coon, Type Registration Group Manager, and he will forward it to the responsible committee.

NEMA offers plenty of opportunity, too, to interested individuals. It has joint activities with organizations like the IEEE that involve the investigation of specific groups of devices and equipment. An individual can submit his suggestions through his company, if the company is a member of NEMA. If it isn't, the engineer can work through a subcommittee of the IEEE. Suppose, for example, that a design engineer would like to see the adaptation of uniform specification for switches. He may get in touch with the SF1 subcommittee of the IEEE, which handles switches, fuses and insulators. If the subcommittee considers the suggestion worthwhile, it will propose it to NEMA. The chances are that if the IEEE proposes something, it will be accepted, since it represents the user's opinion to the manufacturers.

Joseph Werner, who is also an official of NEMA, says: "National standards can only be established through the acceptance of all concerned—meaning manufacturers, users and general-interest groups."

Many engineers wary

The apparent willingness of industry-oriented organizations to listen to and accept suggestions from individual engineers is a step toward improving industry-engineer relations. Engineers should use this opportunity. However, many told ELECTRONIC DESIGN that they never considered it because:

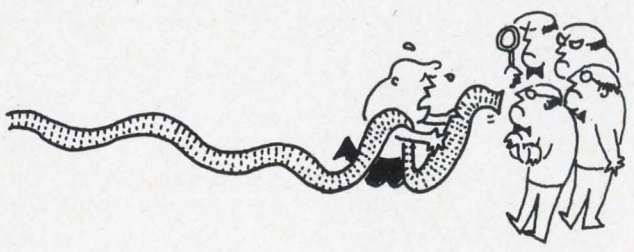

"I am too busy in my job, to get involved."

"Manufacturers are keeping too much information off their specs sheets, but they are in the business of making money. Uniform testing and specification will never be established through a group supported by manufacturers."

"I would rather spend extra time in finding the best device than have the prices raised. Uniform testing and specification will surely cost money, and manufacturers will pass the cost along to us—the users."

Some engineers even felt that there might be a need for Federal action:

"The Government is the largest buyer, and waste and inefficiency cause the largest losses for the Government. They should force the manufacturers to establish uniform test procedures and specifications."

Most engineers in the survey accepted the existing conditions as "the facts of life," even though they did not like them. Very few had given thought to possible remedies. The most common suggestion was for the establishment of an organization that would serve as a sounding board for engineers. This organization could coordinate engineer-buyer comments and pass them along to manufacturers.

Nontechnical problems persist

What of the nontechnical aspects of the profession—status, job security and working conditions?

The most frequently heard complaints on the professional status of engineering urge the following:

- Increased recognition and respect for engineering as a learned profession.
- Greater voice in management decisions.
- More engineers in management.
- Management encouragement of participation of civic and professional society affairs.
- Release from technician's work.
- Less supervision by non-engineers.
- Better support and service facilities.

Two large organizations serve the general interest of engineers on the job: the Engineers Joint Council (EJC) and the National Society for Professional Engineers (NSPE).

The EJC is a federation of 38 professional engineering societies; it does not have individual membership. Its activities are concentrated on nationwide problems of engineering. For example, it develops and publishes information on engineering demand, salaries, enrollments and degrees; it acts as a liaison between the Government and the EJC member societies on issues that relate to engineering jobs. It is more concerned about the engineer as an employe than as a professional.

The EJC publishes studies on the nationwide employment of engineers, covering such subjects as the demand for engineers now and in the future and the salaries and income of engineering teachers. The list of available reports and their cost

may be obtained by writing to the Engineers Joint Council, Dept. P, 345 E. 47 St., New York, N. Y. 10017. In addition to these reports, the council publishes a quarterly newspaper, "Engineer," which covers the professional problems of engineering, including obsolescence, layoff problems in the defense industry and legislative actions that affect the profession.

The membership of the NSPE consist mainly of licensed, or registered, engineers.

The NSPE is conducting a vigorous and extensive public-relations campaign to enlighten the public to the broad spectrum of engineering activities. This society is the only one that is registered as a national and state lobby, and it actively tries to influence legislation for the engineering profession.

The society has been quite successful in its lobbying activities. It supported legislation to improve the economic status of engineers employed by the Federal Government. It obtained full recognition for engineers in the military services and set up minimum compensation standards for engineering consultants. The NSPE publishes newsletters and magazines to keep its members informed of its activities.

However, so far as the majority of the electrical and electronic engineers are concerned, the society hardly exists. Its requirement for licensed members only prevents many engineers from joining; only 18% of its members are from electronic and electrical areas. But there are signs that the NSPE realizes the shortcoming of excluding many able engineers who do not need the license for their work. The society's Long-Range Planning Committee has proposed a broadened membership approach that would make possible the admittance of non-licensed engineers.

The public image of the engineering profession is important, engineers believe. A good image attracts bright young men into engineering, improves the morale of those already in the field and helps raise salaries. Most engineers, the E|D survey showed, feel that the profession lacks luster, that the public is not clearly aware of the importance of an engineer's work. But a Gallup poll, initiated by the NSPE, showed the opposite to be true.

The poll asked the public: "Suppose a young man came to you and asked your opinion about taking up a profession. Assuming that he was qualified to enter any of these professions, which one of them would you first recommend to him?" The replies rated the engineering profession as the second most desirable, ahead of science and law. The medical profession took first place. It would appear that the complaints about the professional status of engineering cannot be written off as the result of public unawareness.

Still, engineers are treated by some companies almost as if they were itinerant workers. They are hired or laid off en masse. If a company receives a fat contract, it may hire hundreds of engineers. When the contracts are terminated or canceled, the engineers are let go. This situation is most apparent in the defense industry, and engineers feel that it strips them of their professional dignity.

The majority of engineers in the defense industry, E|D's survey showed, think that the NSPE is organized to fight for protection against this practice. Suggestions to remedy the situation ranged from contracts that would include some provisions for layoffs to the formation of an engineering organization that would publish a monthly scoreboard of engineers hired and laid off, to discourage employment at companies with bad records. Nearly unanimous opposition to unions was expressed by the engineers. They consider unions to be a last resort.

Engineers outside the defense industry do not feel too strongly about this problem, the survey showed. The most common view was that the higher salaries offered by the defense industry compensate for the risk of steady employment. "If they don't like it, they don't have to take it," one engineer commented.

However, engineers in and out of the defense industry agreed that the lack of a strong organization (like the American Medical Association, some said) contributes to the unprofessional handling of engineering personnel.

The engineer has two good ways to bolster his professional stature:

- Continued study.
- Greater participation in civic and community affairs.

With today's rapid changes in electronics, continued study has become a professional necessity. Engineers believe that employers should help out here, with time off for study and financial assistance.

The educational goal committee of ASPE has recommended that the master's degree—awarded at the completion of a five-year program—become the recognized professional degree of engineering, instead of the bachelor's degree. The resultant curriculum, it is argued, would strengthen the liberal education of engineers, expose them to the social sciences and the problems of society and provide a deeper understanding of the engineering sciences. (See "Engineer," Vol. VI, No. 3).

Engineers can also further their professional status, in the view of some groups, by taking into consideration the needs of people and the community when they design equipment. James K. Carr, former Undersecretary of the Interior and now San Francisco's manager of utilities, put it this way at a recent meeting of the Consulting Engineers Association of California: "To provide leadership in this new era, engineers must remember that engineering works are built to meet man's needs. Too often engineers have been the hirelings of men concentrating on profit alone, who are indifferent to people's needs."

Carr is also an engineer.

NOW!

P&B Quality in a full line of Precision Snap Switches

Engineered in the tradition of P&B relays. Same pride of craftsmanship, same excellent cost-to-quality ratio. Specify with confidence in our ability to deliver the switches you want when you want them.



A New Reliable Source for Your Precision Snap-Action Switch Needs

P&B's new line of precision snap-action switches is designed to meet or exceed industry standards for electrical ratings and life characteristics.

Operating forces, actuating characteristics and mounting dimensions make these switches directly interchangeable with many competitive types. P&B precision snap-action switches meet Underwriters' Laboratories and Canadian Standards Association requirements.

Wide Variety of Stock Switches for New Applications and Direct Replacements

A wide variety of types is carried in P&B's stock. These include: General purpose, miniature, subminiature, and appliance. All four basic types are available with various actuators, terminals, and contact arrangements. They can be used for both AC and DC voltages. Mounting holes, terminals, operating and release forces, pretravel, overtravel, differential travel and pertinent dimensions meet industry standards.

Precision General Purpose

P&B general purpose snap-action switches are recommended for applications where loads may be heavy and space is not the primary consideration. They are available for 15 and 20 amperes with a broad variety of actuators, such as pin and overtravel plungers, rigid lever, roller lever, panel mount plunger and others.

Precision Miniature

P&B miniature snap-action switches are highly sensitive and especially suited for compact installations where precision is a primary factor. Their small size and high electrical capacity recommend them for applications of multiple installations in limited space. Available with various contact and terminal arrangements.

Precision Subminiature


Designed for applications requiring exceptionally small size and low operating forces. Especially suited for electronic equipment, business machines, military apparatus and other precision electrical equipment. Available for operation by pushers, cams, or lever actuators with or without rollers. Solder, turret and quick-connect terminals are available.

Precision Appliance

Economical, reliable and durable, P&B appliance switches are compact and easy to install. A white nylon enclosure gives protection for most applications. Quick-connect terminals are furnished in side or front-connected configurations. Pin plunger, plain lever, formed lever and panel-mount actuators are available.

For complete information and engineering assistance, contact your local P&B representative or call direct (812) 385-5251. We'll be happy to send you Catalog 1-A on request.

P&B Precision Switches are available at leading Electrical and Electronic Distributors.




POTTER & BRUMFIELD

Division of American Machine & Foundry Co., Princeton, Ind.

Export: AMF International, 261 Madison Ave., New York, N.Y.

ON READER-SERVICE CARD CIRCLE 218

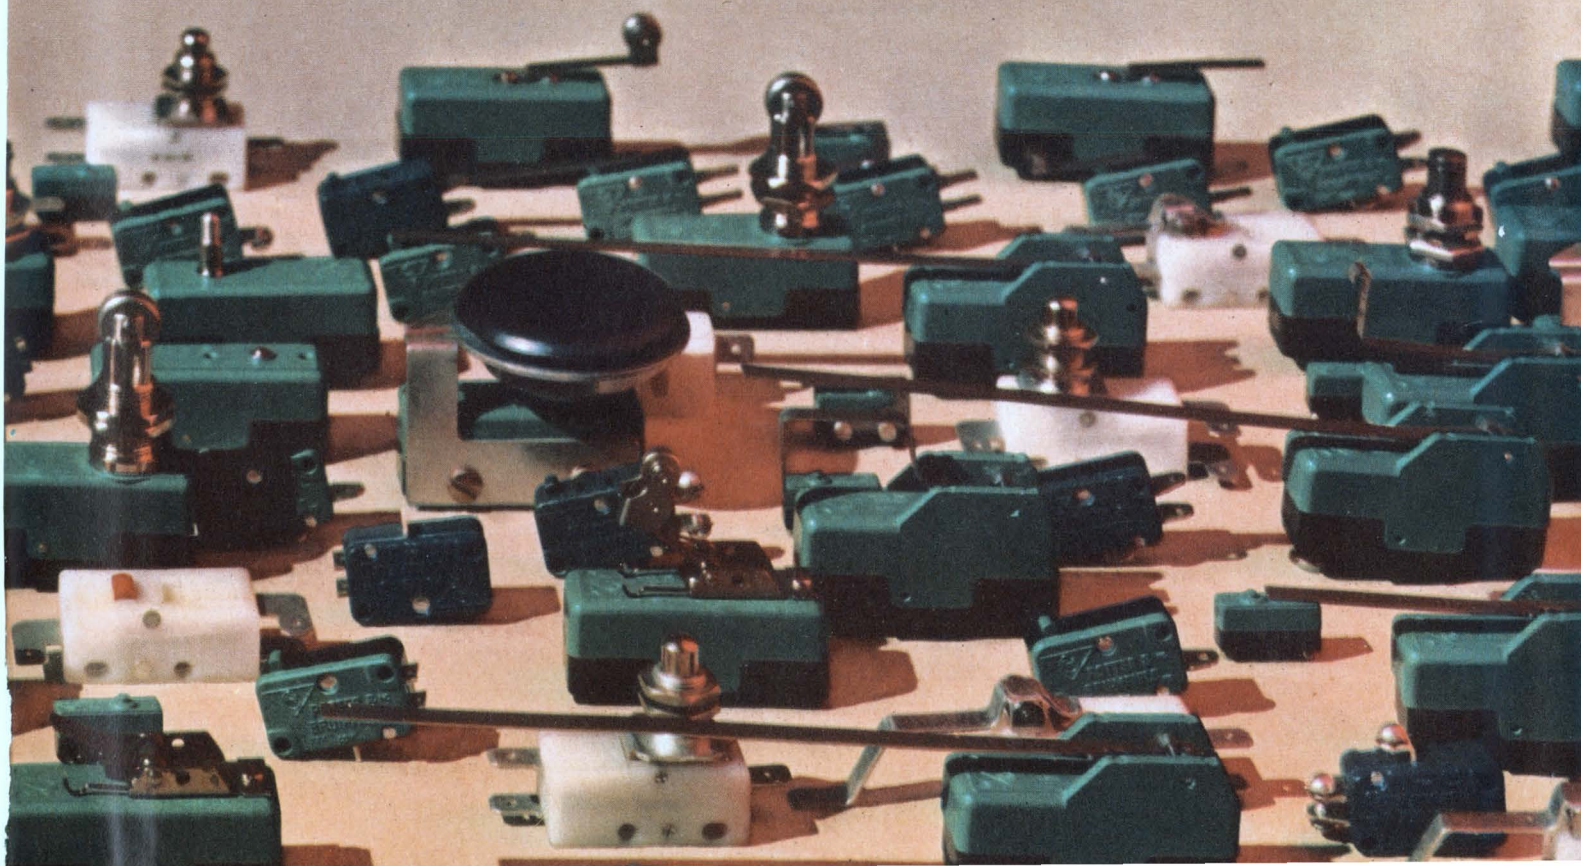

When, where and what to hear—

Here's the complete scorecard of IEEE technical papers by specialty. Time and place is included for each paper.

Categories (papers are grouped as follows:)

Antennas
Circuits
Circuit Theory
Communications
Components
Computers
Consumer Electronics
Control Systems
Cybernetics
Electromagnetic Compatability
Hardware
Industrial Electronics
Lighting
Management
Medical Electronics
Microelectronics
Microwaves
Military Electronics
Municipal Planning
Oceanography and Underwater Systems
Power Generation and Control
Radiation Effects
Reliability
Sensing and Measuring
Signal Processing
Solid-State Devices and Theory
Space Electronics
System Engineering
Television
Test Equipment and Techniques
Transportation
Writing and Speech

See Planning Guide for Paper Order Form.

Antennas

Far Field Simulation of Antennas Which Have Complex Aperture Distribution Functions—*D. C. Beste, Hughes Aircraft Co. (55.1, Thurs./a.m./G)*

A Superdirective Array of Higher Mode Helical Dipoles—*A. J. Poggio, F. P. Ziolkowski, P. E. Mayes, Univ. of Illinois (55.2, Thurs./a.m./G)*

A Broadband Interferometer—*W. Waltman, C. D. McGillem, G. R. Cooper, Purdue Univ. (55.3, Thurs./a.m./G)*

An Explicit Relation Between Mutual Coupling and the Pattern of an Antenna Array—*W. Wasylkiwskyj, ITT Federal Labs.; W. K. Kahn, Polytechnic Institute of Brooklyn (55.4, Thurs./a.m./G)*

On a Pattern Synthesis Method for a Linear Array—*Taneaki Chiba, Tokyo Shibaura Electric Co. (55.5, Thurs./a.m./G)*

Array Synthesis Using Lambda Function—*S. L. Shih, General Electric Co.; L. Bergstein, Polytechnic Institute of Brooklyn (55.6, Thurs./a.m./G)*

Lambda Functions for Dipole Applications—*J. F. Ramsey, Airborne Instruments Lab. (63.1, Thurs./p.m./G)*

Traveling Wave Antenna with Nondissipative Loading—*D. P. Nyquist, K. M. Chen, Michigan State Univ. (63.2, Thurs./p.m./G)*

Fresnel and Fraunhofer Patterns of Overmoded Feeds and Reflector Antennas—*P. A. McInnes, J. F. Ramsey, Airborne Instruments Lab. (63.3, Thurs./p.m./G)*

An Electronically Scanned Antenna Using Fresnel Zone Techniques—*R. W. Ruben, Sylvania Electronic Systems (63.4, Thurs./p.m./G)*

The Radiation Characteristics of the Conical Horn Reflector Antenna Excited in Higher Modes—*Takashi Kitsuregawa, Yoshihiro Takeichi, Motoo Mizusawa, Takashi Katagi, Mitsubishi Electric Corp. (63.5, Thurs./p.m./G)*

Packset Radio Antenna Measurements—*J. A. Kuecken, General Dynamics/Electronics (63.6, Thurs./p.m./G)*

Turnstile Antenna for Space Communications—*C. C. Chen, Northrop Space Labs. (67.3, Fri./a.m./SN)*

Automotive AM Broadcast Band Antennas—*J. R. Cherry, Ford Motor Co. (79.4, Fri./p.m./G)*

Circuits

A Method of Obtaining a Uniform Electric Field—*A. V. Dralle, D. L. Waidelich, Univ. of Missouri (2.5, Mon./a.m./M)*

Design Notes on the DC Chopper—*Eberhart Reimers, Lear Siegler, Inc. (14.2, Mon./p.m./N)*

SCR Voltage Regulator for Mobile Power Generation—*W. K. Volkmann, General Electric Co. (14.4, Mon./p.m./N)*

The Design of a Simple Single-Phase SCR Regulator—*E. S. McVey, R. E. Russell, Univ. of Virginia (14.5, Mon./p.m./N)*

A Simple Noise Eliminator for Television Receiver Synchronizing Circuits—*Kenneth James, Emerson Radio and Phonograph Corp. (15.2, Mon./p.m./G)*

Transistorized Horizontal Output Stage—*Bechara Aboufadel, Warwick Electronics, Inc. (15.3, Mon./p.m./G)*

An Experimental Solid-State Pulse Modulated Wideband Switch—*B. Brightman, Stromberg-Carlson Corp. (19.1, Tues./a.m./M)*

Overload Protection for the New NEMA Rated Motors—*O. A. Herman, General Electric Co. (22.1, Tues./a.m./R)*

The Design of High Performance Active RC Bandpass Filters—*W. J. Kerwin, NASA, L. P. Huelsman, Univ. of Arizona (28.5, Tues./p.m./SS)*

A Precision Television Wave Form Oscilloscope for the Bell System—*J. R. Hefele, Bell Telephone Labs. (61.2, Thurs./p.m./R)*

Optical Parametric Oscillators—*Arthur Ashkin, Bell Telephone Labs. (77.4, Fri./p.m./R)*

Circuit Theory

An Approximate Method for Computing Blocking Probability in Switching Networks—*L. Lee, J. A. Brzozowski, Northern Electric Co. (19.4,*

Code to abbreviations

The abbreviations used within this index are as follows:

a.m.—Morning sessions
p.m.—Afternoon sessions

Session locations in the New York Hilton are:

G—Gramercy Suite
M—Mercury Ballroom
MH—Murray Hill Suite
N—Nassau Suite
R—Regent Room
SN—Sutton Ballroom North
SS—Sutton Ballroom South
T—Trianon Ballroom

Numerals refer to sessions and to papers within a session —for example, 14.2 is paper 2 in session 14.


The daily schedule for the technical sessions is as follows:

Mon. 9:30 a.m.-12:00 noon
2:00 p.m.- 4:30 p.m.


Tues., 9:00 a.m.-11:30 a.m.

Wed. & 2:00 p.m.- 4:30 p.m.
Thurs.

Fri. 9:00 a.m.-11:10 a.m.
11:20 a.m.- 1:30 p.m.

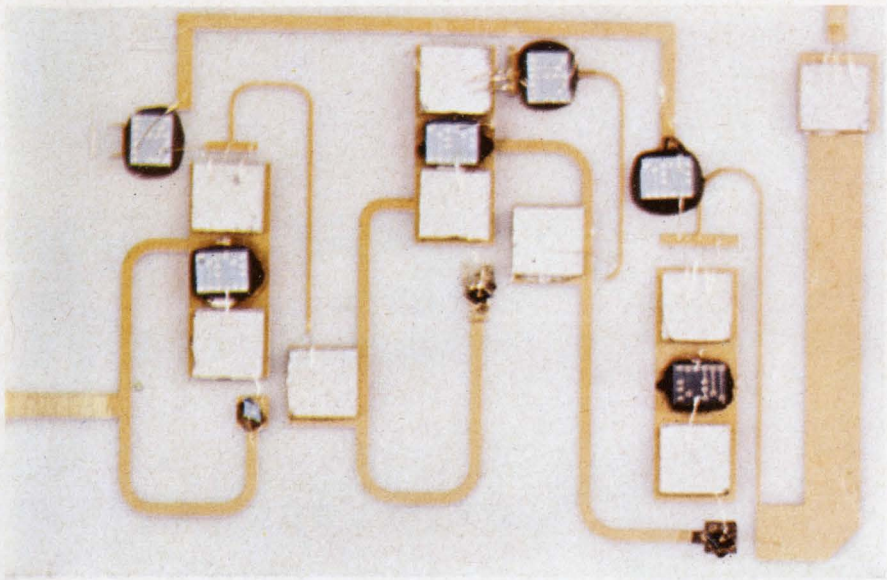

Early breadboard of power amplifier for Texas Instruments phased-array radar had as its aim 2 watts of pulse power at 2.25 GHz (paper 45.1).

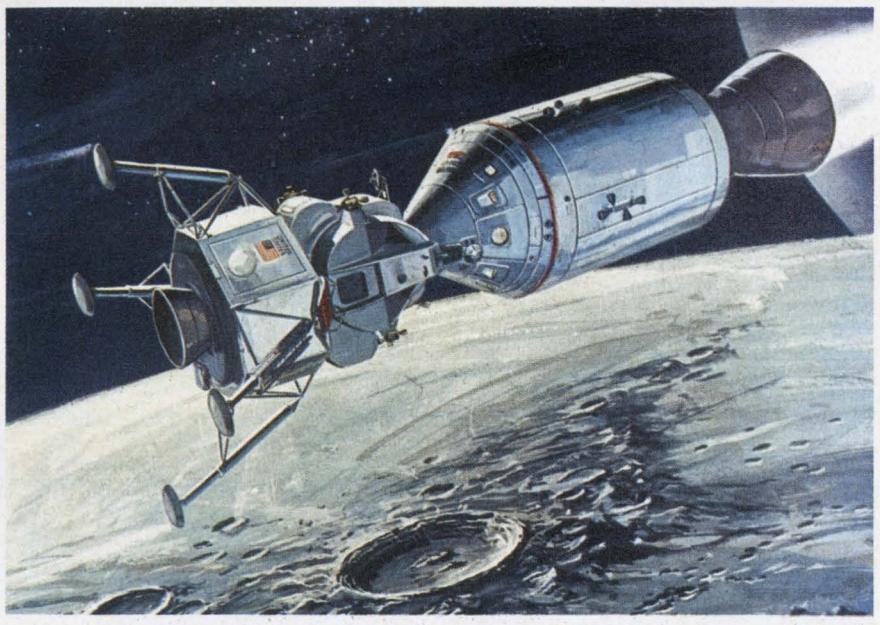

Lunar Excursion Module prepares to land two astronauts on the moon's surface, as seen in this artist's conception.

Tues./a.m./SN)

On Invariance and Sensitivity—*J. B. Cruz, W. R. Perkins, Univ. of Illinois (57.1, Thurs./p.m./T)*

Optimal Passive Imbedding for Lumped Linear n-Port Networks—*R. A. Rohrer, State Univ. of New York (57.2, Thurs./p.m./T)*

A Note on the Stability of Linear Systems Containing a Time-Varying Element with Restricted Rate of Variation—*I. W. Sandberg, Bell Telephone Labs. (57.3, Thurs./p.m./T)*

Network Synthesis via Reactance Extraction—*D. C. Youla, Plinio Tissi, Polytechnic Institute of Brooklyn (57.4, Thurs./p.m./T)*

Brune's Realization Procedure in a New and Generalized Apsect—*K. H. Hasse, Air Force Cambridge Research Labs. (70.1, Fri./a.m./N)*

A New Method for Steady-State A-C Analysis of RLC Networks—*F. H. Branin, Jr. (70.2, Fri./a.m./N)*

Graphical Aanalysis and Synthesis of Memoryless Nonlinear Networks—*L. O. Chua, Purdue Univ. (70.3, Fri./a.m./N)*

Constant Resistance One-Ports with Nonlinear Time-Varying Elements—*C. A. Desorv, K. K. Wong, Univ. of Calif. (70.4, Fri./a.m./N)*

Maximization Procedure for the Synthesis of Single-Element-Kind Networks—*Guiseppe Biorci, Alessandro Chiabrera, Univ. of Genova (70.5, Fri./a.m./N)*

Distributed Parameter R-C Network Analysis—*E. C. Bertnolli, Univ. of Missouri (78.1, Fri./p.m./N)*

Subarea Determination of the Capacitance of a Torus of Regular Polygonal Cross-Section-Part II—*D. P. Carroll, T. J. Higgins, Univ. of Wisconsin (78.3, Fri./p.m./N)*

Four Abstract Reference Frames of an Electric Network—*Gabriel Kron, General Electric Co. (78.5, Fri./p.m./N)*

A New Formula for Obtaining the Inverse Laplace Transformation in Terms of Laguerre Functions—*C. F. Chen, Univ. of Alabama Research Institute (78.6, Fri./p.m./N)*

Statistics of Switching-Time Jitter for a Tunnel Diode Threshold-Crossing Detector—*D. E. Nelsen, MIT (80.1, Fri./p.m./MH)*

On the Analysis of Composite Lumped-Distributed Systems—*J. J. Kelly, M. S. Ghausi, J. H. Mulligan Jr., New York Univ. (80.3, Fri./p.m./MH)*

The Reactive Gyrator—A New Concept and Its Application in Active Network Synthesis—*S. K. Mitra, Bell Telephone Labs.; W. G. Howard Jr., Univ. of Calif. (80.4, Fri./p.m./MH)*

An Analysis of Lumped-Parameter Nonlinear Transmission Lines—

IEEE USA

PLANNING GUIDE

The convention can be time-consuming, but not if you plan ahead with this handy guide.

Technical program: Check the sessions you want to attend, the hour and location. Order papers with the convenient coupon, p. 3.

Exhibits: Check exhibitors list. Find the booths you'll visit on the maps.

New Products: Find new products by category in the cross-index. Read about them in ads and editorial coverage, as indicated in the product listing; then see them at the booths.


Discount coupons: Use them, and save money on a variety of important design and reference books, or even on a museum admission.

Fold this Planning Guide and take it with you.

COMPONENT CAPSULES


Here's the right integrated circuit if you want very stable switching voltage

We call it the Silicon Bilateral Switch. You'll find it just about eliminates power output fluctuations caused by temperature effects on the triggering voltage. The switching voltage of this new device is virtually unaffected by temperature. What's more, G.E.'s new SBS has extremely low switching voltage—a mere 10 volts. Use G-E SBS's to trigger SCR's and bi-directional thyristors (Triac's). They're available in unilateral form as well as bilateral form. Circle **Number 90** for more details.



Silicon Bilateral Switch Equivalent Circuit

G-E thermistor probes solve many design problems




Here's the answer if thermistor probes are your problem:

- **G-E H-series probes** give you trigger-fast response in a truly rugged, hermetically sealed unit . . . operate up to 400C in air, gas and non-conductive liquids.
- **G-E ¼″ diameter probes** range from 50 to 100,000 ohms resistance, Grade 1 through 4 materials.
- **G-E bead probes** are designed to fit into nearly any circuit package. Easy-to-mount and operable up to 400C, you can even use them in liquid media. Circle magazine inquiry card **Number 91.**

New bonded heater-cathodes for planar ceramic triodes

Now you can meet all these design goals: ■ faster warmup . . . 3 to 5 seconds without heater over-voltage ■ tolerance to extreme mechanical environments . . . up to 50 g's RMS ■ extremely low microphonic output . . . quietest of any known tube design ■ improved life, reliability . . . heater temperature is sharply reduced ■ predictable thermal transfer between heater and cathode . . . permits precise control of cathode temperature through heater-voltage control ■ circuit simplicity . . . indirectly-heated cathode needs no special heater circuitry or voltage. This new heater-cathode technique can be applied to all recent tube designs. Circle **Number 92** on the magazine inquiry card.



More and still more G-E economy transistors

Switch to the low-cost way to solid state. Try the famous planar passivated economy line. Try new G-E 2N3973-76 transistors for example. They're tops for medium speed industrial switching and large signal RF amplifiers. And they feature excellent h_{FE} holdup at collector currents between 0.1mA and 500mA. Or try our new 2N3858A and 2N3859A transistors . . . excellent as high voltage, high gain amplifiers. Circle inquiry card **Number 93.**

Want high-level color demodulation?



The 6AG10 compactron

This little G-E 6AG10 compactron gives full color fidelity . . . actually does the work of 2 miniature demodulators, or of 2 pentodes and 3 triodes. The 6AG10 puts out 3 "color-difference" signals directly to 3 cathode-ray-tube guns. Here, unquestionably, is your lowest-cost way to full-color-fidelity demodulation. And best of all, it's a COMPACTRON. Ask your G-E engineer/salesman for our new "Compactrons for Color TV" Brochure or circle **Number 94** on the magazine inquiry card.

MORE

COMPONENT CAPSULES

Solid-state light-sensitive switch controls G.E.'s meter relays




GE-Type 195 meter relay with single setpoint

Contactless pass-through control action—that's the advantage you get with these solid-state meter relays. Completely self-contained control action is initiated by a light-sensitive switch directly controlling the load relay. No troublesome pointer contacts. No external amplifiers, power supplies or load relays. No mechanical interference with meter movement. Pointer travel is unrestricted across the entire scale. You get continuous indication above and below the setpoints. And you get all this in a distinctive, easy-to-read BIG LOOK meter package. Ask for Publication GEA-8014 or circle magazine inquiry card **Number 95.**

PREDICTION: Crystal-can relays out. 150-grid relay family in.

G-E low-profile 150 Grid-space relays set the trend for things to come in relay applications. Available now in 2-pole and 4-pole arrangements (and a latching version's due this year, too) these small devices have 150-mil terminal spacing, are only 0.32" high. This growing family of new relays offers you the best in space-saving ability with all the performance required from a mil-spec relay. Circle **Number 96.**



Family will soon include new latching version

Give critical components the protection they deserve




Triggered Vacuum Gap

Divert system and component faults through a General Electric triggered vacuum gap. Nothing else will do the job as well. TVG's trigger remarkably easily, just as low pressure gas gaps do. Yet TVG's are gas-free. Their voltage holdoff capabilities won't degenerate. They are also free from adverse atmosphere damage, adaptable to any environment, and will protect against faults ranging from 10 to 100% of their rated voltage. Circle **Number 97** for more information on all 5 available models.


Try this new ramp-and-pedestal precision temperature regulator

At maximum gain setting, this low cost circuit controls load power over its entire range by a mere 3°C change in thermistor temperature. What's more its feedback control network is stabilized by the circuit's adjustable gain. How's it work? Ask your G-E engineer/salesman for Application Information Publication 671.1 and cost details. Or circle magazine inquiry card **Number 98.**

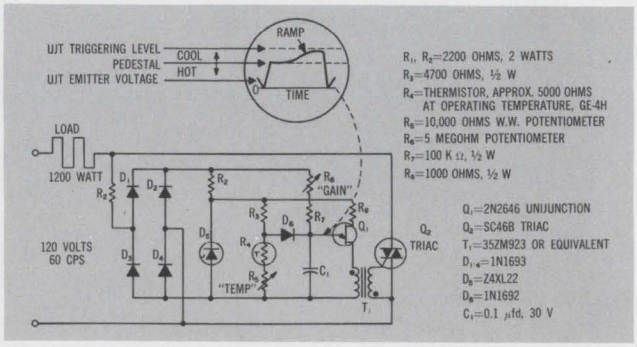

8 different case sizes now for Black Hawk capacitors

And each capacitor size has 5 different voltages to choose from—50, 100, 200, 400 or 600 VDC. Black Hawk capacitors are molded to give you a hard, moisture-resistant shell around the capacitor roll. Each one you use has strong welded leads, extended foil construction, and very precise dimensions (±0.005). Circle **Number 99** on the magazine inquiry card for all the facts.




Featuring molded encapsulation

WE MAY NOT OFFER EVERYTHING YOU WANT FROM ONE COMPONENTS SUPPLIER. BUT WE DO COME A LITTLE CLOSER THAN ANYONE ELSE.

285-12

GENERAL ELECTRIC

Here's a Great New Way to Buy Silicon DC Power Modules

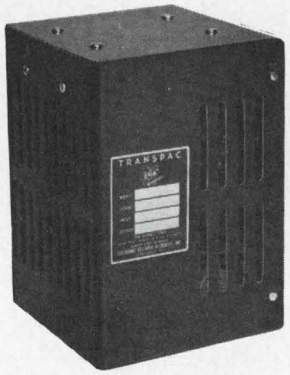

MODEL
LC 322

Introducing ERA's All-New, Wide-Range Variable, 71°C, All-Silicon, Fully Repairable DC Power Modules at Exceptionally Low Prices

ERA's new Value-Engineered DC Transpac® power modules provide, for the first time, all-silicon, high performance DC power in a wide range, variable, *low cost* module.

Low prices are made possible through ERA's continuing program of value-engineering, which has reduced manufacturing costs through new circuitry, mechanical designs and production techniques.

All units can be set to desired voltages by a simple external tap change and users will find that a single model can serve many voltage requirements. Stocking problems are reduced to a minimum and power module obsolescence is practically eliminated.

Designed to "worst case" specifications, the new Transpacs feature long term stability (less than 5 mv), low ripple (less than 800 microvolts), 0.01% Regulation, 71°C free air rating, and all other advanced features required for even the most demanding applications.

Write today for all the data, and start buying *your* DC power modules this great new way!

Model	Voltage Range, DC	Current	Price
LC32P7	4-32	O-750 MA	$ 89.00
LC 322	4-32	O-2 Amps	$105.00
LC 325	4-32	O-5 Amps	$159.00
LC 601	30-60	O-1 Amp	$145.00

WRITE TODAY FOR CATALOG #146

ELECTRONIC RESEARCH ASSOCIATES, INC.

Dept. ED-3, 67 Sand Park Road • Cedar Grove, N. J. 07009 • (201) CEnter 9-3000

SUBSIDIARIES: ERA Electric Co. ■ Advanced Acoustics Co. ■ ERA Dynamics Corp. ■ ERA Pacific, Inc.

ON READER-SERVICE CARD CIRCLE 41

Panel discussions

Cavitation Measurement—*T. Bulat, S. Jacke, R. Lanyi (4, Mon./a.m./SS)*

What Control Theory Gives and Takes from Biology—*J. G. Truxal, Lawrence Stark, John Milsum (16, Mon./p.m./MH)*

Present Views on Electromagnetism—*W. F. Brown, Jr., H. A. Haus, Paul Penfield, Jr., J. F. Szablya, Chento Tai (18, Tues./a.m./M)*

Relative Color TV Receiver Complexity—*(25.4, Tues./p.m./T)*

Unusual Load Characteristics of New High Energy Metal Tools—*G. C. Quinn, Moderator (26.2, Tues./p.m./M)*

Engineering Management—*(31, Tues./p.m./G)*

Undersea Technology I—*(35.5, Wed./a.m./SN)*

Present Status and Future Utilization of Advanced Technology in High Frequency Systems Engineering—*D. P. Worthington, G. Brunette, R. C. Kirby, R. Kulinyi, W. R. Vincent, W. L. Hatton (40, Wed./a.m./MH)*

Undersea Technology II—*(43, Wed./p.m./SN)*

Standards— *(51, Thurs/a.m./SN)*

Goals of Engineering Education—*(53, Thurs./a.m./R)*

Automatic Checkout Systems —*(59.7, Thurs./p.m./SN)*

Power Engineering Educators' Reactions to Goals of Engineering Education Study—*A. E. Fitzgerald, H. H. Woodson, S. Linke, H. A. Peterson, J. C. Hogan (62, Thurs./p.m./N)*

Human Factors in Electronics —*(69, Fri./a.m./R)*

Aerospace Systems Integration/Management — *(71, Fri./a.m./G)*

Comparison of Various Media for Long-Haul Global Communications—*Ralph Clark, F. J. D. Taylor, R. P. Haviland, E. D. Becken, George Mauksch (72, Fri./a.m./MH)*

F. A. Benson, J. D. Last, Univ. of Sheffield; V. I. Zharikov, Moscow State Univ. (80.5, Fri./p.m./MH)

Communications

Corona Noise Models and Statistical Properties—*J. B. Thomas, Princeton Univ. (2.3, Mon./a.m./M)*

Linear-Real Coding—*W. H. Pierce, Carnegie Institute of Technology (5.1, Mon./a.m./R)*

Multivalued Arithmetic Burst Error Codes—*David Mandelbaum, Communications Systems, Inc. (5.2, Mon./a.m./R)*

Image Information, Classification and Coding—*P. D. Dodd, F. B. Wood, International Business Machines Corp. (5.3, Mon./a.m./R)*

Optimal Processing and Design of Digital Signals Perturbed by Gaussian and Nongaussian Noise—*M. K. Simon, Ludwik Kurz, New York Univ. (5.4, Mon./a.m./R)*

Minimizing Lightning Damage to Pipeline Communications Facilities—*R. H. Buechner, Transcontinental Gas Pipe Line (8.1, Mon./a.m./MH)*

Simultaneous Message and Wide Band Data Loading on a Microwave Baseband—*J. H. Lippard, L. R. Foiles, General Electric Co. (8.2, Mon./a.m./MH)*

System Engineering Aspects of the RA-I Radio System—*I. Godier, Northern Electric Co. Ltd. (8.3, Mon./a.m./MH)*

An Automatic Communications Test and Evaluation Console for ATS Ground Stations—*R. W. Donaldson, Westinghouse Electric Corp. (8.4, Mon./a.m./MH)*

Advancements in the Facsimile Art During 1965—*W. H. Bliss, Radio Corp. of America (11.2, Mon./p.m./SN)*

Studies on Long Chain of Broadband PCM Repeaters—*Masao Kawashima, Isao Fudemoto, Yushi Katagiri, Fujitsu Ltd. (11.3, Mon./p.m./SN)*

Four-Wire Switching for Private Networks, Using the Series 100 Director —*R. C. Clark, J. S. Young, Automatic Electric Labs., Inc. (12.1, Mon./p.m./SN)*

Common Mode of Operation for Local Office Equipment and Subscriber Loop Voice Frequency Repeaters in Step-by-Step Offices—*P. G. Lambidakis, C. C. Crow, W. Ahrens, H. P. Price, D. Riney, U.S. Dept. of Agriculture (12.2, Mon./p.m./SS)*

A New Family of Dial Long-Line Circuits for the Bell System—*D. C. Pilkinton, Bell Telephone Labs., Inc. (12.3, Mon./p.m./SS)*

New Concepts in Telephone Answering Systems—*R. E. Watson Jr., S. B. Weinberg, Bell Telephone Labs., Inc. (12.4, Mon./p.m./SS)*

Automated Patching System (APS)—*T. K. Cheney, R. J. Walker, North Electric Co. (19.3, Tues./a.m./SN)*

Concept for a National Security Information System—*H. R. Johson, Executive Office of the President (24.3, Tues./a.m./MH)*

The Elements of Survivability Analysis for Command Control Communications Systems—*E. A. Steeves, The Mitre Corp. (24.4, Tues./a.m./MH)*

Space Communication Systems—*N. T. Petrovich, All-Union Electrotechnical Institute of Communications, Moscow (27.5, Tues./p.m./SN)*

A New Teleprinter for 133 WPM—*W. A. Kaiser, Standard Electrik Lorenz AG, Germany (32.1, Tues./p.m./MH)*

The Automatic Telprinter Exchange System TWK—*H. Rädler, Siemens and Halske AG, Germany (32.2, Tues./p.m./MH)*

A New Technique for Application of Magnetic Tape to Digital Communications—*R. P. Burr, J. J. Rheinhold, Photocircuits Corp.; R. K. Andrew, Radio Corp. of America (32.4, Tues./p.m./MH)*

Communications System Disciplines *(48, Wed./p.m./MH)*

The 1963 Survey of Impulse Noise on Bell System Carrier Facilities—*J. H. Fennick, I. E. O. Nasell, Bell Telephone Labs. (56.1, Wed./p.m./MH)*

The Remote Measurement of Insertion Loss and Echo Return Loss in Michigan—*D. W. Gilbo, Michigan Bell Telephone Co. (56.2, Wed./p.m./MH)*

Use of E6 Telephone Repeaters with Nonloaded Cable—*R. W. DeMonte, W. J. Kopp, Bell Telephone Labs.; T. J. Talley, American Telephone and Telegraph Co. (56.3, Wed./p.m./MH)*

Systems Engineering Aspects of a High Capacity PCM System—*J. Deregnaucourt, Northern Electric Co., Ltd., Canada (56.4, Wed./p.m./MH)*

The Evolution of Wideband Services in the United States—*R. T. James, American Telepone and Telegraph Co. (64.1, Thurs./p.m./MH)*

Transmission Plan for General Purpose Wideband Services—*J. J. Mahoney Jr., Bell Telephone Labs. (64.2, Thurs./p.m./MH)*

A Wideband Data Station—*R. D. Fracassi, F. E. Froehlich, Bell Telephone Labs. (64.3, Thurs./p.m./MH)*

Transmission Facilities for General-Purpose Wideband Services on Analog Carrier Systems—*J. S. Ronne, Bell Telephone Labs. (64.4, Thurs./p.m./MH)*

T1 Carrier Transmission Systems for General Purpose Wideband Services—*R. Tarbox, Bell Telephone Labs. (64.5, Thurs,/p.m./MH)*

Analysis of the Frequency Dependence of Man-Made Radio Noise—*E. N. Skomal, Aerospace Corp. (65.5, Fri./a.m./T)*

System Identification in the Presence of Noise by Digital Techniques—*A. I. Liff, New York Univ. (66.1, Fri./a.m./M)*

Interplanetary Spacecraft Telecommunication Systems—*G. A. Reiff, NASA (67.2, Fri./a.m./SN)*

Communication Requirements in Diving Operations—*E. C. Stephan, Ocean Systems, Inc. (68.1, Fri./a.m./SS)*

Underwater Communication Problems from the Navy Swimmer's Standpoint—*B. L. Cannon, U.S. Navy Mine Defense Lab. (68.2, Fri./a.m./SS)*

Wireless Diver Communications, Problems and performance—*J. E. Kenny, Aquasonics Engineering Co. (68.3, Fri./a.m./SS)*

An Underwater Audio Communicator—*H. J. Webb, J. R. Webb, Hydrotronics Co. (68.4, Fri./a.m./SS)*

Comparison of Various Media for Long Haul Global Communications *(72, Fri./a.m./MH)*

An Interphone System for "Hands Free" Operation in High Ambient Noise—*E. L. Torick, R. G. Allen, CBS Labs. (76.2, Fri./p.m./SS)*

A Theory of Audition—*M. Rosenstein, Newark College of Engineering (76.3, Fri./p.m./SS)*

Cannon Blast Pressures and Their Effects on Loudspeaker Moving Systems—*A. B. Cohen, University Sound (76.5, Fri./p.m./SS)*

Finding the Maximum Complete Subgraph in Coding Models for Random Access Communications—*S. D. Bedrosian, Univ. of Pennsylvania (78.2, Fri./p.m./N)*

Components

A Figure of Merit for CATV Amplifiers: The Coefficient System—*D. N. Carson, Bell Telephone Labs. (24.2, Mon./p.m./MH)*

Submillimeter Waves—*G. Convert, Centre de Recherches de la CSF, France (34.1, Wed./a.m./M)*

High-Power Linear Beam Tubes—*T. Moreno, Varian Associates (34.2, Wed./a.m./M)*

Recent Advances in Beam-Plasma Amplifiers—*Paul Chorney, Microwave Associates, Inc. (34.3, Wed./a.m./M)*

Television Cathode Ray Display Tubes—*Fred Townsend, Westinghouse Electric Corp. (34.4, Wed./a.m./M)*

Transient Radiation Effects on Passive Electronic Components—*H. W. Wicklein, The Boeing Co. (44.2, Wed./p.m./SS)*

Solion Tetrode—A Reliable Integrator and Memory Device—*R. S. Norman, C. W. Hewlett Jr., G. M. Marcotte, General Electric Co. (60.1, Thurs./p.m./SS)*

Dual Potentials in Silver-Oxide/Zinc Batteries—*R. C. Dawer, Lockheed Missiles and Space Co. (60.2, Thurs./p.m./SS)*

Optimizing Transformer Response Parameters with Magnetic Core Geometry—*G. I. Larson, Bell Telephone Labs. (60.3, Thurs./p.m./SS)*

Enhancement of Resonator Q by Superconductivity and Its Usefulness—*David Grissom, National Geophysical Co., Inc. (60.4, Thurs./p.m./SS)*

Specifying Resistance Temperature Stability of Precision Resistors—*O. A. Keser, Speer Carbon Co. (60.5, Thurs./p.m./SS)*

Magnetic Scan Head for High-Frequency Recording—*Marvin Camras, ITT Research Institute (61.1, Thurs./a.m./R)*

Subminiature Transistors—*F. M. Dukat, Raytheon Co. (76.1, Fri./p.m./SS)*

Recent Progress of Thin-Film Solar Cells—*D. M. Perkins, Radio Corp. of America (77.2, Fri./p.m./R)*

Mode Control in Giant Pulse Lasers and Some Applications—*F. J. McClung, Hughes Research Labs. (77.3, Fri./p.m./R)*

Optical Parametric Oscillators—*Arthur Ashkin, Bell Telephone Labs. (77.4, Fri./p.m./R)*

Computers

Applications of Computers to Biomedical Work—*O. L. Updike, Univ. of Virginia (1.1, Mon./a.m./T)*

Computer Learning in Theorem Proving Process—*D. L. Johnson, A. D. C. Holden, Univ. of Washington (7.3, Mon./a.m./G)*

Audio Response Unit Using a Digitally Stored Vocabulary—*R. F. MacDonald, International Business Machines Corp. (19.2, Tues./a.m./SN)*

On-Line Real Time Data Recording for Analysis—*J. L. Deitz, General Precision, Inc. (28.3, Tues./p.m./SS)*

Graphical to Digital Converter—*G. L. d'Ombrain, L. A. Cox, L. Rozsa, McGill Univ. (28.4, Tues./p.m./SS)*

Drum Scanning Techniques for Digitizing and Recording Image Data—*W. L. Gilman, International Business Machines Corp. (33.1, Wed./a.m./T)*

High-Performance, Parallel-Serial Analog-to-Digital Converter with Error Correction—*G. G. Gorbatenko, International Buiness Machines Corp. (33.2, Wed./a.m./T)*

The Design of Binary Adders with a Flexible Criterion Function—*J. M. Scanlon, Bell Telephone Labs. (33.3, Wed./a.m./T)*

Parallel Matrix Multiplier, Using Read-Only Array—*George Nagy, International Business Machines Corp. (33.4, Wed./a.m./T)*

Digital Curve Matching, Using a Contour Correlation Algorithm—*J. Feder, H. Freeman, New York Univ. (33.5, Wed./a.m./T)*

Using a Computer for the Design of Analog and Digital Control Systems—*P. J. Wirtz, Reliance Electric and Engineering Co. (38.2, Wed./a.m./R)*

Graphics as Computer Input and Output—*R. L. Wigington (41.1, Wed./p.m./T)*

Speech as Computer Input and Output—*D. L. Hogan (41.2, Wed./p.m./T)*

Integrated Circuit Design by Digital Computer—*R. A. Mammano, ARINC Research Corp. (52.3, Thurs./a.m./SS)*

Solion Tetrode—A Reliable Integrator and Memory Device—*R. S. Norman, C. W. Hewlett Jr., G. M. Marcotte, General Electric Co. (60.1, Thurs./p.m./SS)*

Man-Computer Interaction—Present and Future—*R. G. Mills, MIT (69.3, Fri./a.m./R)*

Consumer Electronics

A Goal: Spurious-Signal Immunity of Solid-State AM/FM Tuners—*R. V. Fournier, C. H. Lee, J. A. Kuklis, Radio Corp. of America (15.1, Mon./p.m./G)*

A Simple Noise Eliminator for Television Receiver Synchronizing Circuits—*Kenneth James, Emerson Radio and Phonograph Corp. (15.2, Mon./p.m./G)*

Transistorized Horizontal Output Stage—*Bechara Aboufadel, Warwick Electronics, Inc. (15.3, Mon./p.m./G)*

An Analysis of the Necessary Decoder Corrections for Color Receiver Operation with Nonstandard Receiver Primaries—*Norman Parker, Motorola Consumer Products Div. (15.4, Mon./p.m./G)*

Hybrid TV Receivers—Color and Black and White—*A. R. Curll, Philco Corp. (15.5, Mon./p.m./G)*

Design and Characteristics of Coaxial Cables for Community Antenna Television (CATV) Systems—*W. T. Smith, W. L. Roberts, Superior Cable Corp. (24.1, Tues./a.m./MH)*

Television Cathode-Ray Display Tubes—*Fred Townsend, Westinghouse Electric Corp. (34.4, Wed./a.m./M)*

Trends in Special Lighting—*H. J. Wald, Wald and Zigas (36.4, Wed./*

a.m./SS)

Stereophonic Tape-Cartridge System for Automobile Use—*R. C. Moyer, RCA-Victor Div. (76.6, Fri./p.m./SS)*

Problems of Sound Systems in Passenger Vehicles—*A. B. Cohen, University Sound (79.1, Fri./p.m./G)*

Testing and Designing for Reliability in Auto Radios—*F. Bauer, Ford Motor Co. (79.2, Fri./p.m./G)*

An FM Stereo Converter for Use with AM Auto Radios—*Mark Chandler, Alan Nollmeyer, The Bendix Corp. (79.3, Fri./p.m./G)*

Automotive AM Broadcast Band Antennas—*J. R. Cherry, Ford Motor Co. (79.4, Fri./p.m./G)*

Control Systems

Computer Monitoring Chromatograph —*Ira Lichtenstein, G. R. Marr Jr., Electronic Associates, Inc., (1.2, Mon./a.m./T)*

American Electric Power Company's System in Ohio—*Nathan Cohn, Leeds & Northrup Co. (1.3, Mon./a.m./T)*

A New Control Concept for Electric Vehicles—*T. R. Kelley, I-T-E Circuit Breaker Co. (14.1, Mon./p.m./N)*

What Control Theory Gives and Takes from Biology—*(16, Mon./p.m./MH)*

Terminal Control: Minimum Energy Controller for a Linear, Time-Varying, Multiple-Input Discrete System —*J. A. Cadzow, State Univ. of New York (22.2, Tues./a.m./N)*

The Sleeve Induction Motor for High-Performance Servomechanisms—*D. E. Wiegand, Argonne National Lab. (22.3, Tues./a.m./N)*

Solid-State Speed, Acceleration and Load-Control System—*F. T. Thompson, A. Wavre, Westinghouse Electric Corp. (22.5, Tues./a.m./N)*

Spacecraft Command and Control—*J. T. Mengel, NASA (27.2, Tues./p.m./SN)*

Using a Computer for the Design of Analog and Digital Control Systems —*P. J. Wirtz, Reliance Electric and Engineering Co. (38.2, Wed./a.m./N)*

High-Performance Control for Tandem Cold Mill Main Drive Systems—*R. E. Moore, General Electric Co. (38.3, Wed./a.m./N)*

A High-Power Amplifier with Improved Frequency Response in the 0-to-50-c/s Range—*T. H. Barton, McGill Univ., R. S. Birtch, International Business Machines Corp. (47.1, Wed./a.m./G)*

An Electronic System for Continuous Processing of Corn Syrup—*G. G. Taylor, American Maize Products, R. A. Van Schelt, The Foxboro Co. (47.2, Wed./p.m./G)*

Nonlinear Analog Computing Elements for Process Control—*H. H. Koppel, P. J. Wajs, Bailey Meter Co. (47.3, Wed./a.m./G)*

A High-Performance AC Position Servo Using a DC Motor—*P. Will, M. Zeldman, American Machine and Foundry (47.4, Wed./p.m./G)*

A New Current Integrator—*R. J. Bamford, Catalytic Construction Co. (47.5, Wed./p.m./G)*

The Status of Optimal Control Theory and Applications for Deterministic Systems—*Michael Athans, MIT (58.1, Thurs./p.m./M)*

The Status of Stability Theory for Deterministic Systems—*R. W. Brockett, MIT (58.2, Thurs./p.m./M)*

The Status of Optimal Control and Stability for Stochastic Systems—*H. J. Kushner, Brown Univ. (58.3, Thurs./p.m./M)*

The Stability of Pulse-Frequency-Modulated Closed-Loop Control Systems—*J. P. C. Clark, The Boeing Co.; Endrik Noges, Univ. of Washington (66.4, Fri./a.m./M)*

The Analysis and Synthesis of Manual Closed-Loop Control Systems—*E. S. Krendel, The Franklin Institute (69.2, Fri./a.m./R)*

Generalization of the Parameter Plane Method—*D. D. Siljak, Univ. of Santa Clara (74.1, Fri./p.m./M)*

Stability of Linear Systems with Transport Lag—*Lawrence Eisenberg, Newark College of Engineering (74.2, Fri./p.m./M)*

Application of Root Locus Methods for Designing Noninteracting Control Systems—*W. L. Green, Mississippi State Univ. (74.3, Fri./p.m./M)*

A DC Equivalent of an AC Synchronous Motor—*G. S. MacDonald, Photocircuits Corp. (74.4, Fri./p.m./M)*

New Theorems on Absolute Stability of Nonautonomous Nonlinear Control Systems—*Y. H. Ku, H. T. Chieh, Univ. of Pennsylvania (78.4, Fri./p.m./N)*

Cybernetics

Cybernetics in Europe and the U.S.R.R.: Outlooks, Plans and Activities—*R. W. Swanson, Air Force Office of Scientific Research (7.1, Mon./a.m./G)*

A Class of Nonlinear Recognition Procedures—*C. K. Chow, International Business Machines Corp. (7.2, Mon./a.m./G)*

Computer Learning in Theorem-Proving Processes—*D. L. Johnson, A. D. C. Holden, Univ. of Washington (7.3, Mon./a.m./G)*

Towards a Theory of the Reticular Formation—*J. Blum, M.I.T., E. Craighill, W. L. Kilmer, Michigan State Univ., W. S. McCulloch, M.I.T. (7.4, Mon./a.m./G)*

Electromagnetic Compatability

An Operational-Oriented Performance-Control Model —*Frank Pethel, Stanley Cohn, ITT Research Institute (65.1, Fri./a.m./T)*

Single-Shot Transient Analyzer—*D. W. Moffatt, Paul Slysh, General Dynamics/Convair (65.2, Fri./a.m./T)*

The Grounding Concepts for Instrumentation Grounding as They Differ from Lighting and Power, Fault Safety Grounding—*H. M. Hoffart, General Electric Co. (65.3, Fri./a.m./T)*

Oscillator Stability and Electromagnetic Compatability—*F. L. Marek, M. D. Aasen, ITT Research Institute (65.4, Fri./a.m./T)*

Analysis of the Frequency Dependence of Man-Made Radio Noise—*E. N. Skomal, Aerospace Corp. (65.5, Fri./a.m./T)*

Hardware

Recent Studies on the Physics of Electrical Connector Surfaces—*J. P. B. Williamson, Burndy Corp. (10.1, Mon./p.m./M)*

Current Topics in the Surface Chemistry of Electric Contacts—*Morton Antler, Burndy Corp. (10.2, Mon./p.m./M)*

Recent Advances in Sliding Contacts Including Space Applications—*E. I. Shobert 2d, Stackpole Carbon Co. (10.3, Mon./p.m./M)*

Recovery Strength Measurements in Arcs from Atmospheric Pressure to Vacuum—*G. A. Farrall, J. D. Cobine, General Electric Co. (10.4, Mon./p.m./M)*

Current Ideas in the Philosophy of Testing of Electrical Contacts—*H. B. Ulsh, International Business Machines Corp. (10.5, Mon./p.m./M)*

A New Teleprinter for 133 WPM—*W. A. Kaiser, Standard Electrik Lorenz AG, Germany (32.1, Tues./p.m./MH)*

Advance in Printing Telegraphy and Data in 1965—*W. Y. Lang (32.3, Tues./p.m./MH)*

Industrial Electronics


Computer Monitoring Chromatograph —*Ira Lichtenstein, G. R. Marr Jr., Electronic Associates, Inc. (1.2, Mon./a.m./T)*

The PCP-88 System—*Bruce Baldridge, The Foxboro Co. (1.4, Mon./a.m./T)*

Electrical Demulsification, Process and Equipment—*L. C. Waterman, J. D. Winslow, Petrolite Corp. (2.2, Mon./a.m./M)*

Pulse—Width Modulated Inverters for AC Motor Drives—*Boris Mokrytzki, Reliance Electric and Engineering Co. (6.2, Mon./a.m./N)*

An AC Equivalent Circuit for Cyclo-

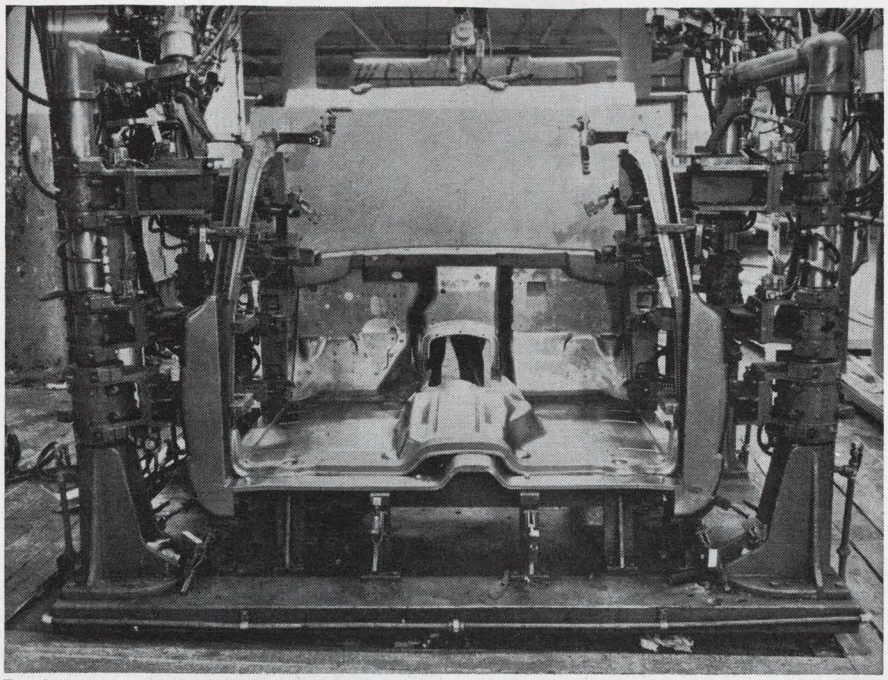

Resistance-welding fixture at Kaiser Jeep Corp. incorporates simplified tooling plus standardized welding equipment (paper 29.1)

converters—*C. J. Amato, Lear Siegler, Inc. (6.3, Mon./a.m./N)*

Overload Protection for the New NEMA-Rated Motors—*O. A. Herman, General Electric Co. (22.1, Tues./a.m./N)*

The Sleeve Induction Motor for High-Performance Servomechanisms—*D. E. Wiegand, Argonne National Lab. (22.3, Tues./a.m./N)*

A Vernier Type Load Tap Changer for Precision Industrial Voltage Control—*C. C. Haley, Westinghouse Electric Corp. (22.4, Tues./a.m./N)*

Solid-State Speed, Acceleration and Load-Control System—*F. T. Thompson, A. Wavre, Westinghouse Electric Corp. (22.5, Tues./a.m./N)*

Fusing Solid-State Motor Control—*Phillip Jacobs, Chase-Shawmut Co. (26.1, Tues./p.m./M)*

Panel Discussion on Unusual Load Characteristics of New High Energy Metal Tools (26.2, Tues./p.m./M)

European Developments in Resistance Welding—*Walter Masing, Masing and Co. (29.1, Tues./p.m./R)*

Problems and Policies of an International Automotive Welding Operation—*T. F. Ellis, Kaiser Jeep Corp. (29.2, Tues./p.m./R)*

Pulsed Current for Gas-Shielded Arc Welding—*J. C. Needham, British Welding Research Association (29.3, Tues./p.m./R)*

Warehouse Lighting: An Analytic Study—*Norman Falk, Richard Mollin, Holophane Co. (36.2, Wed./a.m./SS)*

Generation and Behavior of X-rays in Thickness Measurement—*W. R. Baarck, Weston Instruments, Inc. (38.1, Wed./a.m./N)*

Using a Computer for the Design of Analog and Digital Control Systems *P. J. Wirtz, Reliance Electric and Engineering Co. (38.2, Wed./a.m./N)*

High-Performance Control for Tandem Cold Mill Main Drive Systems—*R. E. Moore, General Electric Co. (38.3, Wed./a.m./N)*

Induction Heating of Bars and Semifinished Steel—*D. G. Hatchard, Westinghouse Electric Corp. (38.4, Wed./a.m./N)*

SCR-Magnetic Analog Regulator for Single-Phase and Unbalanced Three-Phase Nonlinear Heater Loads—*Baruch Berman, Electric Regulator Corp. (46.2, Thurs./a.m./N)*

A DC Equivalent of an AC Synchronous Motor—*G. S. MacDonald, Photocircuits Corp. (74.4, Fri./p.m./M)*

Lighting

Mechanization of Point-by-Point Calculations—*E. Mahler, Holophane Co. (36.1, Wed./a.m./SS)*

Warehouse Lighting: An Analytic Study—*Norman Falk, Richard Mollin, Holophane Co. (36.2, Wed./a.m./SS)*

Free Heat from Lighting Applied to the All-Electric Building—*George Gilleared, R. S. Wissoker, Day-Brite Lighting (36.3, Wed./a.m./SS)*

Trends in Special Lighting—*H. J. Wald, Wald and Zigas (36.4, Wed./a.m./SS)*

Management

Engineering Management *(31, Tues./p.m./G)*

Synergetic Management of Complex Military Systems—*M. V. Ratynski, U.S. Air Force (49.1, Thurs./a.m./T)*

An Electronic PERT Diagram—*M. G. Kaufman, U. S. Naval Research Labs. (49.2, Thurs./a.m./T)*

Automated Techniques for Problems of Configuration Control —*C. E. Lenz, W. K. Masenten, M. L. Shope, Autonetics (49.3, Thurs./a.m./T)*

Apollo Spacecraft Test Evaluation Management Plan—*R. E. McKann, C. Clark Jr., General Electric Co. (49.4, Thurs./a.m./T)*

Personnel Evaluation: Key to Successful Management—*G. R. Desi, Westinghouse Electric Corp. (49.5, Thurs./a.m./T)*

Medical Electronics

Applications of Computers to Biomedical Work—*O. L. Updike, Univ. of Virginia (1.1, Mon./a.m./T)*

Ultrasound Analysis of Implanted Cardiac Prosthetic Valves—*Benedict Kingsley, G. B. Flint Jr., B. L. Segal, Zdravko Asperger (3.1, Mon./a.m./SN)*

Engineering Aspects of Medical Thermography—*E. E. Brueschke, J. D. Haberman-Brueschke, J. Gershon-Cohen (3.2, Mon./a.m./SN)*

Modal Analysis of the Dicrotic Portion of the Human Blood-Pressure Curve—*R. M. Goldwyn, Rice Univ., T. B. Watt Jr., Baylor Univ. (3.3, Mon./a.m./SN)*

A Permanent Transvenous Standby Pacemaker—*G. H. Myers, New York Univ.; Victor Parsonnet, N. J. College of Medicine; C. W. Keller, Cordis Corp.; I. R. Zucker, L. Gilbert, Newark Beth Israel Hospital (3.4, Mon./a.m./SN)*

A 600,000-Watt Rectangular-Wave Defibrilator—*J. C. Schuder, G. A. Rahmoeller, Harry Stoeckle, Gary Raines, Univ. of Missouri (3.5, Mon./a.m./SN)*

Microelectronics

A Microminiature MTI System for Surveillance Radars—*W. Cappadona, Airborne Instruments Lab., D. Kenneally, Griffiss Air Force Base, Rome Air Development Center (20.5, Tues./a.m./SS)*

Microelectronics Applications in Undersea Instrumentation—*William Liben, Johns Hopkins Univ. (35.3, Wed./a.m./SN)*

Current Developments in Integrated Electronics—*R. L. Petritz, Texas Instruments, Inc. (42.3, Wed./p.m./M)*

Microwave Integrated Circuits in Phased-Array Radars—*T. M. Hyltin, Texas Instruments, Inc. (45.1, Wed./p.m./R)*

Integrated S- and X-Band Mixers—*C. Howell, C. Genzabella, Microwave Associates, Inc. (45.2, Wed./p.m./R)*

A UHF Telemetry Converter Employing Integrated Microwave Circuits—*H. M. Weil, F. S. Coale, Melabs (45.3, Wed./p.m./R)*

Integrated Tunnel Diode Amplifier for Multi-Channel Communication in the Case of f_{ro} Being Higher Than f_{xo}—*H. Yunoki, Y. Ito, T. Kudo, H. Komizo, Fujitsu Ltd. (45.4, Wed./p.m./R)*

Electron Beam Gun in an Exploratory Fabrication System—*D. Zeheb, N. H. Krietzer, D. G. Cullum, International Business Machines Corp. (52.1, Thurs./a.m./SS)*

Birefringent Tape: A New, Easier Technique for Separating Thin-Film and Printed-Circuit Master Drawings with Perfect Registration—*B. J. Askowith, William Middleton, The Martin Co. (52.2, Thurs./a.m./SS)*

Integrated Circuit Design by Digital Computer—*R. A. Mammano, ARINC Research Corp. (52.3, Thurs./a.m./SS)*

Thin Inlays for Electronic Applications—*Ken Comey, Richard Shoemaker, G. L. McDermott, Texas Instruments, Inc. (52.4, Thurs./a.m./SS)*

An Integrated Stabilized Gain Block—*G. W. Haines, Sprague Electric Co. (80.2, Fri./p.m./MH)*

Microwaves

Simultaneous Message and Wide Band Data Loading on a Microwave Baseband—*J. H. Lippard, L. R. Foiles, General Electric Co. (8.2, Mon./a.m./MH)*

Distribution and Microwave Links—*A. D. Fowler, Bell Telephone Labs. (17.3, Tues./a.m./T)*

A Precision DC Potentiometer Microwave Insertion Loss Test Set—*C. T. Stelzried, M. S. Reid, Jet Propulsion Lab. (23.2, Tues./a.m./G)*

Submillimeter Waves—*G. Convert, Centre de Recherches de la CSF, France (34.1, Wed./a.m./M)*

Multi-Layered Film Microwave Acoustic Transducers—*H. J. Shaw, D. K. Winslow (37.1, Wed./a.m./R)*

Computer Analysis of Ferrite Digital Phase Shifters—*E. Stern, W. J. Ince, Lincoln Lab., MIT (37.2, Wed./a.m./R)*

Te-Mode Solutions for Partially Ferrite-Filled Rectangular Waveguide Using ABCD Matrices—*W. P. Clark, K. H. Hering, D. A. Charlton, Hughes Aircraft Co. (37.3, Wed./a.m./R)*

Recent Advances in Digital Latching Ferrite Devices—*L. R. Whicker, Westinghouse Electric Corp. (37.4, Wed./a.m./R)*

A Real Time-Delay Microwave Measuring System—*R. A. Sparks, Litton Systems, Inc. (37.5, Wed./a.m./R)*

Microwave Integrated Circuits in Phased-Array Radars—*T. M. Hyltin, Texas Instruments, Inc. (45.1, Wed./p.m./R)*

Integrated S- and X-Band Mixers—*C. Howell, C. Genzabella, Microwave Associates, Inc. (45.2, Wed./p.m./R)*

A UHF Telemetry Converter Employing Integrated Microwave Circuits—*H. M. Weil, F. S. Coale, Melabs. (45.3, Wed./p.m./R)*

Integrated Tunnel Diode Amplifier for Multi-Channel Communication in the Case of f_{ro} Being Higher than F_{xo}—*H. Yunoki, Y. Ito, T. Kudo, H. Komizo, Fujitsu Ltd. (45.4, Wed./p.m./R)*

Military Electronics

High-Voltage DC Brushless Torpedo Propulsion Motor—*W. R. Cox, Naval Underwater Ordnance Station; V. F. Janonis, Lear Siegler, Inc. (14.3, Mon./p.m./N)*

Land-Clutter Characteristics for Airborne Radar System Design—*J. Cohen, J. Di Stefano, J. T. McManus, Grumman Aircraft Engineering Corp. (20.4, Tues./a.m./SS)*

A Microminiature MTI System for Surveillance Radars—*W. Cappadona, Airborne Instruments Lab.; D. Kenneally, Griffiss Air Force Base, Rome Air Development Center (20.5, Tues./a.m./SS)*

The Elements of Survivability Analysis for Command Control Communications Systems—*E. A. Steeves, The Mitre Corp. (24.4, Tues./a.m./G)*

Synergetic Management of Complex Military Systems—*M. V. Ratynski, U.S. Air Force (49.1, Thurs./a.m./T)*

Role of Automatic Checkout in the Tactical Air Command—*A. E. Smith, Frank Micca, Wright-Paterson Air Force Base (59.4, Thurs./p.m./SS)*

Municipal Planning

Concept for a National Security Information System—*H. R. Johnson, Executive Office of the President (24.3, Tues./a.m./MH)*

The Long Range City Plan—*Joseph Oberman, Office of the Development Coordinator, Philadelphia (30.1, Tues./p.m./N)*

The City as a Physical System—*J. T. Eberhard, Dept. of Commerce (30.2, Tues./p.m./N)*

The City as an Information Network—*T. O. Paine, General Electric Co. (30.3, Tues./p.m./N)*

The City of Tomorrow: Power for Urban Progress—*(30.4, Tues./p.m./N)*

Oceanography & Underwater Systems

The Hostile Sea—*A. J. Finocchi, ITT Federal Labs. (35.1, Wed./a.m./SN)*

Environmental Data for Undersea Technology—*Woodrow Jacobs, National Oceanographic Data Center (35.2, Wed./a.m./SN)*


Microelectronics Applications in Undersea Instrumentation—*William Liben, Johns Hopkins Univ. (35.3, Wed./a.m./SN)*

Underseas Instrumentation Reliability! Where Away?—*J. M. Snodgrass, Scripps Institution of Oceanography (35.4, Wed./a.m./SN)*

Panel Discussion on Underseas Technology—*(35.5, Wed. a.m. SN)*

The Role of Electronics in Deep-Submergence Systems—*J. H. Clotworthy, Westinghouse Electric Corp. (43.1, Wed./p.m./SN)*

Command and Control of Deep/Submergence Vehicles—*Victor Ander-*

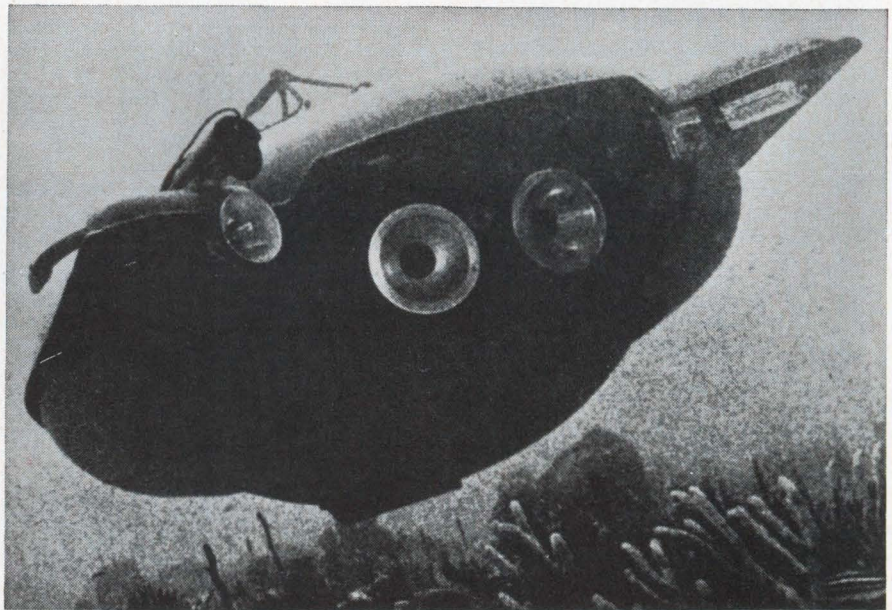

Deepstar three-man vehicle is designed to dive to a depth of 4000 feet. Developed at the Westinghouse Defense and Space Center, it will be leased for scientific dives.

son, Scripps Institution of Oceanography (43.2, Wed./p.m./SN)

Sensor and Navigation System for the Deep-Submergence Program—*J. A. Cestone, Dept. of the Navy (43.3, Wed./p.m./SN)*

Electronic Aids to Human Physiology Underseas—*C. W. Sem-Jackson, Oslo Univ., Norway (43.4, Wed./p.m./SN)*

Undersea Technology: Industry's Role —*G. W. Miller, Textron Corp. (43.5, Wed./p.m./SN)*

Communication Requirements in Diving Operations—*E. C. Stephan, Ocean Systems, Inc. (68.1, Fri./a.m./SS)*

Underwater Communication Problems from the Navy Swimmer's Standpoint—*B. L. Cannon, U. S. Navy Mine Defense Lab. (68.2, Fri./a.m./SS)*

Wireless Diver Communications, Problems and Performance—*J. E. Kenny, Aquasonics Engineering Co. (68.3, Fri./a.m./SS)*

An Underwater Audio Communicator —*H. J. Webb, J. R. Webb, Hydrotronics Co. (68.4, Fri./a.m./SS)*

Helium Speech Unscrambling—*Michel Copel, U. S. Naval Applied Science Lab. (68.5, Fri./a.m./SS)*

Power Generation and Control

Recent Advances in Electrofluiddynamic Power Generation—*H. E. Brandmaier, Bernard Kahn, Curtiss-Wright Corp. (2.4, Mon./a.m./M)*

Interphase Transformer for Multiple Connected Power Rectifiers—*O. N. Acosta, I-T-E Circuit Breaker Co. (6.1, Mon./a.m./N)*

Pulse-Width-Modulated Inverters for AC Motor Drives—*Boris Mokrytzki, Reliance Electric and Engineering Co. (6.2, Mon./a.m./N)*

An AC Equivalent Circuit for Cycloconverter—*C. J. Amato, Lear Siegler, Inc. (6.3, Mon./a.m./N)*

The Differential Saturable Transformer as the Basic Component of a Controlled High-Efficiency Power Supply —*S. P. Jackson, Solidstate Controls Inc., H. R. Weed, Ohio State Univ. (6.4, Mon./a.m./N)*

Power Measurement Errors in Controlled Rectifier Circuits—*M. S. Erlicki, D. Schieber, J. Ben Uri, Israel Institute of Technology (6.5, Mon./a.m./N)*

Design Notes on the DC Chopper— *Eberhart Reimers, Lear Siegler, Inc. (14.2, Mon./p.m./N)*

High Voltage DC Brushless Torpedo Propulsion Motor—*W. R. Cox, Naval Underwater Ordnance Station; V. F. Janonis, Lear Siegler, Inc. (14.3, Mon./p.m./N)*

SCR Voltage Regulator for Mobile Power Generation—*W. K. Volkmann, General Electric Co. (14.4, Mon./p.m./N)*

The Design of a Simple Single-Phase SCR Regulator—*E. S. McVey, R. E. Russell, Univ. of Virginia (14.5, Mon./p.m./N)*

A Vernier-Type Load Tap Changer for Precision Industrial Voltage Control—*C. C. Haley, Westinghouse Electric Corp. (22.4, Tues./a.m./N)*

Fusing Solid-State Motor Control— *Philip Jacobs, Chase-Shawmut Co. (26.1, Tues./p.m./M)*

Panel Discussion on Unusual Load Characteristics of New High Energy Metal Tools (26.2, Tues./p.m./M)

The City of Tomorrow: Power for Urban Progress—*(30.4, Tues./p.m./N)*

SCR-Magnetic Analog Regulator for Single-Phase and Unbalanced Three-Phase Nonlinear Heater Loads—Baruch Berman, Electric Regulator Corp. (46.2, Wed./p.m./N)

A Synchronous Tap Changer Applied to Step Up Cycloconverters—*W. R. Light Jr., E. S. McVey, Univ. of Virginia (46.3, Wed./p.m./N)*

Anaylsis of an L-C Tuned Static Inverter—*A. G. Potter, Iowa State Univ. (46.4, Wed./p.m./N)*

The Three-Phase Half-Wave Inverter —*Eberhart Reimers, Lear Siegler, Inc. (46.5, Wed./p.m./N)*

A Method for Minimizing the Length of Electric Power Lines Used in Single-Ended Distribution Systems— *L. M. Maxwell, Colorado State Univ. (54.1, Thurs./a.m./N)*

The Cooling of Underground EHV Transmission Cables—*J. A. Hitchcock, M. J. Thelwell, Central Electricity Research Labs. (54.2, Thurs./a.m./N)*

Modal Theory of Skin Effect in Straight Flat Conductors—*P. Silvester, McGill Univ. (54.3, Thurs./a.m./N)*

Network Analogue Solution of Skin and Proximity Effect Problems—*P. Silvester, McGill Univ. (54.4, Thurs./a.m./N)*

Dual Potentials in Silver-Oxide/Zinc Batteries—*R. C. Dawer, Lockheed Missiles and Space Co. (60.2, Thurs./p.m./SS)*

Silicon-Germanium Thermoelectrics for Power Generation—*G. S. Lozier, Radio Corp. of America (77.1, Fri./p.m./R)*

Radiation Effects

Lifetimes of Trapped Charge in Electron Irradiated Dielectrics—*J. Dow, S. V. Nablo, Ion Physics Corp. (2.1, Mon./a.m./M)*

Atomic Origins of Transient Nuclear Radiation Effects in Electronis— *A. W. Snyder, Sandia Corp. (44.1, Wed./p.m./SS)*

Transient Radiation Effects on Passive Electronic Components—*H. W. Wicklein, The Boeing Co. (44.2, Wed./p.m./SS)*

A Review of Diode and Transistor Transient Response to Ionizing Radiation—*S. C. Rogers, Bell Telephone Labs. (44.3, Wed./p.m./SS)*

Computer Usage in Radiation Effects Studies—*W. A. Bohan, H. W. Mathers, F. C. Tietze, International Business Machines Corp. (44.4, Wed./p.m./SS)*

Reliability

Reliability of Plated-Through Holes in Multilayer Boards—*R. H. Gauger, Hazeltine Corp. (73.1, Fri./p.m./T)*

Circuit Failure Asymmetries for Reliability Improvement in Digital Circuits—*H. D. Goldman, Sperry Gyrocope Co. (73.2, Fri./p.m./T)*

Setting Reliability Incentives, Using Linear Programming—*R. T. Maloney, Sperry Gyroscope Co. (73.4, Fri./p.m./T)*

Reliability Testing in a Bayesian Context—*D. M. Brender, System Prediction Analysts (73.5, Fri./p.m./T)*

Achievement and Potential of a New Tool for Quality Assurance: Infrared Techniques—*Riccardo Vanzetti, Stephen Boba, Raytheon Co. (73.6, Fri./p.m./T)*

Sensing and Measuring

Power-Measurement Errors in Controlled Rectifier Circuits—*M. S. Erlicki, D. Schieber, J. Ben Uri, Israel Institute of Technology (6.5, Mon./a.m./N)*

Radar Cross-Polarization Measurements for the Determinatin of Target Surface Properties—*Kumar Krishen, W. W. Koepsel, S. H. Durrani, Kansas State Univ. (20.3, Tues./a.m./SS)*

A Real-Time-Delay Microwave Measuring System—*R. A. Sparks, Litton Systems, Inc. (37.5, Wed./a.m./R)*

Generation and Behavior of X-Rays in Thickness Measurement—*W. R. Baarck, Weston Instruments, Inc. (38.1, Wed./a.m./N)*

Semiconductor Evaluation with the Fast Scanning Infrared Microscope— *Riccardo Vanzetti, Leon Hamiter, Raytheon Co. (39.1, Wed./a.m./G)*

Lock-On Magnetometer Utilizing Superconducting Sensor—*R. L. Forgacs, A. Warnick, Ford Motor Co. (39.2, Wed./a.m./G)*

Force-Field Detection of Objects in Space—*M. G. Kaufman, U. S. Naval Research Labs. (39.3, Wed./a.m./G)*

Lunar Observation Experiment with the Westinghouse Image Dissector— *K. C. Leonard Jr., James Nicholson, Westinghouse Electric Corp. (39.5, Wed./a.m./G)*

A Solar-Burst Radiometer for the Radio Astronomy Explorer Satellite—

R. Donegan, M. Chomet, Airborne Instruments Lab. (39.6, Wed./a.m./G)

The Remote Measurement of Insertion Loss and Echo-Return Loss in Michigan—*D. W. Gilbo, Michigan Bell Telephone Co. (56.2, Thurs./a.m./MH)*

Packset Radio Antenna Measurements—*J. A. Kuecken, General Dynamics/Electronics (63.6, Thurs./p.m./G)*

Additional Results of Actual Measurements Using the Doppler-Shift Technique for Determination of Relative Geodetic Location by the Use of Satellites—*E. S. Keats, Westinghouse Electric Corp. (67.4, Fri./a.m./SN)*

Burst Measurements in Audio and Electroacoustics—*W. W. Lange, International Business Machines Corp. (76.4, Fri./p.m./SS)*

Signal Processing

Analysis of Phase-Locked Loop Acquisition: A Quasi Stationary Approach—*S. A. Meer, ADCOM, Inc. (13.1, Mon./p.m./R)*

Probabilities of Detection and False Alarm for a Coherent Detector With Amplitude Limiting of Arbitrary Hardness—*David Silber, Westinghouse Electric Corp. (13.2, Mon./p.m./R)*

The Problem of Too Many Measurements in Pattern Recognition and Prediction—*D. C. Allais, International Business Machines Corp. (13.3, Mon./p.m./R)*

Adaptive Threshold Detection of M-ary Signals in Statistically Undefined Noise—*J. B. Millard, Ludwik Kurz, New York Univ. (13.4, Mon./p.m./R)*

A Goal: Spurious-Signal Immunity of Solid-State AM/FM Tuners—*R. V. Fournier, C. H. Lee, J. A. Kuklis, Radio Corp. of America (15.1, Mon./p.m./G)*

A Signal Design Philosophy for High-Resolution Radar—*E. L. Titlebaum, Univ. of Rochester (20.1, Tues./a.m./SS)*

Comparison of Frequency-Shift-Keyed and Phase-Shift-Keyed Pulse Compression Systems—*R. W. Klassen, The Martin Co. (20.2, Tues./a.m./SS)*

On-Line Real-Time Data Recording for Analysis—*J. L. Deitz, General Precision, Inc. (28.3, Tues./p.m./SS)*

Graphical to Digital Converter—*G. L. D'Ombrain, L. A. Cox, L. Rozsa, McGill Univ. (28.4, Tues./p.m./SS)*

High-Performance Parallel-Serial Analog-to-Digital Converter with Error Correction—*G. G. Gorbatenko, International Business Machines Corp. (33.2, Wed./a.m./T)*

System Identification in the Presence of Noise by Digital Techniques—*A. I. Liff, New York Univ. (66.1, Fri./a.m./M)*

Statistical Properties of Random-Pulse Trains—*O. A. Z. Leneman, MIT Lincoln Lab. (66.2, Fri./a.m./M)*

Determination of the Output Statistics of a Sampled-Data System with a Nonlinearity—*D. Tabak, B. C. Kuo, Univ. of Illinois (66.3, Fri./a.m./M)*

Limit Cycle Compensation of Switched-Type Nonlinear Systems, Using Pole Zero Techniques—*H. W. Deaner, Sperry Piedmont Co., E. S. McVey, Univ. of Virginia (66.5, Fri./a.m./M)*

Solid-State Devices and Theory

Lifetimes of Trapped Charge in Electron Irradiated Dielectrics—*J. Dow, S. V. Nablo, Ion Physics Corp. (2.1, Mon./a.m./M)*

Solid-State Speed, Acceleration and Load Control System—*F. T. Thompson, A. Wavre, Westinghouse Electric Corp. (22.5, Tues./a.m./N)*

Metal Semiconductor Schottky Barriers and Devices—*M. M. Atalla, Hewlett-Packard Co. (42.1, Wed./p.m./M)*

Unpackaged Devices—*J. M. Early, Bell Telephone Labs. (42.2, Wed./p.m./M)*

Micropower Linear Circuits—*J. D. Meindl, P. H. Hudson, U. S. Army Electronics Command (42.4, Wed./p.m./M)*

A Higher-Power Ultrasonic Switch—*C. F. dePrisco, Aeroprojects, Inc. (46.1, Wed./p.m./N)*

Subminiature Transistors—*F. M. Dukat, Raytheon Co. (76.1, Fri./p.m./SS)*

Statistics of Switching-Time Jitter for a Tunnel-Diode Threshold-Crossing Detector—*D. E. Nelsen, MIT (80.1, Fri./p.m./MH)*

Space Electronics

Recent Advance in Sliding Contacts, Including Space Applications—*E. I. Shobert 2d, Stackpole Carbon (10.3, Mon./p.m./M)*

High-Quality Kinescope-Film Recording of Meteorological Satellite Pictures at Slow-Scan Rates—*S. M. Ravner, Radio Corp. of America (11.1, Mon./p.m./SN)*

Panel Discussion on An Astronaut's Appraisal of His Electrical and Electronics Aids *(27.1, Tues./p.m./SN)*

Spacecraft Command and Control—*J. T. Mengel, NASA (27.2, Tues./p.m./SN)*

Propulsion Systems for Space Operation—*A. Tischler, NASA, (27.3, Tues./p.m./SN)*

Simulators for Manned Space Flight—*F. B. Smith, NASA (27.4, Tues./p.m./SN)*

Space Communication Systems—*N. T. Petrovich, All-Union Electrotechnical Institute of Communications, Moscow (27.5, Tues./p.m./SN)*

Force Field Detection of Objects in Space—*M. G. Kaufman, U. S. Naval Research Labs. (39.3, Wed./a.m./G)*

Lunar Observation Experiment with the Westinghouse Image Dissector—*K. C. Leonard Jr., James Nicholson, Westinghouse Electric Corp. (39.5, Wed./a.m./G)*

A Solar Burst Radiometer for the Radio Astronomy Explorer Satellite—*R. Donegan, M. Chomet, Airborne Instruments Lab. (39.6, Wed./a.m./G)*

Role of ACE-S/C in Spacecraft Checkout—*W. Parsons, NASA (59.3, Thurs./p.m./SN)*

H-F Applications to Re-Entry Capsule Surveillance and Tracking—*M. H. Lowe, Radio Corp. of America (67.1, Fri./a.m./SN)*

Interplanetary Spacecraft Telecommunication Systems—*G. A. Reiff, NASA, (67.2, Fri./a.m./SN)*

Turnstile Antenna for Space Communications—*C. C. Chen, Northrop Space Labs. (67.3, Fri./a.m./SN)*

Additional Results of Actual Measurements Using the Doppler-Shift Technique for Determination of Relative Geodetic Location by the Use of Satellites—*E. S. Keats, Westinghouse Electric Corp. (67.4, Fri./a.m./SN)*

Design Considerations for the Selection of an On-Board Checkout Systems Computer—*L. F. Rowe, General Electric Co. (67.5, Fri./a.m./SN)*

Recent Progress of Thin-Film Solar Cells,—*D. M. Perkins, Radio Corp. of America (77.2, Fri./p.m./R)*

System Engineering

System Engineering Aspects of the RA-I Radio System—*J. Godier, Northern Electric Co., Ltd. (8.3, Mon./a.m./MH)*

A Signal Design Philosophy for High-Resolution Radar—*E. L. Titlebaum, Univ. of Rochester, N. DeClaris, Cornell Univ. (20.1, Tues./a.m./SS)*

Land-Clutter Characteristics for Airborne Radar System Design—*J. Cohen, J. DiStefano, J. T. McManus, Grumman Aircraft Engineering Corp. (20.4 Tues./a.m./SS)*

A Microminiature MTI System for Surveillance Radars—*W. Cappadona, Airborne Instruments Lab., D. Kenneally, Griffis Air Force Base, Rome Air Development Center (20.5, Tues./a.m./SS)*

Panel Discussion on Present Status and Future Utilization of Advanced Technology in High-Frequency Systems Engineering—*(40, Wed./a.m./MH)*

Systems Engineering Aspects of a High-Capacity PCM System—*J. Deregnaucourt, Northern Electric Co.,*

Ltd., Canada (56.4, Thurs./a.m./MH)

Practical Criteria for Automatic Checkout System Design—*E. Dalca, Grumman Aircraft Engineering Corp. (59.5, Thurs./p.m./SN)*

Television

A Simple Noise Eliminator for Television-Receiver Synchronizing Circuits—*Kenneth James, Emerson Radio and Phonograph Corp. (15.2, Mon./p.m./G)*

Transistorized Horizontal Output Stage—*Bechara Aboufadel, Warwich Electronics, Inc. (15.3, Mon./p.m./G)*

An Analysis of the Necessary Decoder Corrections for Color Receiver Operation with Nonstandard Receiver Primaries—*Norman Parker, Motorola Consumer Products Div (15.4, Mon./p.m./G)*

Hybrid TV Receivers: Color and Black and White—*A. R. Curll, Philco Corp. (15.5, Mon./p.m./G)*

Color TV Standards: Opening Remarks—*D. G. Fink, IEEE (Tues./a.m./T)*

Problems Common to All Systems Cameras, Lighting, Film—*H. Kozanowski, RCA (17.1)*

Tape Recording for Color—*J. Roizen, Ampex (17.2)*

Distribution and Microwave Links—*A. D. Fowler, Bell Telephone Labs. (17.3)*

Systems Under Consideration (NTSC, PAL, SECAM)—*R. Theile, Institut for Rundfunktechnik, Germany (17.4, Tues./a.m./T)*

The European Broadcasting Union (EBU) What is the EBU? Results of Tests by EBU on NTSC, PAL, SECAM—*George Hansen, European Broadcasting Union (17.5, Tues./a.m./T)*

Design and Characteristics of Coaxial Cables for Community Antenna Television (CATV) Systems—*W. T. Smith, W. L. Roberts, Superior Cable Corp. (24.1, Tues./a.m./MH)*

A Figure of Merit for CATV Amplifiers: The Coefficient System—*D. N. Carson, Bell Telephone Labs. (24.2, Tues./a.m./MH)*

Color TV Standards: International Exchange of Programs *(Tues./p.m./T)*

The Conversion of One Standard to Another—*Enzo Castelli, Radio Television Italiana (25.1)*

Special Problems on Program Exchange—*S. N. Watson, British Broadcasting Corp. (25.2)*

Statement by System Proponents NTSC—*G. H. Brown, Radio Corp. of America (25.3)*

PAL, SECAM (Experts in PAL and SECAM are also expected to contribute to the discussion.)

Discussion Panel on Relative Receiver Complexity *(25.4, Tues./p.m./T)*: NTBC—Harris Wood, Electronic Industries Assoc.
PAL, SECAM (Experts in PAL and SECAM are also expected to contribute to the discussion.)

Television Cathode-Ray Display Tubes—*Fred Townsend, Westinghouse Electric Corp. (34.4, Wed./a.m./M)*

Operational and Control Simplification in TV Studio Video-Switching Systems—*Blair Benson, Columbia Broadcasting System (61.3, Thurs./p.m./R)*

Test Equipment and Techniques

Panel Discussion on Cavitation Measurement *(8.4, Mon./a.m./MH)*

Current Ideas in the Philosophy of Testing of Electrical Contacts—*H. B. Ulsh, International Business-Machines Corp. (10.5, Mon./a.m./M)*

A New Wideband True RMS/DC Converter—*Peter Richman, Weston Instruments, Inc. (23.1, Tues./a.m./G)*


A Precision DC Potentiometer Microwave Insertion Loss Test Set—*C. T. Stelzried, M. S. Reid, Jet Propulsion Lab.; S. M. Petty, Univ. of Southern California (23.2, Tues./a.m./G)*

Status Report on Proposed IEEE Oscilloscope Standards—*C. N. Winningstad, Tektronix, Inc. (23.4, Tues./a.m./G)*

Improved Ultra-Fast Transient Recording by Fibre Optics Cathode-Ray Tubes—*F. L. Katzmann, Fairchild Camera and Instrument Corp. (23.5, Tues./a.m./G)*

A Wide-Range Semiautomatic Filter Test Set—*P. J. Nordquist, Sylvania Electric Products (28.1, Tues./p.m./SS)*

Test by Pulse Reflection of Electro Explosive Devices—*D. E. Landry, J. M. Marshall, General Electric Co. (28.2, Tues./p.m./SS)*

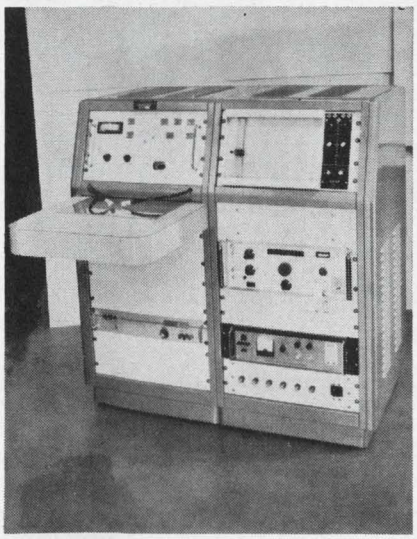

Wide-range filter test set was developed by Sylvania Electronic Systems for use in high-volume filter production (paper 28.1).

Automatic Checkout: The State of the Art—*D. M. Goodman, New York Univ. (59.1, Thurs./p.m./SN)*

VAST—A Computerized Test System for Carrier-Based Avionics—*A. J. Stanziano, Dept. of the Navy (59.2, Thurs./p.m./SN)*

Role of ACE-S/C in Spacecraft Checkout—*W. Parsons, NASA (59.3, Thurs./p.m./SN)*

Role of Automatic Checkout in the Tactical Air Command—*A. E. Smith, Frank Micca, Wright-Paterson Air Force Base (59.4, Thurs./p.m./SN)*

Practical Criteria for Automatic Checkout System Design—*E. Dalca, Grumman Aircraft Engineering Corp. (59.5, Thurs./p.m./SN)*

Automated Test Equipment: An Analysis of the Problem—*J. W. Breehl, Office of Maintenance Policy (59.6, Thurs./p.m./SN)*

Panel Discussion on Automatic Checkout Systems *(59.7, Thurs./p.m./SN)*

Transportation

A New Control Concept for Electric Vehicles—*T. R. Kelley, I-T-E Circuit Breaker Co. (14.1, Mon./p.m./N)*

Policy Decisions in Transportation System Planning—*Alan Boyd, Office of Secretary of Commerce for Transportation (21.1, Tues./a.m./R)*

Models for Railroad Terminals—*C. B. Shields, Battelle Memorial Institute (21.2, Tues./a.m./R)*

Economic Models for Rail Systems—*J. P. Carstens, R. C. Baxter, Julian Reitman, United Aircraft Corp. (21.3, Tues./a.m./R)*

Rail Gauge and Rapid-Transit Train Stability—*E. G. Chilton, Stanford Research Institute (21.4, Tues./a.m./R)*

Stereophonic Tape Cartridge System for Automobile Use—*R. C. Moyer, RCA/Victor Div. (76.6, Fri./p.m./SS)*

Problems of Sound Systems in Passenger Vehicles—*A. B. Cohen, University Sound (79.1, Fri./p.m./N)*

Writing and Speech

An Analysis and Comparison of Defense/Space Marketing Publications—*R. M. Woelfle, Bendix Mishawaka Div. (9.1, Mon./p.m./T)*


Optimum Information Transfer: Engineer to Engineer—*E. T. Clare, Cohu Electronics, Inc. (9.2, Mon./p.m./T)*

The Reading Habits of Engineers in the Avionics Industry—*J. F. Lufkin, Honeywell, Inc., E. H. Miller, The Martin Co. (9.3, Mon./p.m./T)*

The Effect of Thematic Quantization on Expository Coherence—*J. X. Tracey, Hughes Aircraft Co. (9.4, Mon./p.m./T)*

This is Siemens

...making motors and transformers in Pakistan, in the modern factory shown below. We also make cables in India, generators in Spain, telephones in Argentina. We manufacture in 28 countries and erect, service and repair our installations in almost every country in the world. Of the 240,000 in the Siemens family, 40,000 are employed abroad. Everywhere, they provide imaginative planning, high-quality equipment, skilled and rapid construction and reliable service.

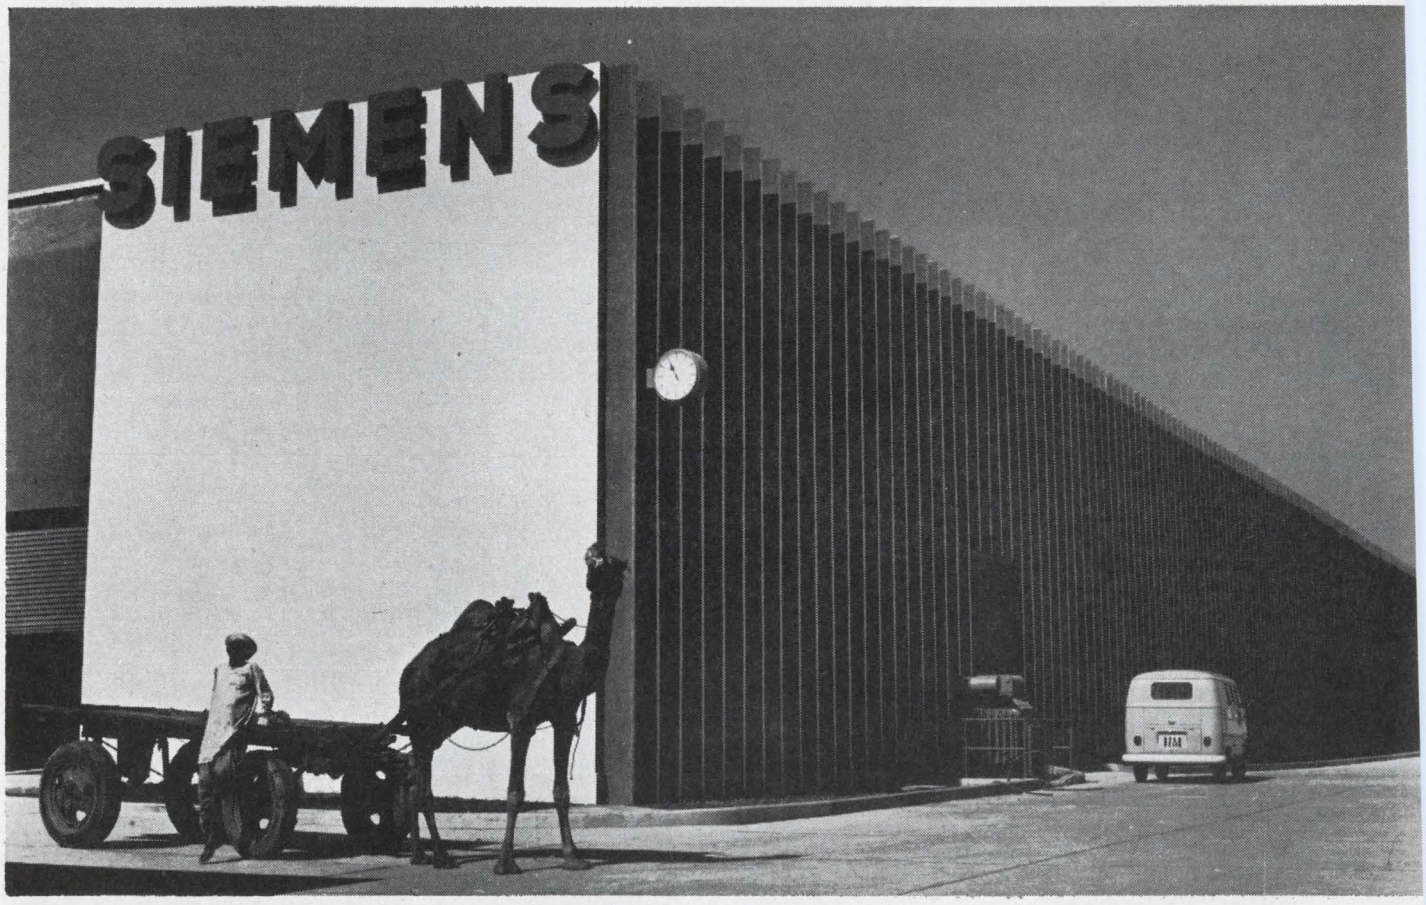

SIEMENS

Siemens MKH

metallized film capacitors

Small size and high reliability are new standards set by Siemens capacitors. Twenty years' experience in making metallized capacitors has resulted in advanced precision techniques which closely control every capacitor property, making them 100% "foolproof" in service. "Self-healing" is an automatic reaction, eliminating the possibility of any voltage breakdown.

Two-way self-healing gives double protection. Internal voltage breakdown very rarely occurs. If it does, the thin metal coatings at the breakthrough point, act as a fuse and immediately vaporize, eliminating the breakthrough point within microseconds.

Electrochemical self-healing is the second protective process. It starts whenever and wherever insulation resistance decreases in the dielectric material. This process operates at any voltage, even as low as 10 mV, changing the metal coating at the point of lowest insulation resistance to a non-conductive oxide—thus eliminating the point electrically.

Less than one breakdown (self-healing) per year and per mF—that is the consistent average shown by tests at nominal voltage. This value, which is for the first year, is even less for succeeding years.

Highly stable capacitance. Overload tests (at 2.2 nominal voltage and at 85°C) show that decrease in capacitance as a result of self-healing is negligible, even after several years.

Small size—low cost. Intricate manufacturing techniques enable MKH (metallized polyester) capacitors to be produced to unvarying standards. They are available with axial or radial leads, in flat compact form. Leads soldered to metallized ends ensure reliable contact. The dielectric is polyester film, widely used for capacitors.

MKH properties. Operating temperatures: −40° to +125°C. Insulation resistance: minimum 20,000 megohms for normal capacitance up to .022mF at +20°C. For higher capacitance values: 10,000 megohms X mF (typical values). Temperature coefficient: approx. .04%/C° between 0° and 70°C. Dissipation factors: 0.5% at 1 kc; 1.5% at 10 kc (typical values).

Immediate shipment. Substantial stocks are held in White Plains, N. Y.

Write now for full information on Metallized Film Capacitors.

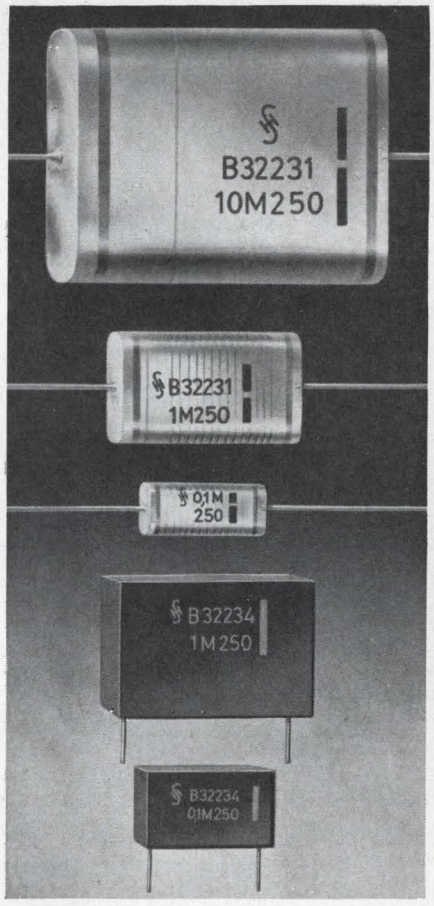


PHOTO: ACTUAL SIZE

SIEMENS AMERICA INCORPORATED
Components Division
230 Ferris Avenue, White Plains, N.Y.

In Canada: SIEMENS CANADA LIMITED
407 McGill Street, Montreal 1, P.Q.

ON READER-SERVICE CARD CIRCLE 42

Touring the Exhibit Areas

The new products at the 1966 IEEE Show have been arranged so that you can take a stroll through the aisles without ever leaving your desk. The show is broken down into main product categories, and products within those categories are located at particular spots on the four floors of the New York Coliseum.

Components—1st floor. Start your tour on page 110, and pay particular attention to TIs' plastic unijunction transistor.

Heavy Machinery—1st floor. Start on page 129 and follow on through the latest developments.

Components—2nd floor. The tour starts on page 132. Curtis has a new time/signal integrator and there's lots more.

Instruments—3rd floor. Starting with page 142 we take you on a tour which includes Weston-ROTEK's rms-to-dc converter.

Systems—3rd floor. Page 158 starts the systems section, but Rowan Controller's plug-in power supply is really on the 2nd floor.

Components—4th floor. Beginning on page 168 a lot of new items are shown, including Zeltex' sine-cosine generator.

Production Materials—4th floor. On page 129 start your tour of this section.

ON READER-SERVICE CARD CIRCLE 226 ➤

Polaroid Land film makes you wait 10 seconds for an oscilloscope picture. The suspense can be unbearable.

We're sorry we can't do anything about that 10-second wait.

But if you can bear up under the strain, you'll get a sharply detailed, high-contrast, trace record.

You can study it, attach it to a report, send it as a test record along with a product shipment, or file it for future reference.

You also get a choice of four films for oscilloscope recording in pack, roll, and 4 x 5 formats.

The standard film has an ASA equivalent rating of 3000. And if you think that's fast, you haven't heard of our special film called Polaroid PolaScope Land film.

With an ASA equivalent rating of 10,000, it's the fastest thing in films. It can actually record a trace too fleeting for the human eye [for instance, a scintillation pulse with a rise time of less than 3 nanoseconds].

Of course, Polaroid Land films are as quick to point out a mistake as they are to point out a success.


If your trace shows an error, you know it right away. And you never go through the tedium of darkroom procedure only to find out that your blip was a blooper.

To use these films on your scope, you need a camera with a Polaroid Land Camera Back. Most manufacturers have them. Including these: Analab, BNK Associates, Coleman Engineering, EG&G, Fairchild, General Atronics, Hewlett-Packard, Tektronix.

You can get complete details by writing to one of these manufacturers or to Polaroid Corporation, Sales Department, Cambridge, Massachusetts 02139.

By the way, if 10 seconds fray your nerves, just imagine what it was like when Polaroid Land film made you wait 60 seconds to see your trace.

"Polaroid" and "PolaScope"®

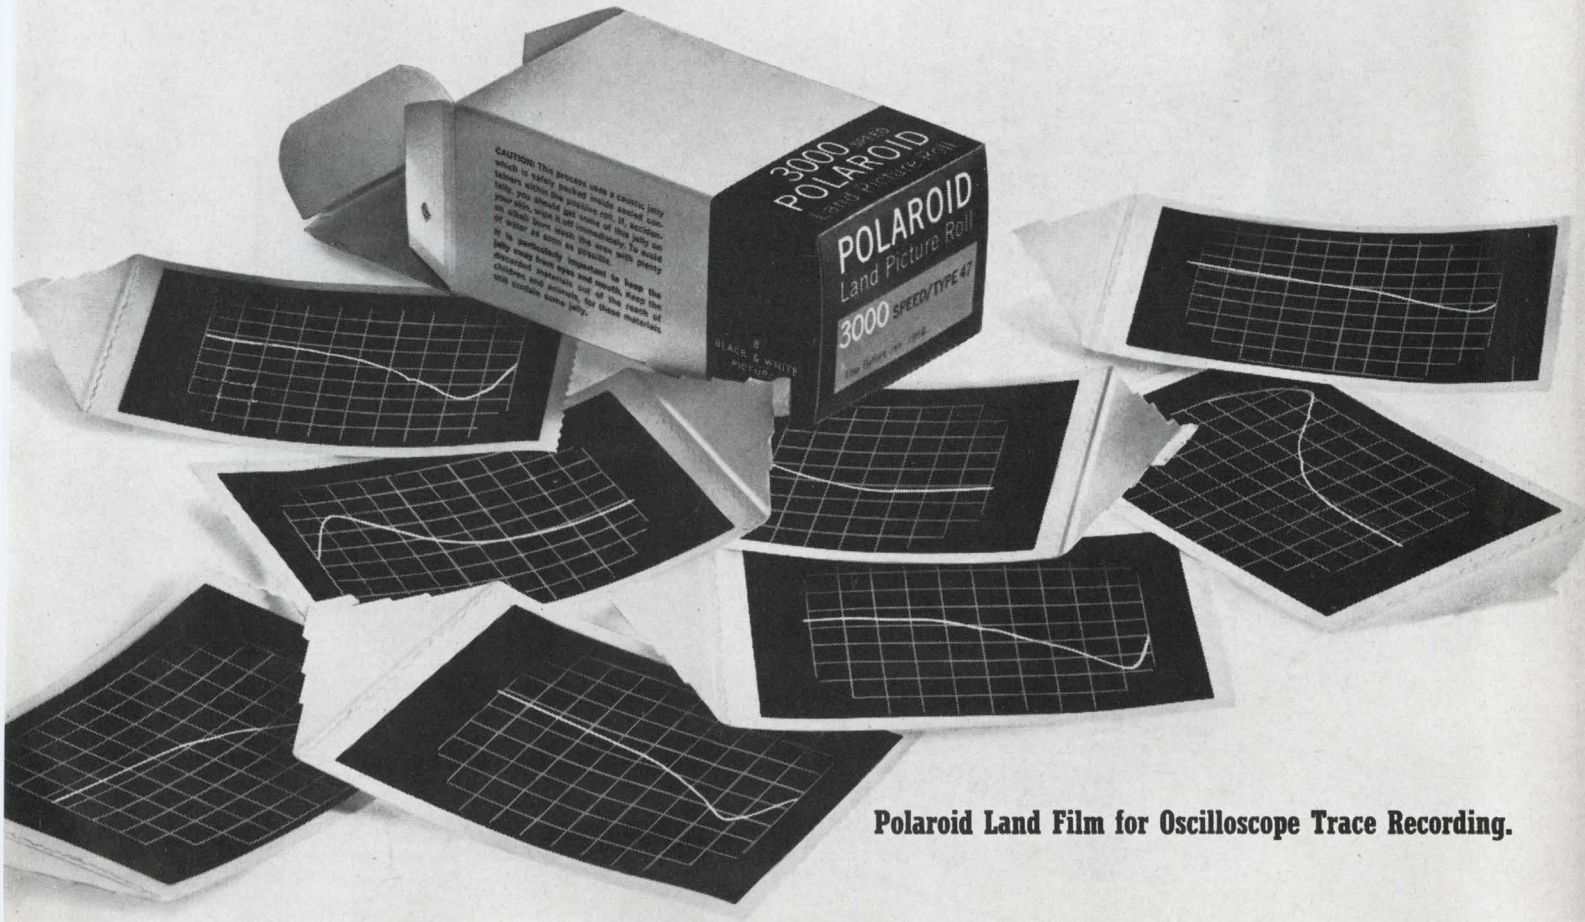

Polaroid Land Film for Oscilloscope Trace Recording.

Plastic unijunction in planar form has low leakage

A plastic encapsulated silicon unijunction transistor, type SJ-5898, has a fast switching time with 20-200 times lower leakage current than most contemporary devices. Applications include SCR drivers, relaxation oscillators, and V and I sensing.

The SILECT device has a leakage current specified at less than 10 nA. Inter-base resistance is 4 K min, 9.1 K max. Peak emitter current is 1 A, rms emitter current is 50 mA, and base 1 peak voltage is 3 V min. Maximum interbase voltage is 35 V, I_{valley} is a minimum of 2 mA, and I_{peak} per base is 5 μA. I_{B2} is a minimum of 10 mA. Intrinsic standoff ratio is 0.55 min, 0.80 max.

The device operates over the entire military temperature range from −55° to +125°C, while it can be stored at up to 150°C.


Packaging capability is broad in scope; duel flat-packs, dual TO-5s, or any other comparable configuration.

Mechanically the device withstands 60,000 G acceleration.

P&A: depends on quantity and configuration; 60 days. Texas Instruments, 13500 N. Central Pkway., Dallas. Phone: (214) 235-3111.


SEE AT BOOTH 1D13-25


Circle No. 504

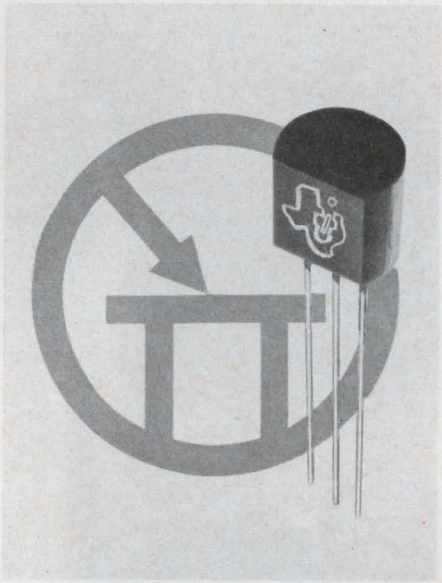

Planar uni-junction

Specifications for this new planar-unijunction transistor include: 10 nA max leakage; 60,000 G acceleration; emitter rms current, 50 mA max; emitter peak current, 1 A max; base 1 peak pulse, 3 V min; I_V, 2 mA min, I_P, 5 μA max; Ve_{Sat}, 4 V max; R_{BB}, 4 k min—9.1 k max; intrinsic standoff ratio, 0.55 to 0.80; operating temp. range is −55° to +125°C; storage temp. is −55° to +150°C; Max interbase V is 35 V; I_{B2} mod is 10 mA min. No type number has yet been assigned to this unit which is now known only as SJ5898.

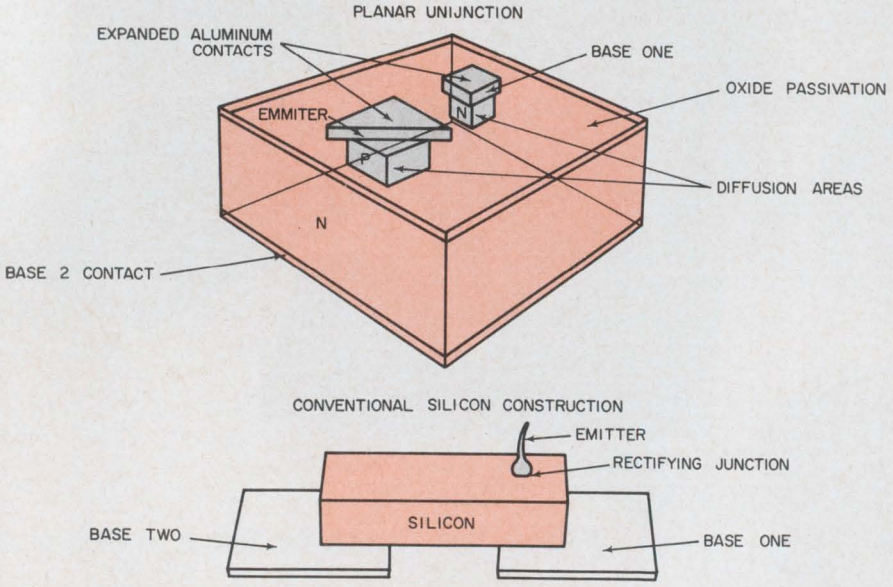

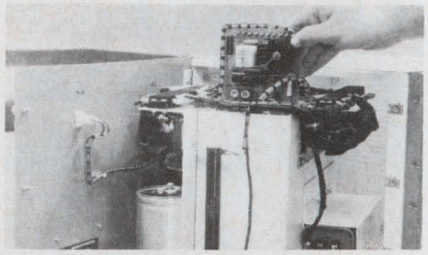

Static SCR inverter

A completely solid-state SCR inverter is available in sizes from 10 VA to 10 kVA. Up to 100 kVA is available on order.

The inverter produces regulated, filtered, sine-wave ac power from a dc source. Applications as emergency standby power for critical loads, or as frequency changers (50-60 Hz, 60-120 Hz, 60-4000 Hz, etc.), as dc to dc converters, or as motor speed controls.

Smaller units are mounted in a 19-in. relay-rack cabinet. Larger units are floor-mounted.


Used with a battery charger, battery, and alternate ac, the unit furnishes a fail-safe standby power system. The line voltage is fed through the inverter to the load as is the battery source. Should the line fail or dip, the battery takes over to maintain a constant current out of the inverter. No switching or synchronizing is needed; power is never lost.

P&A: about $1/VA; 60 days. Fansteel Metallurgical Corp., Rectifier div., 1 Tantalum, North Chicago, Ill. Phone: (312) 336-4900.

SEE AT BOOTH 1E27-29

Circle No. 505

Thrust actuator

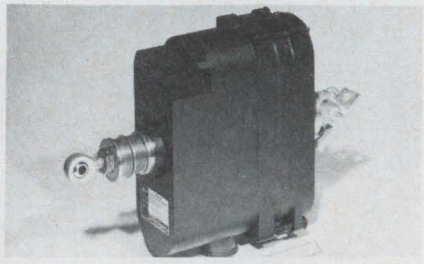

A thrust-vector actuator can gimbal velocity control engines.


Stroke is ±0.293-in., load is 3 lb., input V is 19-31 Vdc ±15 Vdc, and it weighs 3.7 lb. Max leakage is 1 cc/year at 1 x 10^{-11} TORR.

Kearfott Div., Gen. Precision, 1500 McBride, Little Falls, N. J. Phone: (201) 256-4000.

SEE AT BOOTH 1C22-24

Circle No. 506

New Class B amp gives 94 db gain at 4.5 Vcc, has over 50% efficiency

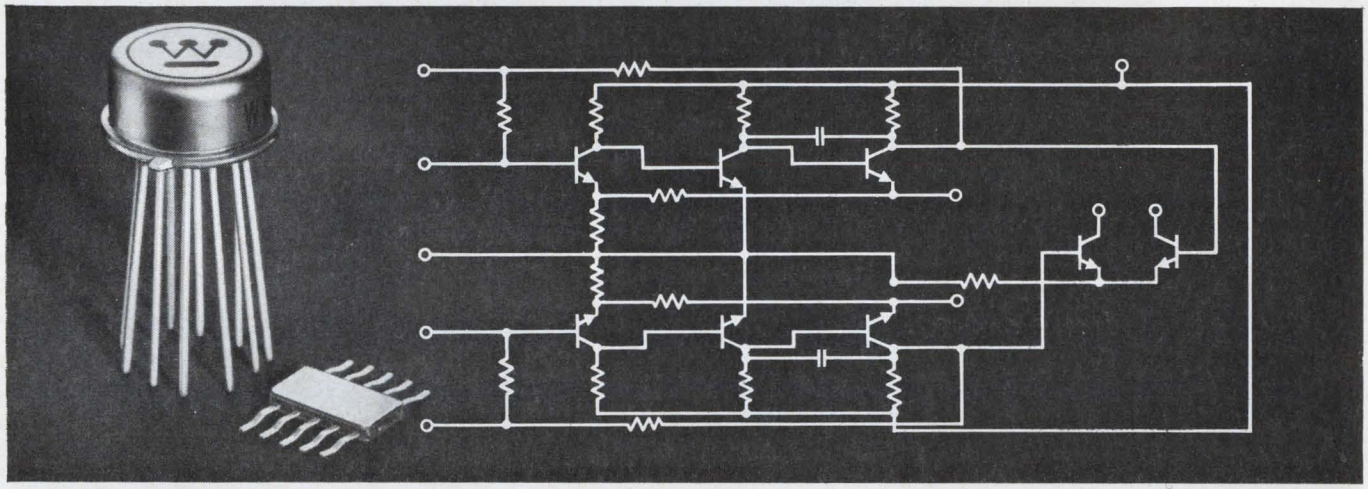

...and it can beat discrete in the price/performance tradeoff

Here's the best commercially available Class B audio amplifier in silicon! It's the new Westinghouse WC 183. This universal low-level IC audio amplifier gives high gain throughout the Vcc range from 1.5 to 9. Minimum gain with a single battery cell is 60 db.

And here's a stopper... you can buy the WC 183 in TO can or flat package for only $7.50 in quantities of 50!

How does Westinghouse do it? We start the circuit with a three stage Class A preamplifier. There's your high gain. We follow it with a Class B output stage. That gives high efficiency. The entire 8-transistor balanced circuit with internal DC feedback draws only 5 ma. at a minimum output power of 3 mw.

The quiescent current is extremely low too. It's only 0.9 ma. at 1.5 Vcc. This means vastly extended battery life in most applications. It also makes possible a broad range of new battery-powered IC applications.

You'll find the WC 183 ideal for hearing aids, paging systems, dictating equipment, phone amplifiers, and dozens of other voice communication applications. You can also put it to work in phonographs, tape recorders, and other uses where you want flat frequency response extending beyond the audio range.

Reliability? Every chip undergoes storage bake at 150°C, 20,000 G centrifuge, and hermeticity tests. Life tests indicate less than 0.01% failure rate per 1000 hrs.

Call your Westinghouse distributor. Or write Westinghouse Electric Corporation, Molecular Electronics Division, Box 7377, Elkridge, Maryland 21227. J-09129

You can be sure if it's Westinghouse

ON READER-SERVICE CARD CIRCLE 43

We'll be looking for you at the IEEE Exhibit in Booths M22-25 March 21-24, 1966

If it's your job

to evaluate and specify

electronic test instruments...

YOUR JOB JUST GOT EASIER


Figure it on features or price...

Monsanto's new line adds up to "buy"

ELECTRONICS Monsanto®

PULSE GENERATOR


• Extremely clean waveforms • Independent width and delay on double pulse mode • Both pulses referenced to the same trigger in double pulse operation • Provides sweep delay for oscilloscopes not so equipped • Three trigger output signals, all available in both single and double pulse operation.

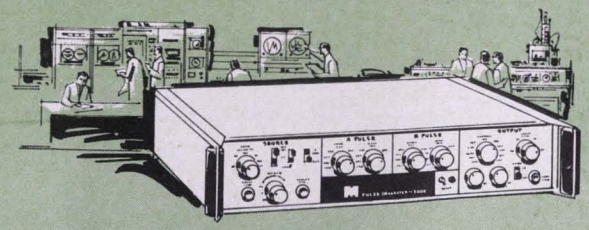

All-silicon, solid-state instrument provides both single and double pulse operation. A great number of the active circuits are integrated for reliability and performance in a compact package only 3½ inches high. **$1,100.00**

20 MHz COUNTER/TIMER


• Stored Display • Modular Construction • Front panel only 3½ inches high • Weight only 16 pounds • Versatile instrument measures frequency, frequency ratio, period, and time interval.

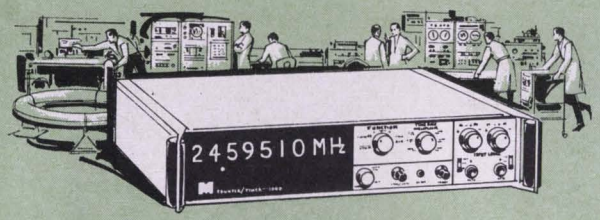

Reliability, accuracy and compactness because Monsanto designs this counter-timer with 90% integrated circuits. Seven of its sixteen printed circuit boards are interchangeable for easy maintenance. **$1,975.00**

5 MHz COUNTER/TIMER


• Time base range from 1μ second to 100 seconds in decade steps • Resolution for frequency measurement of 0.01 Hz. • Compact, light package—only 3½ inches high and 16 pounds.

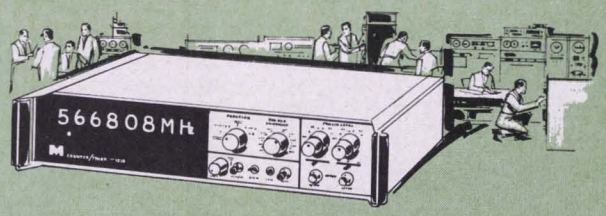

Integrated circuits in 90% of the active circuits build big performance into a small package. Plus speed, accuracy, reliability, and easy maintenance. Six of the 13 printed circuit boards are interchangeable. **$1,575.00**

DIGITAL VOLTMETER

• Fully floated and guarded • Input impedance—10 megohms (all ranges) • Accuracy .01% on all ranges • 4 digits + 100% over-range digit • Common mode rejection: DC > 140 DB; AC > 120 DB at 60 Hz.

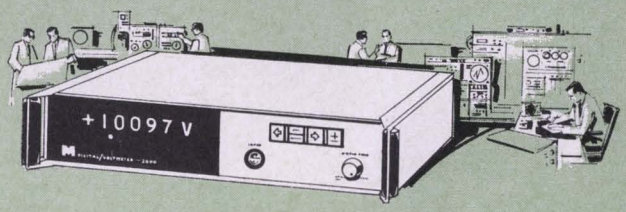

Auto-ranging digital voltmeter with integrated circuits that hold size down to 3½ inches high and only 20 pounds. Automatic operation—ranging, decimal point and polarity—built in at the basic price. **$1,975.00**

Let us fill you in with details. Just return the coupon.

Monsanto Electronics Department
St. Louis, Missouri 63166

Details, please, on the

- ☐ Pulse Generator
- ☐ 5 MHz Counter/Timer
- ☐ 20 MHz Counter/Timer
- ☐ Digital Voltmeter

Name/Title_____


Company_____

Address_____

City_____

State_____ Zip_____

ON READER-SERVICE CARD CIRCLE 44

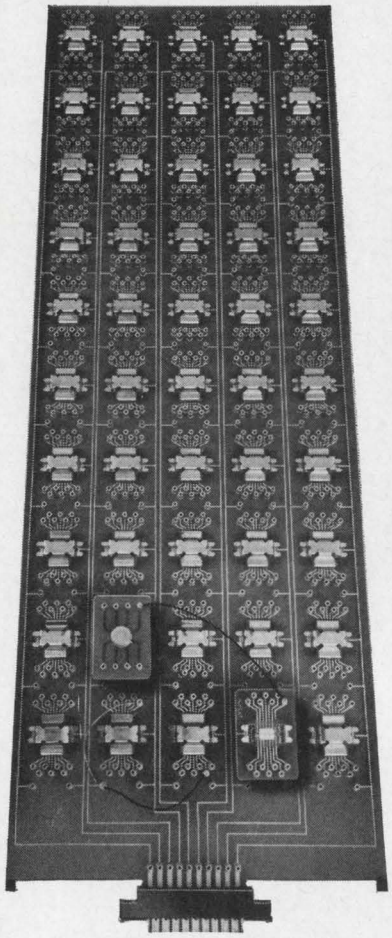

Booth 2B31—IEEE

TIME SAVING BREADBOARD and TEST PANEL for integrated circuitry

- Snap Action Cover Design Eliminates Lead Soldering Or Welding
- Wire Jumpers Available For Solderless Interconnections
- 50 Patterns For Flat Pack or TO-5 Jedec Case Size
- 6" x 17" Panel


For complete time saving flexibility in changing connections and circuitry, write today for Catalog 364.

AUGAT INC.

31 PERRY AVENUE
ATTLEBORO, MASSACHUSETTS

ON READER-SERVICE CARD CIRCLE 45

Time indicators

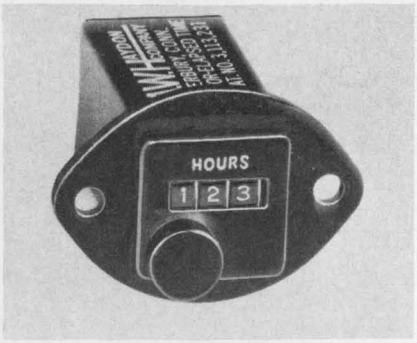


Instantaneous zero reset is a feature of the micro-miniature elapsed time indicators, Models LM19202 and LM19203. Readout is 99.9 and 999 hours respectively. Units are hermetically sealed and meet applicable requirements of MIL-M-7793C. Timing tolerance is ± one digit at 400 Hz. Operating voltage is 115 VAC at 400Hz.

A. W. Haydon, 232 North Elm, Waterbury, Conn., 06720. Phone: (203) 756-4481

SEE AT BOOTHS 1D07-11

Circle No. 631

Repeat cycle timers

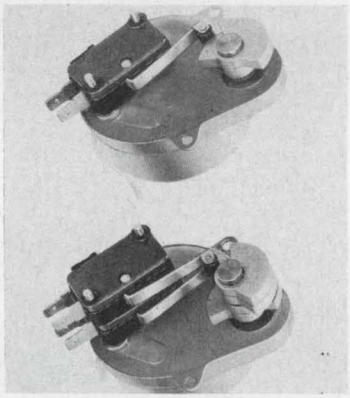

A wide range of speeds is available in the K42400 series of low-cost repeat cycle timers.


Models are offered with either one of two SPDT switches rated at 15 A resistive or inductive at 115 volts, 60 Hz. Available speeds are up to 8 rpm for the single-switch unit and 4 rpm for the two-switch version.

A. W. Haydon, 232 North Elm, Waterbury, Conn., 06720. Phone: (203) 756-4481

SEE AT BOOTHS 1D07-11

Circle No. 632

Eight-switch timer

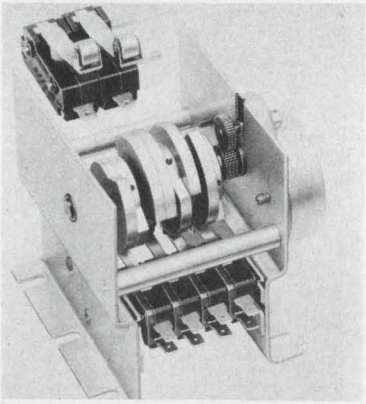


Over-all cycle times from 6 seconds to 25 hours are available with the L42401 and L42402 series of repeat cycle timers. Up to eight SPDT switches are available to control either 15 or 25 A loads at 115 VAC, 60 Hz. Synchronous motor drive is furnished for either 6, 12, 24, 115 or 230 VAC, 50 or 60 Hz operation.

A. W. Haydon, 232 North Elm, Waterbury, Conn., 06720. Phone: (203) 756-4481

SEE AT BOOTHS 1D07-11

Circle No. 633

Pressure transducer

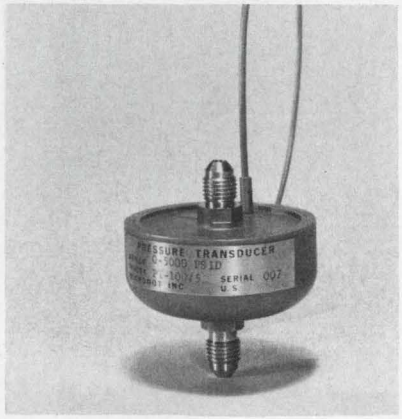

A high-temperature strain gage pressure transducer maintains a thermal-error band of less than ±2%. Because of its extremely low thermal error band, the Microdot PT 100 pressure tranducer needs little or no data correction.

A "C" type Bourdon tube is restrained at creating a strain generating element.

Microdot Inc., 220 Pasadena Ave., South Pasadena, Calif. Phone: (213) 682-3351.

SEE AT BOOTHS 1B08-10

Circle No. 634



Monsanto announces a semiconductor indicator light at prices lower than you'd expect.

New MVE-100 diode offers long life, maximum reliability and fast switching speed!

The new MVE-100 by Monsanto introduces design opportunities and performances never before offered in its price range. The MVE-100's dramatically low price ranges from $14.50 each in lots of one to nine, to $8.00 each in lots of 1,000.

The MVE-100 semiconductor indicator light is suitable for use as an instrument signal light, panel indicator and for many computer uses. In fact, Monsanto is using these lights as trigger and overflow indicators in its new integrated circuit counter/timers.


Produced from gallium arsenide-phosphide, the MVE-100 emits monochromatic red light. Under typical use conditions, when the device operates at 1.6 volts, surface brightness exceeds 50 foot-lamberts with a current of 50 ma and is brighter at higher current. Also, it offers the reliability and long life typical of solid state devices where lifetimes of more than 10,000 hours are achieved. On-off response is extremely rapid, on the order of 8-10 nanoseconds.

So if reliability and price are important to you, write us for complete price list and technical data. Monsanto Electronics Dept., 800 N. Lindbergh Blvd., St. Louis, Missouri 63166.

Monsanto®

LET THE MEN FROM MONSANTO WORK FOR YOU

ON READER-SERVICE CARD CIRCLE 46

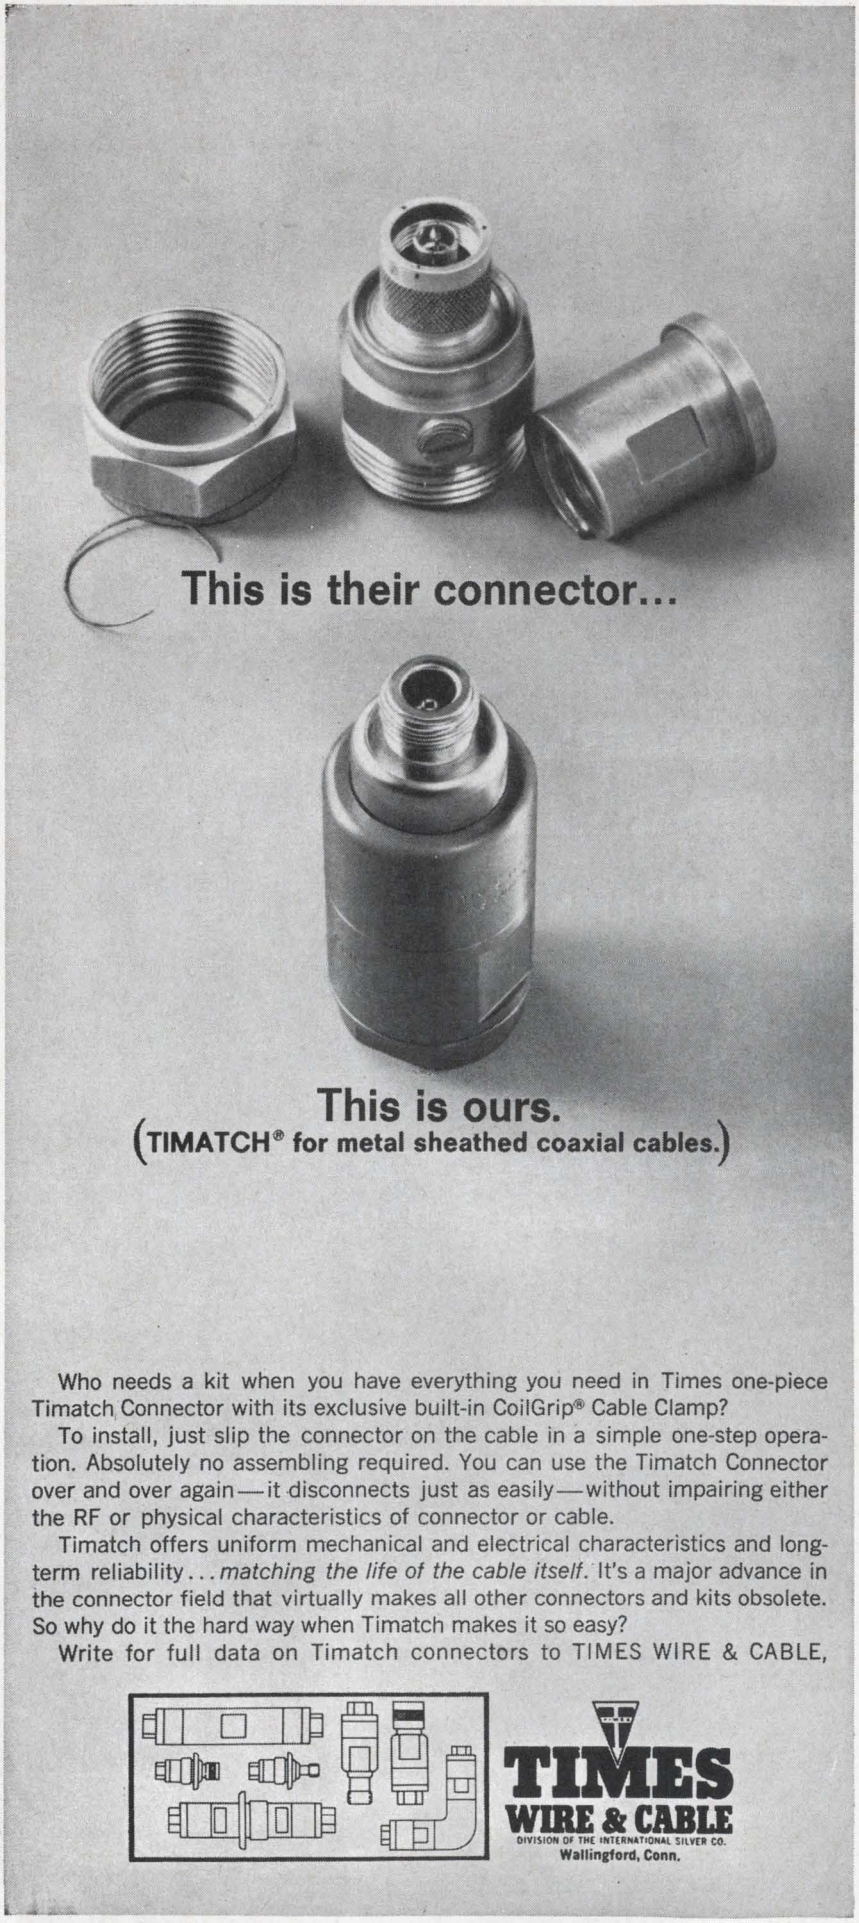

Who needs a kit when you have everything you need in Times one-piece Timatch Connector with its exclusive built-in CoilGrip® Cable Clamp?


To install, just slip the connector on the cable in a simple one-step operation. Absolutely no assembling required. You can use the Timatch Connector over and over again—it disconnects just as easily—without impairing either the RF or physical characteristics of connector or cable.

Timatch offers uniform mechanical and electrical characteristics and long-term reliability... *matching the life of the cable itself.* It's a major advance in the connector field that virtually makes all other connectors and kits obsolete. So why do it the hard way when Timatch makes it so easy?

Write for full data on Timatch connectors to TIMES WIRE & CABLE,

TIMES
WIRE & CABLE
DIVISION OF THE INTERNATIONAL SILVER CO.
Wallingford, Conn.

ON READER-SERVICE CARD CIRCLE 47

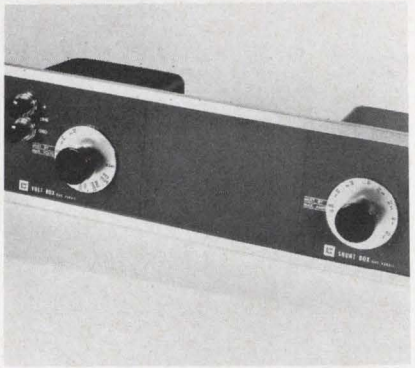

Volt and shunt boxes

These accessories for precise dc measurements have been packaged for ready mounting on 19-in racks. The volt box extends the measurement range of millivolt potentiometers to 500 volts in eight steps. The shunt box provides switch selection of eight settings from 0.05 to 10 A. Error is $\pm 0.02\%$.

Leeds & Northrup, 4907 Stenton Ave., Philadelphia, Pa. Phone: (215) 329-4900.

SEE AT BOOTHS 1B18-20

Circle No. 635

High-voltage transistor

Leading this family of medium power is the 2N3945, a high-voltage, low-saturation general purpose unit. The 2N3945, for industrial non-saturated switching circuits, provides in a 50-volt type a minimum h_{fe} of 40 (at V_{CE} = 10 V, IC = 150 mA), with V_{CE} (sat) less than 0.5 volts at 150 mA.

P&A: $.88-$3.50; stock. Transitron, 168 Albion, Wakefield, Mass. Phone: (617) 245-4500.

SEE AT BOOTH 1B03-11

Circle No. 636

Dual-emitter chopper

This dual-emitter integrated chopper, is designed to provide an optimum combination of low offset voltage, low thermal drift, very low leakage. The chopper provides a minimum BV_{EEO} of 20 volts and maximum leakage of 0.5 picoamps. The device is suited for multiplex applications. The low offset voltage is 10 microvolts maximum.

Transitron Electronic 168 Albion, Wakefield, Mass. Phone: (617) 245-4500.

SEE AT BOOTHS 1B03-11

Circle No. 637


COMPETITIVE INFORMATION

COMPANY CONFIDENTIAL

OKAY CARL, YOU ASKED ME TO DO A LITTLE SNOOPING ON SPECTROL FOR IEEE, and I managed to dig up some advance information and sneak a few snapshots of their products. Here they are, so "read 'em and weep"...

I guess this is enough bad news for one spying venture. But if we can't scoop Spectrol, I'm sure that the other big "B" can't either. Just the same, I think I'll hop right over and see what they're doing, too.

Bill

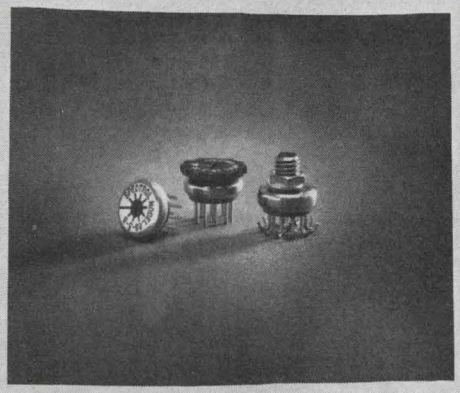


MINIATURE ROTARY SELECTOR SWITCHES: Look out for this line of half-inch switches for PCB applications. Their single-pole, ten-position Model 88 got a lot of attention at WESCON, but now they've come up with a whole new line of three-, five-, and ten-position switches with stops, available in single-pole, double-pole and three-pole versions. This Model 87 line is going to be a hard one to beat. No one else in the industry has anything like it!

P.S. You'll find


spectrol

at IEEE Booth 2E03-2E05.

ON READER SERVICE-CARD CIRCLE 219

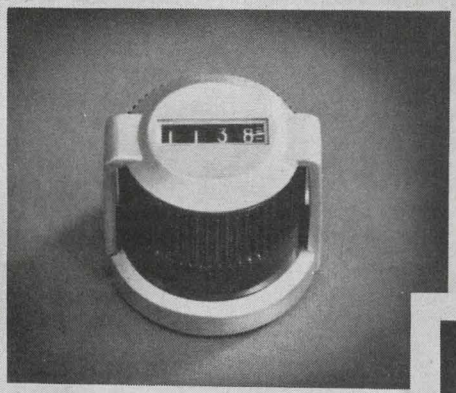

TURNS-COUNTING DIALS: And we can't afford to overlook their Dial line either. This Model 25 turns-counting dial is available in both a three-wheel and four-wheel version. It is only 1-13/16 of an inch in diameter and is easier to read, set, lock, and mount than anything anyone else is offering.

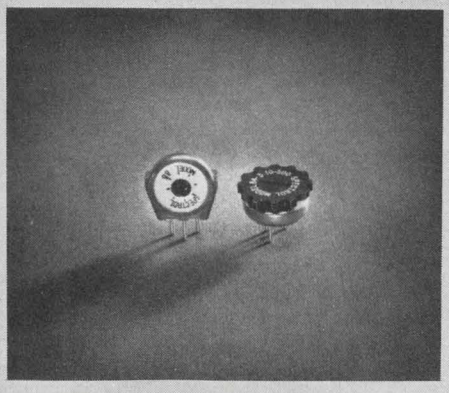

TRIMMERS: They're going to be right in there with trimmers, too. The Models 84 and 85 half-inch, single-turn wirewound jobs have been giving us plenty of trouble in the marketplace. These round trimmers are rated at 1-1/2 watts at 70°C. and have a standard resistance tolerance of ±4%. They've been popular enough to push our stuff into the background wherever they've been tried!



PRECISION POTS Of course, they've always been hard guys to catch up with in precision pots. When they brought out their low-cost, ten-turn, half-inch Model 162, it shook us up because it looked like a military pot at commercial prices. Well, now they're broadening this line with two companion models—the 163 with a rugged 1/4-inch shaft and 3/8-32 thread bushing for panel mounting; and the 164, which is a servo mount version of the standard 162. And they're also going to be pushing their Model 140—which is a lot of pot for the money in a half-inch, single-turn version.


©SPECTROL ELECTRONICS CORPORATION, 17070 E. GALE AVE., CITY OF INDUSTRY, CALIF. 91745

PROCEDYNE PRECISION PHASE METER

with Outstanding Specifications

Model PM-200

- Frequency Range 10 cps. to 500 kcps.
- Direct plus automatic readout 0-360°
- Wide scales for good resolution over full range of phase angles
- Minimum controls, rapid accurate phase measurement
- Hybrid circuitry for maximum performance

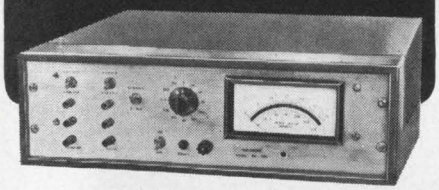


The Procedyne Model PM-200 is a direct reading precision phase angle meter designed for the dynamic analysis of physical systems. This unit measures the phase angle difference between two periodic voltage signals of equal frequency over a frequency range of 10 cps. to 500,000 cps. This unit is a low cost general purpose meter with excellent performance characteristics. It is a highly reliable, extremely precise, convenient tool for phase angle measurement. Write for product catalogue of phase meters, frequency response analyzers and calibration equipment.

PROCEDYNE CORPORATION
221 Somerset St., New Brunswick, N.J. 08903
120 South LaSalle Street, Chicago, Illinois

SEE US AT THE IEEE SHOW • N.Y. COLISEUM

ON READER-SERVICE CARD CIRCLE 48
U118

Thermal switch

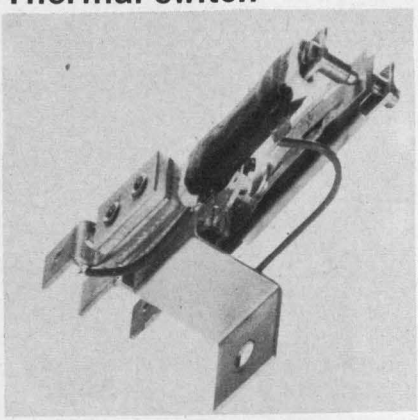


A thermal switch, Series 4300 is being offered. The Series 4300 switch is a snap-acting, heavy duty bimetal actuated unit. Contacts are single pole single throw, available either normally open or normally closed. These switch-units are capable of switching up to a 30 A resistive load, or a 1500 watt Tungsten load.

Hart Mfg. Co., 110 Bartholomew Ave., Hartford, Conn. Phone: (203) 525-3491.

SEE AT BOOTH 1B06

Circle No. 640

Magnetic clutches

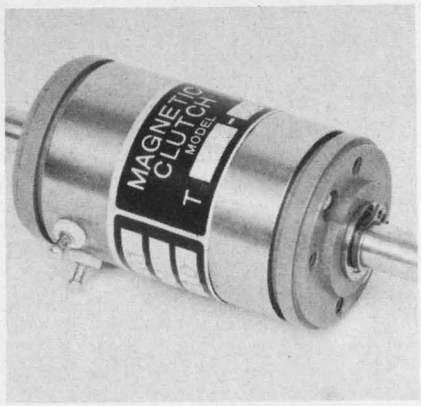

A magnetic particle clutch, Series T-570, features extremely low output inertia and high power gain for compatability with modern servo systems. Torque-to-inertia ratio is 7.61×10^6 rad/sec^2.


They are mechanically interchangeable with standard Buord size 11 friction clutches. Thus, existing systems can be easily updated.

P&A: $170; 30 days. Designatronics Inc., 76 East Second St., Mineola, N. Y. Phone: (516) 741-7070.

SEE AT BOOTH 1F21

Circle No. 641

Logic cards

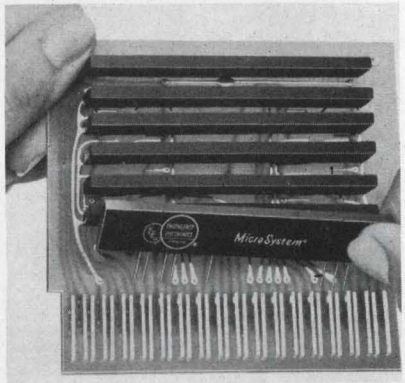

A wide range of standard and special purpose logic cards using integrated circuits includes a free running Multivibrator.

Microsystem interconnection of ICs is an advanced technique that allows from 2 to 10 flat packs, of any size, to be interconnected or intermixed with discrete components into a "stick".

Engineered Electronics Co., 1441 E. Chestnut Ave., Santa Ana, Calif. Phone: (714) 547-5651.

SEE AT BOOTH 1B22

Circle No. 642

Rack-mounting pots




Rack-mountable precision potentiometers are now available. These instruments, and the related bridges and accessories, can create test stations with maximum convenience and economy.

In temperature models, there is option of single or double range scales calibrated for any of the common thermocouple types.


Leeds & Northrup, 4907 Stenton Ave., Philadelphia, Pa. Phone: (215) 329-4900.

SEE AT BOOTHS 1B18-20

Circle No. 643

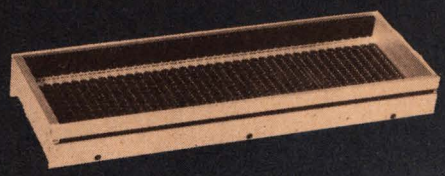


CFW-540 CONNECTOR FRAME

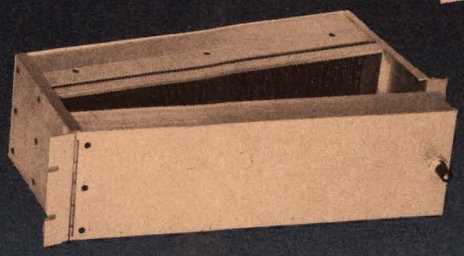


CGS-540 40 CARD SYSTEM CAGE

DISTINCTIVE ACCESSORIES FOR SERIES C MICRO LOGIC CARDS

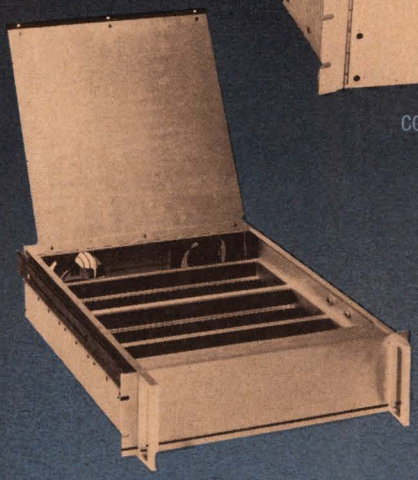

CGD-503 120 CARD DRAWER CAGE

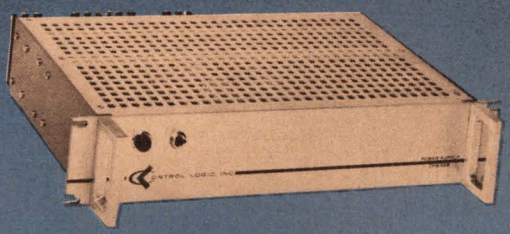


CPS-508 8A POWER SUPPLY



PROGRAM CARD
CPC-503



BLANK CARD
CBC-501




EXTENDER CARD
CXC-501


The Series C provides the most advanced 5 MC Logic Cards . . . over 25 in-stock card types include full input/output capability, and offer exceptional features and performance for logical design and trouble-free operation of systems.

A complete, distinctive family of accessories is now available for the application of Series C Micro Logic Cards.

These serve the essential functions of C card mounting, power and test, **but more important** are designed to meet packaging requirements of high frequency wiring, system cabling, adaptation of controls and connectors, and access convenience for assembly and "on line" servicing. In essence, these are designer products — tailored for completeness and flexibility in fabrication and use of equipment.

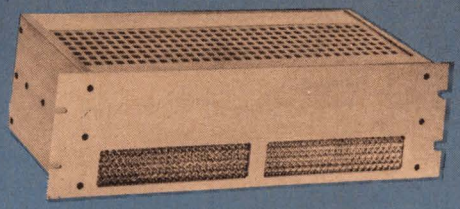

CCU-502 COOLING UNIT



CTU-502 C CARD TESTER

For complete information on Series C Micro Logic Cards and Accessories, write for Brochure 8b.

CONTROL LOGIC, INC.

SUBSIDIARY OF SCHAEVITZ ENGINEERING

3 STRATHMORE ROAD, NATICK, MASSACHUSETTS, 617-655-1170 OR 235-1865.

See us at the IEEE Show — Booth 3A28

ON READER-SERVICE CARD CIRCLE 49

To make or buy a power supply ...let SOLA quote you both ways

Make the decision a realistic one. Let SOLA quote you on a custom built CV transformer *and* CVDC power supply. *You* will then have the costs and specifics to make the right decision.

Building your own d-c supply?
Start with the SOLA CV, custom built to match your power supply's outputs, exactly. Save extra component costs in your design. Get short circuit protection, regulation within ± 1% for line variations to ± 15%. Send output power and circuit requirements, we'll return price of CV and values of circuit components.




Sola CV transformer matched to your output requirements

Buying a complete d-c supply?
Choose the SOLA CVDC, custom built to your specified output requirements. Get a high watts-per-pound package combining the CV's tight regulation, low forward voltage drop of the rectifier and low output impedance of the capacity filter.


Let SOLA quote both ways. Send us your specs for custom-built CV's and CVDC's, or call your distributor and ask about his line of standard CV's and CVDC's.

Sola Electric Division, Sola Basic Industries, 1717 Busse Road, Elk Grove Village, Illinois 60007 (312) 439-2800.



Sola CVDC built to your output requirements


CUSTOM VOLTAGE REGULATION HEADQUARTERS

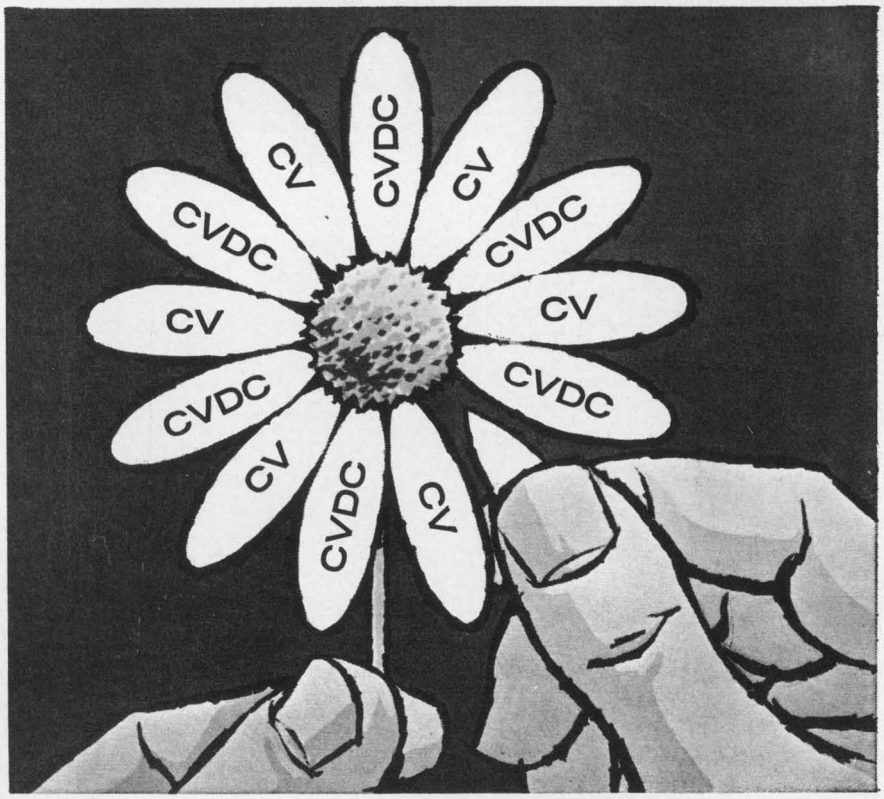

SOLA ELECTRIC SB
DIVISION OF SOLA BASIC INDUSTRIES

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 50

COMPONENTS—1ST FLOOR

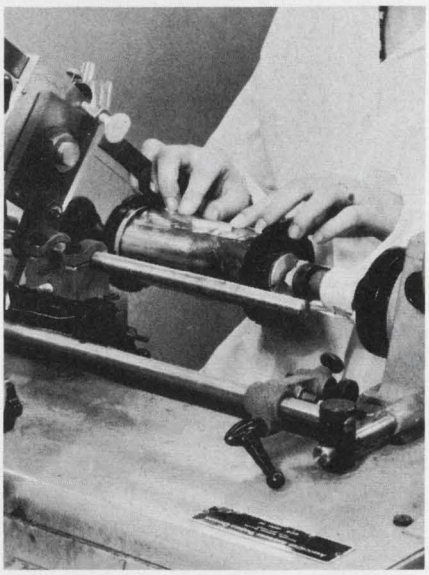

Superconductive ribbons

Two new commercial superconductive ribbons which offer high-field performance, increased current capability, greatly improved economies of application and superior mechanical strength in high-field magnets are available.

Designated RCA type SR-2100 and SR-2101 they have superior mechanical strength without heat treatment by the user. SR-2100 is recommended for windings that are subject to fields up to 75 k gauss. For use in higher-field regions RCA SR-2101 superconductive ribbon is recommended.

RCA Corp., 30 Rockefeller Plaza, New York, N. Y. Phone: (212) 689-7200.

SEE AT BOOTHS 1F04-10

Circle No. 638

Modified switch


The modified model 910 switch has two more terminals 3 pdt or 4 pst switching, while the overall dimensions remain the same as the predecessor 910 switch. Typical ratings are: 20 A, 1 hp @ 120 Vac; 2 hp @ 240 Vac. Higher ratings are available for special applications.

The switch is equipped with standard 1/4-in. spade terminals.

Hart Mfg. Co., 110 Bartholomew Ave., Hartford, Conn. Phone: (203) 525-3491.

SEE AT BOOTH 1B06

Circle No. 639

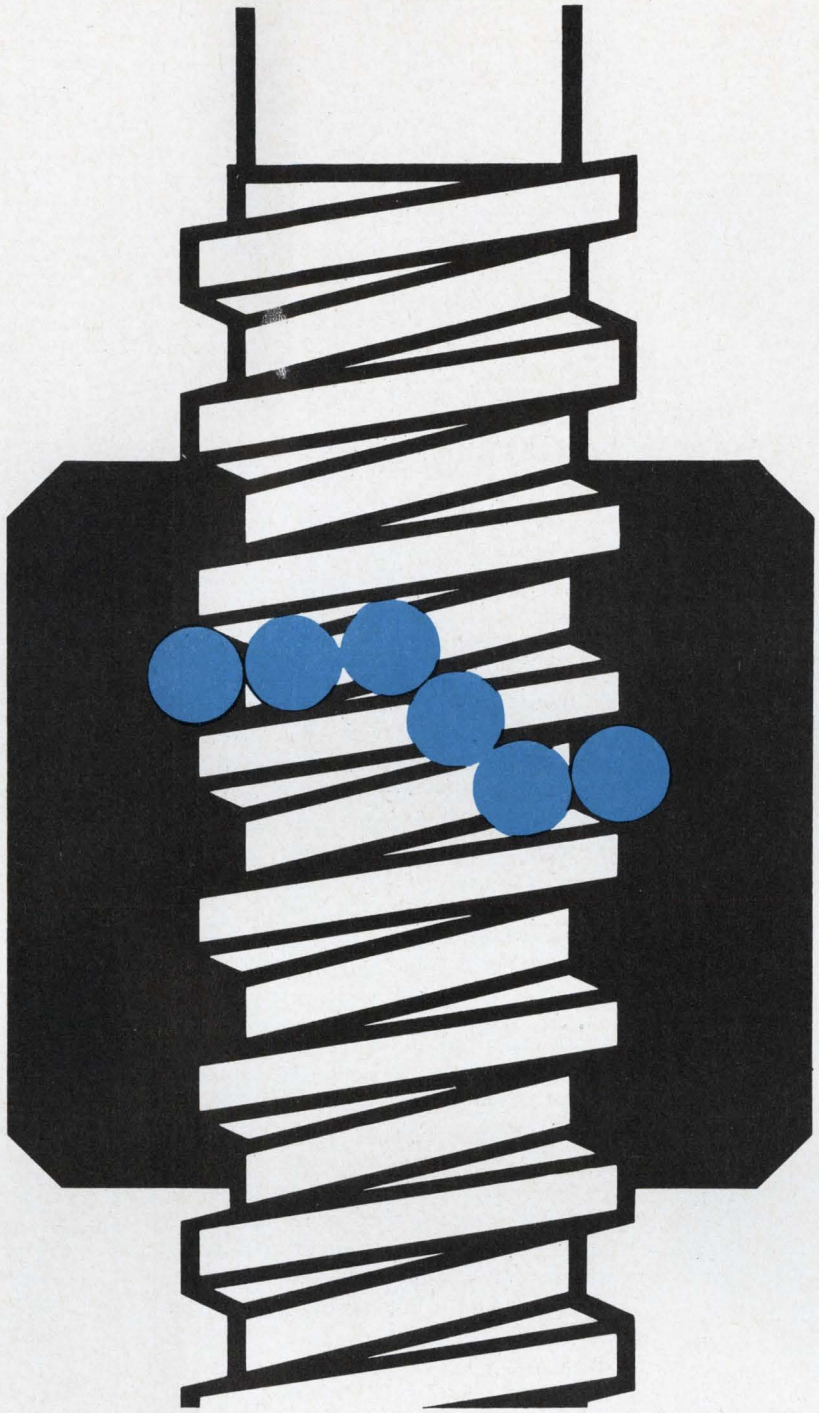

Kidde Ballscrews

FOR LIGHTWEIGHT, COMPACT TRANSFER OF MOTION AND POWER.


Design engineers anxious to hold down weight and size of power transfer units turn to Kidde. Highest precision and compact construction make Kidde Ballscrews ideal for use in computers, potentiometers, capacitors, scientific instruments, nuclear reactors, and inertial guidance packages in missiles and satellites.

Units feature almost complete frictionless action, and can be custom-made to any configuration to suit a particular application. Stock items in sizes from 3/16″ to 1/2″ are immediately available. For complete information on compact Kidde Ballscrews, write for your free copy of "Ballscrews and Mechanical Actuator Assemblies." Walter Kidde & Company, Inc., 374 Main Street, Belleville, New Jersey 07109; Northolt, England; Luneburg, Germany.

Kidde

ON READER-SERVICE CARD CIRCLE 51

Time indicator

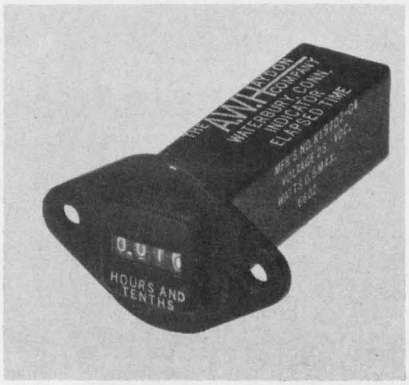

Two microminiature elapsed time indicators for operation on 28VDC, include model K19703 with a four digit counter providing a maximum of 9999 hours; K19702 has a four digit indicator for hours and tenths. Maximum readout is 999.9.


Timing accuracy is ±1 digit between −54°C and +85°C.

A. W. Haydon, 232 N. Elm st., Waterbury, Conn. Phone: (203) 756-4481.

SEE AT BOOTHS 1D07-11

Circle No. 366

50-1000 MHz amplifier

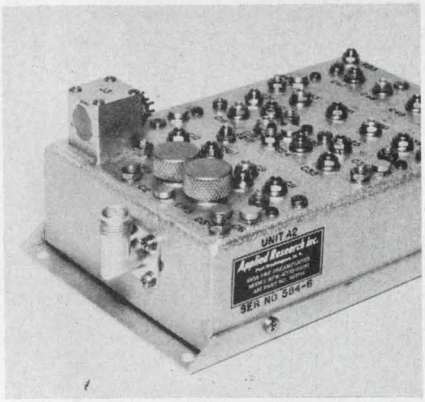

Available in three frequency bands (50 to 300, 250 to 500 to 1000 MHz), this line of high dynamic range transistor amplifiers offers octave bandwidths with low noise.


Gain is 18 to 22 dB (50 to 500 MHz), 15 dB (500 to 1000 MHz), (18 dB if the output pad is replaced by a circulator) and the peak-to-valley ratio is less than ±1 dB.

Applied Research Inc., 76 S. Bayles Ave., Port Washington, N. Y. Phone: (516) 767-8707.

SEE AT BOOTHS 1D31-33

Circle No. 367

S-band to vhf converter

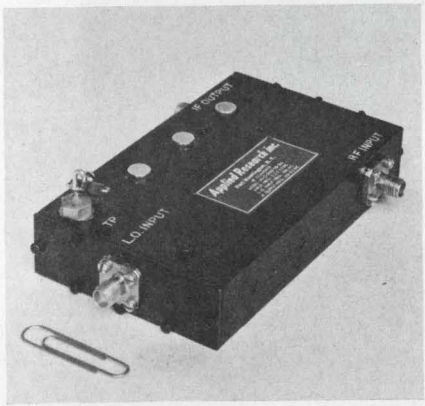

Model UHC-2250/100-265 is a down-converter which translates input signals in the 2200 to 2300 MHz telemetry band to the 215 to 315 MHz telemetry band.


Included within the package are the preselector, mixer, IF matching network and output filter. Minimum conversion loss is achieved by the use of a hot carrier diode.

Applied Research Inc., 76 S. Bayles Ave., Port Washington, N. Y. Phone: (516) 767-8707.

SEE AT BOOTHS 1D31-33

Circle No. 368

Bandreject filter

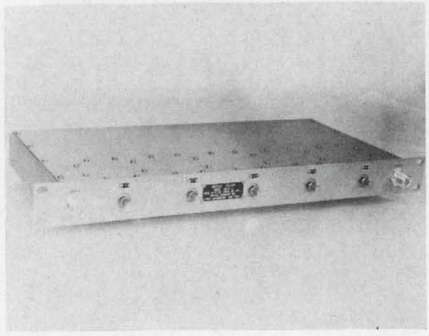

Model MN-69-5 filter is capable of operating over a wide frequency range. It provides high rejection at one frequency between 60 and 90 MHz as well as rejection to as mnay as five separate and independent frequencies within the same operating band.

The unit features single or multiple frequency rejection.

Applied Research Inc., 76 S. Bayle Ave., Port Washington, N. Y. Phone: (516) 767-8707.

SEE AT BOOTHS 1D31-33

Circle No. 369

Buy your ITT Red Caps from any of the following ITT authorized distributors

ALABAMA
Gulf Semiconductors, Inc.
(205) 881-7737

ARIZONA
Moltronics of Arizona
(602) 278-5531
R. V. Weatherford Company
(602) 943-1966

CALIFORNIA
Capacitors, Inc.
(213) 682-3541
Electronic Components, Inc.
(714) 232-8951
Fortune Electronics
(415) 826-8811
Hollywood Radio and Electronics
(415) 322-3431
Perlmuth Electronics
(213) 931-1041
Santa Monica Bell Electronics
(213) 321-5802
Wesco Electronics
(213) 795-9161

CONNECTICUT
Cramer Electronics
(203) 288-7771

FLORIDA
Cramer Electronics
(305) 566-7511
Gulf Semiconductors, Inc.
(305) 887-6541

ILLINOIS
Semiconductor Specialists, Inc.
(312) 622-8860

MARYLAND
D & H Distributing Company, Inc.
(301) 539-6525
Frontier Electronics, Inc.
(301) 427-3300

MASSACHUSETTS
Cramer Electronics, Inc.
(617) 969-7700
Greene-Shaw Company, Inc.
(617) 969-8900

MINNESOTA
D. F. Countryman & Company
(612) 645-9151
Semiconductor Specialists, Inc.
(612) 866-3434

MISSOURI
Olive Industrial Electronics
(314) 863-4051

NEW JERSEY
Eastern Radio Corporation
(201) 471-6600
General Radio Supply
(609) 964-8560
Valley Electronics
(609) 662-9337

NEW YORK
Arrow Electronics, Inc.
(516) 694-6800
Electronic Supply Corporation
(212) 478-4000
Harvey Radio Company, Inc.
(516) 921-8700
Milo Electronics
(213) 233-2980

NORTH CAROLINA
Southeastern Radio Supply
(919) 828-2311

OHIO
Alpine Industries, Inc.
(513) 278-5861
Pioneer Standard Electronics
(216) 432-0010

PENNSYLVANIA
Philadelphia Electronics
(215) 568-7444


TENNESSEE
Electra Distributing Company
(615) 255-8444

TEXAS
Beta Electronics, Inc.
(817) 277-2231
Contact Electronics
(214) 631-9530
McNicol, Inc.
(915) 566-2936

VIRGINIA
Meridian Electronics
(703) 353-6648

CANADA
Prelco Electronics, LTD
(514) 389-8051

ITT

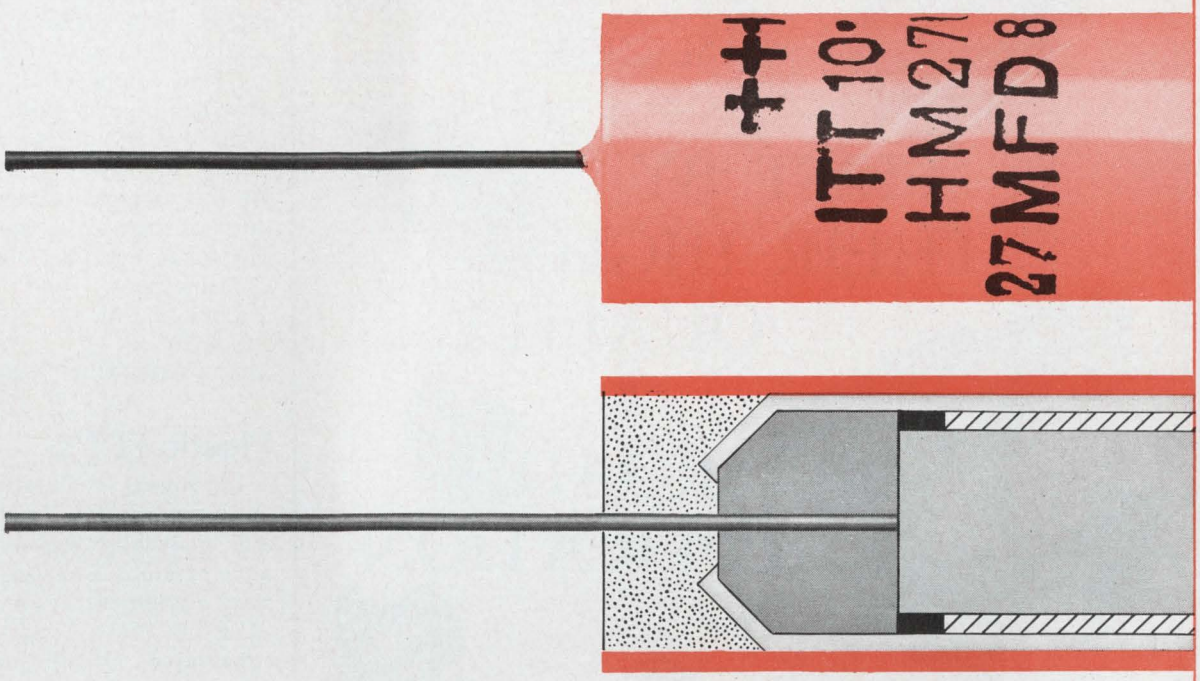

Why ITT wet tantalum capacitors can't leak


Every ITT Red Cap® wet tantalum capacitor gets a "total stress" seal that, unlike the ordinary single-crimp seal, positively prevents electrolyte leakage. To accomplish this, ITT inserts a teflon end seal, then spins down the open end of the can until end seal, anode and insulating washer are under a predetermined compressive force.

Seal integrity is further insured by the addition of an epoxy end fill. Since the epoxy's expansion coefficient is less than that of the can, temperature cycling cannot relax the spun seal.


If you're tired of electrolyte leaks and the problems that go with them, here's an easy solution. Order the ones that can't leak — the Red Caps® — from your ITT Capacitor distributor or from ITT Semiconductors, 3301 Electronics Way, West Palm Beach, Florida.

ITT


ON READER-SERVICE CARD CIRCLE 52



DISCRIMINATING ENGINEERS ARE AMAZED...



FIRST BY THEIR HIGH QUALITY & BROAD APPLICATION

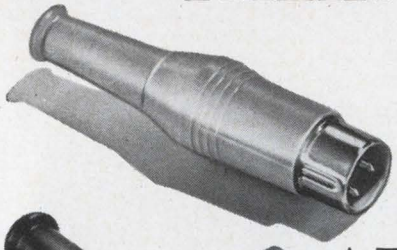








...THEN BY THE LOW COST



SWITCHCRAFT INC.® Preh*

2 TO 7 CONTACT LOW-LEVEL AUDIO CONNECTORS

FITS IN WITH TODAY'S TREND IN MINIATURIZATION
Excellence throughout, low cost, wide variety of types and broad range of standard and optional features call-up practical and economical solutions to many design and cost-control problems in low level connections . . . particularly where miniaturization is a design consideration.

OVER 90 CIRCUIT-TAILORED TYPES
Includes male and female plugs and receptacles from 2 to 7 contacts, in nickel-plated shells, or snap-on plastic shells. 13 different receptacles offer some form of internal switching (SPST, SPDT in addition to mating of contact circuits . . . in some instances eliminating need for external switches! Silver plated pins for low contact resistance. Exclusive "automatic" grounding and fool-proof polarization provisions. Contact friction coupling for minimal mechanical interference noise; lockring coupling for reliability where vibration is a factor. Ingenious 8-position right-angle plug enables you to position cable entry in any of 8 different angles. Etc., etc. Rugged and versatile . . . yet they cost surprisingly little.

APPLICATIONS LIMITED ONLY BY YOUR IMAGINATION!
Virtually unlimited commercial, industrial, consumer and military applications in any type of low level circuitry: audio and test equipment, instruments, computers, cameras, control devices, communications equipment and business machines. Receptacles for flush, extended, P.C. board, screw and rivet type mounting; straight cord, 90° angle; control and switching plugs: many others.

SEND FOR THE NEW COMPREHENSIVE ENGINEERING SPECIFICATION
CATALOG NO. C-503 or see your local Switchcraft Authorized Industrial Distributor . . . he has units for your inspection, and can make immediate delivery at factory prices.

20 1946-1966

SWITCHCRAFT INC.®
5529 No. Elston Ave., Chicago, Illinois 60630

* Preh is a trademark of Preh Electromechanical Works, Bavaria, Germany

SEE IT AT IEEE — BOOTH 2H29-2H31

ON READER-SERVICE CARD CIRCLE 53

COMPONENTS—1ST FLOOR

3 ampere rectifier

This 3 A axial lead rectifier offers: high surge current ratings and rugged construction.

The seven device types (1N4719-1N4725) display typical ratings of peak reverse voltage, 50 up to 1000 volts; average forward current 75°C 3 amperes; average forward current 125°C, 1.5 amperes; 1 cycle surge current, 300 amperes.

Transitron, 168 Albion St., Wakefield, Mass. Phone: (617) 245-4500.

SEE AT BOOTH 1B03-11

Circle No. 655

Plastic FET's

Improved sensitivity, reduced cross-modulation, reduced noise, and generally improved performance of much consumer and industrial equipment is claimed for the SILECT FETs. These plastic-encapsulated, silicon junction units are available as n-channel (2N3819) and TIS34) and p-channel 2N3820) devices.

Applications include AM/FM tuners; mixers; low-, and high-frequency amplifiers; and digital applications. Low-cost matched pairs for FET complementary circuits or differential amplifiers can be obtained by clamping matched units together. N = channel g_m is 2000-65000 μmhos at 1 kHz (4000 μmhos min for the TIS23) and 1900 min. at 100 MHz. p-channel g_m is 800-5000 μmhos at 1 kHz, and 700 min at 10 MHz. C_{ss} is 4 pF.

Texas Instr. Inc., 13500 N. Central Expwy., Dallas, Tex. Phone: (214) 235-3111.

SEE AT BOOTH 1D13-25

Circle No. 364


3-dB hybrid couplers

A group of microwave components is being shown. They include: 3-dB hybrid couplers—broadband coaxial devices for applications requiring two signals equal in power but 90° out of phase. Continuous frequency coverage from 0.2 to 8.0 GHz and a hgh frequency instrument load for a 50 ohm coax line up to 18 GHz.

Alford Mfg. Co., 299 Atlantic Ave., Boston, Mass. Phone: (617) 426-2150.

SEE AT BOOTH 1E18

Circle No. 365

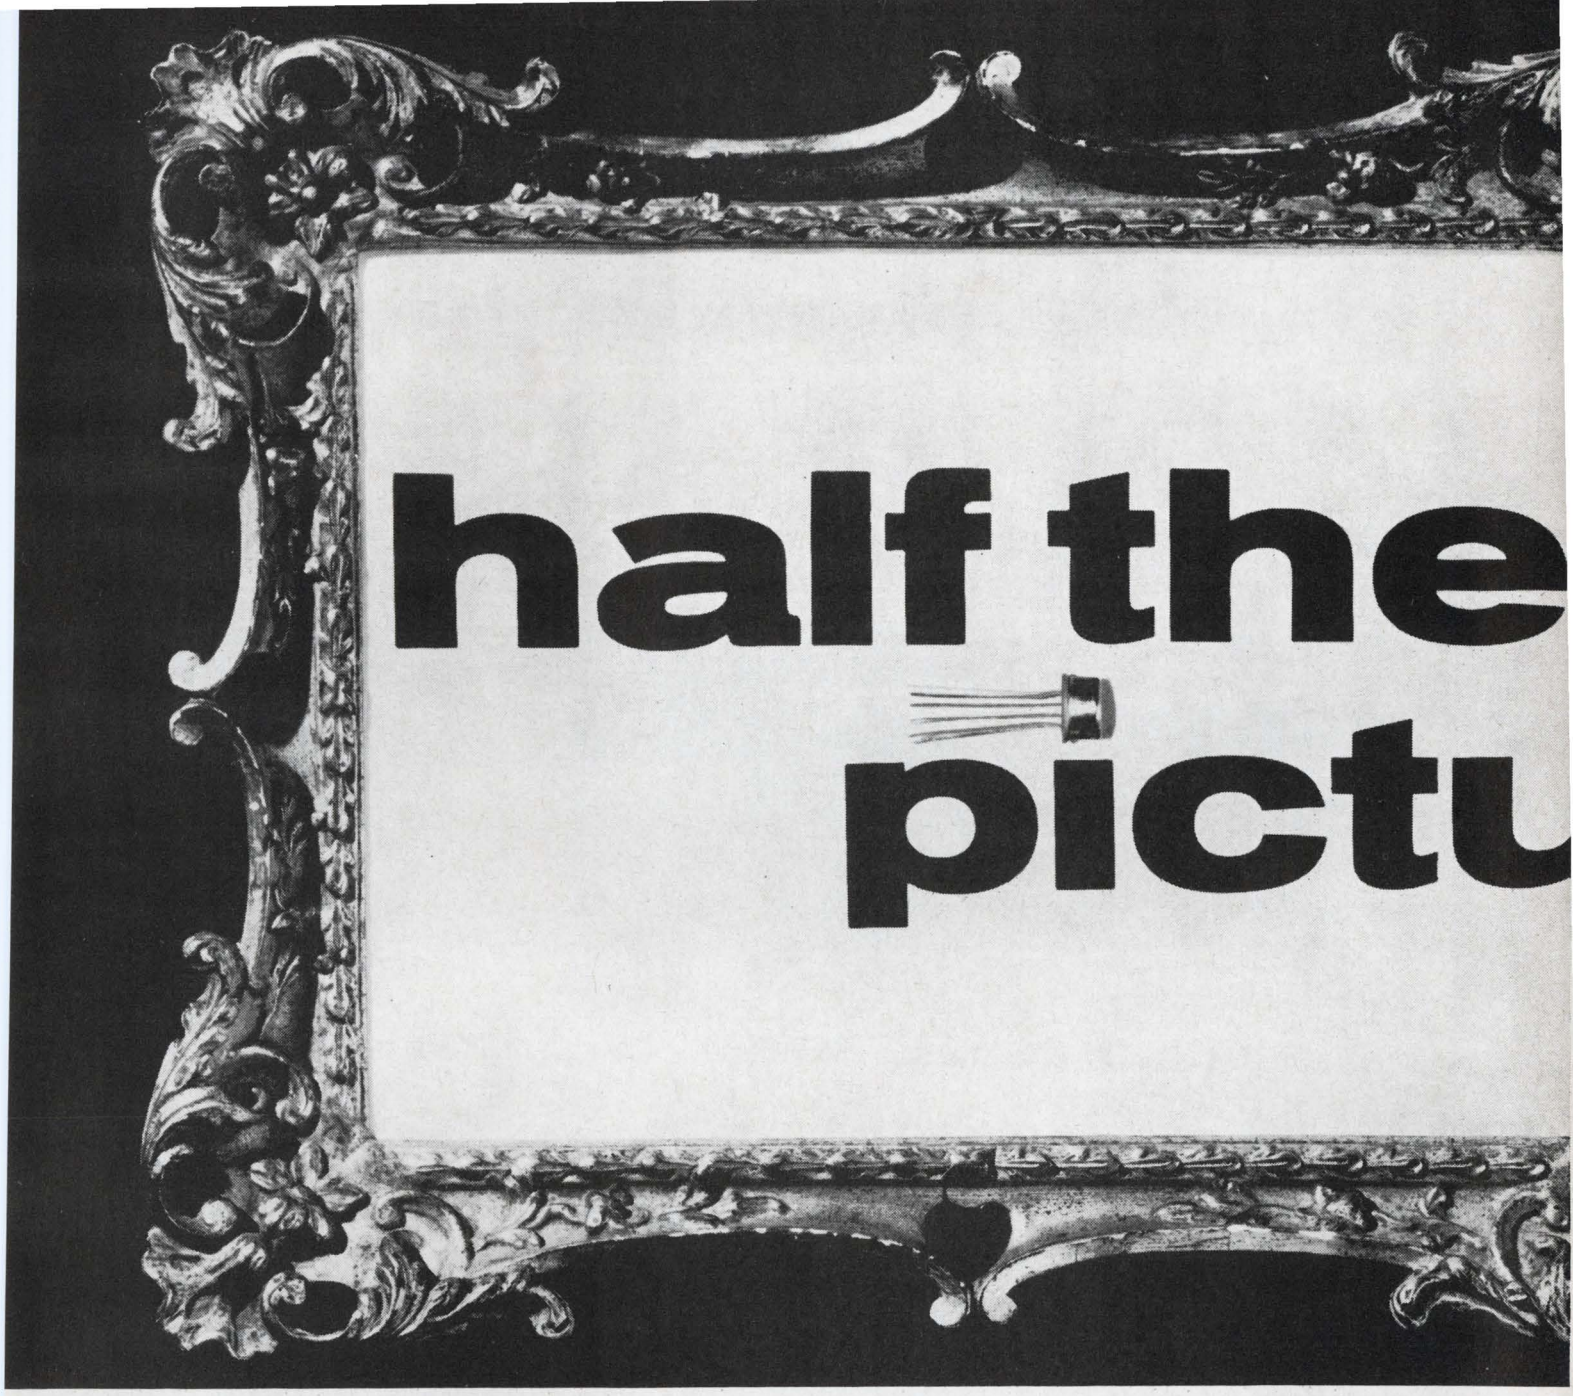

When you look at electronic components are you seeing only half the picture?

We're the last people to argue with component purchasers who put performance, price and delivery first — meeting these three basic requirements is what keeps us in business. But most engineers are also on the lookout for something more, and many of them find it at Mullard.

Take research and development for instance. Out of Mullard R&D have come outstanding devices such as the travelling wave tubes for the New York — San Francisco and Montreal — Vancouver microwave links. Production resources? Mullard plants are among the most efficient anywhere, with a reputation for the production of tight-tolerance devices to proved standards of reliability. As for circuit know-how, Mullard has the best equipped applications laboratories in Britain. And when it comes to technical services, you will find that Mullard provides the kind of comprehensive performance specs, survey documents and application reports that are just that much more useful.

If you want to get the *whole* picture, why not ask us to help you with some of your component problems?

ON READER-SERVICE CARD CIRCLE 228


DIODES · TRANSISTORS · PHOTO-DEVICES AND RADIATION DETECTORS · RECTIFIER DIODES AND STACKS · THYRISTORS AND STACKS · INTEGRATED CIRCUITS · CATHODE RAY TUBES · RECEIVING TUBES · ELECTRON OPTICAL DEVICES · PHOTOSENSITIVE DEVICES · COLD CATHODE DEVICES · POWER DEVICES · TRANSMITTING TUBES · MICROWAVE DEVICES · CAPACITORS · FERRITE MATERIALS AND ASSEMBLIES · COMPUTER COMPONENTS AND ASSEMBLIES · MAGNETIC MATERIALS · SPECIAL PURPOSE MAGNETS · VACUUM DEVICES · WOUND COMPONENTS.

Mullard


where the product is only part of the deal

MULLARD LIMITED · TORRINGTON PLACE · LONDON WC1 · ENGLAND

HAVING
FREQUENCY
PROBLEMS?

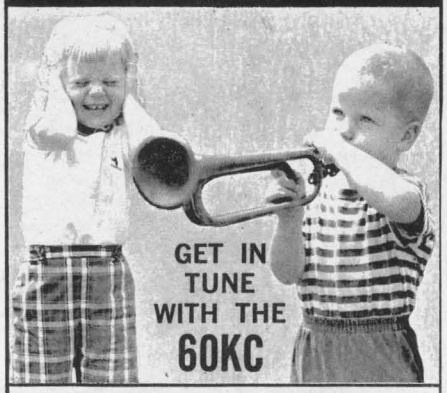

PHASE COMPARATOR
RECEIVER

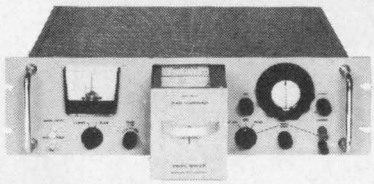

Low Cost • Easy to Operate • Accurate

The Model SR-60 is the *first* low cost VLF Phase Comparison Receiver designed to permit phase comparison measurements between a local oscillator and the National Bureau of Standards transmitted 60 Kc/s from WWVB, Fort Collins, Colorado. The receiver is a straight-forward Tuned Radio Frequency receiver and can be used in any location in the United States with highly satisfactory results.

The SR-60 permits accuracy measurements to parts in 10^{10} with relative short measurements. Phase difference is displayed on a front panel meter or on a strip chart when more precise measurements are made over a long period of time.

Antenna input through a specially designed antenna coupler is made from the rear chassis. The antenna coupler allows the use of a high impedance antenna. Provisions are made to tune the coupler for any antenna. Connections are also available for scope monitoring the incoming signal (output of RF Amplifiers) the multiplied RF carrier signal and the multiplied (or divided) local oscillator signal.

PRICE: $850.00

Write, wire or phone for complete catalog information.

Specialists in Frequency Management


SPECIFIC PRODUCTS

P.O. BOX 425
21051 COSTANSO STREET
WOODLAND HILLS, CALIFORNIA
AREA CODE: 213 340-3131

SEE OUR SPECIFICATIONS IN VSMF MICROFILM CATALOG FILE

ON READER-SERVICE CARD CIRCLE 54

Frequency multiplier

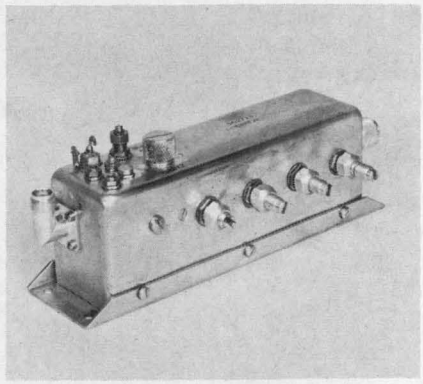

Model VM-2250/100-10, uses the newest snap-action diodes for s-band telemetry multiplying.


An instantaneous bandpass of the full 2200 to 2300 MHz telemetry band is supplied, thus eliminating the need for any returning input frequency. Power is 100 mW, and multiplication ratio is 10:1. Spurious rejection is 50 dB.

Applied Research Inc., 76 S. Bayles Ave., Port Washington, N. Y. Phone: (516) 767-8707.

SEE AT BOOTHS 1D31-33

Circle No. 396

Coax connector

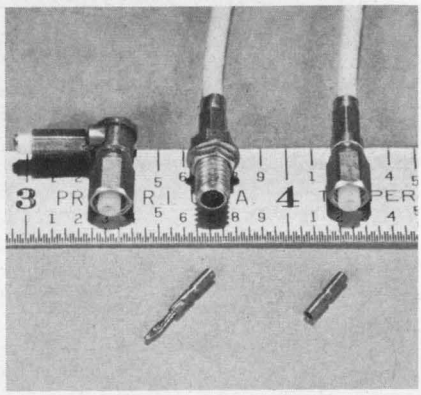

Half the size of standard microminiature coaxial connectors, this new ultraminiature connector has an outside body diameter of only 1/8-in.


It features the new twist/con pin and socket producing high reliability and continuity. The size enables low level noise equipment to be designed into smaller packages.

Microdot Inc., 220 Pasadena Ave., So. Pasadena, Calif. Phone: (213) 682-3351.

SEE AT BOOTHS 1B08-10

Circle No. 397

Coax attenuators

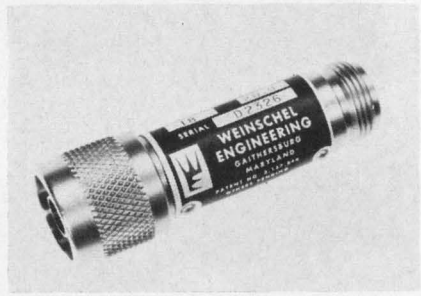

The models 1 and 2 coax attenuators broaden the range of applications for coaxial systems—including use of the 12.4 to 18.0 GHz, band usually reserved for waveguide. Both models applicable where isolation between RF components is needed. The attenuators can also be used in the calibration of directional couplers, antenna characteristics, and in the simulation of path losses.

Weinschel Engineering, Gaithersburgh, Md. Phone: (301) 948-3434.

SEE AT BOOTH M-14

Circle No. 398

Plastic power transistors

This new npn planar device, types TIP 14, is designed especially for cost critical industrial and consumer application. The low-profile, double-ended plastic package incorporates a mounting tab for simplified assembly. The transistor can be mounted on chassis or heat sink with a single self-tapping screw. CE (sat) = 0.1 typical at 200 mA).

Texas Instr., Inc., 13500 N. Central Expwy., Dallas, Texas. Phone: (214) 235-3111.

SEE AT BOOTHS 1D13-25

Circle No. 399

Elapsed time indicators

The 42200 series of ac elapsed time indicators is for industrial and commercial use. They indicate time for lubrication, overhaul, recalibration, or what-have-you on any electrical equipment.


Standard models in three configurations for 50 or 60 Hz operation between 6 and 230 V have six-place digital readouts in hours, tenths, minutes, tenths, and seconds.

A. W. Haydon, Waterbury, Conn., Phone: (203) 756-4481.

SEE AT BOOTH 1D07

Circle No. 357

NEED A SUPPLIER WHO MAKES RELIABLE REED SWITCHES AND RELAYS?

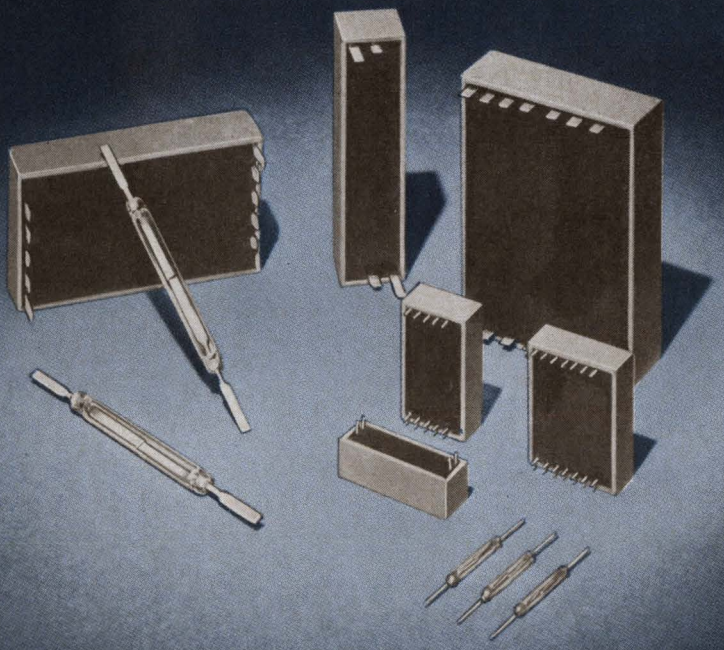

RBM CONTROLS IS DOING IT NOW!

(we call them Bi-Reeds®)

We make the complete switch—with automatic equipment in white room facilities for consistent characteristics and reliability. We assemble these unexcelled switches into relay packages. This single source responsibility means total reliability for you. Numerous pole forms are available—miniature or standard switches or relays.

Ask Your Local RBM CONTROLS Sales Engineer for Special Reports Relative to Your Application.

RBM CONTROLS

Serving Major Markets Since 1921

RBM CONTROLS


Division Essex Wire Corporation
Logansport, Indiana


RBM
STANDARD CONTROLS
ARE AVAILABLE FROM YOUR
ELECTRONIC PARTS DISTRIBUTORS

SEE US AT THE IEEE SHOW BOOTH 2H35

ON READER-SERVICE CARD CIRCLE 55

NEW LOW-COST
UCINITE PRESS-IN TEST JACKS

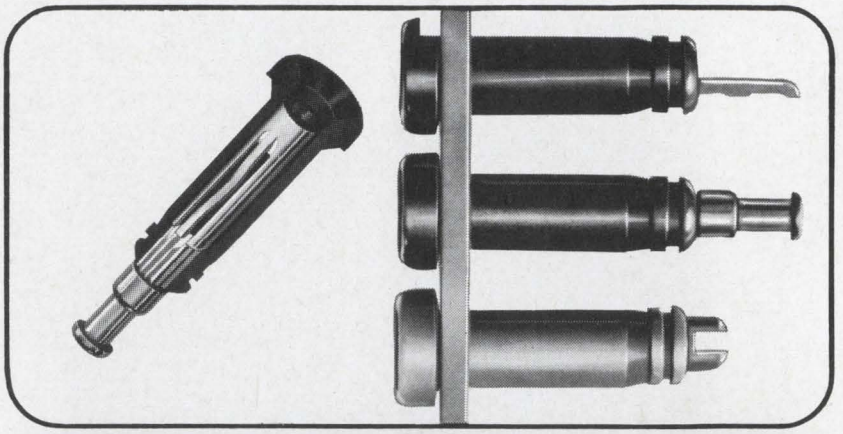

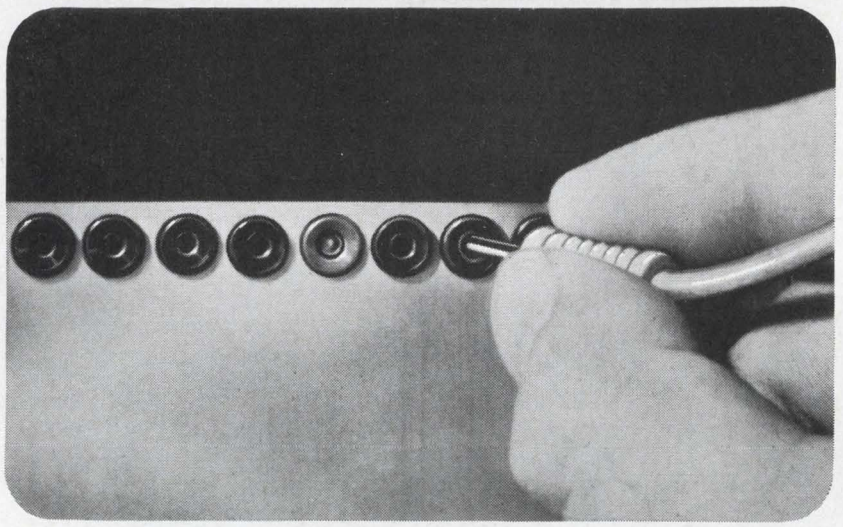

Now Ucinite offers you press-in test jacks for high-density, low-weight applications. Using nylon insulators available in 11 colors, these new test jacks have stamped or screw-machined closed-entry, beryllium-copper contacts that meet the performance requirements of MS-16108. They are available in a variety of terminal styles, and finishes. For complete details write for Bulletin 7072.

In addition to these new press-in test jacks, Ucinite manufactures conventional test jacks, banana plugs and jacks, switches, communications plugs and jacks, patch cords, magnetron connectors, anode connectors, and other electromechanical products. Write for further information.

OFF-THE-SHELF DELIVERY THROUGH THESE UCINITE DISTRIBUTORS

EAST: R & D Supply, Inc., Needham, Mass.; Alisco Company, Garden City, N. Y.; Alpha Electronic Services, Pennsauken, N. J.; Reed Electronic Sales Corp., Rochester, N. Y.; Ack Radio Supply Co., Inc., 554 Deering Road, Atlanta, Ga.

MIDWEST: W. M. Pattison Supply Company, Cleveland, O.; Alisco Company, Chicago, Ill.; Target Sales Corporation, St. Louis, Mo.; Contact Electronics, Inc., Dallas, Texas.

WEST: Waco Electronics, Denver, Colo.; Western Electromotive, Inc., Culver City, Calif.; Fisher Switches, Inc., Palo Alto, Calif.; Farwest Electronics, Inc., Bellevue, Wash.

The Ucinite Company, Division of United-Carr Incorporated, Newtonville, Mass. 02160.


DOT

UCINITE

DIVISION OF UNITED-CARR

Visit our booth #2W05-06 at IEEE.

ON READER-SERVICE CARD CIRCLE 56

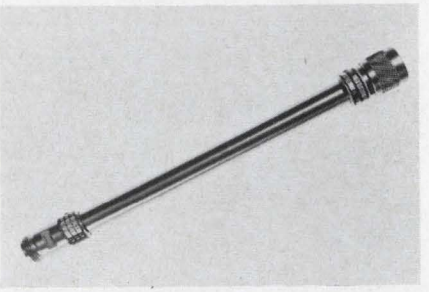

Coax attenuators

Series 210A precision attenuators are made with film resistors which are artificially aged to give maximum stability under, peak pulse power and extreme temperature and humidity cycling to comply with MIL-A-3933A. For maximum life with minimum wear, stainless steel barrels and connectors are featured.

Reliable mating of connectors is assured by holding closer tolerances on critical inside dimensions than NBS or MIL specs. Each attenuator is coded with RETMA color-coding for easy identification of values. As an example, a 3 dB attenuator is banded with an orange nameplate and a 20 dB attenuator is banded with a red and black nameplate. Each attenuator is supplied with a certificate of calibration of stated accuracy giving insertion loss and vswr test data fully guaranteed for the attenuator at four frequencies.

Availability: 60-90 days. Weinschel Engineering, Gaithersburg, Md. Phone: (301) 948-3434.

SEE AT BOOTH M-14

Circle No. 370

Heliax elliptical


A long length flexible elliptical waveguide has attenuation equal to or lower than conventional rigid rectangular waveguide. Small Heliax elliptical waveguide eliminates the numerous bends, twists and other special configurations, the overall cost of an installation is less than half that of a conventional system.

P&A: $2.80-$6.00/ft. $32-$112 for connectors; 2-4 wks. Andrew Corp., Box 807, Chicago, Ill. Phone: (312) 349-3300.

SEE AT BOOTHS 1F12-14

Circle No. 395

ON READER-SERVICE CARD CIRCLE 247 ➤

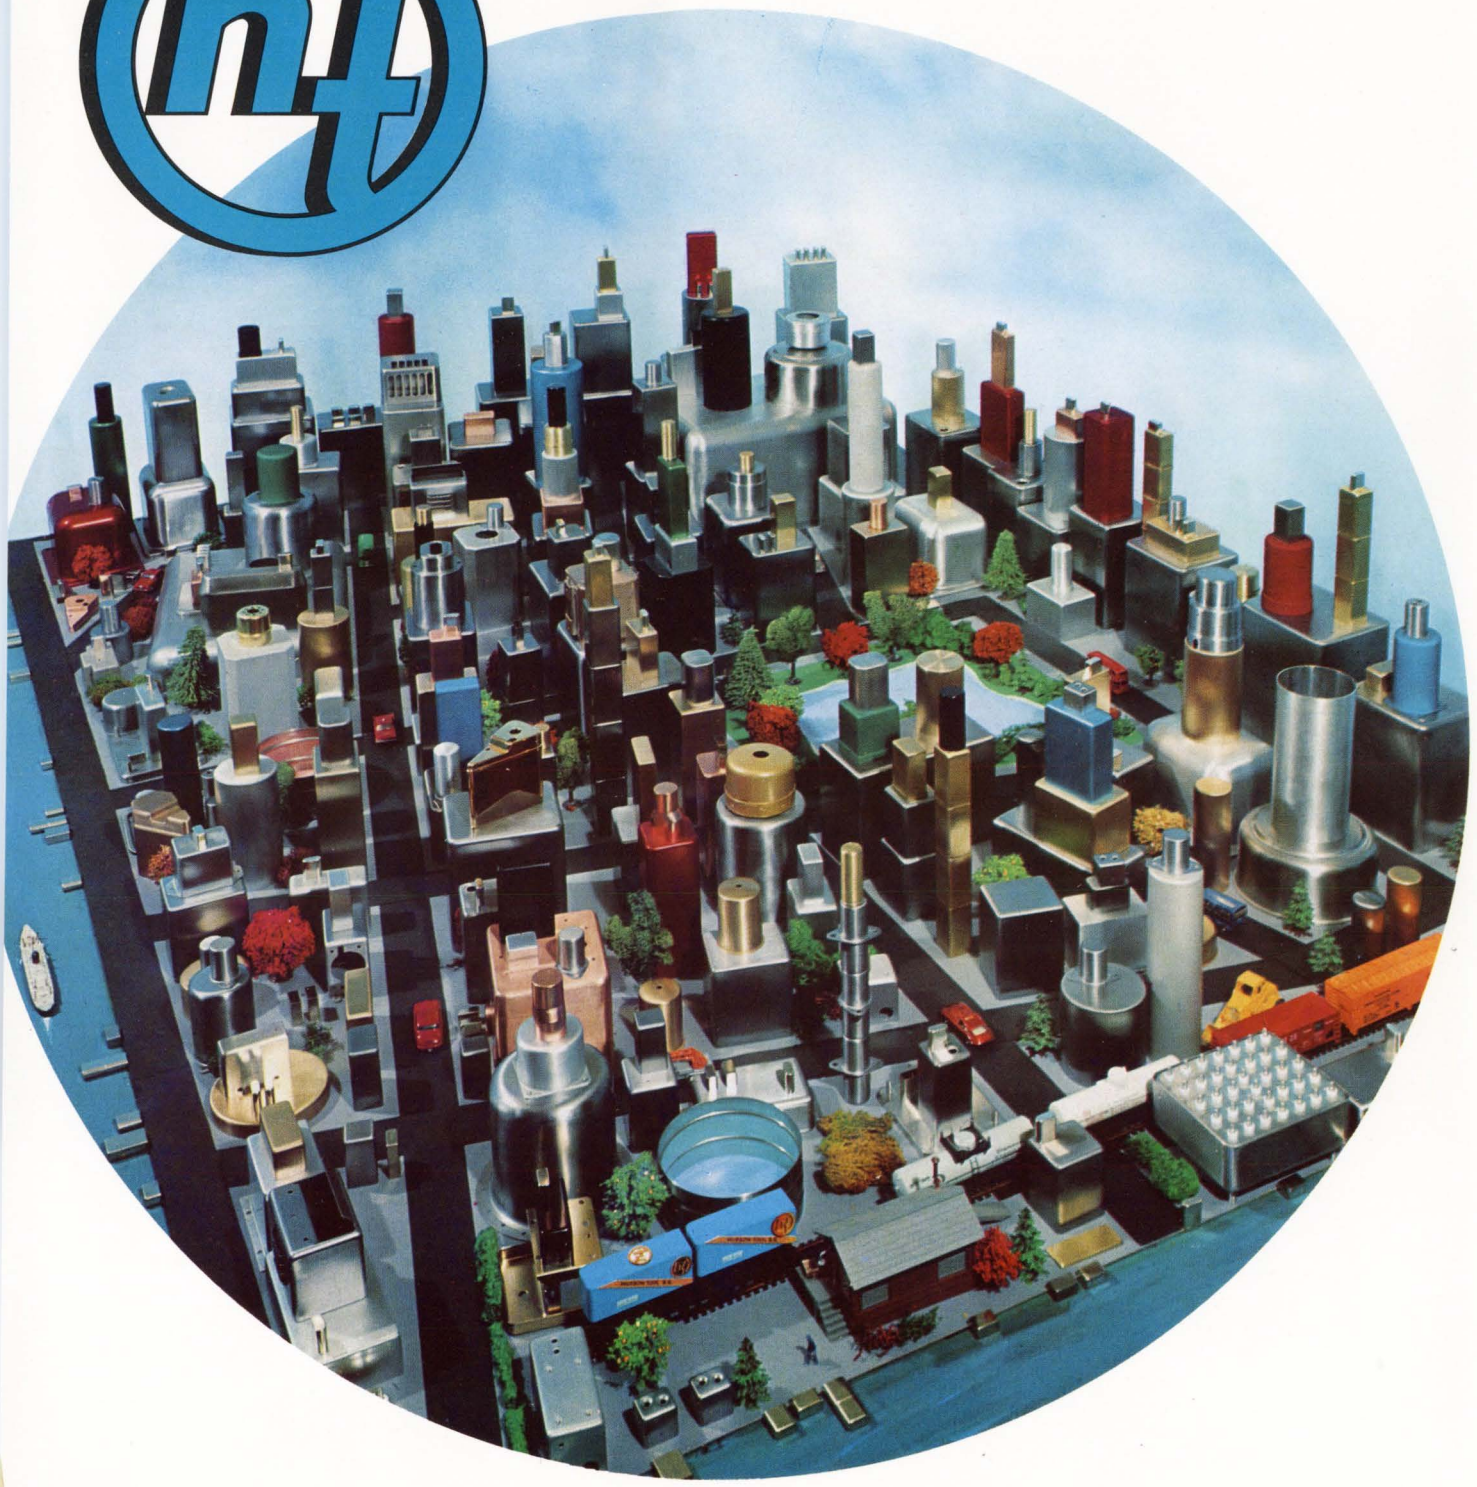


HUDSON'S ELECTRI-CITY... U.S.A.

During the past 25 years, our community has grown into a fully developed metropolis, populated by the nation's leading "electri-citizens". Some of our prominent families like the Relays, the Transformers and the Filters have been conducting business in our custom-built "standard" models for years.

The current census report includes over 5,000 varied shape units in every size and building material, available for immediate occupancy.

With Hudson's construction "know-how", you'll find housing costs at an absolute minimum so that moving into a precision built efficiency model is quite economical.

Looking at our city, you can see we appreciate individuality. So, if you don't see precisely what you want, Hudson will build it to your exact specifications . . . after all, this is how Hudson's Electri-City came to be.

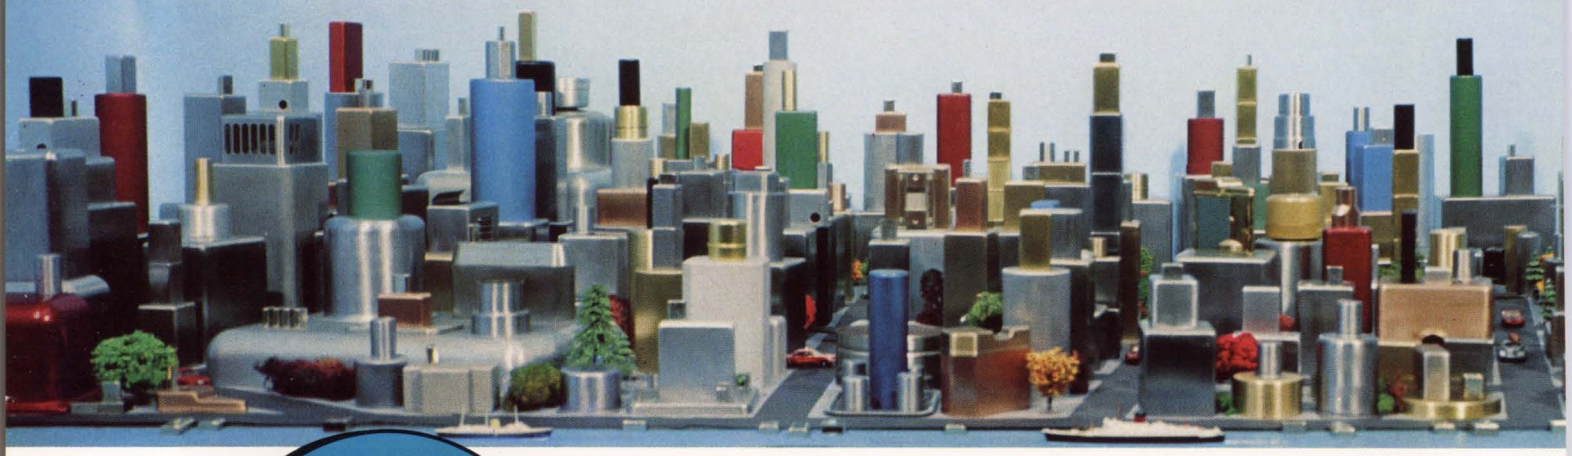


HUDSON

TOOL & DIE COMPANY, INC.

Enclosures, Stampings and Assemblies

NEWARK, NEW JERSEY — U. S. A.

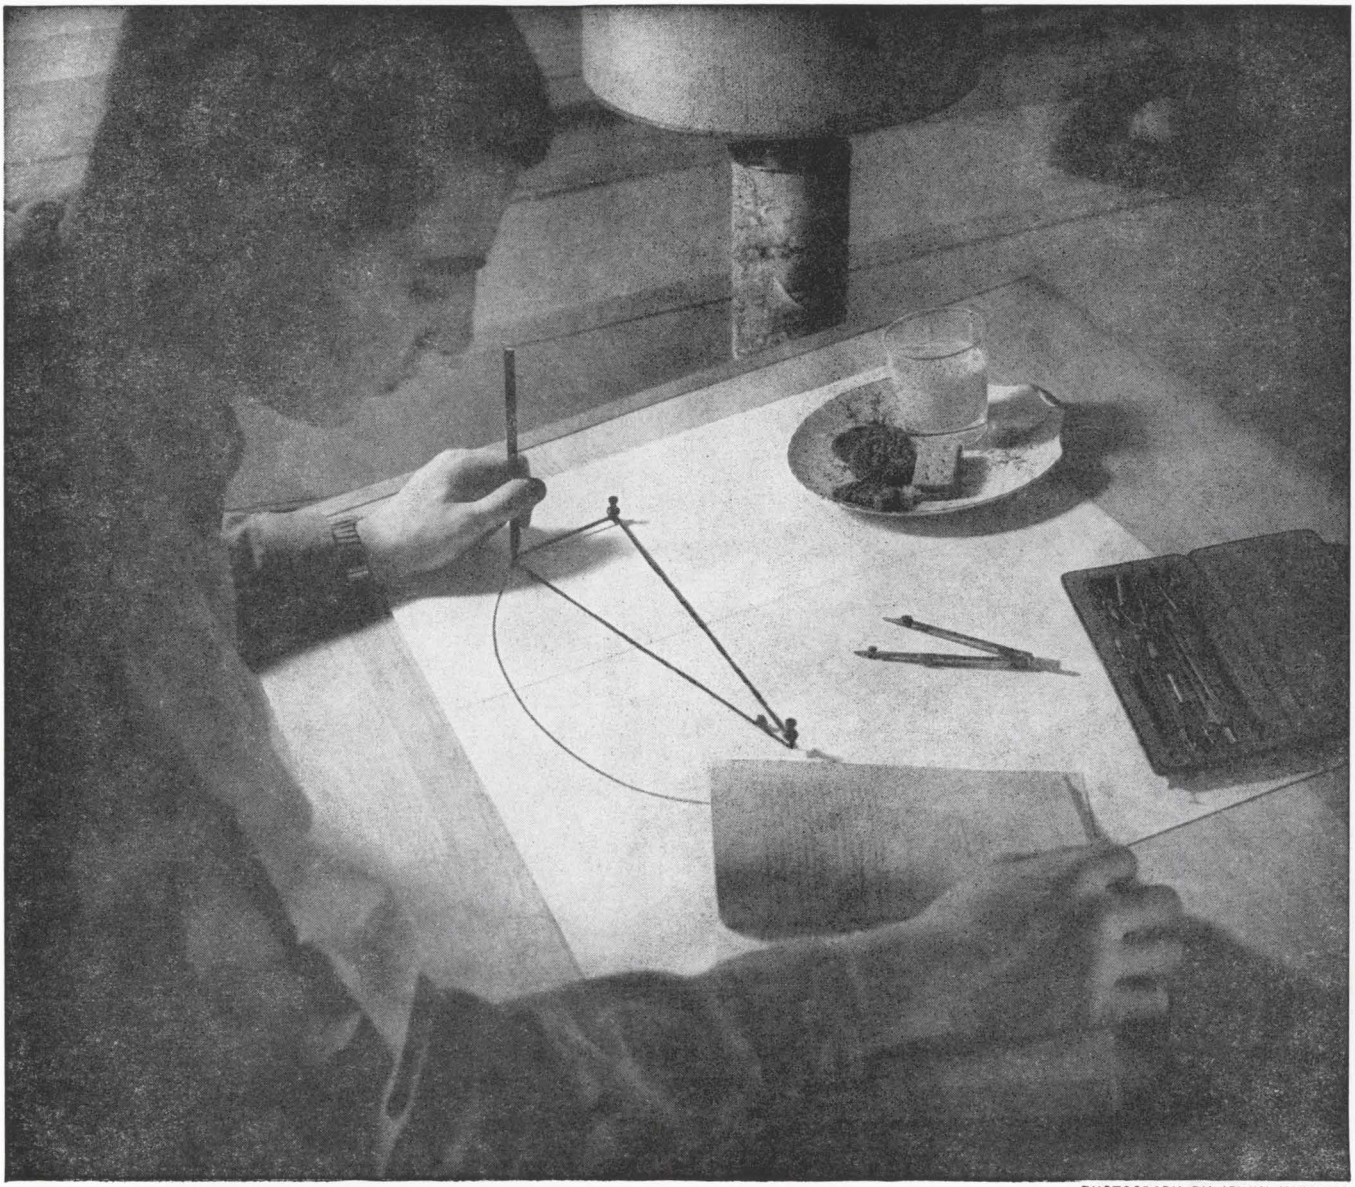

PHOTOGRAPH BY IRWIN KARNICK

How do you construct an engineer?

An awakening to ideas known since Euclid... a gifted teacher... a friendly engineer, speaking casually of the mighty wonders of modern technology. All it takes to point a promising youngster toward a career is a tiny intellectual push, just a particle of genuine enthusiasm.

This is how the Junior Engineering Technical Society builds engineers. Men who love their profession carry enlightenment and enthusiasm to the young... and the love comes back increased a thousand-fold. The engineer works with the youth of his community, the industrialist supports his efforts, and the resolve that builds engineers is born.

Help bring the wonder of modern science and technology to the high school student. Form a JETS chapter in your local high school. Support your community's program and your society's efforts with active participation and financial help. *Give a little, and get a lot.*

THE JUNIOR ENGINEERING TECHNICAL SOCIETY


United Engineering Center, 345 East 47th Street, New York 17, New York

JETS

JETS — A non-profit technical society dedicated to fostering the development of America's most vital natural resource — our youth.

HONEYWELL

MICRO SWITCH Precision Switches

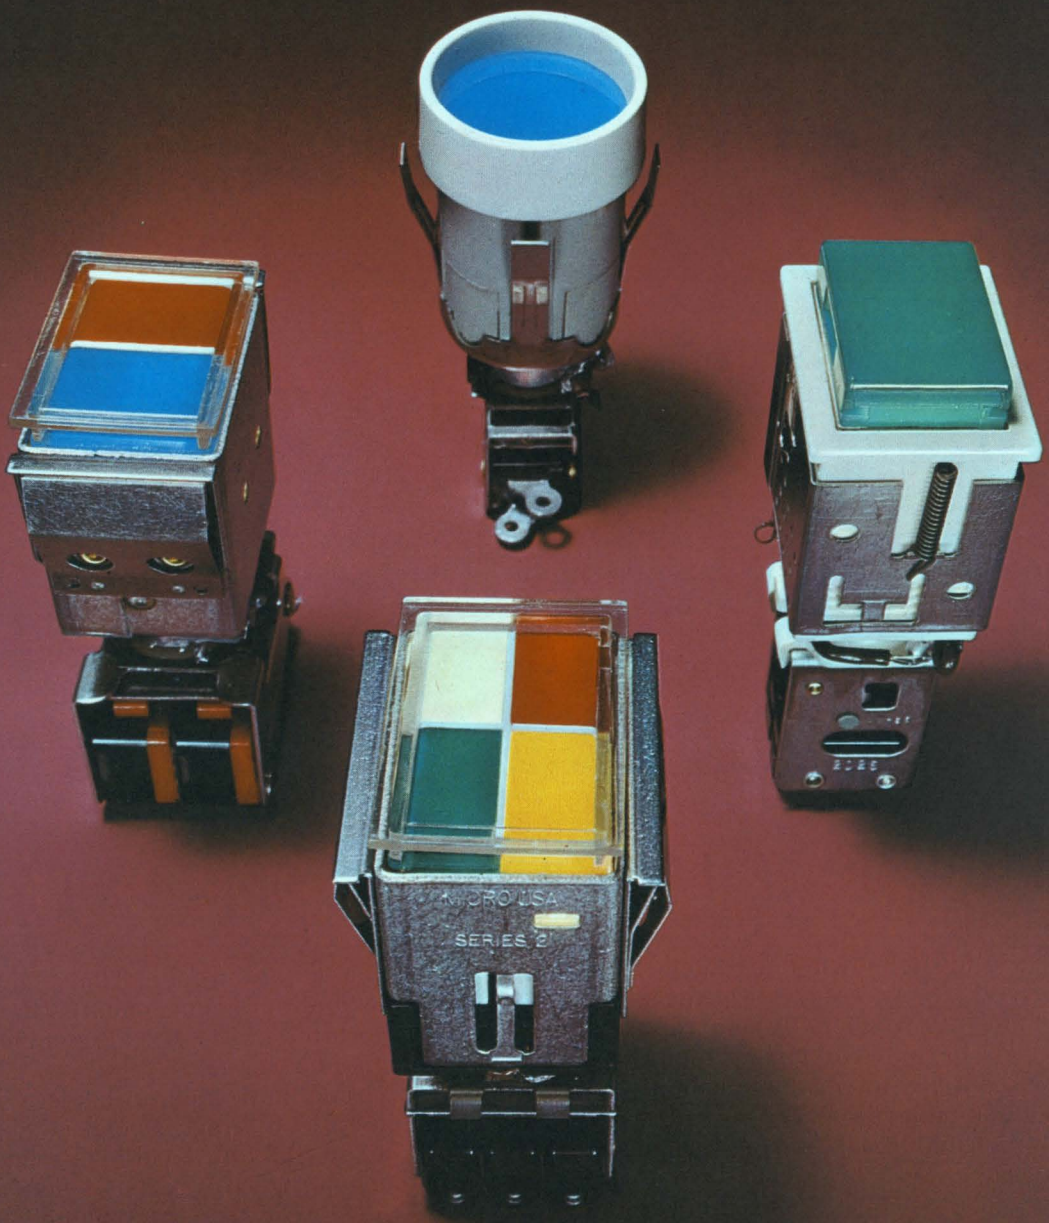

How to make sure you are not in the dark on the latest in Lighted Pushbutton Switches

Take a new look into the complete line available from MICRO SWITCH.


Ever since MICRO SWITCH introduced the first modular pushbutton switch with lighted legends, the line has been expanding. New modules, new assemblies, new ideas now offer you more opportunities to work out custom answers to today's panel requirements.

In addition to the popular Series 2 which started the modular trend, the line now includes Series 2N and Series 2C200. All three offer unequalled freedom of design—in sheer number of possible control and display combinations—in ease of installation—and in panel appearance.


MICRO SWITCH gives you another bonus: application experience. Our specially trained field engineers will be glad to discuss your requirements. They are backed by the industry's most elaborate research and development facilities.

For information, contact a Branch Office or Distributor (see Yellow Pages, under "Switches, Electric") or write for literature.

MICRO SWITCH—the line providing unequalled freedom of design with all this versatility



Series 2 offers both rectangular and round display, permitting shape-coding of stations or group functions. Snap-in mounting. Solenoid pull-in and/or hold-in coil for remote control.



Series 2C200. Snap-in mounting. Relamp without tools. Available with RFI shield, and solenoid pull-in or hold-in coil for remote control.



Series 2N. Shock-resistant spring-lock mounting. Hold-in coil. Relamp without tools. Molded-color housings.

in BUTTONS—Choice of 1, 2, 3, or 4-section buttons.

in COLOR—Wide selection of transmitted and projected (filtered) color schemes, and 1 to 4 lamps for up to 4-color display.

in CIRCUITRY—Up to 4-pole double-throw and 2-circuit double-break contact arrangements.

in RATINGS—Wide selection of modules for handling low energy to heavy duty electrical loads.


in WIRING—Solder, screw or quick connect wiring terminations.

in MOUNTING—Snap-in flange and barrier mountings or spring-lock panel attachment.


in REMOTE CONTROL—Only MICRO SWITCH has both remote actuation and release of switching contacts.

MICRO SWITCH
FREEPORT, ILLINOIS 61032
A DIVISION OF HONEYWELL

HONEYWELL INTERNATIONAL – Sales and service offices in all principal cities of the world. Manufacturing in United States, United Kingdom, Canada, Netherlands, Germany. France, Japan.

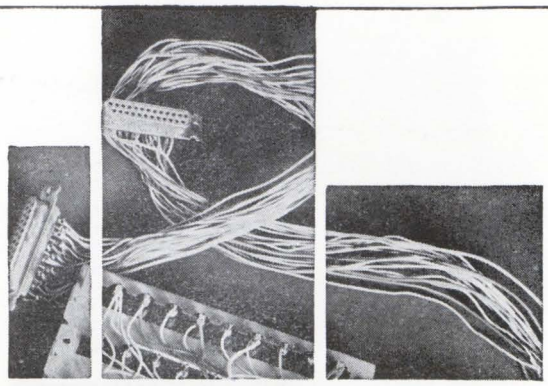

Don't let the high cost of spaghetti choke you

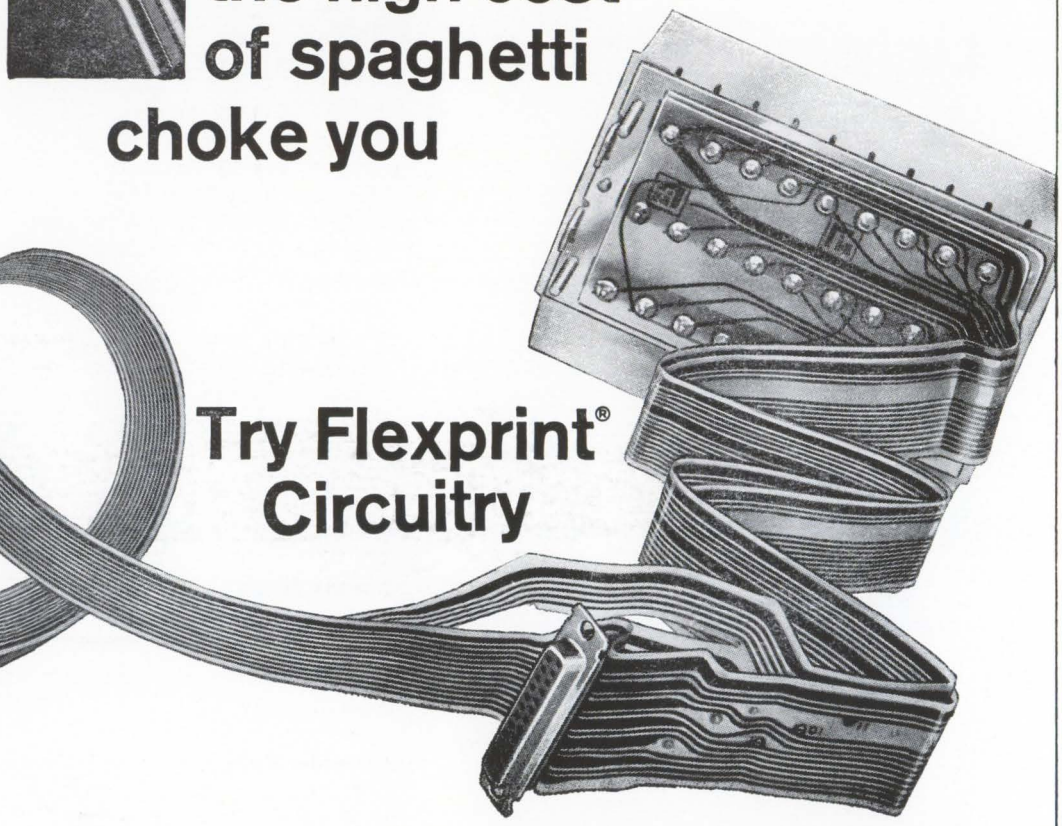

Try Flexprint® Circuitry

Wiring up equipment is more economical with Sanders FLEXPRINT Flexible Printed Circuitry.
Whether you're producing components, instruments, computers or complete systems, FLEXPRINT circuitry provides superior reliability at lower installed cost!
The Leeds & Northrup's Modular Controller uses FLEXPRINT circuits for these benefits:
No rework — FLEXPRINT circuits keyed for fast fool-proof assembly.
Compact, self-storing accordion FLEXPRINT circuits allow control to operate during module replacement.
FLEXPRINT circuits saved 15 to 20% over in-plant assembly with conventional "Spaghetti" wire.
Want help?
Tap the broadest application knowledge and capability in the business by contacting your local FLEXPRINT representative or the marketing manager, FLEXPRINT Products Division, Sanders Associates, Inc., 95 Canal Street, Nashua, New Hampshire 03060.


*T.M., Sanders Associates, Inc.

Sanders Associates, Inc.
Flexprint Products Division
CREATING NEW DIRECTIONS IN ELECTRONICS

See us at the IEEEe Show, Booth 2W02-2W04

ON READER-SERVICE CARD CIRCLE 57

Ultrasonic bonder

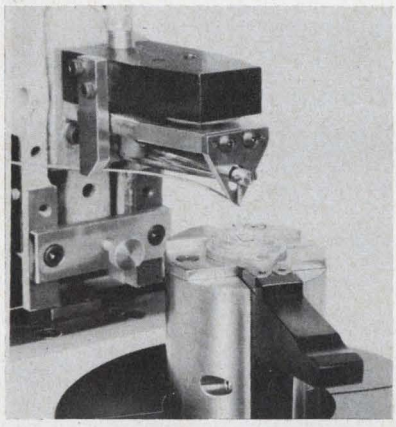

Using ultrasonics, this new model WU-100 wire bonder welds a wide range of power transistors such as TO-3's, TO-66's, stud packs and other large devices. It bonds wire from 5 to 40 mils.


Automatic wire feed and cut-off are featured. Optics are Bausch & Lomb, 7X-30X magnification, a Nicholas illuminator and an ultrasonic generator are included.

Axion, 6 Commerce Park, Danbury, Conn. Phone: (203) 743-9281.

SEE AT BOOTH 4B30

Circle No. 613

Circuit bonder

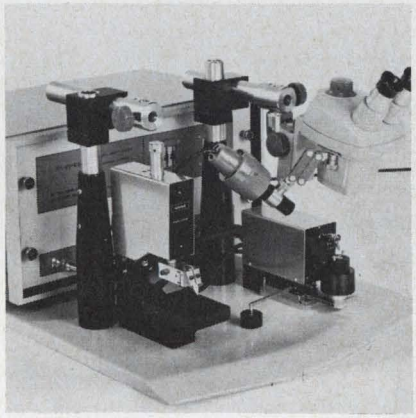

A multi-purpose microcircuit bonding system welds, brazes, parallel-gap soldering and thin-film diffusion bonding.

The smaller head is designed for ultra-fine materials and can apply bonding pressures as light as 10 g. The large weld head is for soldering of flat packs.

P&A: $4115; 4 weeks. Hughes Aircraft, 2020 Oceanside Blvd., Oceanside, Calif. Phone: (714) 722-2101.

SEE AT BOOTHS 2FO3-9

Circle No. 614


Grid drill



Series 15J tape controlled grid drills operate with infinitely variable spindle speeds of 10,000-50,000 rpm. The positioning table may be moved a maximum of 24-in. in both the X and Y directions. Each individual spindle is programmed to "use" or "not use" for each machine cycle. Control input is through 8-channel 1-in paper tape which can be prepared by flexowriter or equivalent means. Gardner-Denver Co., Grand Haven, Mich. Phone: (217) 222-5400.

Circle No. 615

Sheet Metal Fabricator

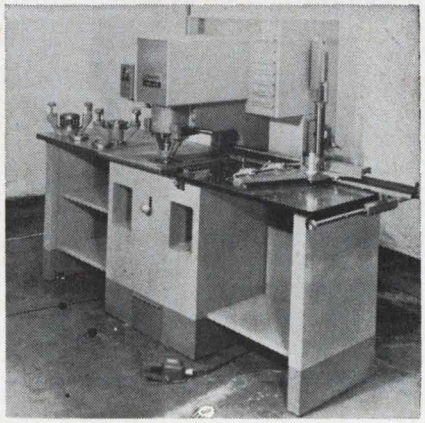


A 30 ton capacity sheet metal fabricator punches 1-in. diameter holes in 1/4-in. material or 3-1/2-in. holes in 10 guage material.

Model Sonic 18/30 has an 18-in. throat when using a pantographic duplicator, and 15-in. when using Microgaging. Right-handed Microgaging eliminates the need for flopping a duplicator template.

Houdaille Industries, Inc., Wales Strippit Co. Division, Akron, N. Y. Phone: (716) 895-8000.

SEE AT BOOTH 1H13-15.

Circle No. 616

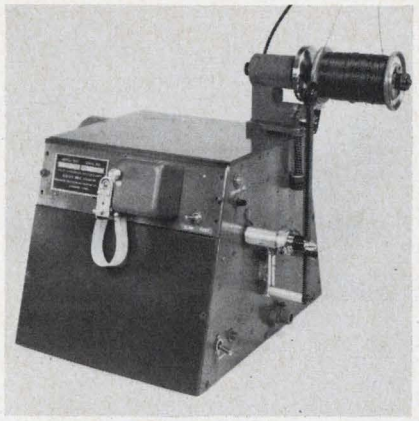

Bobbin winding system

The BW-11 tape-controlled, semi-automatic, multi-bay bobbin winder system and turret automatic system wind at high speeds and change from bay to bay accurately, at low speeds.

Specifications are: up to 4-in. O.D., 6-in. long bobbins, up to #16 AWG wire size, 2 speed programable spindle up to 8,000 rpm, with up to 8 channels.

Price: $3,000. Newal, 131 West, Danbury, Conn. Phone: (203) 744-5510.

SEE AT BOOTH A-1H02

Circle No. 619

Data processor

Model HSC 101 solid-state data processor can be used with most dual beam spectrophotometers without major changes. The unit contains a programmable digital magnetic tape memory to compare a standard specimen. It digitizes and punches output on paper tape.

Price: $15,750; Hoffman Electronics, 700 Hoffman, Santa Barbara, Calif. Phone: (805) 966-2273.

SEE AT BOOTHS 1C09-11

Circle No. 618

Encapsulation machine

Among the features of the model 359F are an oversized platen area for low pressure materials, production speed, regulated totally enclosed moving parts, and semi-automatic operation (slow close, manual, jog up and down, etc.)

The unit is a compression and transfer molding press.

Price: $10,700 Hull Corp., 6591A Davisville Rd., Hatboro, Pa. Phone: (215) 675-5000.

SEE AT BOOTH 1J13-15

Circle No. 617


EDISON
HOME
PHONOGRAPH

DOW CORNING

Before you freeze that new design...

check with us

If *today's* electronic know-how had been available to designers fifty years ago, would the phonograph have looked like this?

No!

If *tomorrow's* know-how were available to you right now, would it affect your next product design?


At Dow Corning it is... and it can!

Dow Corning, the acknowledged leader in silicone research and development for over twenty years, has a history of producing materials to meet unheard of performance requirements... and materials is our *only* business.


More often than not, the suggestions of our Electronic Products Development Laboratory will spark new concepts, new versatility and capabilities for your product... *if* you include us in the early stages of your design thinking.

We manufacture high-performance, premium-quality encapsulating rubbers, rigid molding compounds, flexible casting resins and grease-like compounds which meet the most stringent requirements of the electronic industry.


Our Electronic Products Laboratory offers prompt technical assistance in solving *your* specific problem. Write Dept. 3503, Electronic Materials Department, Dow Corning Corporation, Midland, Michigan 48640. Or phone (517) 636-8940 for more information and the name of the Dow Corning representative in your area.

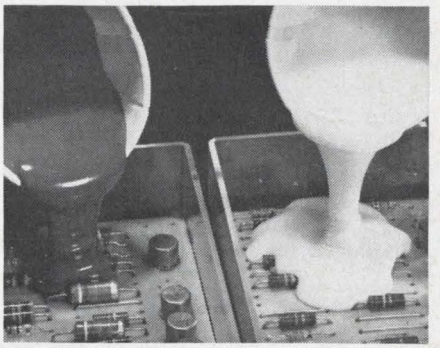

Dow Corning® 3110 RTV encapsulant can be readily color coded by mixing in master batch pigments. It is a low viscosity, deep section curing compound that cures at room temperature and is designed for potting, encapsulating and embedding of electronic circuit and components. It flows readily into place and cures to form a tough, resilient solid. *(Circle No. 851)*

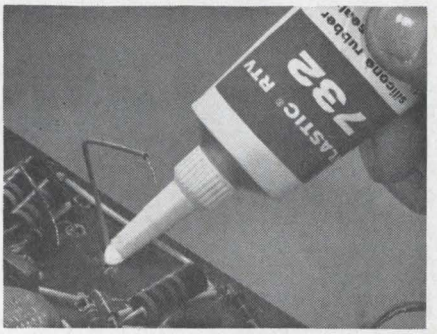


Ready-to-use silicone adhesive encapsulates, seals, bonds. Silastic® 732 RTV rubber is a tough, squeeze-on adhesive/sealant that bonds metal, glass, plastics, rubber and most other materials. It cures at room temperature in 24 hours to a solid rubber... stays flexible from −85 to 500 F. Also recommended as adhesive for Silastic® brand heat shrinkable tubing. *(Circle No. 852)*

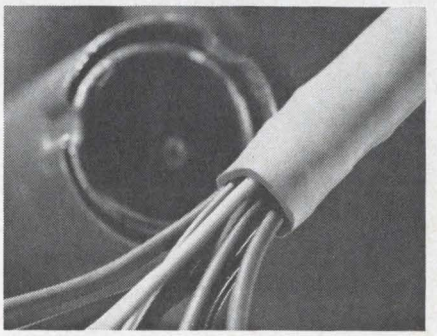

Shrinkable silicone rubber tubing can be the answer where wiring harness and electronic devices or components must be protected. Silastic® brand heat shrinkable tubing simplifies processing – reduces cost – where quick, easy fabrication of a close-fitting insulating covering for splices, leads, or components is required. Shrinks to ½ dia. when heated to 300 F or higher ... in length less than 5%. *(Circle No. 853)*

We're a materials producer exclusively. Let us tailor a material to your need.

Speed Inquiry to Advertiser via Collect Night Letter

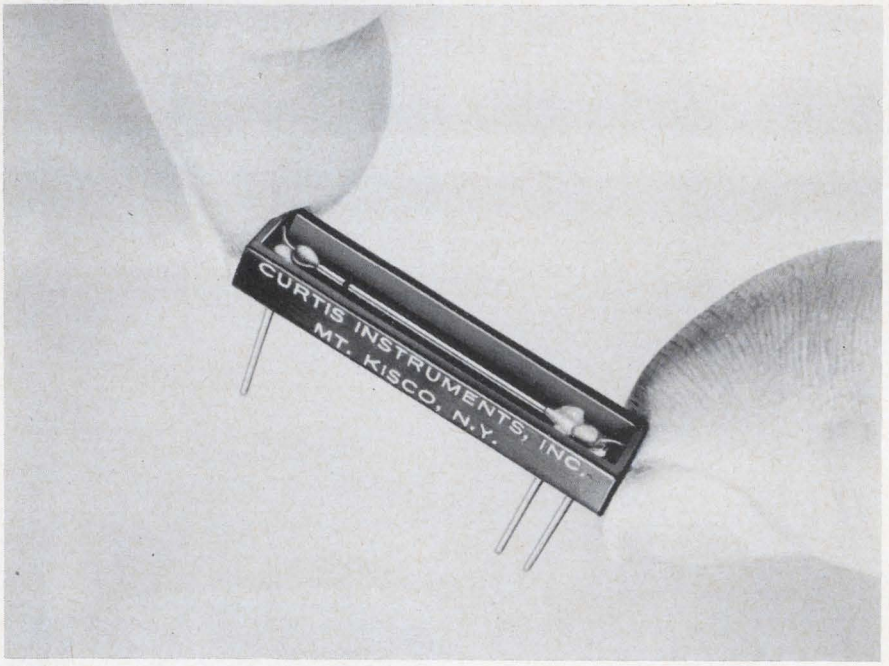

New time-voltage integrator has infinite recall

A new electro-chemical integrator has both visual and electrical readouts with infinite memory capability.

The model 304 utilizes the manufacturer's mercury-electrolytic timer device with differential capacitance readout techniques to provide accurate and symmetrically reversible long and short term integrations. Size, complexity, weight, power consumption, and cost are considerably lower than the electromechanical competition.


The stored integral is retained indefinitely, regardless of power or other external factors. The unit measures only 1.1-in. long by 0.18-in. wide, and can be used with any input signal between −2 mA and +2 mA. Its input threshold is zero.

A glass capillary tube filled with two columns of mercury has a gap between them, filled with an acqeous electrolytic. The input signal electroplates mercury across the gap at a rate which is a direct function of the amplitude of the input signal. The gap is thereby moved to accommodate the new mercury on its further side. Total capacity is a stored integral of 4 mA-hours. The outside of the capillary tube is coated with a vapor-deposited conductive sheath. Capacitances between this sheath and each mercury eletcrode are differentially proportional to the position of the electrolytic gap, and thereby to the integral of the input signal. This capacity is sensed by superimposing an ac signal on the input signal. Output amplitude is linear and a direct function of the integral of the input. Accuracy is within 0.5%.


P&A: $19.50 ($13.10 in 100 lots); 2-3 wks. Curtis Instruments, 351 Lexington Ave., Mount Kisco, N. Y. Phone: (914) 666-8051.

SEE AT BOOTH 2A08

Circle No. 644

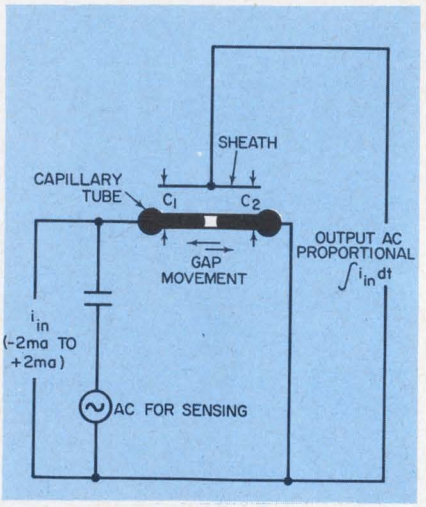

C_1 and C_2 are differentially proportional to the position of the electrolytic gap, thus proportional to the time integral of the input amplitude.

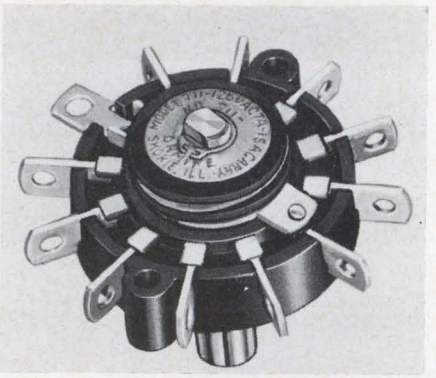

7 A 125 V mini-switch

A miniature selector switch handles 7 A at 125 V, and can carry 15 A ac or dc. The model 711 single-pole non-shorting selector switch has a 1-1/8-in. body diameter.


The contacts are solid-silver alloy. The unit is available with from two to 11 self-wiping contacts, 30° indexing. Action is slow-break, quick-make, thus minimizing sparking and increasing contact life on ac. A melamine-phenolic body has high insulation rating and resistance to arc-tracking.

Normally-unenclosed, the single-unit 711 can be supplied enclosed on request. Tandem assemblies (up to five-in-tandem) are normally supplied enclosed.

P&A: price depends on the unit and quantity ordered; stock. Ohmite Mfg. Co., 3668 Howard St., Skokie, Ill. Phone: (312) 675-2600.

SEE AT BOOTH 2F39

Circle No. 645

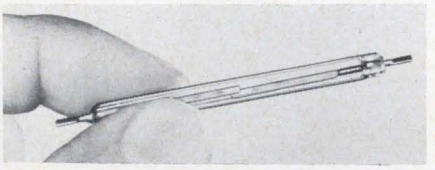

5 amp reed switch

A propietary plating technique for rhodium gives a reed switch that handles up to 5 A. Max switched power is 100 VA. The high-or low current device handles a 200 V inductive load.

Operating time is 1 ms, max rate is 350 Hz. Contact resistance is exceptionally constant. Average value of initial contact resistance is below 25 mohms. Insulation resistance is 10^{12} ohms. Two sizes (2.5 or 3.2-in. long) are available.

Ericsson Corp., 100 Park Ave., New York. Phone: (212) 685-4030.

SEE AT BOOTH 2F06

Circle No. 646

These cycle controlled tools give a precise, consistent crimp every time for terminals, lugs, splice fittings, RF fittings, connectors and special devices. They're light and have high-leverage action allowing low-closing hand pressure. Less operator fatigue means higher production . . . lower cost per crimp.

In-line die action and ratchet control provide the most uniform crimping. Tools are corrosion resistant. Available in standard and miniature models.

CT Terminal Tools crimp MS-25036 terminal lugs and MS-25181 thru-splices and other fittings. "Dial-for-Size" selector for quick crimp depth selection. Terminal locator properly positions fittings and wire for crimping. The CT-S standard-size tool crimps fittings 12-10 through 26-24. The miniature CT-M tool crimps fittings 16-14 through 26-24.

BUCHANAN
ELECTRICAL PRODUCTS CORPORATION

1075 Floral Avenue • Union, New Jersey
(201) 289-8200 • Telex 1-25471
a subsidiary of Elastic Stop Nut Corporation of America


CH Tools Crimp Co-axial and Shielded Fittings and Connectors—Dies are interchangeable and positive bottoming. These tools will crimp BNC, TNC, and N series connectors, and many other fittings requiring hex crimps. Miniature models also available.

CD Tools for Special Custom Applications are furnished with blank dies or special dies as required.


Write today for complete information on these high performance crimping tools.




New Die-type tools *Crimp easiest-fastest!*

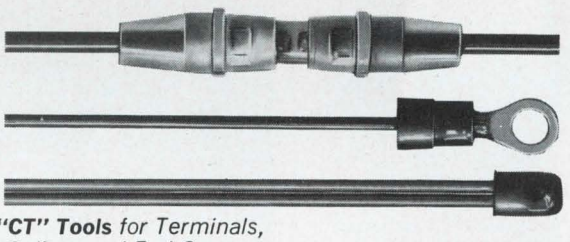

***"CT" Tools** for Terminals, Splices and End Caps*

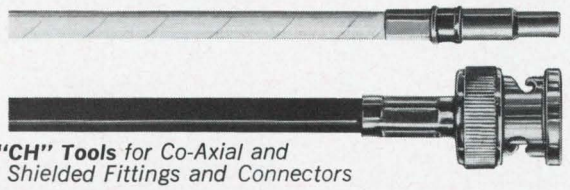

***"CH" Tools** for Co-Axial and Shielded Fittings and Connectors*




***"CD" Tools** for Special Custom Applications*

264

See us at booth numbers 2F47 and 2F49 at IEEE Show


ON READER-SERVICE CARD CIRCLE 187

molded packaged power supplies

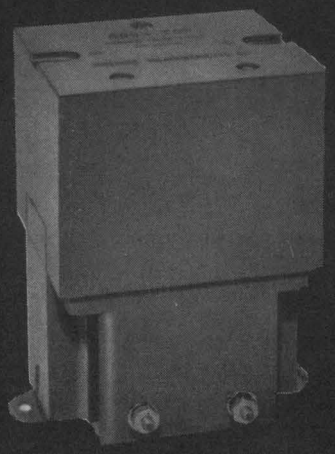

Building-block construction provides a basic transformer, rectifier, and where necessary a regulating device. The three molded elements bolt together quickly and maintenance is simplified. Output is completely isolated. DC voltage is filtered and provides 5% or less ripple. Most units rated for 5 ma, current. Input 115V, 60 cycle. Units available from 15 volts to 100-KV-DC.

high-voltage zener regulators




Regulate up to 20,000 volts. Simply connect in parallel with molded packaged power supply (above) or any high voltage unit and obtain automatically both line and load voltage regulation as well as ripple reduction. Nominal current rating is 0.5 to 1 ma. for better than 1% stabilization. Regulation over range of 0 to 5 ma. is 3%. Can be wired in series for high voltage service. Built-in taps provide for selection of twenty regulated voltages. Ideal for photo-multiplier tubes.

Beckman® INSTRUMENTS, INC.

CEDAR GROVE OPERATIONS
89 Commerce Road
Cedar Grove, New Jersey 07009

Formerly Industrial Instruments, Inc.
See us at IEEE Booths 3D15-17
ON READER-SERVICE CARD CIRCLE 59

Thermistors/varistors

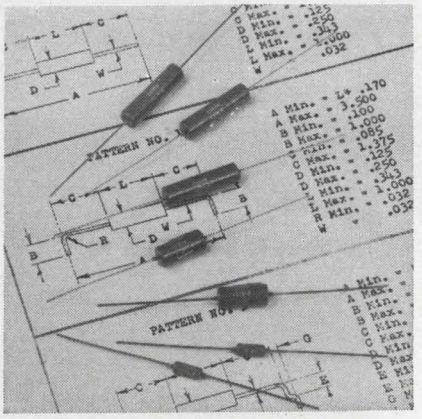


Designed to replace bulky end cap configurations, a new space-saving line of temperature-sensing devices has specifications equivalent to extant units for interchangeability.

Axial or standard formed lead styles are available to fit the fully encapsulated units to various board designs.

The Carborundum Co., Globar Plant, P.O. Box 339, Niagara Falls, N. Y. Phone: (716) 278-2531.
SEE AT BOOTH 2J47-49

Circle No. 329

Crimping tools

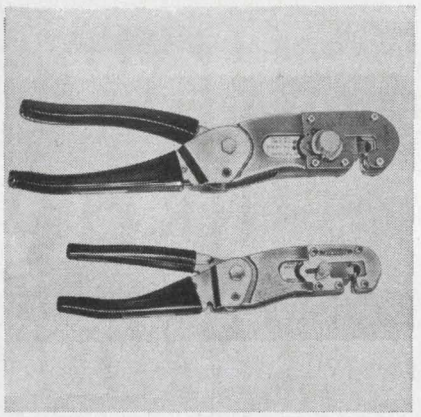


Designed to meet military needs, these "C Series" die-type tools also fill industrial needs. Uses include crimping terminals, lugs, splice fittings, connectors and special devices. Standard and miniature sizes in three categories are available: the CT terminal crimping tools, CH tools for coax and the CD type, with blank dies.

Buchanan Electrical Products Corp., 1065 Floral Ave., Union, N. J. Phone: (201) 289-8200.
SEE AT BOOTH 2F47-49.

Circle No. 330

Point contact diodes

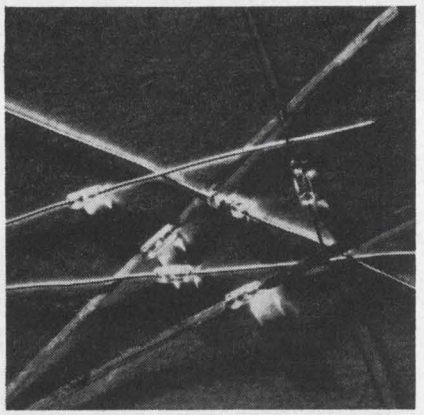


A 2 erg burnout rating is displayed by the Pico-Min family of uhf, S and X-band diodes. They are silicon point-contact mixer and detector units intended for strip transmission line circuits. Cased in hermetically sealed glass, they are available with axial wire or ribbon leads. A typical unit, the MA-4811B S-band mixer, has a 6.5 dB maximum noise figure.

Microwave Assoc., Burlington, Mass. Phone: (617) 272-3000.
SEE AT BOOTH 2D02-4.

Circle No. 331


Choppers/switches

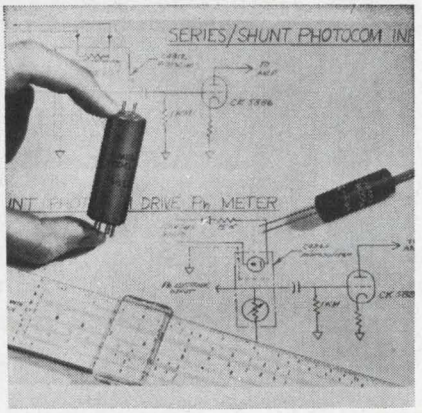

On-resistances exceeding 1 Meg, and off-resistances of more than 10^{11} ohms for use with up to 1000 Meg source impedances are provided by a series of three solid-state choppers/switches. Designed for use in high source impedance, low signal input applications, models C-4812, C-4840 and C-4841 can be used as modulators.

P&A: $39; 5 wks. James Electronics, 4050 N. Rockwell, Chicago. Phone: (312) 463-6500.
SEE AT BOOTH 2A01.

Circle No. 332

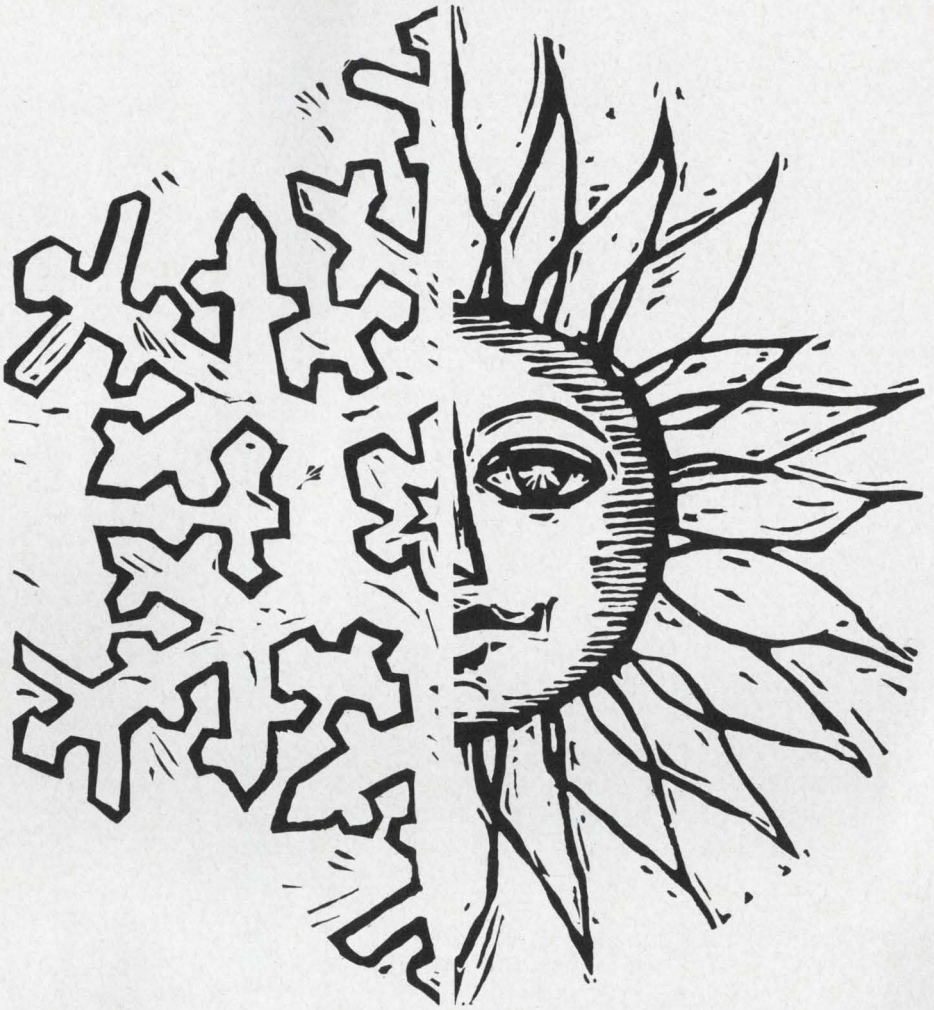

Hoffman makes these temperature compensated reference diodes in standard JEDEC packages or to customers' specifications

Designed for space and military applications, these high reliability, diffused junction zeners provide an extremely stable reference voltage under severe combinations of temperature and shock. They are adaptable to all types of circuits including welded modules.


For further information regarding these products write: Hoffman Semiconductor Division, Hoffman Electronic Corporation, El Monte, California 91734

Hoffman

Be sure to see these and other new Hoffman Semiconductor products at the I.E.E.E. show in New York, March 21-24, Booths 1C09-1C11

JEDEC Type Number	(1) Temperature Coefficient (%/°C)
1N821	.01
1N822	.01
1N823	.005
1N824	.005
1N825	.002
1N827	.001
1N829	.0005
1N821A	.01
1N823A	.005
1N825A	.002
1N827A	.001
1N829A	.0005
1N3154	.01
1N3155	.005
1N3156	.002
1N3157	.001
1N3154A	.01
1N3155A	.005
1N3156A	.002
1N3157A	.001
1N935	.01
1N936	.005
1N937	.002
1N938	.001
1N939	.0005
1N935A	.01
1N936A	.005
1N937A	.002
1N938A	.001
1N939A	.0005
1N935B	.01
1N936B	.005
1N937B	.002
1N938B	.001
1N939B	.0005
1N941	.01
1N942	.005
1N943	.002
1N944	.001
1N945	.0005
1N941A	.01
1N942A	.005
1N943A	.002
1N944A	.001
1N945A	.0005
1N941B	.01
1N942B	.005
1N943B	.002
1N944B	.001
1N945B	.0005

(1) TEMPERATURE COEFFICIENT INDICATED IS CALCULATED ON THE TOTAL VOLTAGE VARIATION WHEN TESTED AT THE END POINT TEMPERATURE ONLY.

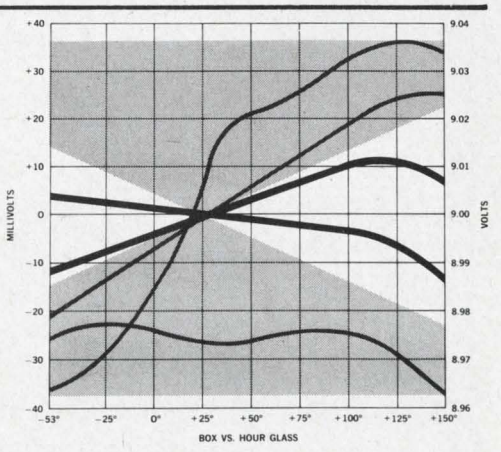

SEMICONDUCTORS

ON READER-SERVICE CARD CIRCLE 60

NEW FIRST TIME IN PUBLIC

COMPONENTS, INC.

SEMCOR DIVISION
ZENER DIODES
TEMPERATURE COMPENSATED
REFERENCE ELEMENTS

CAPACITOR DIVISION
SOLID TANTALUM
CAPACITORS

NO MATTER WHAT FIELD YOU ARE IN; SPACE, MILITARY, COMMERCIAL, INDUSTRIAL, OR ENTERTAINMENT, COMPONENTS, INC., CAN PROVIDE THE SOLID TANTALUM CAPACITORS AND ZENER DIODES YOU REQUIRE.


SEE US AT THE
IEEE SHOW BOOTH 2A-48

CANNOT MAKE THE SHOW?
CALL US COLLECT —
WE WILL COME TO YOU!

COMPONENTS, INC.
BIDDEFORD, MAINE / 207-284-5956
PHOENIX, ARIZONA / 602-272-1341

TECHNICAL INFORMATION
AVAILABLE FROM EITHER DIVISION

ON READER-SERVICE CARD CIRCLE 61

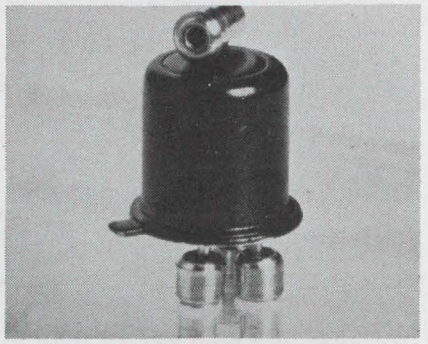

Transistor lead socket

A 2-3 pF capacitance between two connector receptacles spaced 0.070-in. center-to-center is displayed by this device. Each socket can be soldered or dip-soldered in place on a p/c board. Lead wire sizes can be varied from 0.019-0.016-in. Useable with board thicknesses of 0.032-0.125-in., the socket has a 0.062-in. maximum diameter.

The Milton Ross Co., 511 2nd St. Pike, Southampton, Pa. Phone: (215) 355-0201.

SEE AT BOOTH 2D45.

Circle No. 333

Tunable YIG filters

Highly polished single crystalline spheres of YIG or a similar ferrite material are used as gyromagnetic tuning elements in a new line of electronically tunable filters. Max vswr is 1.5 and all units meet MIL-E-5400, Class II. Frequency range is 0.125 to 12 GHz. Accessory driver-amplifiers and power supply units are available for use with these units.

Microwave Associates Inc., South St., Burlington, Mass. Phone: (617) 272-3000. TWX: (617) 272-1492.

SEE AT 2D02-4

Circle No. 334


Rotary stepping switch

A 100,000 cycle life, 47-position advance and reset rotary stepping switch, the Series 130-2500, is designed for industrial uses. A variety of multiple circuits can be arranged in the disk. Count can be reset one step at a time or reset to zero from any switch position. Operation is from 12-115 V ac/dc.

P&A: $15 (small lots); 1 week. Chicago Dynamic Industries, Inc., 1725 Diversey Blvd., Chicago, Ill.

SEE AT BOOTH 2A12.

Circle No. 335

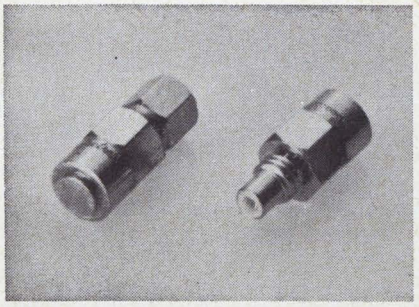

Resistive terminations

Maximum vswr of 1.10:1 from dc to 5 GHz, 1.15:1 from 4 to 7.5 GHz and 1.20:1 from 7.5 to 12.4 GHz are reported for a new line of terminations. Precision film resistors are used to provide a well-matched termination over a wide frequency range. Available engagements include SRM, SSRM, Z, BNC, TNC, Conhex and Microhex.

Sealectro Corp., 225 Hoyt St., Mamaroneck, N. Y. Phone: (914) 698-5600.

SEE AT BOOTHS 2G43-45.

Circle No. 336

Cooling fans

Two general purpose blower units are offered. The Sprite, designed for cooling low-profile instrumentation, is 3 1/8-in. square and delivers 35 cfm. It is recommended for uses requiring pressures of 0.05-0.075-in. of water at 25-30 cfm. The Skipper fan delivers 100 cfm. Its 38 dB noise level makes it suitable for computer rooms and test areas.

Roton, Woodstock, N. Y. Phone: (914) 679-2401.

SEE AT BOOTHS 2E39-43.

Circle No. 337

Crystal protector

A crystal protector for operaton in the 16-17 GHz frequency range, the BLT-111 is warranted for 2000 hours, and has a design life of 5000 hours. Maximum input vswr is 1.3:1 and maximum breakdown power is 200 mW. Noise figure is 0.8 dB and insertion loss is 0.4 dB. The 3.25-oz unit operates over the −55° to +125°C temperature range.


Varian, Bomac Div., Salem Rd., Beverly, Mass. Phone: (617) 922-6000.

SEE AT VARIAN, 2nd Fl.

Circle No. 338

MEPCO

mass-produced film hybrid MICROCIRCUITS

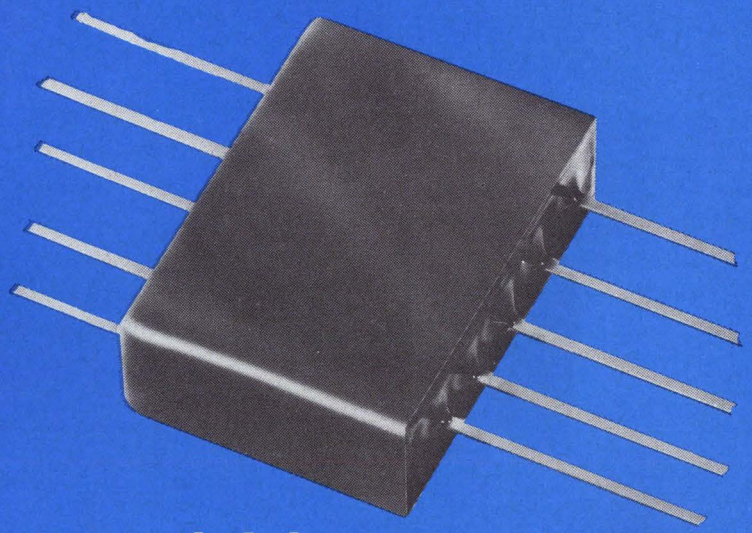

can shrink your existing circuits to micro-packages...from gates to video amplifiers.

FEATURES

- Increased reliability with 10^{-3} or greater size reductions.
- Low set-up and production costs.
- Precision circuit parameters applicable to linear or digital circuits.
- Switching time of 10 nanoseconds.
- Clock rates of 10 megacycles.
- Tracking temperature coefficient characteristics of 10 PPM for a typical resistance ratio of 3 to 1.

Mepco's prototype processes permit rapid delivery of initial evaluation modules. Our high-volume production line can meet your most stringent delivery requirements.

MEPCO

MANUFACTURERS OF PRECISION ELECTRONIC COMPONENTS

Write or call today for complete details

MEPCO, INC.


Columbia Road, Morristown, New Jersey 07960 (201) 539-2000

ON READER-SERVICE CARD CIRCLE 62

THIS NEW MALCO WRAP-A-WIRE® TERMINAL* STAYS PUT!



*Pat. Pending

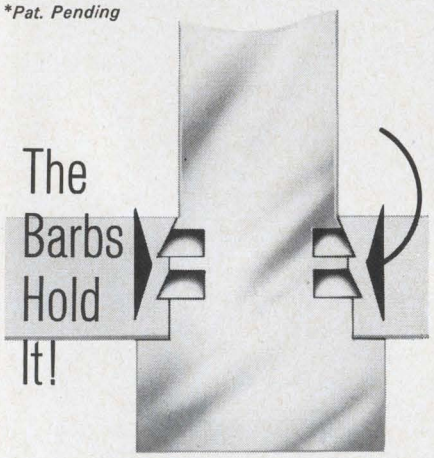


This new Malco Wrap-A-Wire Terminal means fewer defective PC boards—cuts assembly costs.

Clinching, formerly required to attach terminal to the board before soldering, is no longer necessary.

The barbed shank fits into a .070" hole and grips tight. Low silhouette on the circuit side of the board provides optimum solder configuration.

The wrapost is resilient—there's less breakage of PC boards than with a rigid post—and the tendency to lift the copper laminate with a poorly aimed wire-wrap gun or careless handling is minimized.

The swaged tip directs wire-wrap gun placement—helps guide matching crimp-quick receptacle.



AVAILABLE IN CHAIN STYLE, TOO!


Write for complete information and samples.

VISIT BOOTH 1A33 AT IEEE SHOW

MALCO MFG. COMPANY INC
4023 W. LAKE ST., CHICAGO, ILL. 60624

ON READER-SERVICE CARD CIRCLE 63

Low-power op-amp

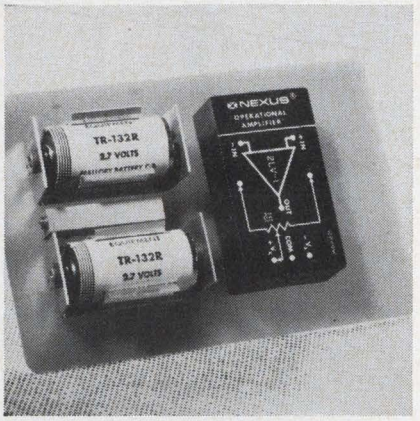


Designed for services requiring low power consumption, Model 2LV-1 operational amplifier features a 4 mW standby power drain at ±2.5 V. The all-silicon unit can be operated from batteries, and offers a dc open loop gain of 10,000 with an output capability of ±1.5 V at ±1.5 mA. The 2,02 x 1.14 x 0.62-in. device operates from −25° to +85°C.

Price: $35 each (1-9). Nexus, 480 Neponset, Canton, Mass. Phone: (617) 828-9000.

SEE AT BOOTH 2H45.

Circle No. 339

Turret attenuators

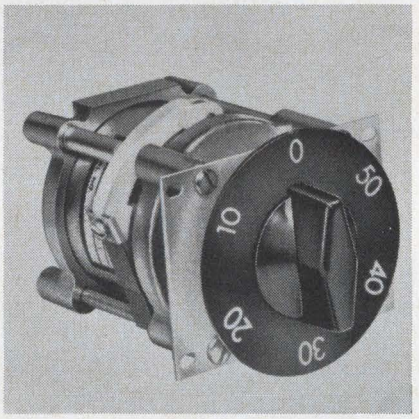

Each module of the ATV-Series turret attenuators occupies < a 3-in. cube space. Designed for the dc to 1.2GHz frequency range, the units provide from 0-50 dB attenuation. Accuracy is ± 0.5 dB. Maximum feed thru is 0.1 dB at 1.2 GHz. All contacts are coin silver. Carbon disc resistors are used.

Price: $195-$280. Jerrold Electronics Corp., 15th & Lehigh Ave., Philadelphia, Pa. Phone: (215) 226-3456.

SEE AT BOOTH 3J06.

Circle No. 340

Reflex klystron




A reflex klystron oscillator designed as a pump tube for parametric amplifiers and masers, the VA-294 delivers a minimum of 100 mW into a matched load over the entire tuning range. Tubes are available to any specified frequency between 26.5 and 40 GHz, and offer a 1 GHz mechanical tuning range. They may be cooled by conduction, forced air or liquid immersion.

Varian, Tube Div., 611 Hansen Way, Palo Alto, Calif. Phone: (415) 326-4000.

SEE AT VARIAN, 2nd Fl.

Circle No. 341

Operational amplifier

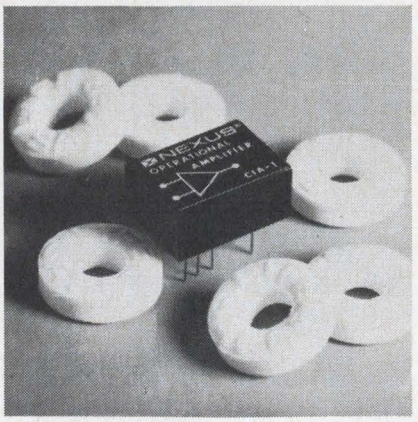


Reported to be more versatile than presently available integrated circuit operational amplifiers, Model CIA-1 is designed for use in OEM equipment where cost and size are important factors. The 0.85 x 0.6 x 0.375-in. device provides a 50,000 open-loop gain at dc. Completely self-containing, it needs no external damping.

Price: $30 each (1-9). Nexus, 480 Neponset, Canton, Mass. Phone: (617) 828-9000.

SEE AT BOOTH 2H45.

Circle No. 342

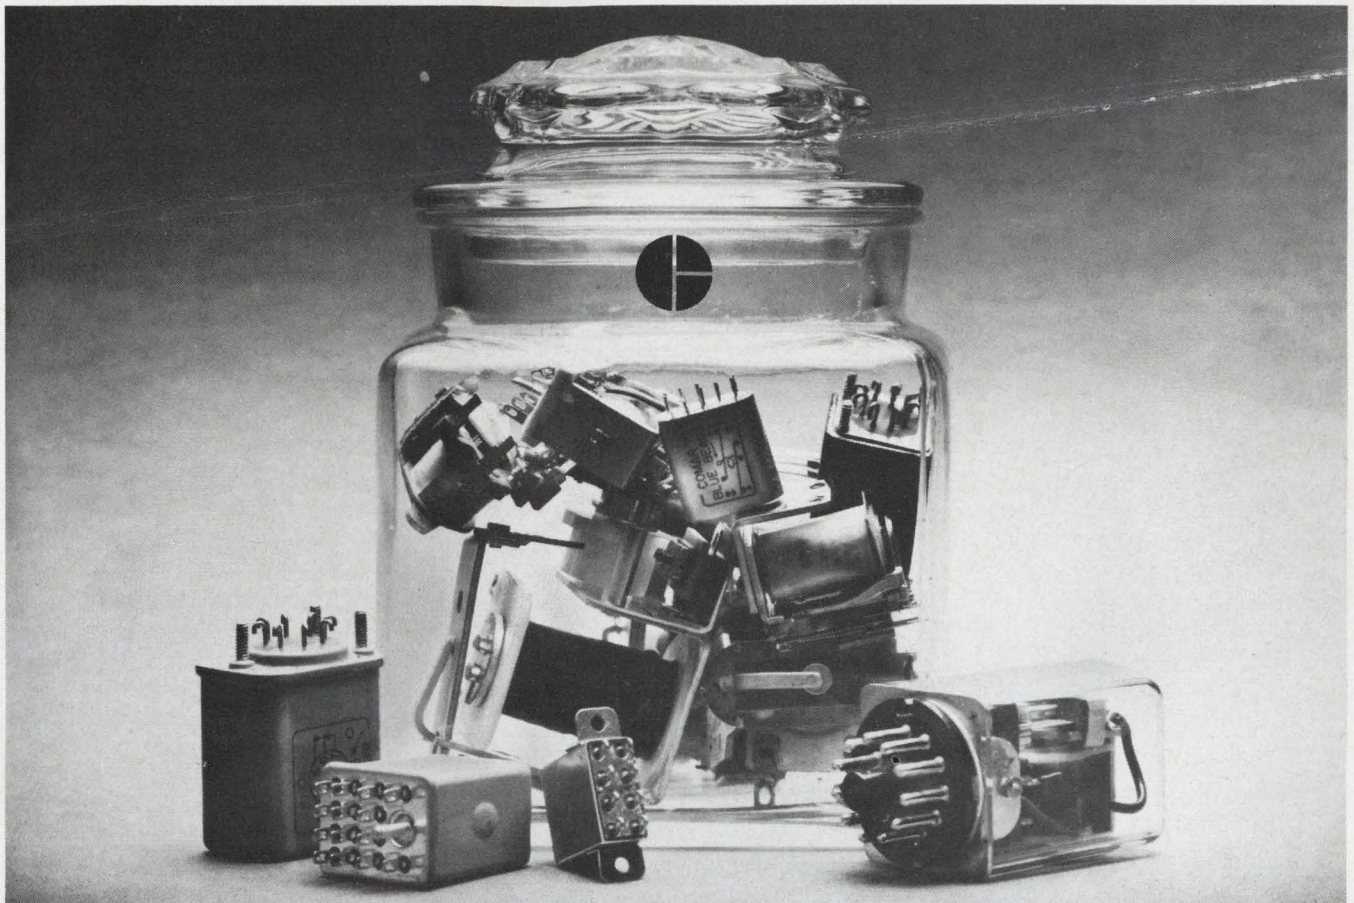

ENGINEER

Just what the ~~doctor~~ ordered . . .

Into all **COMAR** relays are built a versatility that anticipates engineering needs and requirements. There is, in the **COMAR** line, a relay designed to solve your problem. And for the rare occasion when you can't find a standard relay to do a specific job, **COMAR** stands ready, willing and exceptionally able to design and build one that will! Just give us your prescription.

COMAR ELECTRIC COMPANY
3349 Addison Street, Chicago, Illinois 60618

RELAYS • SOLENOIDS • COILS • SWITCHES • HERMETIC SEALING

COMAR REPRESENTATIVES:

A. B. Andrews & Co.
Branch Banking & Trust Co. Bldg.
14th Floor—P.O. Box 2627
Raleigh, North Carolina
TE 3-5567

Desser E-E Limited
2425 Grand Boulevard
Montreal 28, Canada
489-7597

El-Com Sales
3600 Motor Avenue
Los Angeles, California
340-6355

W. Pat Fralia Company
6100 Camp Bowie Boulevard
P.O. Box 12625
Fort Worth, Texas
PErshing 8-2394

Ralph J. Haffey Company
4127 N. Clinton
Fort Wayne 8, Indiana
748-1159

Hill & Company
915 Buder Building
St. Louis 1, Missouri
MA 1-1818

J. D. Irvine & Associates
1900 Prospect
West Des Moines, Iowa
279-8289

R. M. Kaiser Company
1435 DeLynn Drive
Dayton, Ohio 45459
885-2238

Koether-Cox Company
1325 South Inca Street
Denver 23, Colorado
733-5561

Victor S. Malta Company
P.O. Box 4007
Philadelphia 18, Penn.
VErnon 6-5122

Dale Merrick Company
3712 E. Lake Street
Minneapolis 6, Minnesota
721-5331

R. W. Mitscher Co., Inc.
496 Ellicott Square Bldg.
Buffalo 3, New York
TL 4-2517

Nero Electronic
Sales Corporation
3516 Elmwood Avenue
Wilmette, Illinois
AL 6-1045

R. C. Nordstrom
123 Brown Street
Birmingham, Michigan
564-6128

John C. Plate Company
584 Dexter Horton Bldg.
Seattle, Washington 98104
MAIN 4-1673

David H. Ross Company
534 El Camino Real
San Carlos, California
LY 1-4411


Walworth Controls Co.
472 Old Main Street
Rocky Hill, Conn.
JA 9-6806

Willgold Electronic
Sales Corporation
100 North Village Ave.
Rockville Center, New York
RO 4-4022

VISIT US IN BOOTH 1D27 IEEE SHOW

ON READER-SERVICE CARD CIRCLE 64

HERE'S THE
WINNING
PAIR
FOR ANY CIRCUIT!

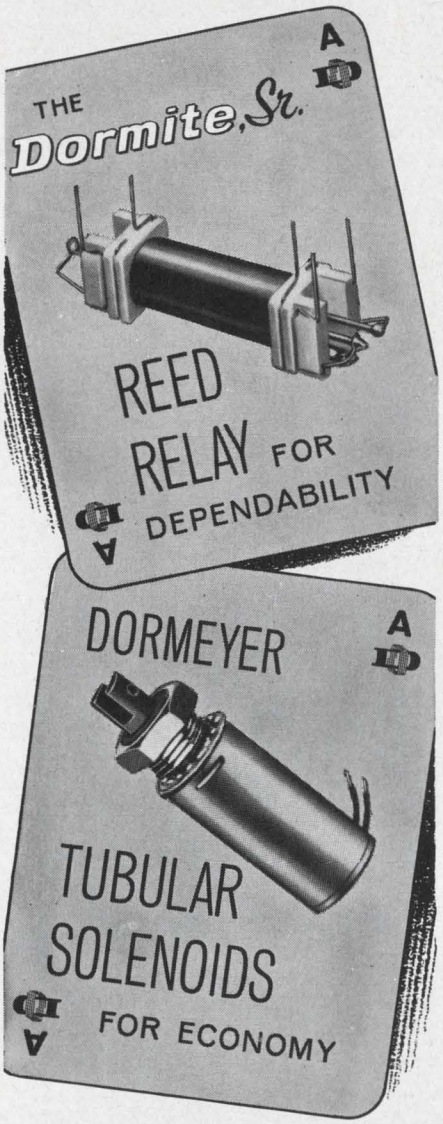

BOTH OUTSTANDING FOR EXTREME LONG LIFE AND LOW COST.

•

SEE THEM AT SPACE 1E14
IEEE SHOW

or Write For Catalogs


DORMEYER INDUSTRIES

3414 No. Milwaukee Ave., Chicago, Ill. 60641
SOLENOIDS • TRANSFORMERS • COILS • RELAYS

DORMEYER Dependability

ON READER-SERVICE CARD CIRCLE 65

Local oscillator

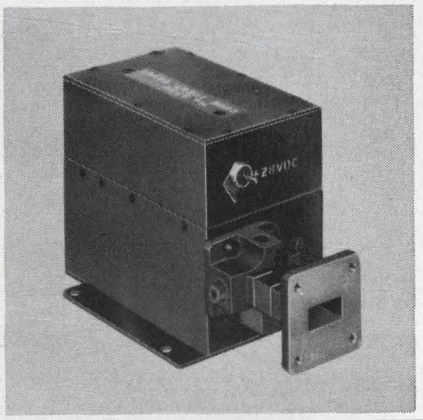


Short-term stability of $\pm 5 \times 10^{-9}$ 100 ms and −30 dB spurious response are featured in the MA-8730. The solid-state, crystal controlled local oscillator operates in the 14-16 GHz frequency range. Minimum power output is 4 mW with low input power drain on a single 28-V supply. The 1.5 lb unit has data link applications.

Microwave Associates, Inc., Burlington, Mass. Phone: (617) 272-3000.
SEE AT BOOTH 2DO-24.

Circle No. 343

Duplex spiral blower

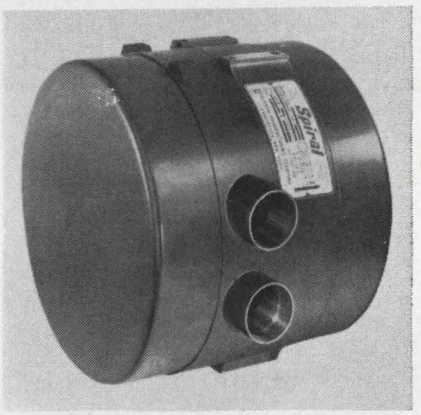


Up to 94 cfm air-flow and 2 psig pressure are featured in the Spiral blower. Three versions are available, including model SL6. This unit, in computer applications, uses two independent air paths to serve separate functions. One, for magnetic tape slack control; the other, for capstan motor cooling. Other models are for document and card handling.

Rotron, Hasbrouck Lane, Woodstock, N. Y. Phone: (914) 679-2401.
SEE AT BOOTHS 2E39-43.

Circle No. 344

Coaxial diode switch

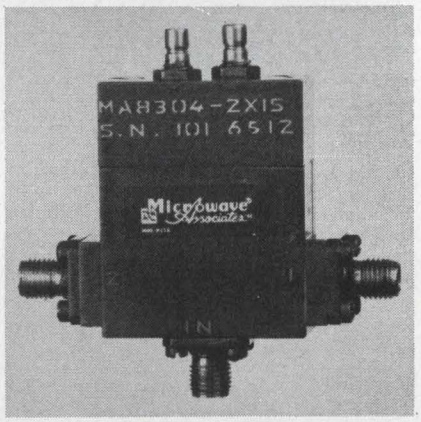


Capable of operating at any 500 MHz band in the 7-12 GHz frequency range, the MA-8304 S is a low power spdt switch. It weighs 2.5 oz and has a switching time under 10 ns. Power handling capabilities are 25 W peak and 2 W average. Insertion loss is 1 dB and isolation is 20 dB. Uses include antenna lobing, system calibration and pulse shaping.

Microwave Assoc., Inc., Burlington, Mass. Phone: (617) 272-3000.
SEE AT BOOTH 2D02-4.

Circle No. 345


CRTs

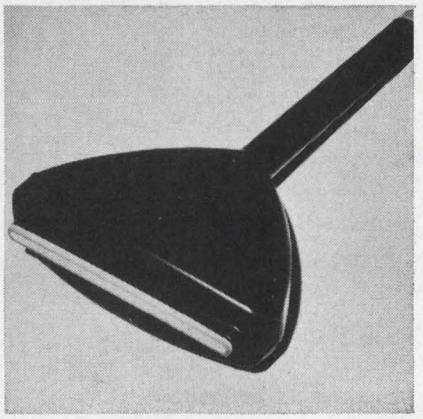

Three new CRTs are offered. The KC237P (pictured) is a line-scan type featuring a flat fiber optic faceplate; it is used to display separate line-scan for film readout. The KC2287P is a fiber optic tube with 3-in. diameter, designed for radar application to convert circle to line scan. The K2619P is a 5-1/4-in. faceplate, single beam type unit for computer readout.

Fairchild Dumont Div., Clifton, N. J. Phone: (201) 733-2000.
SEE AT BOOTH 2G03-13.

Circle No. 346

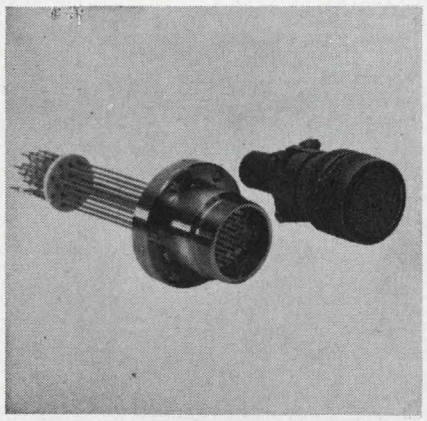


Electrical feedthroughs

A series of 20-pin and 8-pin units is designed for passing multiple electrical connections into a vacuum system. The 954 is available unmounted or flange-mounted. Standard MS connectors and internal connectors that can be crimped or soldered to internal wiring are provided. The devices are rated 7 amps/wire, 700 Vdc or 500 Vac.

Varian, 611 Hansen, Palo Alto, Calif. Phone: (415) 326-4000.

SEE AT VARIAN, 2nd Fl.

Circle No. 652

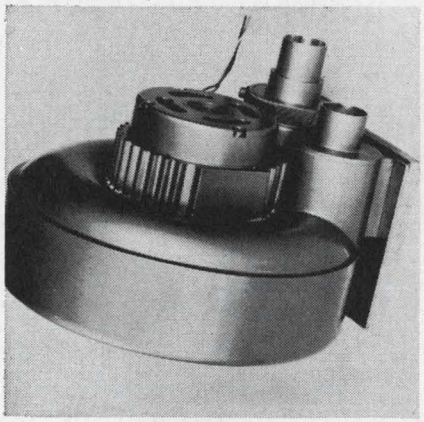

Single-stage blower

Driven by an integral induction motor at 3350 rpm, the Series 925 is reported to give the same performance as a high-speed, brush type and/or multi-stage blower. The unit delivers 61 cfm in free air. Blower diameter is 9.6-in., including mounting pads; depth is 6.8-in., including motor. Typical uses are in fluid computers and as a tape transport vacuum.

Diehl Div., Singer, Sommerville, N. J. Phone: (201) 725-2200.

SEE AT BOOTH 2B39-43.

Circle No. 653



new!

swift, precise circuit board drilling machine: Gardner-Denver GRID DRILL*

The Gardner-Denver Grid Drill: by far the fastest, most precise unit of its kind available. Spindles operate at 50,000 rpm . . . infinitely variable from 10,000 to 50,000 rpm! *Accuracy?* Maximum spindle runout at a distance of 1″ from the collet is .0005″ T.I.R.! Table positioning accuracy of ±.0006″ maximum, repeatability of ±.0003″ maximum. *And so flexible*—both in spindle number and spacing! Each spindle package contains its own power unit, allowing for different rpms for each package. Produces up to 120 holes per minute per spindle. There's lots more information you should have. Write Gardner-Denver now. Ask for Bulletin 15-1

*Trade Mark Gardner-Denver Co.

SEE US AT THE IEEE SHOW IN NEW YORK . . . Gardner-Denver BOOTH NOS. 1G12 & 1G14

SEE WHAT AIR IS DOING NOW...SEE

GARDNER-DENVER

Gardner-Denver Company, Quincy, Illinois

ON READER-SERVICE CARD CIRCLE 66



Wideband true rms/dc converter covers 20 Hz-100 kHz.

A wideband true rms-to-dc converter for use with dc digital voltmeters covers the range of 20 Hz to 100 KHz and 30 mV to 1 kV full scale. Crest factor is in excess of 7:1.

Operation is based on the use of two precision dual-heater thermistors in an automatic double-bridge circuit. By means of this bridge circuit the temperatures of both thermoelements are maintained constant to within 0.002°C.

This unit, model PR840 true rms to dc converter, fills the need for accurate, fast, and automatic measurement of sinusoidal and non-sinusoidal waveforms through the audio range and well beyond. It has a meaningful accuracy of 0.1% of full-scale, or 0.33% of reading. Linearity is 0.02% over a 4:1 input range. Response time takes typically 2.5 seconds to settle to within 0.1% of final value.

The new converter features input Z of 1 Meg, 25 pF max on the 1 V to 1 kV ranges; and 1 Meg, 100 pF max on the 30 to 300 mV ranges. Temperature range is 20-30°C. The unit's output fullscale and impedance is 10 V: driving a 10 to 11 Meg or infinite load. The converter can be supplied to drive loads down to 1 Meg on special order.

Other features of the unit include common-mode rejection of 110 dB at 60 Hz for 1 k impedance in input-low lead; output ripple less than 1 mV, and stability of 0.02%/8 hours. An auxiliary probe supplies a 10-Meg input impedance, with less than 7 pF input capacitance.

Rms-to-dc conversion


This audio range converter operates from double-bridged thermistors with error-correcting feedback holding their temperatures within 0.002°C. Linearity is 0.02%, accuracy is 0.01% full-scale, and common-mode rejection is 110 dB at 60 Hz. Stability is 0.02%/8 hrs.

Applications for this converter range from ac signal-conditioning for digital voltmeters, to 0.01% ac-ac transfer work—with non-sinusoidal waveforms as well as quasi-sinusoidals, typical in field measurement situations. The model PR-840 is guarded and shielded for compatability with guarded digital voltmeters now on the market.

P&A: under $2,000; 90-120 days. Weston Instr., Weston-Rotek Div., 11 Galen St., Watertown, Mass. Phone: (617) 926-1750. TWX: (617) 924-1886.

SEE AT BOOTH 3K07

Circle No. 647

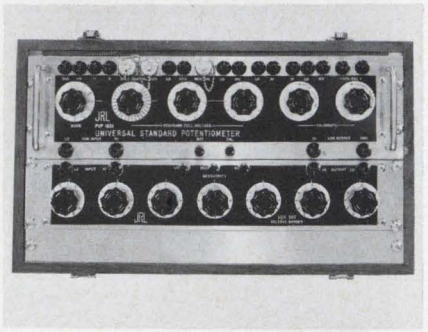

Wide-range resistance thermometer bridge

A versatile wide-range resistance thermometer bridge was designed in response to the chemical and electronics industries' usage of higher resistance probes.

The model 2550 Universal instrument can be used with all base and precious metal probes and solid-state resistance probes which employ two, three, or four terminal configuration. It can also be operated as a Mueller or Callander-Griffiths bridge.

The over-all resistance range is 0 to 1111.11 ohms. 6-place digital readout reads 0.001 ohm resolution direct, and 0.0001 ohm resolution with interpolation. Direct accuracy is ±0.008% + 0.0015 ohms, corrected to ±0.0025% + 0.001 ohm.


Self-calibration of this unit is possible with a precision resistor and a decade box. Calibration is traceable to the NBS.

P&A: $1150; 30-45 days. Radio Frequency Labs, Powerville, Boonton, N. J. Phone: (201) 334-3100.

SEE AT BOOTH 3B00

Circle No. 648



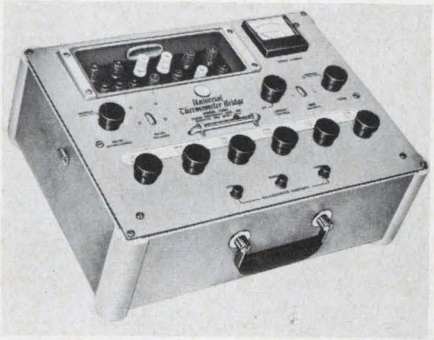

Standards potentiometer has 0.0003% accuracy

The model PVP-1001 Universal Standard Potentiometer is an extremely accurate device. All standards used are traceable to the National Bureau of Standards.

Accuracy in the 0-10 V, 0.1-1.1 V, and 0-1 V ranges is 0.0003% ±1μV. In the 0-0.1 V range it is 0.0005% ±0.1 μV; in the 0-0.01 V range it is 0.0008% ±0.01 μV; and in the 0-0.001 range it is 0.0013% ±0.001 μV.

The unit consists of a standard cell ratio set, an ultra-stable, thermally lagged mercury working cell reference, battery adjust and calibration rheostats, an accurate calibrated resistance chain, and an integral precision ratio range selector.

Primary standard accuracy is achieved by close control of error sources, and by designing around the JRL NB-1 primary standard resistor and the JRL standard oven (SCO-106).

P&A: $1925; 30 days (NBS certification at slight extra cost and delay). Julie Research Labs, 211 W. 61 St., New York, N. Y. Phone: (212) 245-2727.

SEE AT BOOTH 3G11

Circle No. 649

Vector impedance meter

Vector magnitude, R, C, and L can be read with the model 320. No bridge balance is required.

Ac outputs give Z angle with a phasemeter. Dc out indicates Z amplitude and osc. frequency. 5 Hz to 500 kHz, 1Ω to 7 Megs, 1 μH to 100 kH, 0.1 pF to 10,000 μF are the unit's ranges. A 5 Hz to 5 kHz signal is available. The units may be portable or rack-mounted.


P&A: $795; July. Dranetz, 1233 North Ave., Plainfield, N. J. Phone: (201) 755-7080.

SEE AT BOOTH M-4

Circle No. 650

NEW! Push-Button Bridge

Measures Impedance to 0.1% Accuracy

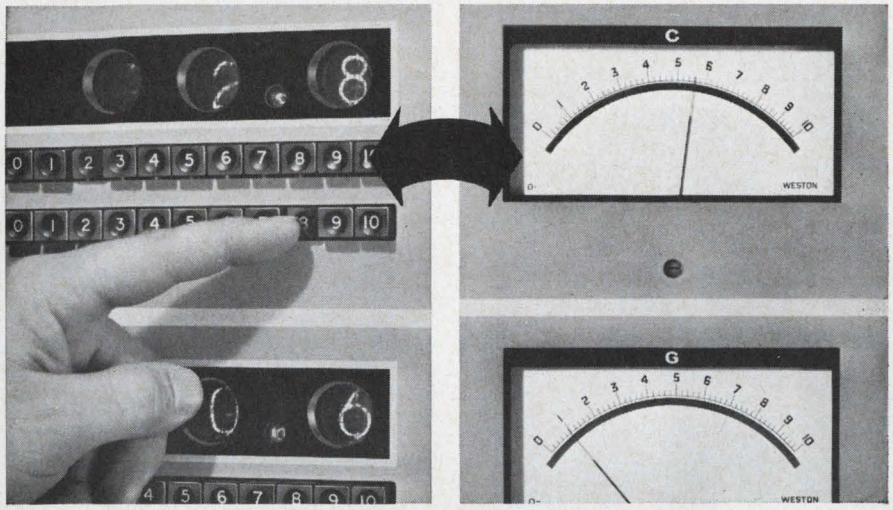


Once the Bridge is trimmed, a series of front-panel range push-buttons are suppressed in sequence until a reading is obtained on the meter. Setting up the first one or two digits of this reading on push-button decade controls gives the final reading.

No Manual Balancing with New Wayne Kerr B641 Universal Impedance Bridge

Now, batch testing of components or the observation of changing values under laboratory conditions are made simpler and faster by the new Wayne Kerr B641 Universal Impedance Bridge.

Designed for the continuous measurement of any type of impedance or admittance, at audio frequencies, as low as 1 picofarad — to an accuracy of 0.1% — the B641 **eliminates manual balancing,** makes readout virtually automatic.

Operation is simple: once the Bridge is trimmed, it is necessary only to depress a series of front-panel range push-buttons in sequence until a reading is obtained on the electronically-balanced meters. Setting up the first one or two digits of this reading on push-button decade controls makes the balancing automatic; the meters can read the first, second, third or fourth digits.



The Bridge produces analog voltage proportional to the meter readings and BCD (in a 1248 code), for the nixie readout.

The B641 is based on the transformer-ratio-arm principle, giving stable performance even when components under test form part of a sub-assembly (such as a printed board or an encapsulated unit) or when long measurement leads must be used.

SPECIFICATIONS

Overall Ranges: 0.002pF — 50,000μF
20p℧ — 500℧
200nH — 5MH
2nΩ — 50,000MΩ

Accuracy: 0.1% from 1pF to 10μF
10n℧ to 100m℧
1mH to 10kH
10Ω to 100MΩ

Discrimination: 0.01% of max. on all ranges

Price: $1,700 FOB Montclair, New Jersey

For literature and detailed specifications, write:

Wayne Kerr CORPORATION


18-B Frink St., Montclair, N.J. 07042 • Phone (201) 746-2438

INNOVATIONS IN INSTRUMENTATION

Visit Wayne Kerr at IEEE Show, Booths 3K45 - 3K46.

ON READER-SERVICE CARD CIRCLE 67

7-digit DVM

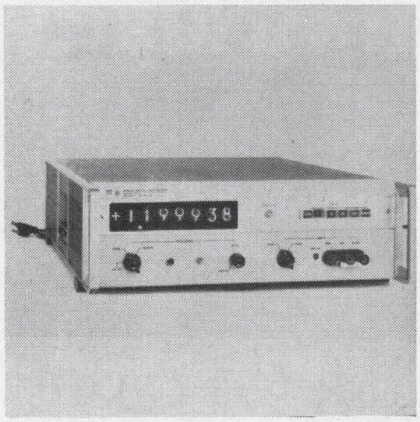


A 1 ppm resolution is featured in the Model H04-3460A Digital Voltmeter. An integrating-potentiometric unit, it measures 100 mV within 0.005% of reading. Accuracy is retained for at least 90 days. Designed for automatic operation in digital data acquisition systems, the unit's four ranges, up to ±1000 V, can be selected.

P&A: $4250; 30 days. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.
SEE AT BOOTH 3E01.

Circle No. 347

DVM plug-in

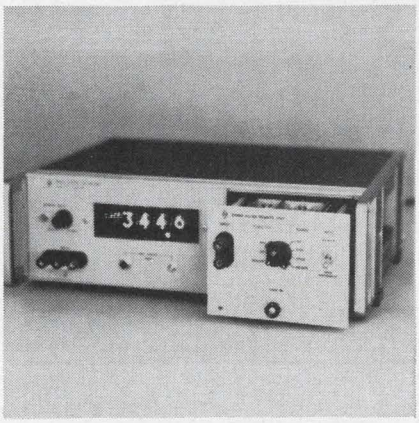


Designed for use with HP's Model 3440A digital voltmeter, model 3446A ac/dc remote plug-in unit makes it possible to remote-control the instrument's voltage range and/or function. The remote unit adds usefulness to the DVM in programed automatic data acquisition or manual test service. DVM remains accurate.

P&A: $575; stock. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.
SEE AT BOOTH 3E01.

Circle No. 348

VLF function generator

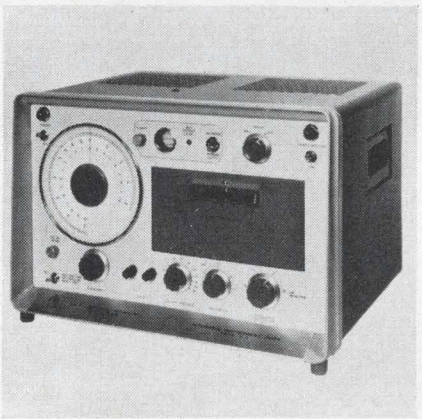


Model SG-88 function generator creates any single-valued waveform. A rotating transparent disc with an opaque representation of the desired waveform is scanned by a narrow light beam. Lenses, mirrors, and a phototransistor convert the light to a signal producing a waveform (0.005-50 Hz at levels from + 25 to − 25 Vdc).

P&A: $2300; 30 days. Houston Omnigraphic, 4950 Terminal, Bellaire, Tex. Phone: (713) 667-7403.
SEE AT BOOTH 3K34-35

Circle No. 349


Log frequency converter

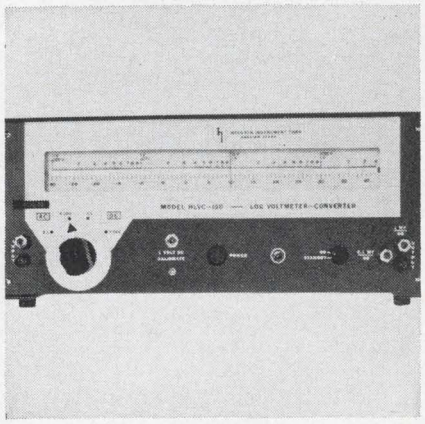

The model HLFC-120 frequency converter provides a dc output voltage directly proportional to the logarithm of the input frequency. Input can vary from 0.5 V to 100 V with high harmonics and not affect accuracy. Output is 100 mV at 350 ohms. Plug-in frequency discriminators cover 3 decades, 5 Hz to 20 kHz.

Houston Omnigraphic, 4950 Terminal, Bellaire, Tex. Phone: (713) 667-7403.
SEE AT BOOTH 3K34-3K35

Circle No. 350

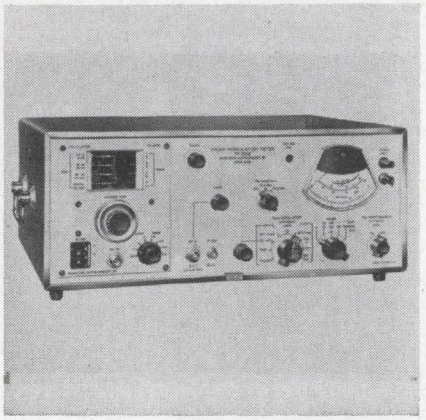


FM/AM meter

Model 2300 covers a 4-1000 MHz frequency range, and measures deviation in five ranges: ±5, 15, 50, 150 and 500 KHz at modulating frequencies up to 150 KHz. The solid-state unit is unaffected by spurious AM to 80%. Deviation due from FM noise is under 15 Hz-15 KHz bandwidth.

P&A: $1735; Mid-1966. Marconi Div., English Electric, 111 Cedar, Englewood, N. J. Phone: (201) 567-0607.
SEE AT BOOTH 3G01-05

Circle No. 351

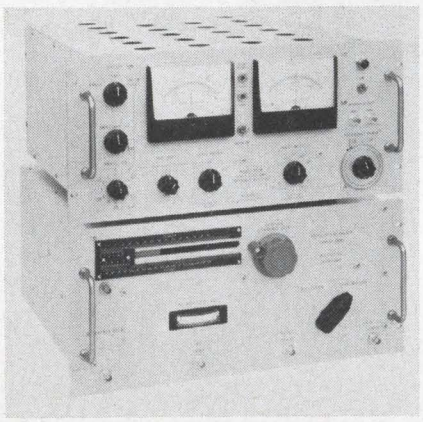


Automatic analyzer

Model 310B is a phase, amplitude and impedance analyzer provided swept frequency over the 20 MHz to 18 GHz range. When used with its companion resolver, it replaces slotted lines, reflectometers, insertion loss meters, Z plotters and bridges. It is suited to FM systems requiring phase and impedance control.


P&A: $8000; 8 weeks. Wiltron Co., 930 E. Meadow Dr., Palo Alto, Calif. Phone: (415) 321-7228.
SEE AT BOOTH 3B33.

Circle No. 352

ADD
new capabilities to your
SM-2000
SWEEP GENERATOR

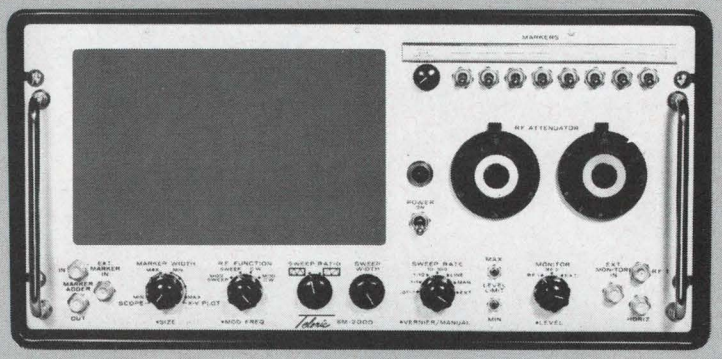

These two new plug-in oscillators permit fast or slow scanning rates with built-in frequency indication and they're both solid-state.




VR-2M Plug-in Oscillator

200 Hz to 12 MHz


- ***Variable Sweeping Rate***
- ***Ultra-stable Oscillator***
- ***Built-in Variable Marker***
- ***1 V RMS Output***

Here's the quickest route to direct determination of frequency response from audio through AM, FM, IF and video frequencies all in a single oscillator. The VR-2M gives the SM-2000 control unit a whole new degree of versatility in checking amplifiers, tuners, oscillators and other wide and narrow band devices. Sweeping rate of the unit may be varied from 0.01 to 100 Hz, and its integral marker system provides precise frequency location over the entire range. Output may be scope displayed or X-Y recording in slow mode, providing db vs. frequency, precisely and directly.



CRYSTAL FILTERS?

A primary application of the VR-2M is check-out of crystal filters. Exceptional stability and slow-sweep rates permit precise recordings of frequency response, as shown in the chart reproduction at left.




VR-50M Plug-in Oscillator

500 to 1000 MHz

- ***Sweeps 5 MHz to Full Octave***
- ***Variable Sweeping Rate***
- ***Solid State Dependability***

The combination of an SM-2000 Controller with the new VR-50M oscillator can deliver a display of frequency vs db over its entire range of 500 to 1000 MHz in a single trace. It can also sweep any portion of that range from 5% up, and at a rate variable from .01 to 100 Hz. It provides fast answers for check-out, alignment and testing of frequency response in IF, RF, and broadband video devices.




Combine all that performance with the VR-50's solid-state reliability, a .3v RMS level output, an integral, continuously variable frequency marker, and you have another reason why the SM-2000 is the most useful, inexpensive investment in swept instrumentation today.

Detailed specification on these two new oscillators, the SM-2000 control unit and 18 other plug-in heads will be sent on request, or contact your nearest Telonic representative.

SWEPT FREQUENCY APPLICATIONS

An invaluable collection of data sheets covering swept frequency applications is also available—send for your set now.




Telonic® INDUSTRIES, INC.
60 North First Avenue, Beech Grove, Indiana
Tel: (317) 787-3231 TWX: 810-341-3202

See Telonic at IEEE, booths 3K24-3K26

ON READER-SERVICE CARD CIRCLE 68

Easily-added AUXILIARY SWITCHES

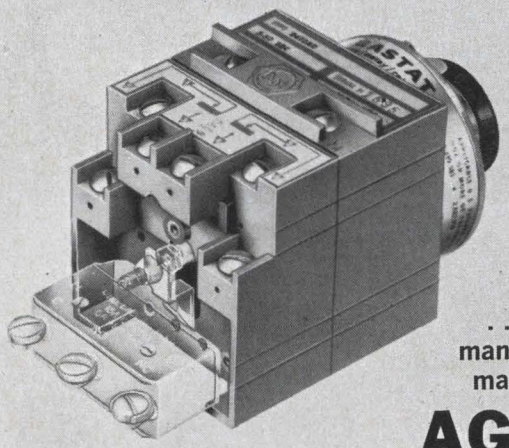


. . . One of the many features that make the all new

AGASTAT®


time/delay/relay

2400 series


the most advanced pneumatic available




Now simplify inventory with easy-to-add auxiliary switches! All basic units can be readily adapted to handle extra circuits, give two-step timing or provide electrical interlock action. Auxiliary switch flexibility is only one outstanding 2400 Series feature; don't overlook these other pneumatic firsts:

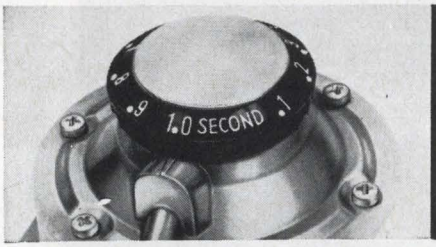


Exclusive time-calibrated adjustment dials—9 ranges from milliseconds to 60 minutes.

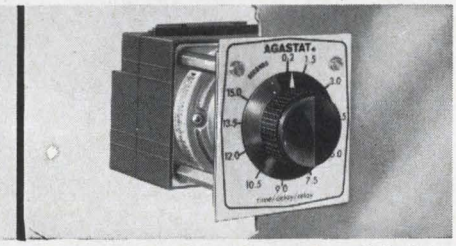

New panelmount style—modern dial plate, protected mechanism.

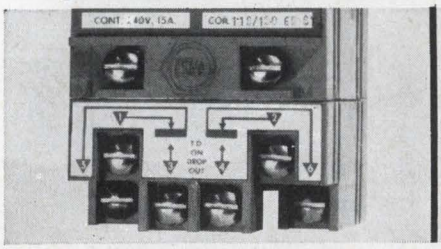

Convenient front terminals—out-front accessibility with integral wiring diagram.

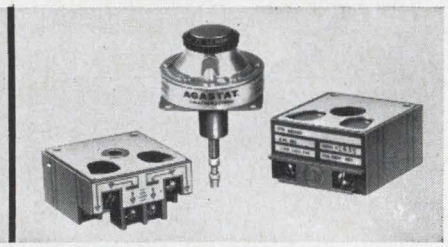

Modular design—permits simple change of coils or switchblocks in the field.

PLUS all popular AC and DC operating voltages • timing on pull-in or drop out or both in one unit • all DPDT switches • capacities to 20 amps • high repeat accuracy • instant recycling.

Write Dept. A27 for full specifications.

AGASTAT TIMING INSTRUMENTS

ESNA ELASTIC STOP NUT CORPORATION OF AMERICA


ELIZABETH DIVISION ■ ELIZABETH, NEW JERSEY

IN CANADA: ESNA LIMITED, 271 PROGRESS AVENUE, SCARBOROUGH, ONTARIO

ON READER-SERVICE CARD CIRCLE 69

INSTRUMENTS—3RD FLOOR

Volt/ratio meter

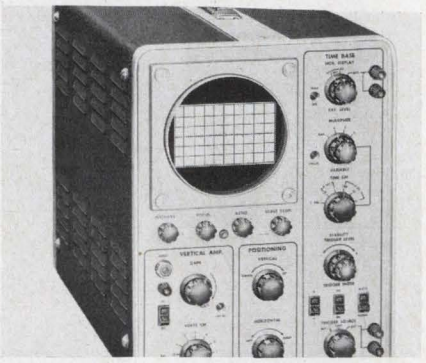

Model DAN 60 differential volt/ratio meter combines 3 instruments: differential voltmeter, differential ratiometer, and null detector—into one package. The unit has two primary components—a complete differential voltmeter and a differential ratiometer. In addition, independent use of the transistorized voltmeter as a sensitive null detector is provided.

General Resistance, Inc., 430 Southern Blvd., Bronx, N. Y. Phone: (212) 487-0242.

SEE AT BOOTH 3D08

Circle No. 507

Dc oscilloscope



Designed for use in industrial, academic, and medical laboratories, the 10-14 dc oscilloscope is available in either kit or wired form. The vertical channel of the scope has a dc to 8 mc bandwidth and a sensitivity of 0.05 V/cm ac or dc. The horizontal channel of the 10-14 has 18 triggered sweep rates in 1, 2, 4 sequence from 0.5 sec/cm to 1 usec/cm with an accuracy of $\pm 3\%$.


P&A: Kit $299, wired $399; April. Heath Co., Benton Harbor, Mich. Phone: (616) 983-3961.

SEE AT BOOTH 3K13

Circle No. 508

Westinghouse makes things happen:

the first new glass capacitors in 14 years

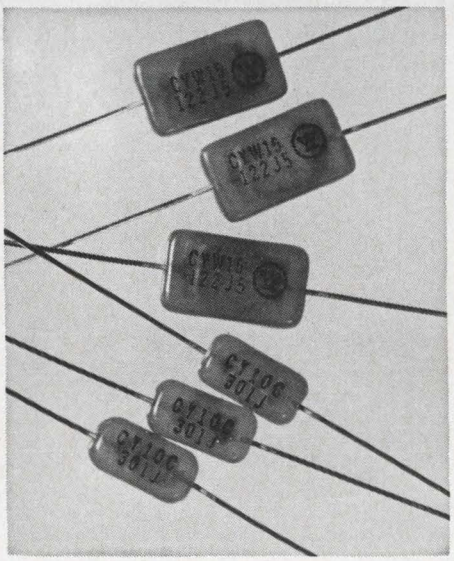

Now Westinghouse introduces two lines of capacitors with monolithic glass construction . . . a true glass-to-metal seal. At last you can do some comparison shopping in glass capacitors.

Type CY exceeds MIL-C-11272. Every capacitor is individually "wrung out" in a battery of punishing tests.

Type CYW is the same capacitor, but at a fraction of the cost. The only difference is that it doesn't get this exhaustive individual testing. It gives you the stable performance of glass, the ideal dielectric, at a price competitive with ordinary capacitors.

What do we mean by stable performance? Plenty. Compare these specs to the capacitors you're now using.

1) Capacitance drift less than 0.1% per decade of frequency. 2) Dissipation factor less than .001 at 25°C and 1 Kc. 3) Monolithic construction—glass to metal seal. 4) 50% greater high-voltage breakdown capability than conventional glass capacitors. 5) Insulation resistance: minimum of 100,000 megohms at 25°C and 10,000 megohms at 125°C.


When a whole circuit's performance can depend on one capacitor, why take chances? Be sure. Specify Westinghouse glass capacitors.

Call your Westinghouse distributor for immediate delivery. Or, for detailed technical data, write G. Blackmon, Marketing Manager, Westinghouse Capacitor Department, P.O. Box 868, Pittsburgh, Pa.

You can be sure if it's Westinghouse

ON READER-SERVICE CARD CIRCLE 70

VOLTMETER WITH A MEMORY ...DC TO 20 MEGACYCLES

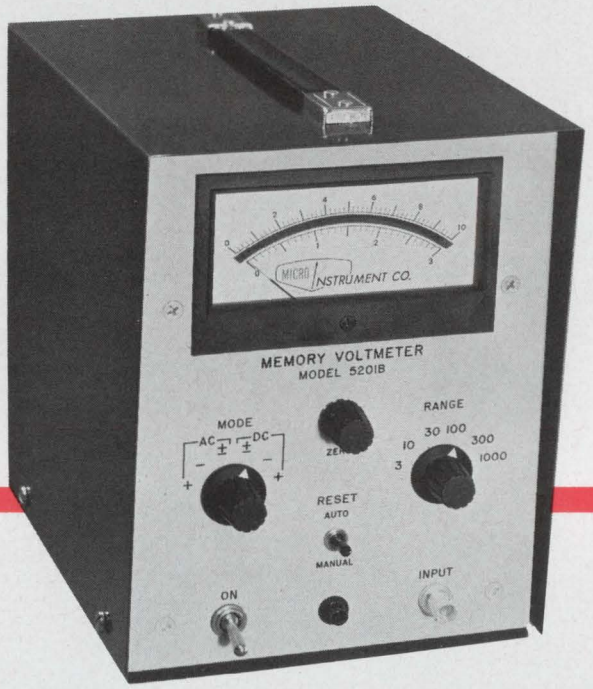

The Model 5201 memory voltmeter is a dc to 20 mc instrument which measures and stores indefinitely the maximum peak voltage applied, including continuous or one shot pulses as short as 50 nanoseconds. A memory reset-switch on the front panel allows the 5201 to monitor peak values of a varying waveform, either positive or negative going.

The solid-state 5201 is also available with a 4-digit in-line Nixie® tube readout. The voltage range may be extended to 30 kv with optional high voltage probes. For complete technical information, contact the Micro Instrument representative near you or write directly to us.

Specifications

VOLTAGE RANGE	0-3, 10, 30, 100, 300, 1000 volts. Can be operated up to 1000 volts above ground.
INPUT IMPEDANCE	100 k-10 megohms (depending on range).
PULSE WIDTH	DC to 50 (typically 30) nanoseconds.
OPERATING MODES	+, —, ± (DC or AC coupled).
READOUT	5" mirror-backed 1% meter.
PRICE	$695.00.


MICRO INSTRUMENT CO.

13100 CRENSHAW BLVD., GARDENA, CALIFORNIA 90249
PHONES: (213) 323-2700 & 321-5704 / TWX (213) 327-1312

ON DEMONSTRATION AT IEEE SHOW IN BOOTH 4 M 31

ON READER-SERVICE CARD CIRCLE 71

INSTRUMENTS—3RD FLOOR

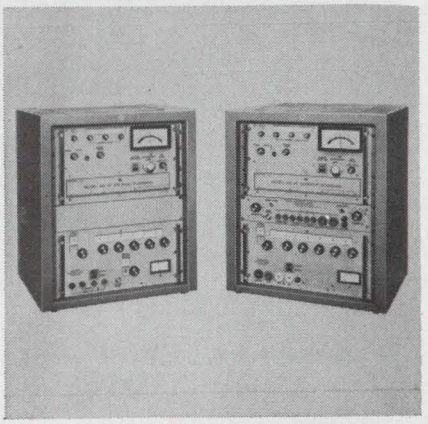


Voltage/current source

Designed for calibrating voltmeters, ammeters and wattmeters, the model 100 system is an ac voltage and current standard for separate or combined operation. The solid-state sine wave source offers ac emf from 1 mV to 1000 V at frequencies from 50 Hz to 10 kHz.

P&A: $7250-$14,500. Radio Frequency Laboratories, Inc., Powerville Rd., Boontoon, N. J. Phone: (201) 334-3100.

SEE AT BOOTH 3B00.

Circle No. 353

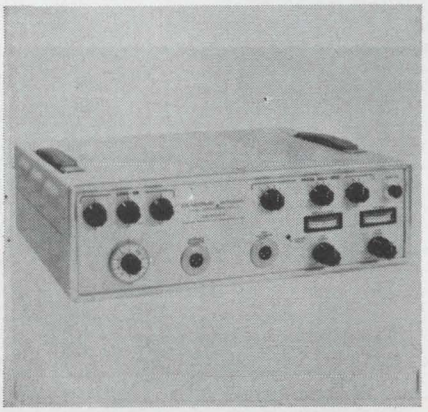


Insertion loss tester

Direct insertion loss in dB, eliminating calibration charts is featured in Model DB-3000-3. The battery-operated unit measures loss with ±0.007 dB absolute accuracy and ±0.002 dB relative accuracy, up to 1.0 dB. Measurements of ±0.01 dB are obtainable over one-third of its 29 dB dynamic range.

P&A: $2495; 4 weeks. Datapulse Inc., DeMornay-Bonardi Div., 780 S. Arroyo Pkwy., Pasadena, Calif. Phone: (213) 792-4142.

SEE AT BOOTH 3K27-29.

Circle No. 354

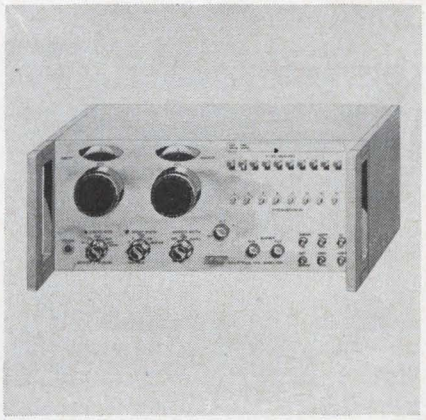


Sweep generator

A 10 kHz wide harmonic marker, said to be better by a factor of 40 over existing systems, is featured in model 1001 sweep generator. The solid-state unit operates over the 100 kHz to 20 MHz range. The marker can be selected to be 10 kHz, 1 kHz or 100 Hz wide. Operation of the generator can be in the swept or cw mode.

Telonic Industries, Inc., 60 N. First Ave., Beech Grove, Ind.

SEE AT BOOTHS 3K24-26.

Circle No. 355

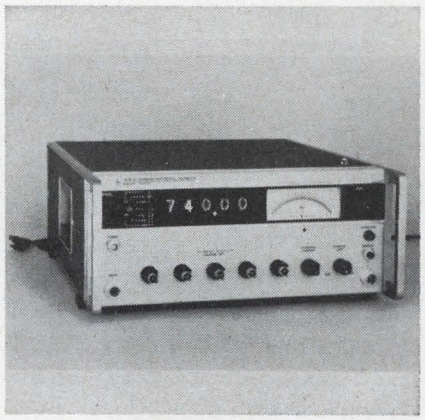

DC voltmeter

A 0.002% dc voltage accuracy is featured in Model 740B Standard/Differential Voltmeter. It has 6 digital places, offered in discrete steps to 1 ppm resolution. As a dc source, the unit produces outputs from 0 to 1000 V. Accuracy remains for 30 days without recalibration, with temperature variations from 15-35°C.

P&A: $2350; 60 days. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.

SEE AT BOOTH 3E01-18.

Circle No. 356


See the NEWEST in SLIDES and CABINETS

chassis Trak inc.

INDIANAPOLIS, INDIANA

IEEE BOOTH 4F14

4TH FLOOR — NEW YORK COLISEUM

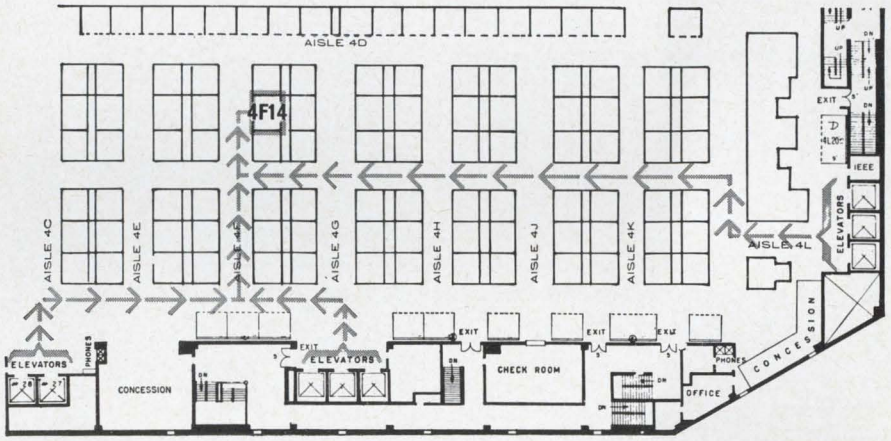

FOLLOW THIS MAP TO THE NEW CHASSIS-TRAK BOOTH

...where you will find the newest ideas and designs in slides and cabinets available in America today. Don't miss this opportunity to spend a few minutes exploring tomorrow's sophisticated enclosures and hardware.

AT THE IEEE BOOTH 4F14

March 21 through March 24

chassis Trak inc.

525 South Webster Avenue

Indianapolis, Indiana

ON READER-SERVICE CARD CIRCLE 72

New Catalog.

HAYDEN BOOKS

1966

New Books:

- ☐ Ideas for Design '66
- ☐ Microelectronic Design
- ☐ Basic Microwaves
- ☐ Principles of Transistor Circuits

and lots more, at our

New Booth...

IEEE SHOW

#1P03 (1st Floor)


HAYDEN BOOKS

ON READER-SERVICE CARD CIRCLE 74

U150

INSTRUMENTS—3RD FLOOR

Semiconductor tester

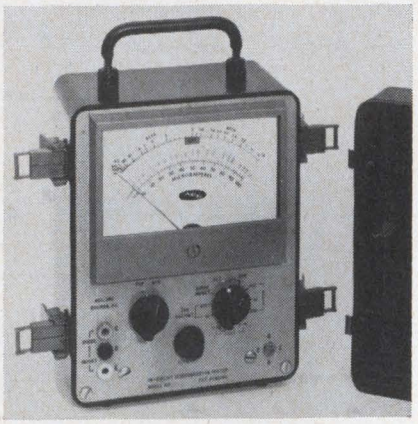


Diodes, rectifiers, transistors, and FETs are checked by model 259 in- or out-of-circuit. It measures both transistors and diodes, in-circuit, for reverse leakage down to 500 ohms of loading. It also measures FETs for leakage and transconductance, and both low and high power transistors for Beta (h_{fe}) within a 1 to 100 range.

American Electronic Laboratories, Inc., P.O. Box 552, Lansdale, Pa. Phone: (215) 822-2929.

SEE AT BOOTH 1A11.

Circle No. 359

Waveform oscilloscope

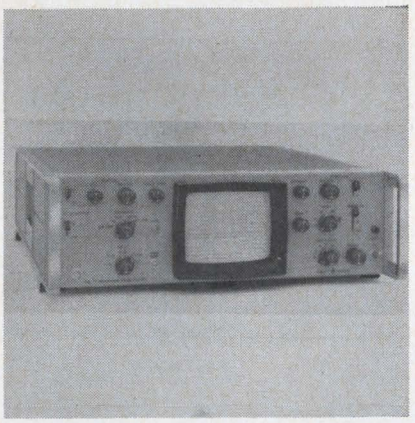

For testing TV waveforms, Model 191A oscilloscope features a 1% vertical accuracy for most measurements, 1% stability for all operations. A new CRT shows low-duty-cycle signals full screen. T/2, T and 2T sine-squared test pulses, used to test transmission facilities, are 62.5 to 250 ns.

P&A: $1295; Summer 1966. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.

SEE AT BOOTH 3E.

Circle No. 360

Delay distortion analyzer




An FM receiver is used in this analyzer designed for use in testing FM circuits. The receiver covers 50-90 MHz, and converters allow RF measurements over 3.7-11.7 GHz. Resolution is 0.5 ns. The model 336 receiver has a companion FM transmitter, model 335.

P&A: Receiver, $5800; Transmitter, $1950. Converters range from $3600 to $3900. 11 wks. Wiltron Co., 930 East Meadow Dr., Palo Alto, Calif. Phone: (415) 321-7428.

SEE AT BOOTH 3B33

Circle No. 361

Test assembly

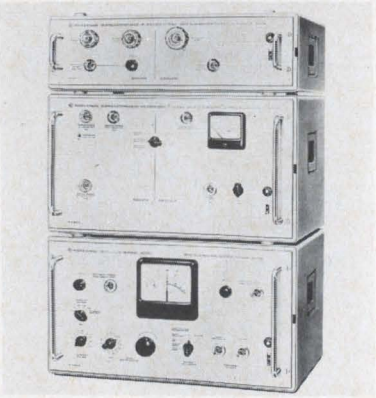

Test assembly type LFM determines group delay and phase distortion of transmission systems. The group-delay measuring section has ±1000 ns, ±300 ns, ±100 ns, ±30 ns, ±10 ns ranges, all ±2%. The group-delay test set video modulator covers a range of 100 kHz to 10 MHz. The RF modulator covers 25 to 250 MHz.


P&A: $8,400; 6 mos. Rhode & Schwarz, 111 Lexington, Passaic, N. J. Phone: (201) 773-8010.

SEE AT BOOTH 300A

Circle No. 362

The Standard Reference For Electronic Test Instruments

DIRECTORY OF TECHNICAL SPECIFICATIONS

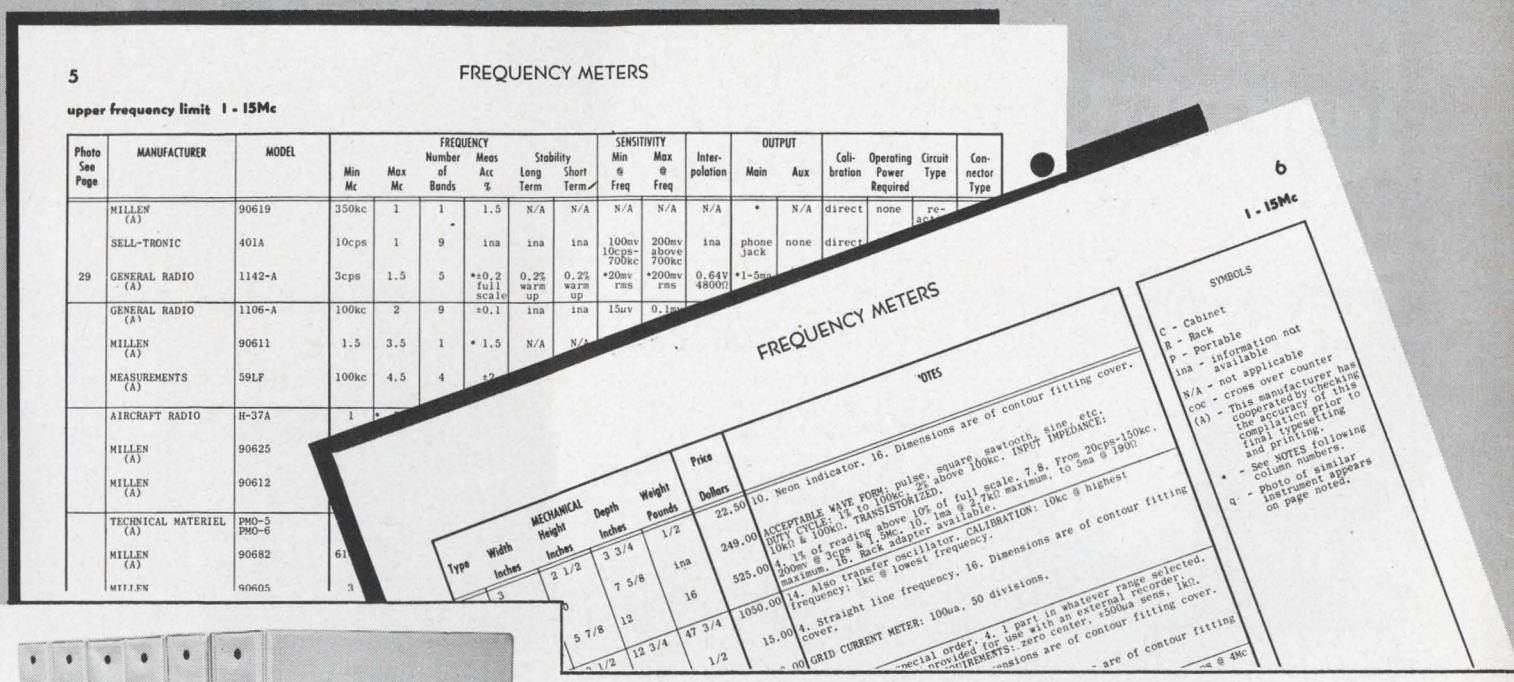

5 FREQUENCY METERS

upper frequency limit 1 - 15Mc

Photo See Page	MANUFACTURER	MODEL	FREQUENCY Min Mc	Max Mc	Number of Bands	Meas Acc %	Stability Long Term	Stability Short Term	SENSITIVITY Min @ Freq	SENSITIVITY Max @ Freq	Inter-polation	OUTPUT Main	OUTPUT Aux	Cali-bration	Operating Power Required	Circuit Type	Con-nector Type
	MILLEN (A)	90619	350kc	1	1	1.5	N/A	N/A	N/A	N/A	N/A	*	N/A	direct	none	re-act-	
	SELL-TRONIC	401A	10cps	1	9	ina	ina	ina	100mv 10cps-700kc	200mv above 700kc	ina	phone jack	none	direct			
29	GENERAL RADIO (A)	1142-A	3cps	1.5	5	*±0.2 full scale	0.2% warm up	0.2% warm up	*20mv rms	*200mv rms	0.64V 48000	*1-5ma					
	GENERAL RADIO (A)	1106-A	100kc	2	9	±0.1	ina	ina	15uv	0.1m							
	MILLEN (A)	90611	1.5	3.5	1	* 1.5	N/A	N/A									
	MEASUREMENTS (A)	59LF	100kc	4.5	4	±2											
	AIRCRAFT RADIO	H-37A	1	*													
	MILLEN (A)	90625															
	MILLEN (A)	90612															
	TECHNICAL MATERIEL (A)	PMO-5 PMO-6															
	MILLEN (A)	90682	61														
	MILLEN	90605	3														

6 1 - 15Mc

FREQUENCY METERS


Type	MECHANICAL Width Inches	Height Inches	Depth Inches	Weight Pounds	Price Dollars
	3	2 1/2	3 3/4	1/2	22.50
			7 5/8	ina	249.00
		5 7/8	12	16	525.00
					1050.00
		12 3/4	47 3/4	1/2	15.00
	1/2				.00

NOTES

10. Neon indicator. 16. Dimensions are of contour fitting cover.
ACCEPTABLE WAVE FORM: pulse, square sawtooth, sine, etc.
DUTY CYCLE: 1% to 100kc, 2% above 100kc. INPUT IMPEDANCE:
10kΩ & 100kΩ. TRANSISTORIZED.
4. 1% of reading above 10% of full scale. 7 8. From 20cps-150kc.
200mv @ 3cps & 2 5mc. 1ma @ 2.7kΩ maximum, to 5ma @ 190Ω
maximum. 15. Rack adapter available.
14. Also transfer oscillator. CALIBRATION: 10kc @ highest
frequency; 1kc @ lowest frequency.
4. Straight line frequency. 16. Dimensions are of contour fitting
cover.
GRID CURRENT METER: 100ua, 50 divisions.
special order. 4. 1 part in whatever range selected.
provided for use with an external recorder
REMENTS: zero center, ±500ua sens., 1kΩ.
nsions are of contour fitting cover.
are of contour fitting
@ 4Mc

SYMBOLS

C - Cabinet
R - Rack
P - Portable
ina - information not available
N/A - not applicable
coc - cross over counter
(A) - This manufacturer has cooperated by checking the accuracy of this compilation prior to final typesetting and printing.
* - See NOTES following column numbers.
q - Photo of similar instrument appears on page noted.

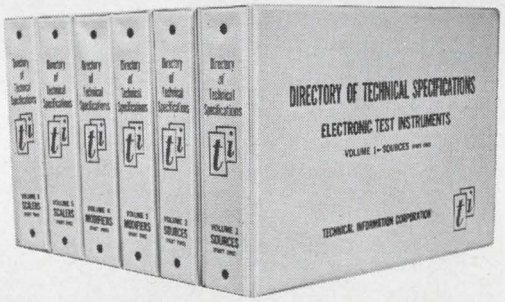

CONVENIENT TABULAR FORMAT PROVIDES QUICK AND EASY MODEL-TO-MODEL COMPARISONS

One look at the specimen pages will show you—better than words—the extent of the information furnished by the DIRECTORY OF TECHNICAL SPECIFICATIONS and the comparative arrangement of the data. These convenient tables are designed for rapid and accurate point-by-point comparison of instruments having similar functional capabilities. By providing a thorough across-the-market analysis, all alternatives can be considered in selecting the right instrument for any application.

SAVE HOURS OF ENGINEERING TIME

The Directory eliminates once and for all the necessity of searching catalogs, sales literature and periodicals to find suppliers, specifications, performance characteristics and prices. It provides in one comprehensive source, arranged and indexed for convenient use, all the information you need to keep completely up-to-date on available instruments, to evaluate competitive products and to select the best instrument at the best price.

NO NEED FOR CATALOG FILES

Keeping and maintaining your own files of manufacturers catalogues, brochures and loose data sheets is completely unnecessary. The DIRECTORY OF TECHNICAL SPECIFICATIONS gives you all the required data to select and specify electronic test instruments—all in one compact and easy to use reference. No other reference source is as complete or efficiently organized. The six-volume Directory lists approximately 14,000 instruments of more than 500 manufacturers and comprises 46 sections, each covering a different type of instrument.

ALWAYS COMPLETE AND UP-TO-DATE

The constant changes in specifications and performance of electronic test instruments is making it increasingly difficult to keep abreast of the latest developments. The Directory is kept continuously up-to-date by the mailing of section revisions to subscribers at the rate of approximately one each week. The information in the entire Directory is completely revised in less than a year.

AVAILABLE ON FREE 30-DAY TRIAL

The DIRECTORY OF TECHNICAL SPECIFICATIONS may be obtained on a FREE 30-DAY TRIAL BASIS for your examination and use. A one-year subscription includes the six-volume set of 46 sections plus the up-dating service to keep all information complete and current.

PRICE . . . $300. per year

For further information write or telephone . . .


TECHNICAL INFORMATION CORP.

P. O. Box 514, Smithtown, N. Y. (516 234-0100

See us at IEEE Booth 1C35

ON READER-SERVICE CARD CIRCLE 75

Columbia
WIRE & SUPPLY
the source that
is geared for
"SPECIALS"

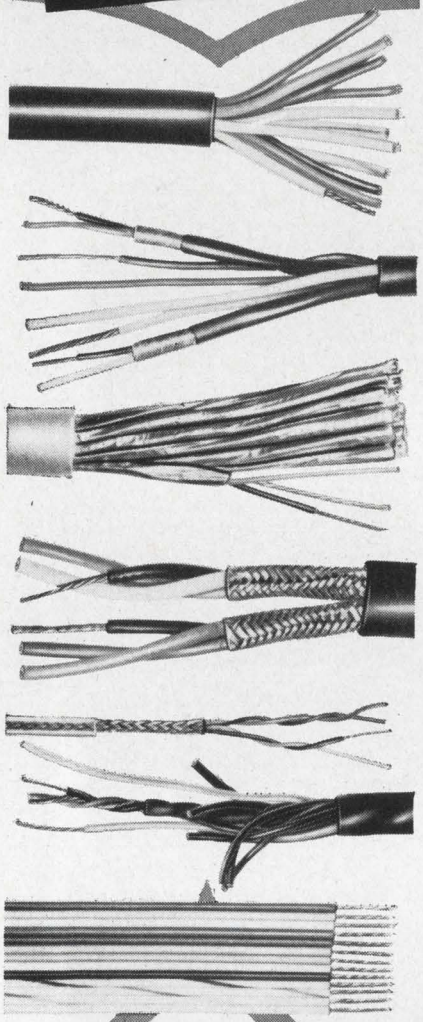


No matter what
your needs are in wire
or cable... the chances are that Columbia
has it . . . IN STOCK and IN QANTITY!
We have built our reputation by being "specialists" in "specials" for industry, science and the military. You name it and Columbia has it . . . or the knowledge skill, and facilities for producing it in very short order. Columbia wire and cable is both UL and CSA listed. For both experimental and production runs, specify Columbia and you'll save both money and time.

Write for Catalog 111 today and learn how completely Columbia "wires you in" to greater profit possibilities.

Columbia
WIRE & SUPPLY CO.
2850 IRVING PARK ROAD
CHICAGO 18, ILLINOIS

ON READER-SERVICE CARD CIRCLE 76

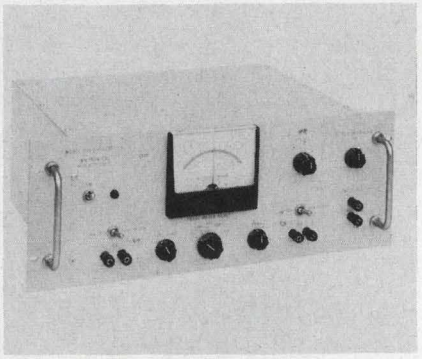

LF phase meter

The range from 10 Hz to 500 kHz is covered in this unit with 0.1° full phase resolution at any phase angle. Any part of the phase range can be expanded. Fixed accuracy is 0.5°. It measures over a 60 dB range without an attenuator (1 mV to 50 V). Swept frequency phase plotting can be done with the unit because of the large dynamic range. In this case, phase measurements have to be made accurately in the presence of amplitude fluctuations. This type of measurement is gaining importance at audio frequencies.

Added sensitivity eliminates the need for external or plug-in preamplifiers which may introduce phase errors of their own into the measurement.

Phase output is provided on a meter as well as in a voltage form with linear calibration from 0 to 180°. The voltage output for 180° is +1.8 V. This sort of voltage-to-angle equivalence makes the unit particularly suited to use with a digital voltmeter of recorder.


The meter also includes a +180° switch so that the operator can easily switch to a more convenient range. This feature is useful where measurements directly around 180° are involved. It is convenient to have these relationships occur around zero degrees, so that the meter doesn't tend to swing back and forth between plus and minus 180°.

Input impedance is 1 Meg shunted by 20 pF.

P&A: $935 FOB Palo Alto. 8 weeks. Wiltron, 930 East Meadow Drive, Palo Alto, Calif. Phone (415) 321-7428.

SEE AT BOOTH 3B33

Circle No. 363

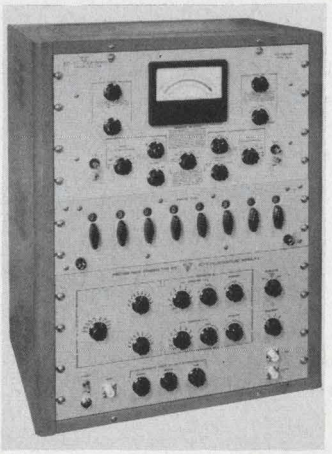

Precision phase standard

Accuracy of 0.018 deg is offered in this wide-band primary precision phase standard, type 209. Coverage is from 50 Hz to 10 kHz continuous, with self-calibration and self-checking by bridge balance. Phase shift can be set to 7-digit resolution from 0 to 360 deg. Unit is suitable for production line or for calibrating phase meters.

Ad-Yu Electronics, 249 Terhune Ave., Passaic, N. J. Phone: (201) GR2-5622.

SEE AT BOOTH 3D05

Circle No. 536

Electronic counter

When used with a voltage to frequency converter, the model EC 715 high speed counter/timer can function as an integrating digital voltmeter in addition to its counting and timing capabilities. The EC 715 unit is said to have all the operating modes usually found in much larger instruments which are normally used for similar digital applications. The count of the EC 715 is visually displayed on the front panel.

Specifications of the counter/timer include: accuracy, ±1 count plus 1 MHz crystal stability of ± 0.1 ppm per week; temperature coefficient of the EC 715 is ±0.002 ppm per degree centigrade warmup. With an overall weight of 7 pounds the EC 715 counter/timer is described by the manufacturer as being a fully portable instrument.

P&A: $1450; 45 days. Aerojet-General, P. O. Box 216, San Ramon, Calif. Phone: (415) 837-5311.

SEE AT BOOTH M16-17


Circle No. 538

There's a big new addition to the DIEHL line of servo components, motors and packages...




SERVO AMPLIFIERS

ALL NEW




VORTEX BLOWER




MOTOR-TACHOMETER-GEAR TRAINS




STEP-SERVOMOTORS




PHASE SHIFTERS AND RESOLVERS

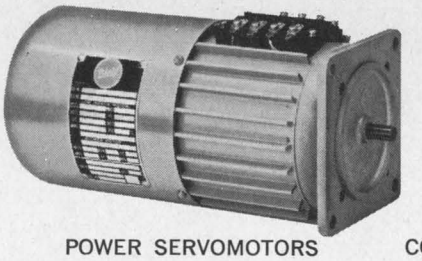


POWER SERVOMOTORS




COMMERCIAL INSTRUMENT MOTORS (with and without gear reduction)

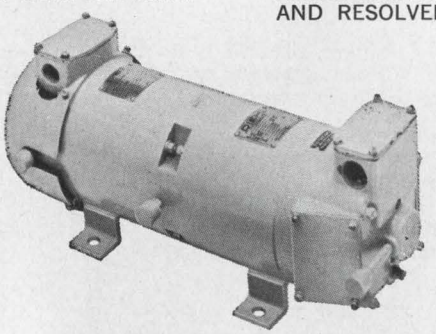

MOTOR-GENERATOR SETS



MULTI-STAGE BLOWERS




D-C MOTORS



INSTRUMENT SERVOMOTORS

See these products at Booths 2B39-43 at IEEE, or Send for Detailed spec sheets.

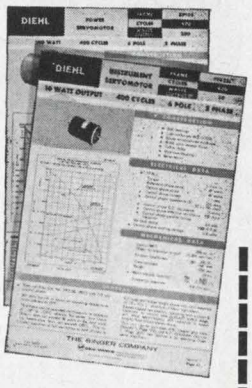

THE SINGER COMPANY

Diehl * **DIEHL DIVISION**

Finderne Plant, Somerville, N. J.

Please send specification sheets on

- ☐ Servo Amplifiers
- ☐ Instrument Servomotors
- ☐ Motor-Tachometer-Gear Trains
- ☐ Step-Servomotors
- ☐ Phase Shifters and Resolvers
- ☐ Power Servomotors
- ☐ Commercial Instrument Motors
- ☐ Motor-Generator Sets
- ☐ Multi-Stage Blowers
- ☐ D-C Motors
- ☐ Vortex Blower

Name . . . . . Title . . . . .

Company . . . . .

Street . . . . .


City . . . . . State . . . . . Zip . . . . .

* A TRADEMARK OF THE SINGER COMPANY • DI-107

ON READER-SERVICE CARD CIRCLE 77

ANOTHER FABRICATING SERVICE FROM AA

ALL TYPES OF ALUMINUM ENCLOSURES

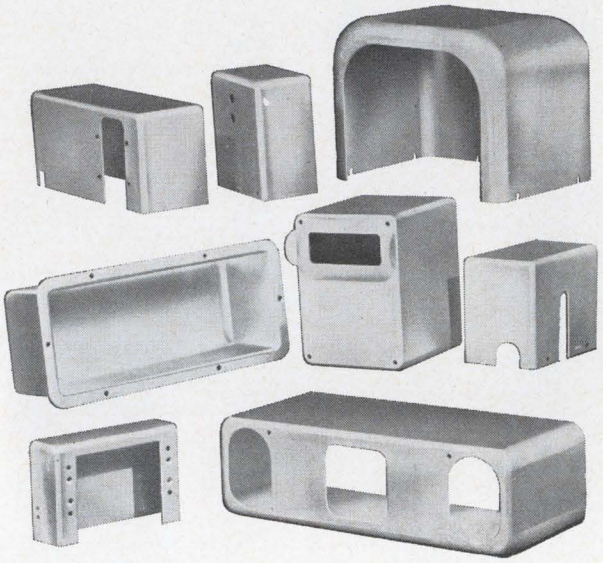


For over fifty years, American Aluminum Company has fabricated all types of aluminum enclosures for the electronics industry.

Today's need for lightweight enclosures are great and American Aluminum's vast facilities can provide many sizes and shapes to fill your specific requirements.

May we quote your next enclosure need? You'll find our services rapid, precise, and dependable. Immediate attention, with emphasis on quality and reliability will be given.

OTHER PRODUCTS & SERVICES OF AMERICAN ALUMINUM

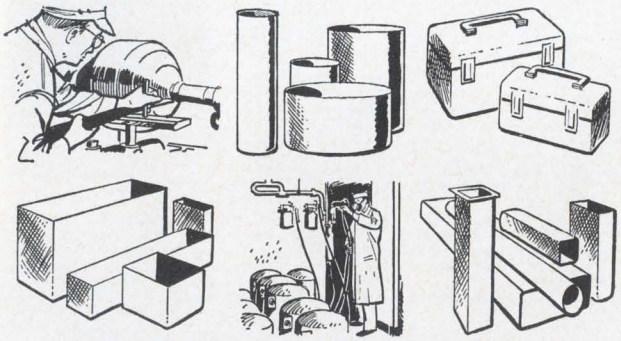

SPECIALISTS IN CONTRACT MANUFACTURING OF ALUMINUM

COMPLETE FABRICATING FACILITIES FOR DEEP DRAWING, HEAT TREATING, SPINNINGS, ASSEMBLY, SHEET METAL, STAMPINGS, ANODIZING, WELDING, FINISHING.

Send for brochure "Aluminum Fabricating For Industry"

AMERICAN ALUMINUM COMPANY

Manufacturers of Aluminum Products for Industry since 1910


230 Sheffield St. • Mountainside, N. J. • 201-233-3500

See us at the I.E.E.E. Show. Booth 4H13

See us at the I.E.E.E. Show, Booth 4H13

ON READER-SERVICE CARD CIRCLE 80

INSTRUMENTS—3RD FLOOR

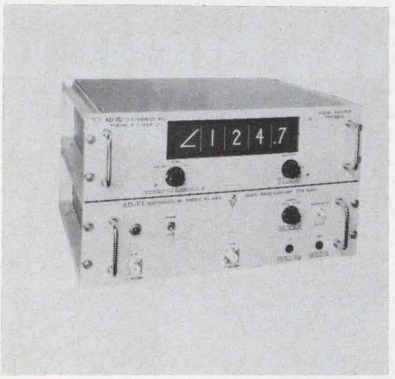

Wide-band phase meter

Designed for simplified operation, the wide-band digital phase meter, type 524A3, provides a direct readout of relative phase with an accuracy of $\pm 0.03°$. Frequency range is 20 Hz to 500 kHz and amplitude range is 0.3 volts to 50 volts. Phase angles from 0° to 360° can be measured without making any instrument adjustments.

An analog output provides direct connection to recorders or programmable systems. This output has a characteristic impedance of approximately 200 kΩ and provides a voltage of 1 mv per 0.1° of phase angle. The digitized output may be read out to four places with the digital indicator, type 524R1.

Instrument accuracy is not affected by the presence of either even or odd harmonics which have either 0° or 180° of phase difference with the fundamental. There is no ambiguity or instability in making measurements in the vicinity of 0° or 180°.

The instrument may be used to plot phase characteristic curves from 20 Hz to 500 kHz and delay distortion curves for telephone lines and communication systems. Phase characteristics of heavily distorted signals may also be plotted if the unit is used in conjunction with the Dual Channel Synchronous Filter, Type 1034, also manufactured by Ad-Yu Electronics, Inc.

Ad-Yu Electronics, Inc., 249 Terhume Ave., Passaic, N. J., Phone: (201) GR2-5622.

SEE AT BOOTH 3D05

Circle No. 539

Why specify Mallory MTP wet slug tantalum capacitors?

☐ they're much smaller than solid tantalum types and


☐ they don't need voltage de-rating!

Suppose you need a high-reliability capacitor for a miniaturized circuit. You know working DC voltage, required capacitance, ambient temperature. What capacitor will meet these parameters in minimum size?

Our answer—the Mallory MTP wet slug tantalum capacitor. C x V "density" of the MTP goes up to 172,000 mfd-volts per cubic inch—about 5 times as much rating per unit size as solid electrolyte tantalum types.

Next step—pick the exact rating you need. The circuit says 30 volts. So you decide to specify a 50 volt unit. Right?

Wrong. You *don't* need to de-rate the MTP. Contrary to long-standing belief, operating at reduced voltage neither improves nor impairs performance. Not for this capacitor. We've made tests to prove it. Here is typical data:

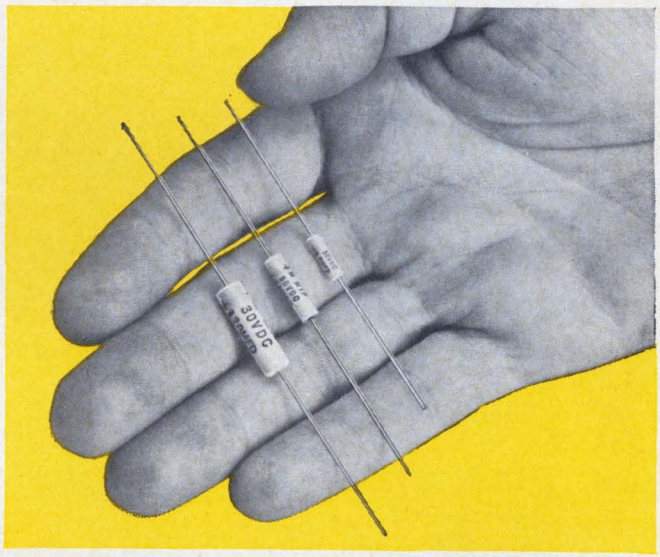

Rating	% change in Capacitance after 1000 hours								
	at 26°C			at 65°C			at 85°C		
	0% RV*	50% RV	100% RV	0% RV	50% RV	100% RV	0% RV	50% RV	100% RV
6.8 mfd, 50V	−1	−1	−1	−0.1	−0.1	0	−1.3	−0.7	−0.9
30 mfd, 50V	0	0	0	0	0	0	−1.0	−2.5	−5.2
78 mfd, 50V	0	0	0	−0.1	−0.2	−0.3	−1.2	−1.2	−1.2
450 mfd, 6V	0	0	0	−0.2	−0.7	−3.0	−1.0	−2.2	−8.0

*RV: Rated DC Voltage

Running the MTP at rated voltage can often help you make further savings in size. 33 mfd at 60 volts, for instance, goes in a "C" case, .225″ in diameter and .775″ long. But a 33 mfd *50* volt rating fits in the "B" case, which is only .145″ in diameter and .590″ long. And the cost is about 13% lower.

And that's not all. The MTP is made in the same facility as similar capacitors for Minuteman II. And like all Mallory wet slug tantalum capacitors, it has lower DC leakage and greater freedom from catastrophic failure than solid tantalum types.


Write today for our latest engineering report on voltage rating tests on MTP capacitors, for bulletin giving complete specifications. Mallory Capacitor Company, a division of P. R. Mallory & Co. Inc., Indianapolis, Indiana 46206.

50th ANNIVERSARY


MALLORY

Speed Inquiry to Advertiser via Collect Night Letter

ON READER SERVICE-CARD CIRCLE 83

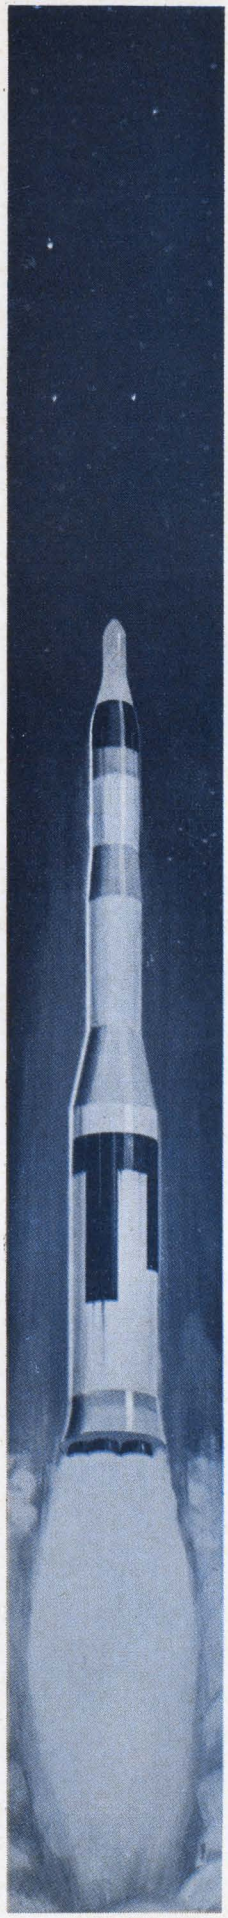

High Q with Assured Reliability!



ACTUAL SIZE

The Johanson 3955 Series **Variable Air Capacitors** are backed by these special **RELIABILITY ASSURANCE PROVISIONS**

1. Parts examined and assembled in accordance with special Johanson high reliability inspection and assembly procedures.
2. All sub-assemblies inspected under magnification to assure highest quality components prior to final assembly.
3. Final assemblies subjected to 100% burn-in and screening tests.
4. Samples taken from each lot and subjected to life tests.
5. Test data supplied on request.

SPECIFICATIONS
Capacity Range: 0-8 - 10 pf
Working Voltage: 250 VDC
Q >2000 @ 100 MC
Temperature Coefficient: 0±20.0 ppm/°C


Write Today for Full Data

Johanson
MANUFACTURING CORPORATION
400 Rockaway Valley Road.
Boonton, N. J. 07005 (201) 334-2676

ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

ON READER-SERVICE CARD CIRCLE 84

INSTRUMENTS—3RD FLOOR

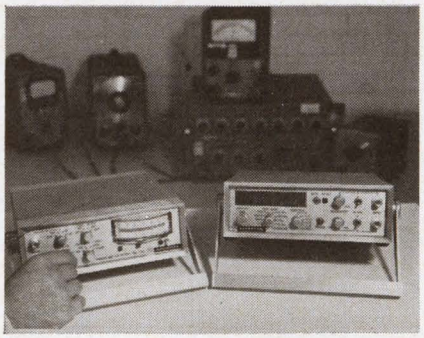

Portable phasemeter

The model PM 720 phasemeter is a fully portable, all-solid state instrument designed for measuring the phase angle between two alternating voltages. Half mega cycle frequency response is combined in the PM 720, with a high degree of accuracy. The phasemeter is capable of accepting two inputs with amplitude differences of as much as 1000 to 1 without having any effect on the phase reading of the instrument.

Phase angles ranging from 0 to 180 degrees can be read directly on the meter located on the phasemeter's front panel. The phasemeter's output signal can be used to trigger external equipment for control of phase shift. The unit is capable of handling signals ranging in frequency from 5Hz to 500 kHz with a reading accuracy of ± 1 degree. Weight of the portable phasemeter is 5 lbs.

P&A: $950; 45 days. Aerojet-General Corp., P.O. Box 216, San Ramon, Calif. Phone: (415) 837-5311.

SEE AT BOOTH M16-17

Circle No. 560


Signal generator

Studying high-quality communications equipment is the function of the SMAR signal generator. It combines the features of low frequency, high frequency, high power, and microvolt generators. It can determine the quality of signal detection equipment, or be a low power transmitter (2-watt output) for lab checking of antennas, receivers, front ends, etc.

P&A: $5,950; stock. Rohde & Schwarz, 111 Lexington, Passaic, N. J. Phone: (201) 773-8010.

SEE AT BOOTH 300A

Circle No. 537

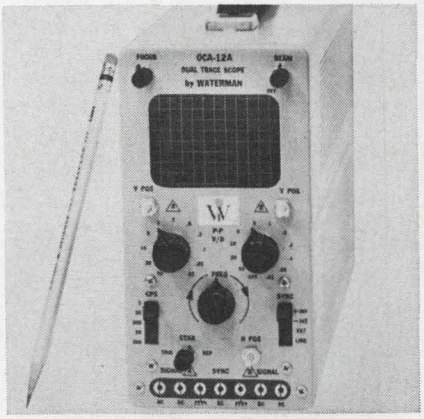

Dual trace oscilloscope


A dc to 200 kHz frequency response is featured in the OCA-12A dual trace scope. Sensitivity is 20 mV p-p/ division. Linear time base is triggered or repetitive. Sampling display is from 3 to 300 cps. The 9-lb unit accepts either 115 or 230 V input voltage, and can be converted for rack mounting.

The OCA-12A is intended for use in industrial servicing and educational field, where it is desirable to observe phase and magnitude relations between input and output. Other features of the OCA-12A are: Dual or single trace at will; sensitivity, 20 mV peak to peak per division; low frequency response, to dc; frequency compensated attenuators "gain" and calibrated output, 20 mV to 50 V; p to p/div in 11 steps using 1-2-5 sequence; trigger and repetitive linear time base, using a single time constant; sampling or alternate operation, automatically selected by sweep range switch; rectangular display, 13/4 x 23/8 inches divided in 0.2 division; signal display, only during "go" time of sweep; automatic sync, without use of level and magnitude controls; dual voltage input, either 115 or 230 volts and 50 to 400 Hz. The scope controls are all on the front panel with six operating controls and five static controls. Signal voltage readings are direct, similar to a voltmeter.


P&A: $295; stock. Waterman Instrument Corp., 1919 E. Boston Ave., Philadelphia, Pa. Phone: (215) 423-5161.

SEE AT BOOTH 3B30


Circle No. 561

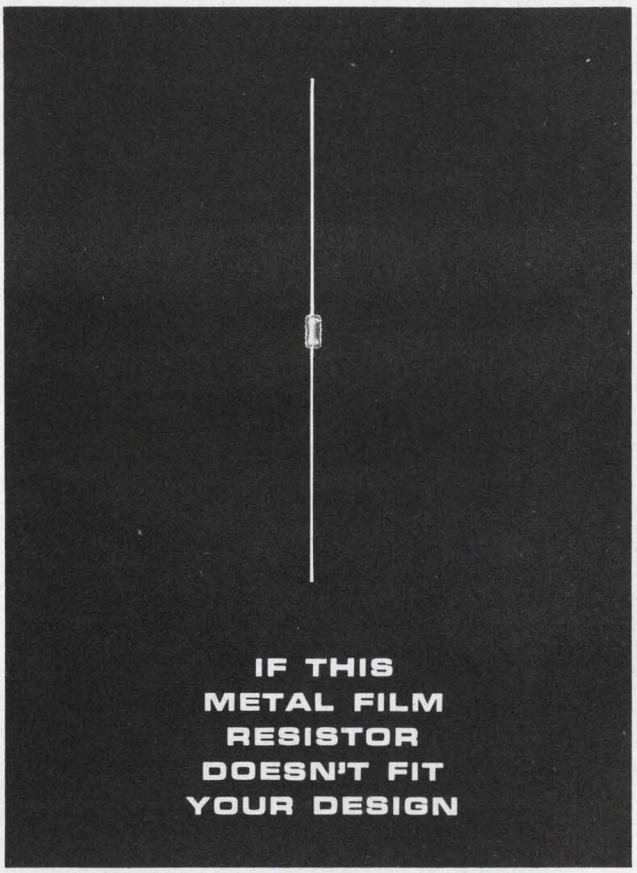

Try These **... high megohm resistors**



Or These **... resistor networks**



Or These **... high reliability carbon film resistors**



Pyrofilm's resistors are changing a lot of design ideas. Perhaps your design needs the small size and high performance (⅛ watt rating) of the PME 50 Pyromet metal film resistor . . . or the extremely high resistance (25 megohms) of the Pyromet PME 75 high meg metal film resistor . . . or the compact-size resistor networks matched within .01% . . . or the stability and reliability of the long accepted PyroSeal carbon film resistors.


There's a Pyrofilm resistor for your most precise circuit designs. Send for free data file which provides complete specifications on the entire Pyrofilm line.

PYROFILM RESISTOR COMPANY, INC.

3 SADDLE ROAD • CEDAR KNOLLS, NEW JERSEY • 201-539-7110

See us at IEEE — Booth 2A04

ON READER-SERVICE CARD CIRCLE 85

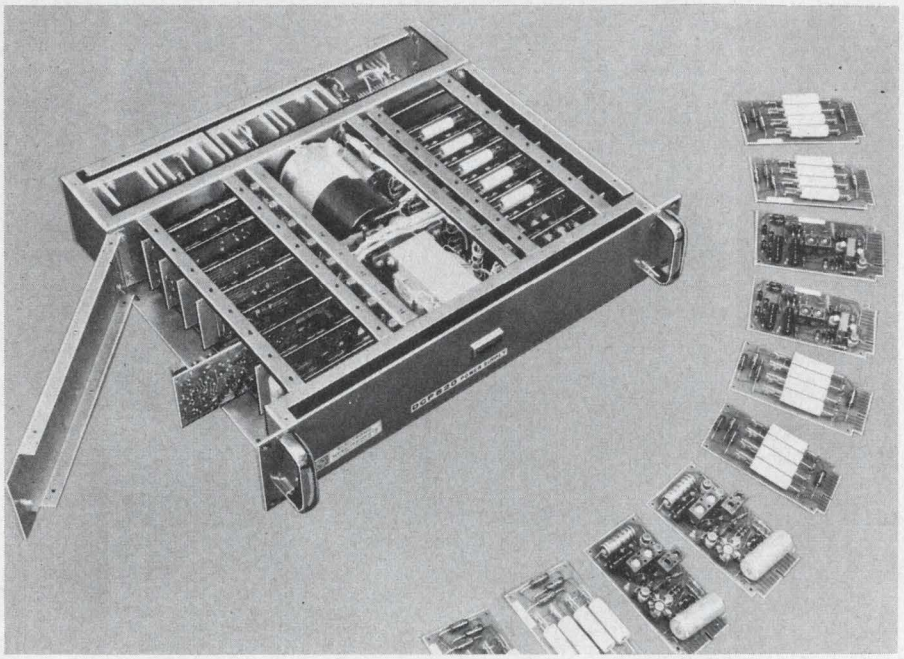

Current and voltage are fully programable with easily interchanged modular circuits.

Programable supply

The DCP800 is a multi-function power source within its voltage current limits. It can be programed to any current-voltage combination, with limiting of either or both, by simple replacement of modular circuit boards. It features a current control system with accurate shunt paralleling for constant-current control down to 1 μA, and crossover circuitry for voltage control to buffer normal 1 mA current so as not to interfere with range or control of constant current. Sinking currents up to 30 mA are also featured.


Programable power supply regulates one microampere

The DCP800 power system is a versatile solid-state dc unit. It is a digitally programed unit for use with automatic test equipment, and provides automatic changeover from regulated current to regulated voltage.

The unit makes this possible through the use of two independent regulator channels which provide sharp automatic crossover for extremely close control or limiting in either mode. Remote sensing or operation under a remote load are within the regulator systems capabilities.

Plug-in cards for reference supplies, amplifiers, and voltage and current decades are included. All control functions are directly driven from relay drivers of a computer into a connector at the rear of the DCP800. A 1-2-4-8 binary code is the standard input for both current and voltage.

Current programing can be 4-digit from 1 μA to 1 A with the use of 3 current ranges (0.001 mA-9.999 mA, 00.00 mA-99.99 mA, and 000.0 mA-1000.0 mA. One μA steps up to 1 A can be programed by means of the current decades and current range selectors

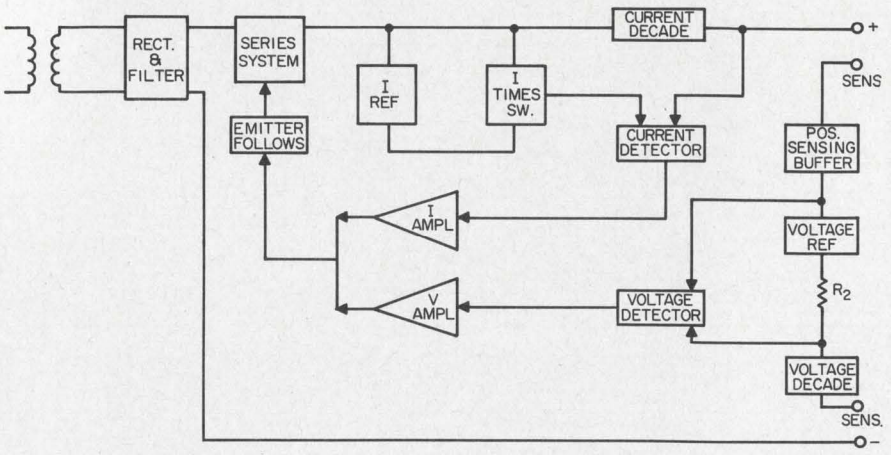

Current and voltage limiting are accomplished through independent regulator channels which provide automatic crossover to either mode for limiting or control. Remote sensing and load are related by these systems.

Voltage programing can be either 4 or 5 digit, covering a range of 00.001 V to 100 Vdc in 1 mV increments.

Both voltage and current decades use precision control resistors and reed relays.

This unit fits 19-in. relay racks and features modular programability with easy access to test points. A standard constant voltage, constant current unit can be converted to a constant voltage unit with current limiting, or to a constant current supply with voltage limiting. This is done by replacing programing boards. If a unit with better stability and temperature coefficient is needed, either or both voltage or current reference and amplifier boards can be changed.

Any code can be substituted for the 1-2-4-8 binary, by replacing voltage or current decade boards with those coded for the desired input. Other relay coil voltages are also available.

P&A: $1500-$1750; 12 weeks. Electronic Measurements Co. Div. of Rowan Controller, 30 Bridge, Red Bank, N. J. Phone: (201) 747-5094. TWX: (201) 741-0771.


SEE AT BOOTH 2G14

Circle No. 651

Precision you can trust, because it's built in.

±50 ppm TC.
1/2% and 1% tolerances.
<0.5% load-life ΔR guaranteed.
Mil-R-10509E, Char. C.

New CORNING® NC-style Resistors.



NC4—1/10 watt at 125° C., 49.9 ohms to 150K



NC5—1/8 watt at 125° C., 49.9 ohms to 499K



NC6—1/4 watt at 125° C., 49.9 ohms to 1 Meg.

True precision resistors with all the long-term reliability you've come to expect from CORNING glass-tin oxide film. And not just tested into some. Nor sorted out of many.

But precision that's built in . . . in a continuous manufacturing process that provides the highest inherent reliability of any resistor made today. Here's how:

The tin oxide film is bonded *molecularly* to a glass cane substrate at red heat . . . it isn't plastered on, or sputtered on.

Temperature coefficient of film and substrate match perfectly. The substrate is chemically inert to the film.

Once cooled, the film compares in hardness to high-carbon tool steel . . . you can't scrape it off.

We make CORNING NC-styles with these materials and this technique to guarantee you constant resistivity, constant quality . . . precision that's built in.

Call your CORNING distributor for technical data and samples or send the coupon today. Evaluate the new NC-styles, and see how their built-in precision gives you new design confidence.

CORNING GLASS WORKS, 3909 Electronics Dr., Raleigh, N.C.

Please send me new NC-style Resistors data and samples.

Name..... Title.....

Company.....

Address.....

City..... State..... Zip.....

CORNING
ELECTRONICS

ON READER-SERVICE CARD CIRCLE 86



RESOLVE THIS YEAR TO DEMAND BETTER RESOLVERS AND SYNCHROS

RESOLVERS

(400 cycle except as noted)

SIZE	PART NUMBER	TYPE	INPUT VOLTAGE (volts)	INPUT CURRENT (ma)	INPUT POWER (watts)	INPUT Z (ohms) (secondary open circuit)	OUTPUT Z (ohms) (primary open circuit)	SENSITIVITY (mv/°)	PHASE SHIFT (°)	RESIDUAL NULL VOLTAGE (mv) (total)	MAX. ERROR FROM E.Z. (min.)	TRANSFORMATION RATIO
5	CJ0 0585 100	Lo-Z	26	47	.640	935∠69°	1325∠73°	455	16	40	10	1
	CJ0 0585 900	Hi-Z	26	23	.3	1660∠69°	2210∠72°	455	19	40	10	1
8	CM0 1034 107	Conventional	26	44	.39	270+j630	39+j142	189	20	20	7	.415
	CM4 1033 008	RX	26	45	.28	137+j558	30.2+j137	206	11	20	3	.454
	CM4 1033 009	RDX	11.8	42	.112	66+j279	83+j327	206	9.75	20	3	1
	CM4 1033 010	RC	11.8	13	.031	210+j956	887+j3912	393	8.8	20	3	1.9
	CM4 1033 011	RDX	11.8	30	.062	71.7+j397	107+j445	206	8.4	20	3	1
	CM4 1033 012	RDX	11.8	5	.010	446+j2464	634+j2756	206	8.4	20	3	1
	CM4 1084 007	Wndg. Comp. Hi-Z	15	9	.051	624+j1960	590+j2100	256	16.2 (a)	12	±.1% (b)	.980
	CM4 1084 003	Wndg. Comp. Lo-Z	13	9.6	.022	246+j812	310+j940	213	15 (a)	12	±.1% (b)	.985
11	RS931-2	Conventional	26	52	.34	550∠78.1°	150∠80.3°	220	8	30	3	.484
	RS931-3	Conventional	26	20	.08	1680∠78.5°	1400∠78°	384	7	18	3	.846
	3R982-004	RX Data Trans.	26	176	.9	170∠77°	42∠80.5°	206	8	20	3	.454
	3R982-002	RDX Data Trans.	11.8	143	.25	95∠80.2°	110∠75°	206	5	20	3	1
	3R982-009	RDX Data Trans.	11.8	41	.084	330∠80°	380∠76°	206	5	20	3	1
	3R982-011	RDX Data Trans.	11.8	15.9	.03	855∠80°	1000∠79°	206	5	20	3	1
	3R982-003	RC Data Trans.	11.8	6.8	.012	2000∠80°	8000∠79°	390	5.5	40	3	1.9
	3R982-012	RC Data Trans.	11.8	6.8	.012	2000∠80°	8000∠76°	390	5.5	40	3	1.9
	CR4 0948 006	Computer Chain	20	12	.036	2060∠79.5°	2380∠83.5°	356	8.5	40	3	1.02
	CR4 0918 003	Computer Chain	26	395	.9	38.2+j166	16.5+j93.5	314	8	40	3	.692
	CR4 0948 003	Computer Chain	15	.19	.004	90,000 tuned	54,000+j7250	157	±6′	15	.05% (b)	.6
	CR4 0980 030	Hi-Z Wndg. Comp.	26	4	.01	380+j2200	400+j2325	445	7.5 (a)	10	±.1% (b)	.980
	R980-41	Hi-Z Wndg. Comp.	60	5.1	.015	500+j2200	550+j2300	1026	7.5 (a)	25	3 (g)	.980
	CR4 0980 016	Lo-Z Wndg. Comp.	20	11	.014	120+j900	198+j934	342	5.6 (a)	20	±.1% (b)	.980
15	CT9 0918 003	RX Data Trans.	26	150	.47	20+j170	8+j38.2	215	3.1	12	±40 sec. (e)	.437
	CT9 0948 003	RDX Data Trans.	11.8	43.8	.048	24+j265	59+j285	206	3.5	6	±40 sec. (e)	1
	CT9 0908 001	RC Data Trans.	11.8	12.3	.012	80+j960	650+j5125	455	3.15	13	±40 sec. (e)	2.228
	CT9 0987 001	Lo-Z Computing	20	75.5	.181	24+j265	59+j285	349	3.5	10	±.02% (e)	1
	CT9 0987 002	Med.-Z Computing	20	14.6	.035	100+j1365	230+j1580	363	2.6	10	±.02% (e)	1.04
	CT9 0987 003	Hi-Z Computing	20	4.5	.011	400+j4400	750+j4800	349	3.5	10	±.02% (e)	1
	CT9 0980 008	Hi Acc. Wndg. Comp.	26	4.5	.014	220+j2200	330+j2300	445	4 (d)	7	±.02% (e)	.980
	T980-003	Wndg. Comp.	26	5.9	.004	480+j2500	440+j2650	445	8.5 (a)	15	±.1% (b)	.980
25	Z5161-001	RX	115	321	4.6	450∠84°	300∠83°	1571	2	47	.3	.783
	Z5191-001	RDX	90	129	1.1	850∠84°	900∠85°	1571	2	47	.3	1
	Z5191-002	RDX	90	39	.52	2700∠80°	2580∠80°	1571	1	47	.3	1
	Z5151-001	RC	90	40	.52	2700∠80°	4600∠80°	2000	2	60	.3	1.278
	Z5151-003	RC	90	12	1.6	8500∠82°	14,000∠82°	2000	2	60	.3	1.278
	Z5151-004	RC	90	12	.180	8500∠83°	3800∠84°	1000	2.5	30	.3	.639
	CZ0 5180 202	Wndg. Comp.	115	.5	.05	225+j1730	166+j1700	1967	2.5 (a)	25	.3	.980
	CZ9 5082 001	Wndg. Comp.	15	6.6	.2	480+j2200	270+j2200	250	8.7 (a)	45	±1.5 (e)	.957
28	Z5153-004	Hi Acc. 4-wire	90	12	.18	8500∠83°	3800∠84°	1000	2.5	30	.33	.639
	Z5163-001	Hi Acc. 4-wire	115	321	4.6	400∠85°	260∠85°	1571	2	47	.33	.783
	Z5193-001	Hi Acc. 4-wire	90	129	1.6	850∠83.6°	900∠84.6°	1571	2	47	.33	1

NOTES:

a. Rotor to stator phase shift. Rotor to compensator Ø shift ranges from 0° to 6 minutes

b. Functional accuracy

c. Available with either 10′, 7′, 5′, or 3′ accuracies as R980-41, 7R980-41, 5R980-41, or 3R980-41 respectively

d. Interaxis error

e. Angular accuracy

Operating temperature range for all units except CZ9 5082 001 is −55°C to +125°C. Max. temperature for CZ9 5082 001 is +85°C. Higher temperature models available.

Components having higher accuracies than those shown are also available. Bu/Weps, Transolvers & Size 25 Pancakes, in Hi & Lo-Z.

Sizes 5, 8 and 11 transolvers in addition to certain Size 11 Bu/Weps resolvers are available. "Pancake" resolvers for operation at 800 cps and 1600 cps in Size 25 diameter also available.

LIKE THESE. PART OF A HIGH-RESOLUTION SERIES FROM KEARFOTT CONSISTING OF SERVO MOTORS, MOTOR GENERATORS, TACHOMETER GENERATORS AND SYNCHROS FOR HIGH-PERFORMANCE SERVO SYSTEMS.

ENCOURAGE US SLIGHTLY AND WE'LL SEND YOU A COLORFUL WALL CHART WITH MUCH MORE DETAIL. A RESOLUTE ALLY OF ALL ENGINEERS WHO USE SERVOS.

Write Kearfott, Dept. 1451,
Little Falls, New Jersey 07424.
Or Phone 201 256-4000.
Or TWX 201 256-5926.

SYNCHROS

(400 cycle except as noted)

SIZE	PART NUMBERS	TYPE	INPUT VOLTAGE (volts)	INPUT POWER (watts) (nom.)	INPUT IMPEDANCE (ohms) (output open circuit)	OUTPUT IMPEDANCE (ohms) (input open circuit)	OUTPUT VOLTAGE (volts)	TRANSFORMATION RATIO	SENSITIVITY (mv/degree)	PHASE SHIFT (°)	TOTAL NULL VOLTAGE (mv) (max.) ±7′ Accuracy	FUNDAMENTAL NULL VOLTAGE (mv) (max.)	MAX. ERROR FROM E.Z. (minutes (max.)
5	CJO 0565 100	CX	26	.5	532∠72°	99∠62°	11.8	.454±4%	206	14	40	30	10
	CJO 0595 100	CDX	11.8	.127	295∠72°	375∠70°	11.8	1.154±4%	203	13	50	34	10
	CJO 0555 100	CT	11.8	.127	290∠72°	1085∠74°	18	1.765±4%	31	13.7	50	34	10
	CJO 0555 900	CT	11.8	.0418	660∠74°	2520∠74°	18	1.765±4%	31	11.5	50	34	10
8	CMO 1014 10□	CX	26	.54	54+j260	12+j45	11.8	.454±.014	206	8.5	30	—	5, 7, or 10
	CMO 1014 20□	CX	115	.8	950+j3850	10+j36	11.8	.1026±.031	206	11	75	—	5, 7, or 10
	CM4 1014 018	TX	26	.54	37+j224	9+j36	11.8	.454±.014	206	8.5	30	—	7
	CMO 1044 10□	CDX	11.8	.21	28+j114	38+j122	11.5	1.127±.034	204	9	30	—	5, 7, or 10
	CMO 1004 10□	CT	11.8	.21	28+j114	210+j690	23.5	2.304±.069	411	9	30	—	5, 7, or 10
	CMO 1004 80□	CT	11.8	.225	145+j640	720+j3550	22.5	2.203±.066	393	8.5	30	—	5, 7, or 10
	CMO 1004 90□	CT	11.8	.073	81+j330	470+j1770	22.5	2.203±.066	393	8.5	30	—	5, 7, or 10
	CMO 1024 108	TR	26	.54	37+j224	9+j36	11.8	.454±.014	—	—	—	—	—
11	RS911-1	CX	26	.95	107∠81.7°	18.1∠79.5°	11.8	.454±4%	206	5	26	17	3, 5, 7, or 10
	RS911-4	CX	26	.30	359∠81.3°	60∠78.5°	11.8	.454±4%	206	4.7	26	17	3, 5, 7, or 10
	RS911-7	CX	26	.45	236∠81°	40∠78.5°	11.8	.454±4%	206	4.7	26	17	3, 5, 7, or 10
	RS911-2	CX	115	80	2210∠82.3°	1130∠81.3°	90	.783±4%	1570	4	94	59	3, 5, 7, or 10
	RS911-6	CX	115	1.03	2060∠80.8°	18.1∠79.5°	11.8	.103±4%	206	5.6	26	17	3, 5, 7, or 10
	RS941-1	CDX	11.8	.25	74.3∠79.7°	86∠77.1°	11.8	1.154±4%	206	6	26	17	3, 5, 7, or 10
	RS941-4	CDX	11.8	.097	195∠80.8°	231.2∠76.7°	11.8	1.154±4%	206	7.4	26	17	3, 5, 7, or 10
	RS941-2	CDX	90	.6	1640∠80.7°	1990∠77.3°	90	1.154±4%	1570	4.7	94	59	3, 5, 7, or 10
	RS901-1	CT	11.8	.25	74.3∠79.7°	418∠78.3°	22.5	2.203±4%	393	6	53	34	3, 5, 7, or 10
	RS901-3	CT	11.8	.03	577∠80.7°	3340∠79.2°	22.5	2.203±4%	393	4.2	40	30	3, 5, 7, or 10
	RS901-2	CT	90	.18	5470∠80.8°	3340∠79.2°	57.3	.735±4%	1000	4.5	94	59	3, 5, 7, or 10
	R925-1	TR	26	.91	107∠81.7°	18.1∠79.5°	11.8	.454±4%	—	—	—	—	50 Static Acc.
	R925-4	TR	26	.30	359∠81.3°	60∠78.5°	11.8	.454±4%	—	—	—	—	45 Static Acc.
	R925-7	TR	26	.45	236∠81°	40∠78.5°	11.8	.454±4%	—	—	—	—	30 Static Acc.
	R925-2	TR	115	.80	2210∠82.3°	1130∠81.3°	90	.783±4%	—	—	—	—	30 Static Acc.
	R925-6	TR	115	1.03	2060∠80.8°	18.1∠79.5°	11.8	.103±4%	—	—	—	—	30 Static Acc.
25	CZ9 5010 001	Pancake CX	26	1.1	130∠78.5°	30∠76.5°	11.8	.454	206	3	20	15	2.5
	422299-1	Pancake CX	115	1.2	2552∠79°	29.8∠76.5°	11.8	.1026	206	4	20	15	2.5
	422305-1	Pancake CX	115	1.2	2552∠78.7°	1335∠75.7°	90	.783	1575	4	120	90	2.5
	Z5000-001	Pancake CT	11.8	.05	760∠75.5°	3890∠77.5°	26	2.205	454	4	45	30	2.5
	422300-1	Pancake CT	11.8	.05	760∠75.5°	3890∠77.5°	26	2.205	454	4	45	30	2.5
	423070-1	Pancake CT	90	.2	7860∠78.3°	4600∠78.7°	57.5	.639	1000	5	90	60	2.5

Operating Temperature Range for all units is −55°C to +125°C. High temperature units (200°C) are also available.

Unless otherwise noted, all units have a frequency of 400 cps.

Size 8 and Size 11 units conforming dimensionally and electrically to standard Bu/Weps, designated synchros are available. We can also provide linear induction potentiometer in Size 8 and Size 11 units. Certain 60 cycle components also available.


KEARFOTT DIVISION
GENERAL PRECISION INC
AEROSPACE GROUP
Little Falls, New Jersey

ON READER-SERVICE CARD CIRCLE 87

Now Cover the

ULTRASONIC SPECTRUM

with the new MULTISONS® series of BROAD BAND POWER GENERATORS

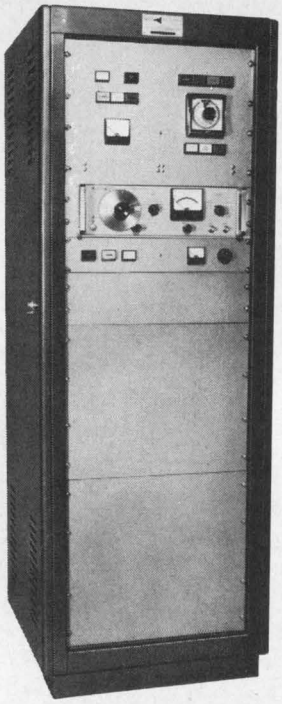

- Bandwidth 10 kcps to 1 mcps
- Average standard power outputs available: 100, 250, 500 and 1 KW (within 3 db)
- Choice of four impedances: between 18 and 2400 ohms
- Push-pull low harmonic distortion driver and output stages
- Standard parts used exclusively
- All power circuits fuse protected
- Maximum accessibility to all sections for ease of servicing tubes
- Variable D.C. bias for magnetostrictive transducers
- Plug in 60 min. timer for automatic programming

Write for Bulletin 105

PIONEERS IN APPLIED SONICS AND ULTRASONICS

MACROSONICS CORPORATION


1001 Roosevelt Avenue
Carteret, New Jersey
Phone 201-541-4131

ON READER-SERVICE CARD CIRCLE 88

U162

SYSTEMS—3RD FLOOR

Reader/spooler

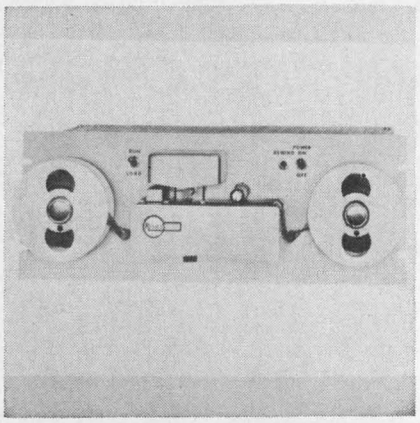


A high-speed photocell punched tape reader/spooler combination is designed for high-speed systems.

The RRS-302D unit includes on-off servo operated reels, and electronic noise suppression. Speeds of up to 300 characters per second with push-button control rewind of 40 inches per second are specified. Reels of 5-1/4-in. diameter store 500 feet of punched tape.

REMEX/Rheem Electronics, Div. Ex-Cell-O Corp., 1200 Oakman, Detroit, Mich. Phone: (313) 868-3900.

SEE AT 3J07-09 *Circle No. 371*

Oscilloscope cameras

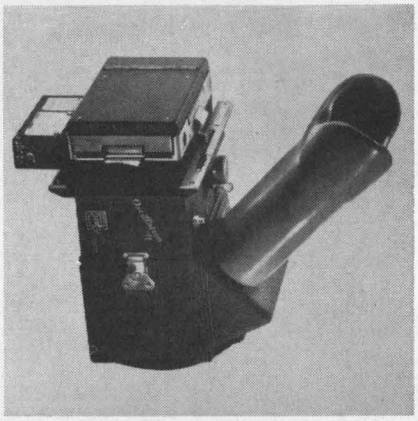


Interchangeable Polaroid or 4 x 5 backs are features in three oscilloscope cameras. Beattie-Coleman Model MIIA offers a 1:1 to 1:0.5 object-to-image recording ratio without special lens. Model 565A records nanosecond traces with an f/1.2 86 mm lens. Model K5R is compact, designed for limited-space areas.

Coleman Engineering Co., Inc., Box 1974, Santa Ana, Calif. Phone: (714) 546-1600.

SEE AT BOOTH 3G12.

Circle No. 372

Electronic counters

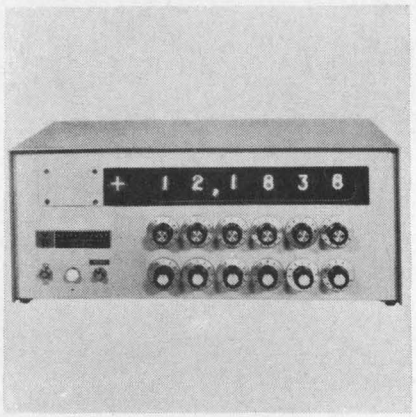


The Digi-Master is a line of high-speed, bi-directional solid-state counters. Two standard models are available: the Series 1844 has up to 6-digit capacity, with Nixie tune readout, and adds or subtracts through zero. The Series 1845 has an additional Nixie tube for plus or minus indication. Reset is to zero or to a variable number.

P&A: $495-$1500; 6 wks. Veeder-Root, 29 Andover, Danvers, Mass. Phone: (617) 774-6110.

SEE AT BOOTH 3G07.

Circle No. 373

Panel mounting printers

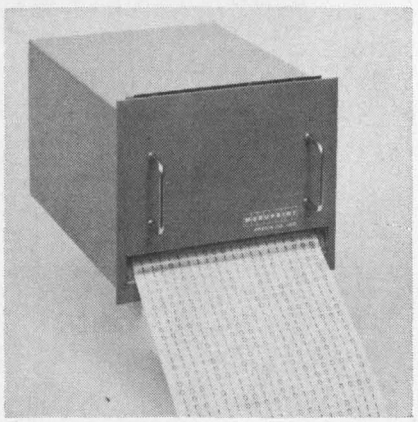


Tape printed data in binary form is presented by the Moduprinter series. According to size, they have capacities for 9, 14, or 20 bits. Each bit needs 6 ms minimum to reach 1 or 0. The installed modules may be moved to either position without decoding from binary sources. Maximum line printing rate is six per second.

P&A: $215; 4-6 wks.. Presin Inc., 226 Cherry St., Bridgeport, Conn. Phone: (203) 333-9491.

SEE AT BOOTH 3A47.

Circle No. 374

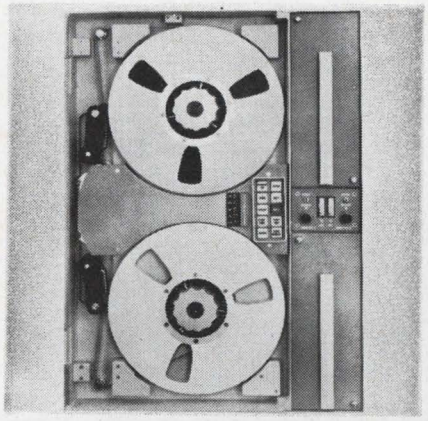

Portable recorder

Model P-5000 recorder/reproducer, in 7- or 14-track configurations, operates at 2.0 MHz, with up to 120 ips tape speed. The units servo system has low-time-displacement error (4μs at 60 ips, 6μs at 30 ips, and 10 μs at 15 ips).

The unit weighs 140 pounds, and has airborne, ship, and mobile applications as a predetection, telemetry, or instrumentation recorder.

Winston Research, Fairchild, 6711 S. Sepulveda Blvd., Los Angeles, Calif. Phone: (213) 670-3305.

SEE AT BOOTH 3D10-18

Circle No. 375



Serial entry printer

Designed for data monitoring and logging systems, the Digit-Matic Series is compatible with systems requiring up to 8 columns printing capacity. This includes communications systems, digital counters, flow-meters and production scales. Solenoids and print command are activated by 24 V.


P&A: $335-$385; 45 days. Victor Comptometer Corp., Business Machines Group, 3900 N. Rockwell, Chicago. Phone: (312) 539-8210.

SEE AT BOOTH 3G10

Circle No. 376

CUSTOM APPLICATION ENGINEERING of Associated's ENVIRONMENTAL CHAMBERS

The ASSOCIATED chambers shown here are used for quality control testing of component modules used in the new E.A.I. *8800* Scientific Computing System manufactured by ELECTRONIC ASSOCIATES, INC. West Long Branch, N.J.

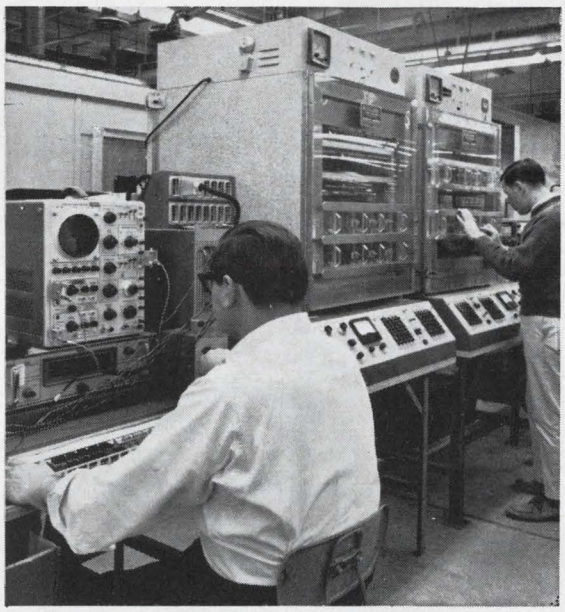

Design engineers at ASSOCIATED TESTING LABORATORIES, INC., can draw on over 1,000,000 man hours of reliability testing experience to meet your every standard or customized environmental chamber requirement.

A broad line of equipment for reliability testing at temperature, humidity, altitude and in corrosive atmospheres is available from stock. ASSOCIATED'S new design service offers custom chamber engineering for environmental laboratory and production testing.

Literature, technical and design details on request.

Standard Chambers from $295 and up...

Associated **Testing Laboratories, Inc.**


150 Route 46 • Wayne, New Jersey • 07470
Area Code (201) 256-2800

6-036

See us at Booth 3K02 and Booth 3K03 — IEEE Show

ON READER-SERVICE CARD CIRCLE 89

WHAT MAKES THIS HARNESS DIFFERENT?

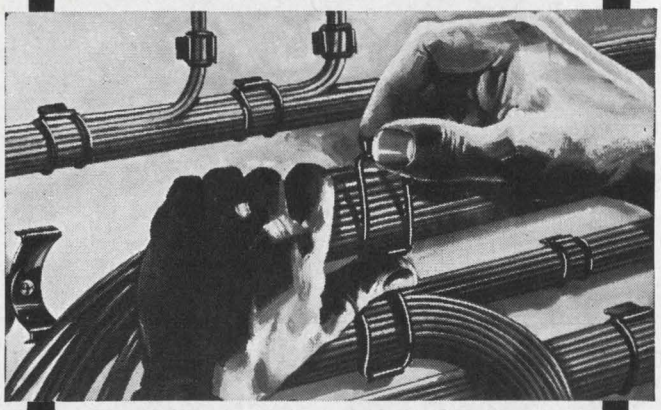

CRADLECLIP

Wherever quality wire harnesses are a "must", you'll find CRADLECLIP. It's the only system of its kind for both supported and unsupported wiring. Just two pieces—easily installed and assembled *without special tools permit quick simple "on-the-spot" wiring changes.* In control panels, motors, wireways...aircraft, missiles, computors ...even under conditions of high frequency vibrations. CRADLECLIP has helped users realize savings of as much as 50%. Prove it yourself. *Write for a free sample today.*

OTHER ELECTROVERT PRODUCTS: strapping; cable ties; spiroband; markers; grommet strip; wavesoldering systems.

Sold Coast-to-Coast through Authorized Distributors.

ELECTROVERT INC.

86 Hartford Ave., Mount Vernon, N.Y. 10553
Burbank, California

See us at Booth 1H17 — 1H19 IEEE Show
ON READER-SERVICE CARD CIRCLE 121

I.E.E.E. SHOW - BOOTH 1C16

telrex



The Choice of the Discriminating Communication Engineer . . . the Man who Never Settles for Anything Less than THE-VERY-BEST!

telrex "BEAMED-POWER" ANTENNAS and ANTENNA SYSTEMS

Provide optimum performance and reliability per element, per dollar. Antennas from 500 Kc to 1500 Mc. Free PL88 condensed data and pricing catalog, describes military and commercial antennas, systems, accessories, Towers, Masts, Rotators, "Baluns" and transmission line data.

ANTENNAS SINCE 1921 telrex LABORATORIES
Communication and TV Antennas
Asbury Park 41, New Jersey, U.S.A.

ON READER-SERVICE CARD CIRCLE 122

SYSTEMS—3RD FLOOR




Laser system

An 800 μs pulse length and 3-5 J output are provided by the 104A. The basic system consists of a power source, Laser head, Q-switch and interconnecting assemblies. Operating mode is determined by the mode selector on the Q-switch. A 15 V, 50-μs synchronization pulse is delivered by the power source. The system beyond is maintenance-free 25,000 cycles.

TRG, Route 110, Melville, N. Y. Phone: (516) 531-0600.

SEE AT BOOTH 2D43.

Circle No. 377

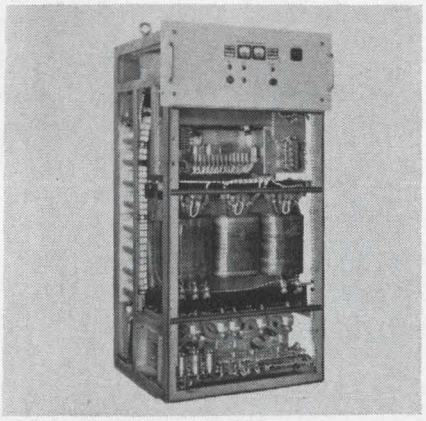


GSE power supply

Features designed to exclude transistor series regulator circuitry are reported for a 0-500 A, 28 Vdc power supply. One of a series of units built to NASA specs, others are rated at 50, 100 and 250 A, with output voltages of 24-40 Vdc. Line and load regulation are $\pm 0.1\%$. Calculated MTBF ranges up to 198 K hours. All rated units fit 19- and 24-in. racks.

Perkin, 345 Kansas St., El Segundo, Calif. Phone: (213) 772-2171. Phone: (213) 2171.

SEE AT BOOTH 1D01.

Circle No. 378

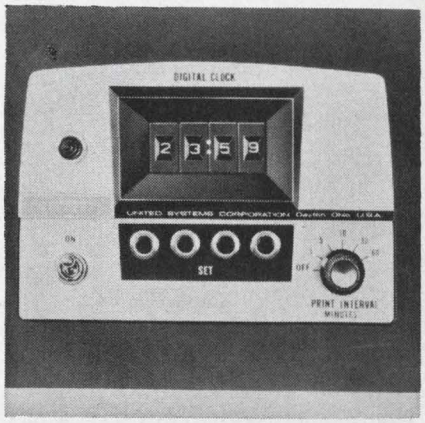


Digital program clock

A digital clock reads out 24 hours in hours and minutes. It features integral time base, BCD control contact closure at five intervals from 1 minute to 1 hour, and an inhibit circuit to prevent ambiguous readings. Used with voltmeters or thermometers and a printer, it provides a "time/voltage" or "time/temperature" system.

Price: $390. United Systems Corp., 918 Woodley, Dayton, Ohio. Phone: (513) 254-3567.

SEE AT BOOTH 3A34-35

Circle No. 379

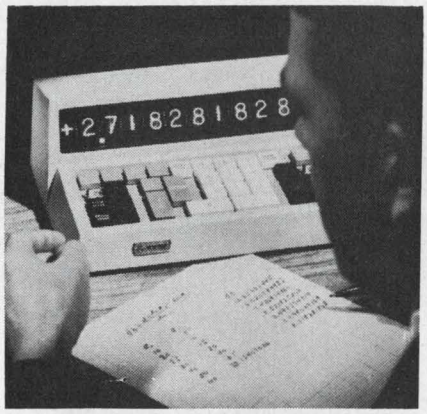

Scientific calculator

The model 320, desk top calculator provides sum, difference, product, quotient, square, square root, natural log, and exponent.

All data are converted to nat logs, operated, and reconverted for decimal readout. Two summing sections store sums and remainders. A third multiplies. Keyboards may be 200 ft. away.

Price: $2095. Wang Labs, 836 North, Tewksbury, Mass. Phone: (617) 851-7311.

SEE AT BOOTH 3B17-18

Circle No. 380

"Silvercote"®
Beryllium Copper
Phosphor Bronze
Nickel Silver
Brass
Zirconium Copper
OFHC Copper
Aluminum
Titanium
Silver & Silver Alloys
Mandrel Wires
Clad Wires

Wire

Non-ferrous spring wire is our specialty. No effort is spared to produce the best quality possible — regardless of quantity. LFA spring wire is *diamond drawn* to produce the best possible surface and highest degree of uniformity. Production is to order and to *your* specification. May we quote your requirements?

LFA
LITTLE FALLS ALLOYS, INC.
189 CALDWELL AVE.,
PATERSON 1, N. J. 07501
201 – 525-1014

ON READER-SERVICE CARD CIRCLE 123


CONTACT STRIPS



Custom Shapes


PRECISION STAMPED IN

BERYLLIUM COPPER



- **The most complete line of standard formings in the industry.**
- **Unequalled engineering experience in this specialized area.**
- **"Permalast" finishing process produces favorable residual compressive stresses and smooth surfaces.**
- **Special finishes are available on many standard and custom parts.**

Switch and Contact Springs—Contact Strips and Rings — Grounding Strips — Wiping Contacts — Fuse Clips — Tube Shields — Retainers for Diodes, Transistors — Crystal Holders.



Send for **FREE** Catalogs


BTI

BRAUN TOOL & INSTRUMENT CO., INC.

140 Fifth Avenue • Hawthorne, N. J.
Telephone: 201-427-1773
TWX: 201-427-2532

ON READER-SERVICE CARD CIRCLE 208

Portable data recorder

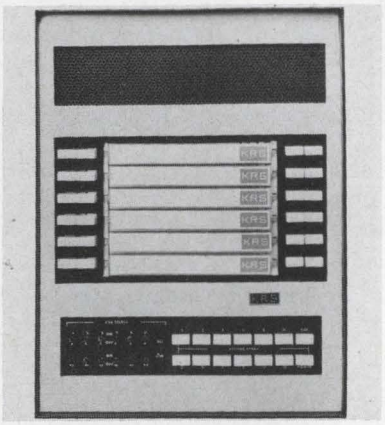


Twelve data channels are provided by the KRS Data-Stact DR-2 recorder. Different versions offer front panel/remote control, or remote control alone, of: random access, cartridge serial/parallel control, cartridge group sequencing, and cue tones. This basic system building block records dc to 100 kHz.

P&A: $4500-$9700; 30-60 days. KRS Instruments, Div. Data-Pulse, Inc., 780 Arroyo Parkway, Pasadena, Calif. Phone: (213) 681-7416.

SEE AT BOOTH 3K27

Circle No. 381

IC-type digital clock

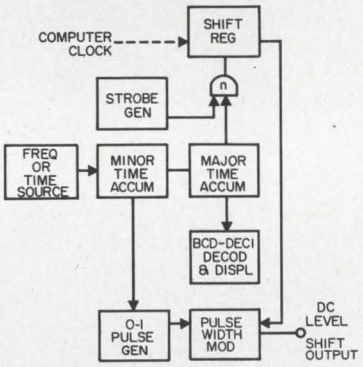

Here's a digital clock-time code generator using integrated circuit logic. It can provide BCD outputs of time and date in either parallel or serial form, or in any combination.

Output pulse train is width-modulated to distinguish between 0 and 1. For tape recording or com links dc level shift can be used to modulate a carrier. It uses a Nixie display.

Parabam, Inc., Hawthorne, Calif.

SEE AT BOOTH 3A42

Circle No. 382

High-precision pot



A guarded high-precision potentiometer, known as the K-5 model contains improvements over the earlier K-3. Range and balancing controls are aligned from left to right in order of usage.


Volts to 5 (or 6) digits are read with three switch decades and a detente slidewire of 115 divisions. Error is ±0.003% of reading + 2 uV max.

Leeds & Northrup, 4901 Stenton, Phila., Pa. Phone: (215) 329-4900.

SEE AT BOOTHS 1B18-20

Circle No. 383

Chassis-mounted boards

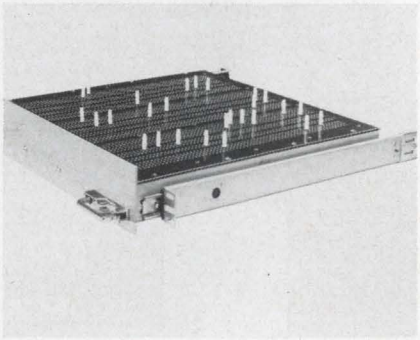


Chassis-mounted multi-switch and program boards with mechanical pull-out and lock-in features are equipped with lever handles that are designed for positive latching of the drawer in the rack. It can make or break multiple pin connectors mounted at the rear of the chassis. Pin friction of up to 400 pounds is easily overcome.

Sealectro Corp., 225 Hoyt St., Mamaroneck, N. Y. Phone: (914) 698-5600. TWX: (710) 566-1110.

SEE AT BOOTH 2G43-45

Circle No. 384

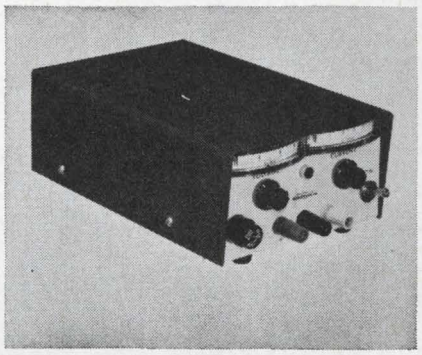

Power supplies

Three new lines of power supplies are offered. The 24 compact models in the ED/EA line (shown) feature the "Duet" twin amplifier for controlling voltage and current with automatic crossover to either mode. The L Series offers 720 models with up to 1.8 Kw output. Model 2909 features advanced circuitry.

Delton Inc., 4th and Cambria, North Wales, Pa. Phone: (215) 739-1101.

SEE AT BOOTH 2H50.

Circle No. 557

Universal recorder

Model 6521 Recorder provides a wide-speed range strip chart recorder, an XY recorder that can control its own test, and a sequential chart mode where the paper advances after a given time or XY test. Chart movement can be controlled directly from external encoders or analog transducers. Paper can reverse for curve families.

P&A: $2700; 4-6 weeks. Houston Omnigraphic, 4950 Terminal, Bellaire, Tex. Phone: (713) 667-7403.

SEE AT BOOTHS 3K34-35.

Circle No. 558

Pulse generator


A 40 MHz pulse generator, model 111 features an independently variable linear rise and fall to 2 ns. Outputs are single or double pulse to ±5 V, with full baseline offset. Variable pulse delay from 10 nsec advance to 50 msec delay and leading edge to leading edge double pulse separation to 20 nsec are offered.

P&A: $1480; June, 1966. Datapulse, 509 Hindry, Inglewood, Calif. Phone: (213) 671-4334.

SEE AT BOOTHS 3K27-29.

Circle No. 559

METALIZED MYLAR CAPACITORS

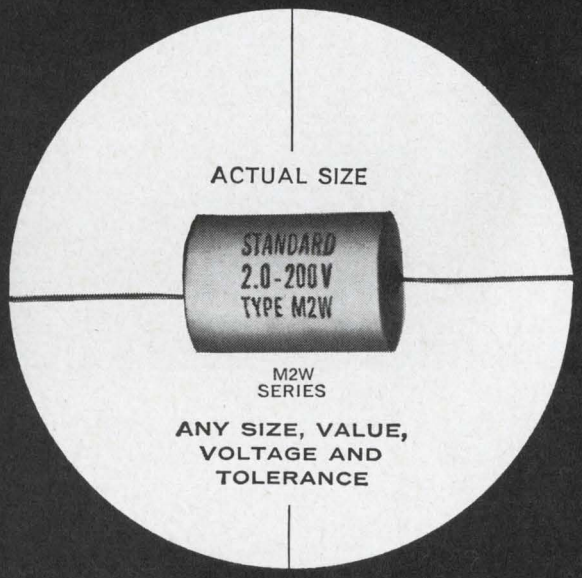

to your exact specifications... at stock prices

METALIZED MYLAR CAPACITORS

Unique, self-healing units that remain in circuit during voltage surges with little or no loss of electrical properties. Use the M2W's where size and weight are limiting factors and long life and dependability are required. The units utilize metalized Mylar* Dielectric with film wrap and custom formulated epoxy resin end fill. Available in round and flat styles.


*Du Pont Trademark for Polyester Film

Samples available on your letterhead request

Standard CONDENSER CORPORATION

DEPT. ED-3, 3749 N. CLARK STREET, CHICAGO, ILLINOIS 60613

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 209

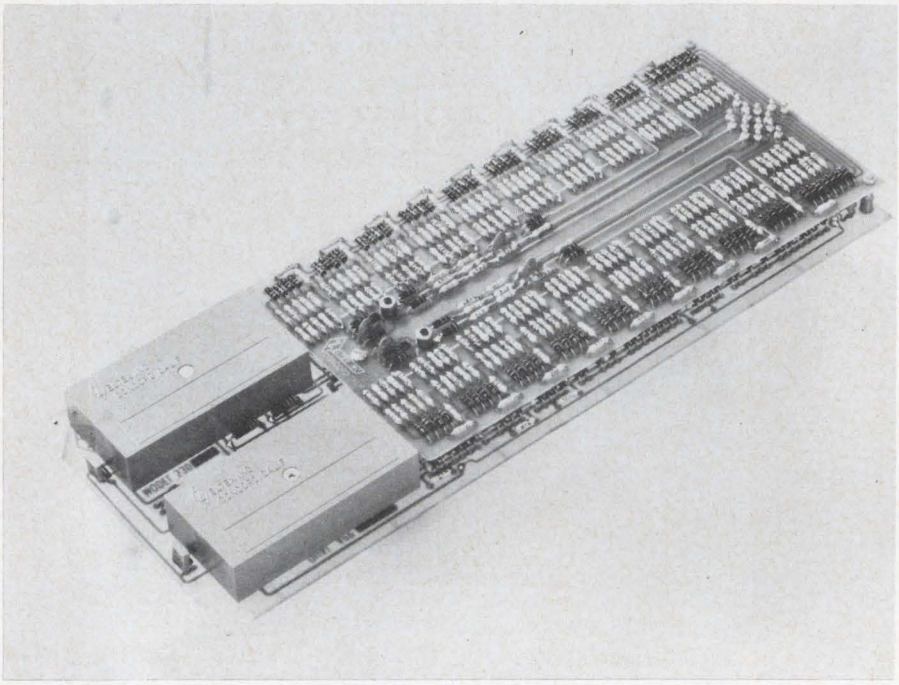

Two-channel function generator gives sines and cosines

A new two-channel function generator is intended for analog computations involving sines and cosines. It has been designated model 530 by the manufacturer, and is a printed-circuit card module, fully compatible with the rest of the manufacturer's 500 series elements operating at ±100 V output. This unit rounds out the analog capabilities of the line.

The 530 may be mounted in the 560 cabinet with power supply, multipliers, amplifiers, and fixed function generators.


The generator features a maximum static error of less than 25 millivolts, a sine capability of ±270°, and a cosine capability of +180° to −270°. The operational amplifier output generates −sin X and −cos X in the range of ±100 V.

An active error suppression method is used for an accuracy of better than 0.025%. Built-in amplifiers provide very stable and accurate line-segments in the critical portions of the non-linear curves, and resistor-diode network drift becomes negligible.

P&A: $700; 30 days. Zeltex, Inc., 2350 Willow Pass Rd., Concord, Calif. Phone: (415) 686-6660.
SEE AT BOOTH 4M12

Circle No. 385

Printed circuit guides

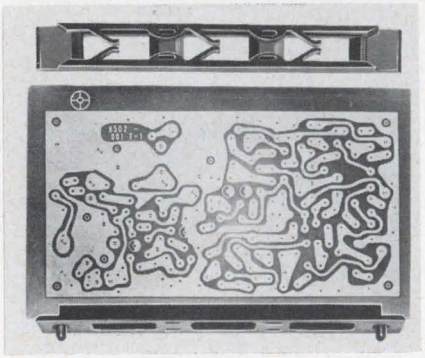


Series 30 one-piece non-magnetic card holders of polycarbonate resin offer quick assembly.

An integral cantilever spring, preventing lateral motion, holds boards from 0.05-0.125-in. thick. Integral lugs permit snap-in placement. The units withstand up to 250°F. Air flow cooling through open areas is featured.

P&A: $.15 (at 5,000). Taurus, Academy Hill, Lambertville, N. J. Phone: (609) 397-2390.
SEE AT BOOTH 4A13

Circle No. 386

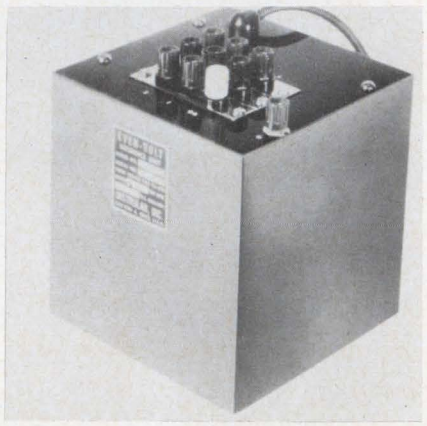

Dc transfer standard


The portable 221G-NW-19 guarded dc transfer standard gives 1, 2, 3, 4, and 5 Vdc outputs ±0.02% at 0.0 mA. Ripple is less than 0.001% Vrms, on an input of 117 Vac, 50-60 Hz ±17 volts, 6 watts.

Line regulation is 0.001% max output change per 10 V line change for both long and short term.

The unit is encased in a 6- x 6- x 6-in. case with shielded line cord, output, ground and guard terminals.

P&A: $300; 4 wks. Instrulab Inc., 1205 Lamar, Dayton, Ohio.
SEE AT BOOTH 4A14

Circle No. 387

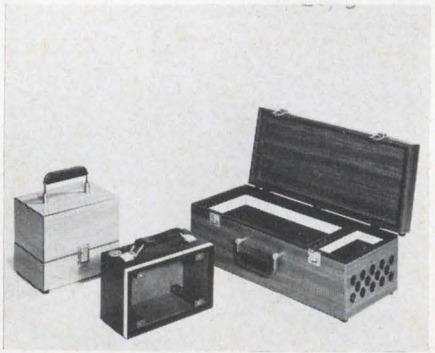

Instrument cases

Formica cases for precision instruments are available in woodgrain or solid color patterns. Mahogony cored, the formica is epoxy bonded under heat and pressure, resulting in considerable strength.

Any size and shape, all manner of partitions, cutouts, seatings, and hardware are offered. These cases have passed US Navy shipboard requirements.

W. A. Miller, Oquossoc, Me. Phone: (207) 864-3344.
SEE AT BOOTH 4C28

Circle No. 388



ACTUAL SIZE

A NEW METRIC SYSTEM
1 FOOT = 24 METERS


PARKER
MINISCAN

Twenty-four — count'em, 24 — meters in one foot. And with 4⅛″ scales! Forty in the width of a 19″ rack.

Plug-in modules, with the PARKER etched-coil movement and scales from 1½″ to 4⅛″, mount on 0.40″ centers. Groups of five to 500 units display system parameters, or show a curve as a function of two variables. Standardized mountings eliminate costly "engineering" for custom assemblies.

Process Control? *Minitrol* monitor/control modules and surface-mounting meters have all-solid-state switching and scales up to 3⅜″ in cases ⅞″ thin.

Ask for Bulletin M-6

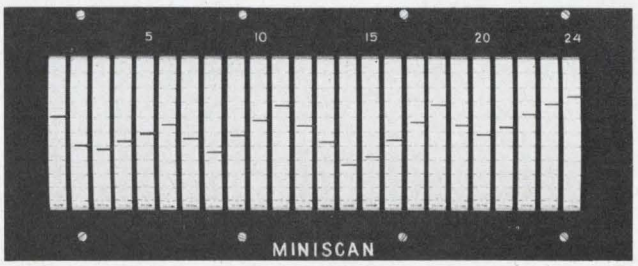

1 FOOT=24 4⅛″ METERS

PARKER INSTRUMENT CORP. 200 HARVARD AVE. / STAMFORD, CONN. 06904 / (203) 325-4361 / TWX 710-474-3390


IEEE BOOTH 2A09

ON READER-SERVICE CARD CIRCLE 126

ATTENUATE VARIABLY


in ONE db steps

with the TB-50, a turret attenuator from Telonic that performs equally well in the lab or as a production component. Total range is 10 db with one open position.



in TEN db steps

with the TA-50 having a total range of 0 to 50 db. As in all Telonic turret attenuators, the TA-50 uses precision resistors in individual pi-pads for each position to avoid tolerance build-up and to maintain constant insertion loss.



with this NEW

digital attenuator the TAB-50. it combines all the best features of the TA-50 and TB-50, then adds the convenience of a direct reading digital dial. Range is 0 to 59 db in 1 db steps.



with the WIDE RANGE

TA-109 that covers 0 to 109 db in one db steps. Dual controls on a concentric shaft permit individual selection of decades and units. VSWR of the TA-109 is a low 1.25:1. Power rating, 1 watt.



YOU can find all specifications on these and other Telonic Turret Attenuators plus Telonic Sweep Instrumentation in catalog 64-A-1. A copy will be sent on request.


Telonic® INDUSTRIES, INC.
60 NORTH FIRST AVE., BEECH GROVE, INDIANA
TEL.: (317) 787-3231 TWX: 810-341-3202

International Leader in Swept Frequency Instrumentation.

Representatives are in all major cities in the United States and abroad.

See Telonic at IEEE, booths 3K24-3K26

ON READER-SERVICE CARD CIRCLE 127

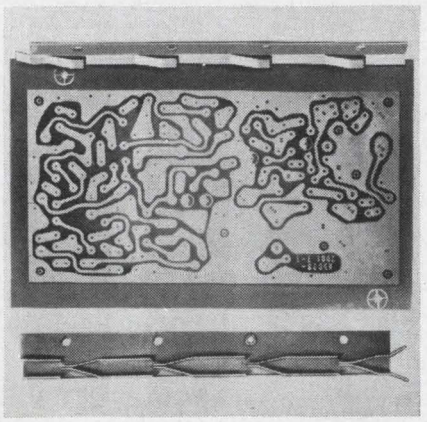


Circuit board holders

Board thicknesses from 0.030 to 0.125-in. are accepted by the Series 70 printed-circuit board holders. Available in 2, 3, 4, 5, and 6-in. tracks, these units are reported to be ideal for airborne applications and other uses requiring light weight. Heat-treated beryllium copper spring clip guides (per QQC-553) are stock.

Taurus Corp., Academy Hill, Lambertville, N. J. Phone: (609) 397-2390.

SEE AT BOOTH 4A13.

Circle No. 389

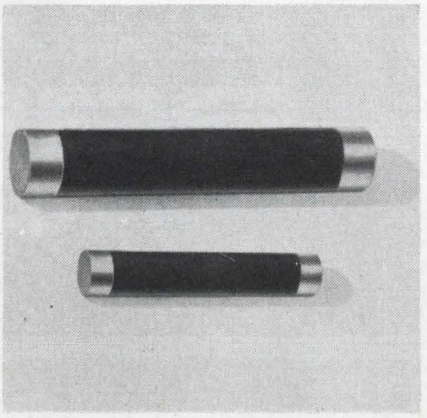

Film rod resistors

Made by a process reported by the manufacturer to eliminate the need for helixing for resistance multiplication, a line of metal film resistors is for microwave uses. Sizes range from the 0.1W TRM-2-12 (0.125 x 0.500-in) 2-12 (0.02 x 0.125-in. long) through the 1-W TRIM-12-50 (0.125 x 0.500-in.).

P&A: $1 (1-W units); 2-4 wks. EMC Inc., 1133 Arch, Philadelphia. Phone: (215) 563-1340.

SEE AT BOOTH 4A28.


Circle No. 390

With EASTMAN 910® Adhesive...

Strong yet destructible bond solves circuit board problem

Because the bonding of transistors to a fiberglass-epoxy circuit board with an epoxy adhesive results in an irreversible "weld", faulty transistors cannot be replaced without board destruction.

Scope, Incorporated, Falls Church, Va. bypassed this problem with EASTMAN 910 Adhesive. A drop of EASTMAN 910 Adhesive is applied to the transistor collar cap to bond it in its slot. Although the bond is strong enough to withstand 1000 G's, the porosity of the surface permits easy rupture and ready transistor replacement.

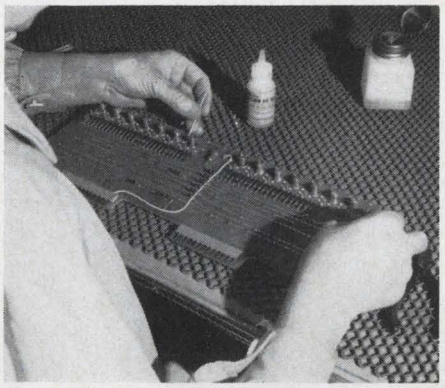

EASTMAN 910 Adhesive will form bonds with almost any kind of material without heat, solvent evaporation, catalysts, or more than contact pressure. Try it on your *toughest* bonding jobs.


For technical data and additional information, write to Chemicals Division, EASTMAN CHEMICAL PRODUCTS, INC., subsidiary of Eastman Kodak Company, Kingsport, Tennessee. EASTMAN 910 Adhesive is distributed by Armstrong Cork Company, Industry Products Division, Lancaster, Pa., and Loctite Corp., 705 N. Mountain Road., Newington, Conn.

Here are some of the bonds that can be made with EASTMAN 910 Adhesive

Among the stronger: *steel, aluminum, brass, copper; vinyls, phenolics, cellulosics, polyesters, polyurethanes, nylon; butyl, nitrile, SBR, natural rubber, most types of neoprene; most woods.* Among the weaker: *polystyrene, polyethylene (shear strengths up to 150 lb./sq. in.).*

Visit Eastman at Booth 4J07 during the IEEE Show

There is no adhesive like EASTMAN 910® Adhesive

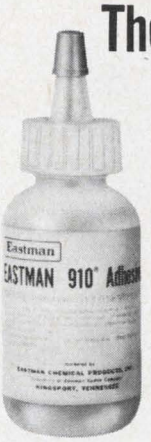

SETS FAST—Makes firm bonds in seconds to minutes.

VERSATILE—Joins virtually any combination of materials.

HIGH STRENGTH—Up to 5,000 lb./in.² depending on the materials being bonded.

READY TO USE—No catalyst or mixing necessary.

CURES AT ROOM TEMPERATURE—No heat required to initiate or accelerate setting.

CONTACT PRESSURE SUFFICIENT.

LOW SHRINKAGE—Virtually no shrinkage on setting as neither solvent nor heat is used.

GOES FAR—One-pound package contains about 30,000 one-drop applications. (Or in more specific terms, approximately 20 fast setting one-drop applications for a nickel.)

The use of EASTMAN 910 Adhesive is not suggested at temperatures continuously above 175°F., or in the presence of extreme moisture for prolonged periods.


See Sweet's 1966 Product Design File 8a/Ea.

Now available! EASTMAN 910 Surface Activator When certain surface conditions inhibit rapid bond formation, use of EASTMAN 910 Surface Activator is suggested to restore the rapid polymerization of EASTMAN 910 Adhesive.

ON READER-SERVICE CARD CIRCLE 107

TERMINAL BLOCKS

WITH BUILT-IN INSULATION

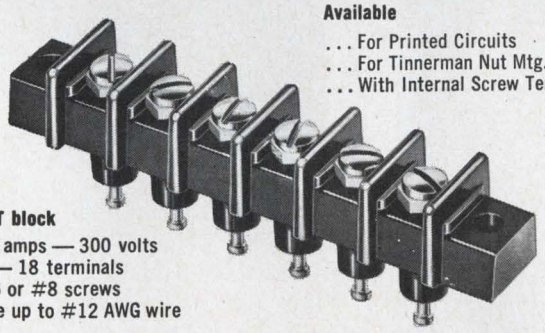

Available
... For Printed Circuits
... For Tinnerman Nut Mtg.
... With Internal Screw Term.

GFT block
20 amps — 300 volts
1 — 18 terminals
#6 or #8 screws
Use up to #12 AWG wire

Versatile Curtis GFT terminal blocks eliminate costly insulating and mounting procedures, when complying with UL and CSA requirements. Fully insulated, GFT blocks give you ¼" solder terminal to ground clearance on ⅛" thick chassis. Excellent conductivity. Terminals are gold-on-silver plated.


Get full details on all GFT variations. Write for your copy of the Curtis Catalog.

CURTIS DEVELOPMENT & MFG. CO.
3236 N. 33rd St., Milwaukee, Wisconsin 53216
See us at Booth 2C39, IEEE Show

ON READER-SERVICE CARD CIRCLE 108

Not all Knobs are

Rogan KNOBS

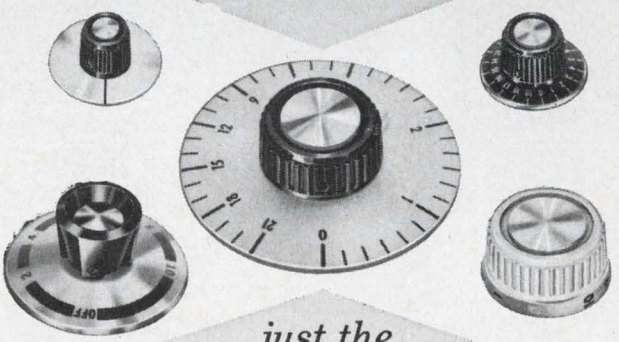


...just the better Knobs

World's finest knobs available from stock molds. Hundreds of exclusive designs. Wide range of sizes, shapes and colors. No tool costs. Preferred by leading design engineers everywhere. Write for new Rogan catalog today.

Rogan BROTHERS, INC.
8025 N. Monticello Ave.
Skokie, Illinois 60076

Specializing In Stock Molded Knobs Since 1939

ON READER-SERVICE CARD CIRCLE 109

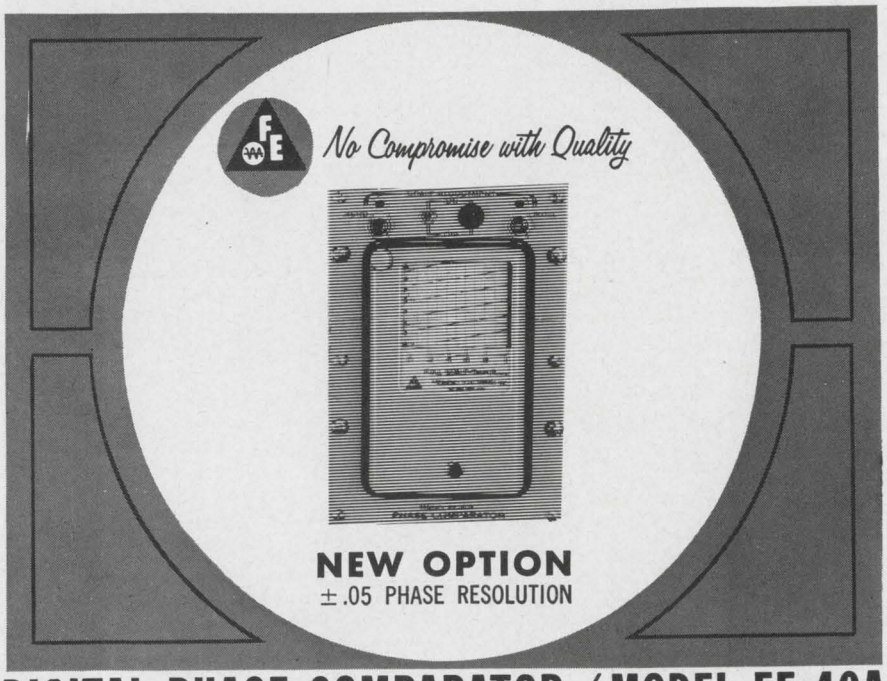

DIGITAL PHASE COMPARATOR / MODEL FE 40A

High reliability achieved through a unique simplicity of design for maintenance-free operation & laboratory accuracy

● Resolution to 1 PP10[12] ● Accepts frequencies from 1 CPS to 1 MC ● Measures phase ±2°


MEETS SPECS MIL-E-16400 **$687.50 Availability 2 weeks** SEND FOR COMPLETE CATALOG ED

FREQUENCY ELECTRONICS, INC.


55-11 Queens Boulevard, Woodside, N.Y.11377 (212) 458-4747

Mfrs. of HIGH STABILITY FREQUENCY STANDARDS / PORTABLE CLOCKS
DISTR. AMPLIFIERS / CRYSTAL OSCILLATORS / OTHER RELATED PRODUCTS

ON READER-SERVICE CARD CIRCLE 129

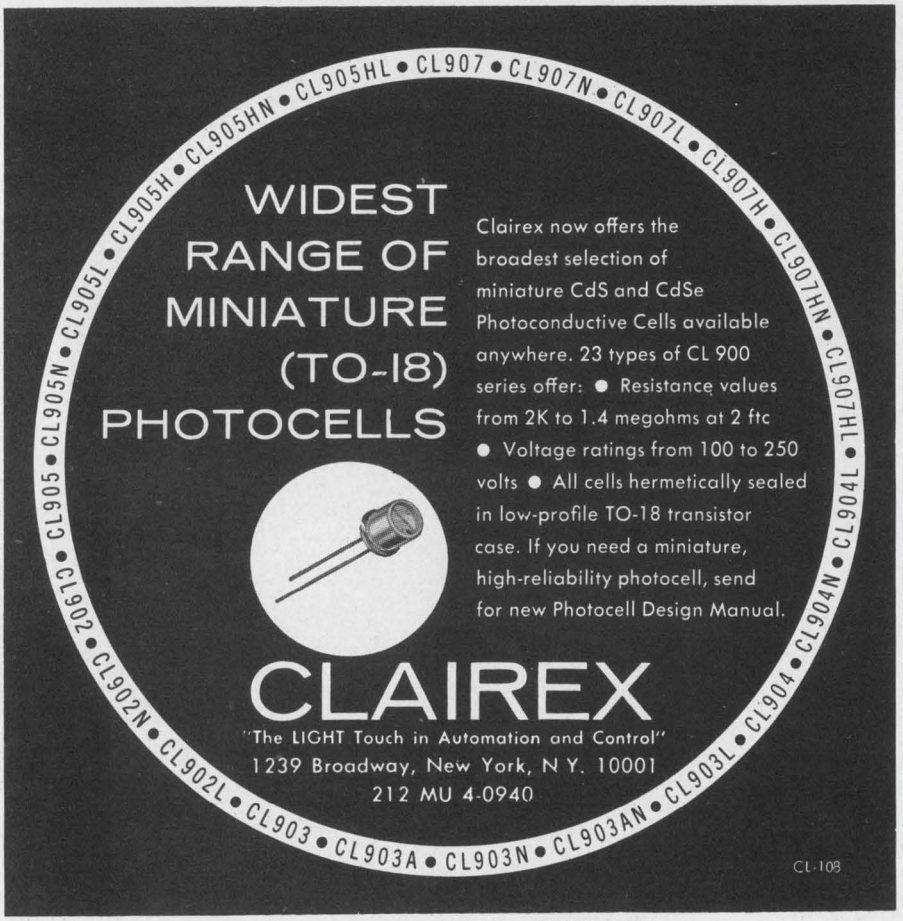

ON READER-SERVICE CARD CIRCLE 130

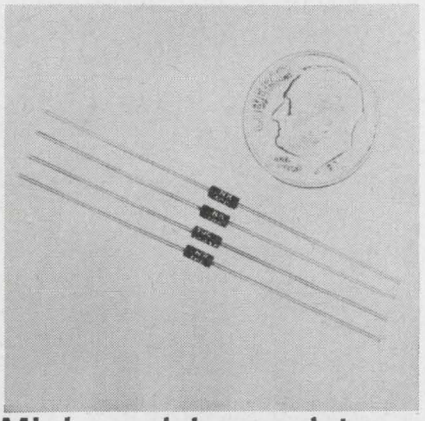

Mini precision resistor


The EE-1/20 conforms to all requirements of MIL-R-10509F and MIL-R-55182B, styles RN50 and RNR50.

It measures 0.068 x 0.156-in. long. Leads are 0.016 x 1-in. and are available in tinned copper, gold-plated dumet, or bare nickel. Rating is 200 V, 1/20 W at 25°C. Resistance range is 10 ohms to 110 k. Tolerance is 1% down to 0.05%, temperature coefficient is ±50 ppm/°C, down to ±10 ppm/°C.

P&A: $0.54-$2.06; samples, stock, production quantities; 2-5 weeks. American Components, 8 Ave. at Harry, Conshocken, Pa. Phone: (215) 828-6240.

SEE AT BOOTH 4A06

Circle No. 391

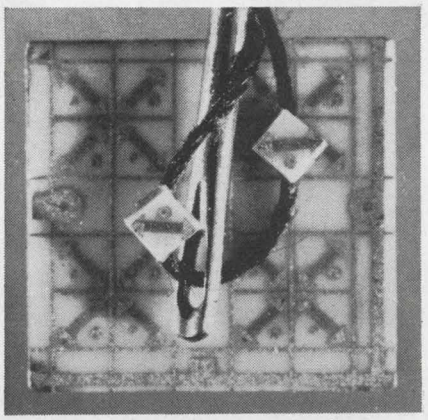


Microminiature resistor

Microminiature metal-film resistors, for T-O cans or flat packs, measure 0.04-in. 0.01-in. As many as 36 resistors can be made on a single substrate and sliced for production use.

Initial tolerance is ±10% and the temperature coefficient is ± 100 ppm/°C, −55° to +150°C.

Price: $4.00. Electronic Films, 9 Third Ave., Burlington, Mass. Phone: (617) 272-5650.

BOOTH NO. 4A26 *Circle No. 392*

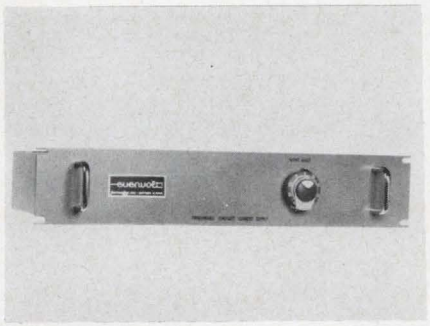


Constant current supply

A solid state programmable current supply offers 0.1-50 mA, adjustable or step-selected. Line regulation is 0.005% or 0.5 μA for 10% change, while load regulation is 0.005% or 1 μA for 100% change. A compliance voltage of 15 Vdc max and a 0.01 μA rms max random noise level are featured. Output impedance is greater than 0.5 MΩ.

P&A: $350-650; 4 wks. Instrulab, 1205 Lamar, Dayton, Ohio. Phone: (513) 223-2241.

SEE AT BOOTH 4A14

Circle No. 393

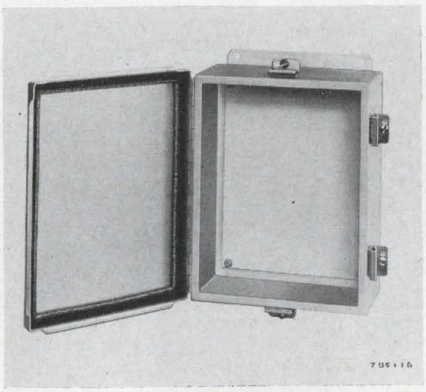

RFI shielded boxes


Radio frequency interference shielded boxes and enclosures are oil and dust tight units. Body and cover are fabricated from 14 and 16 gauge cold rolled steel.

All seams are continuously welded, and no openings or knockouts are provided. They are cadmium plated per MIL QQ-P-416a Type II Class B. Certified enclosure attenuation tests are performable if desired. Custom fabrications are available.


Hoffman Eng., Anoka, Minn. Phone: (612) 421-2240.

SEE AT BOOTH 4H08

Circle No. 394

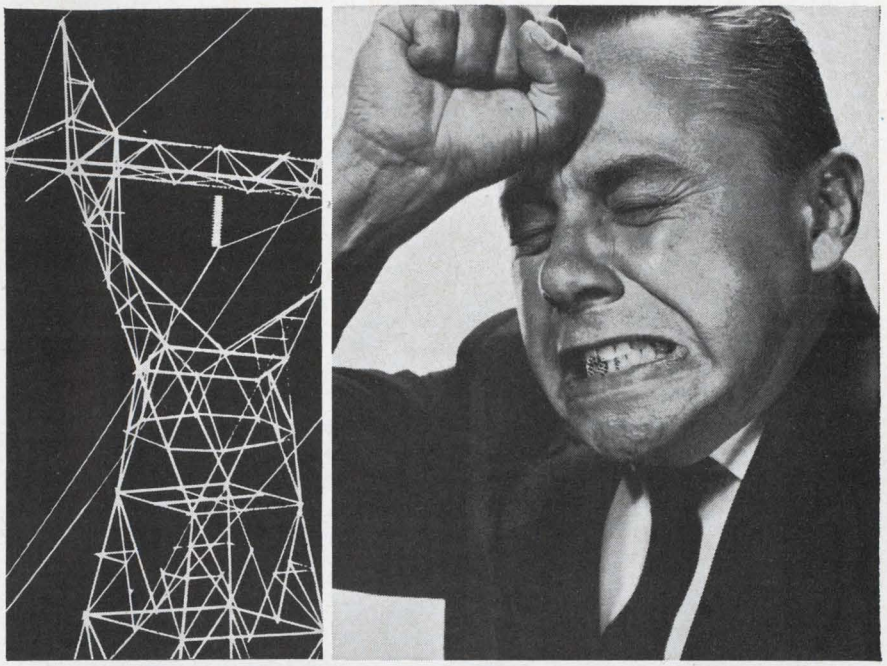

BUGGED BY DIRTY POWER-LINE NOISES?

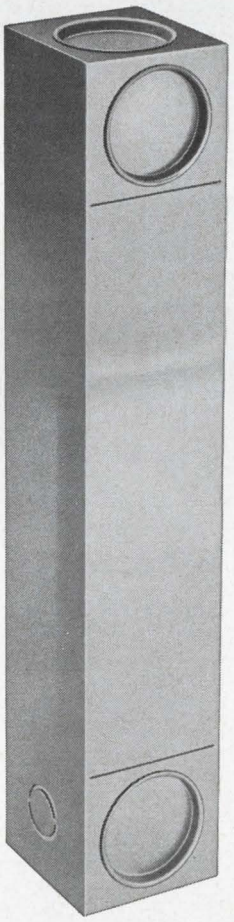

Keep power clean with Hopkins filters!

Hopkins filters clean dirty lines—remove radiated and conducted interference from your power circuits. Meeting MIL-STD-220A, Hopkins Series 1960 power-line filters surpress interference more than 100 db in frequencies from 14 kc to 10 kmc.

As a pioneer in power-line filtration Hopkins has designed and built more than 2,000 different types of filters. Used in thousands of varied applications under all operating conditions in ground installations, in secure rooms, aircraft, on board ships, HOPKINS POWER-LINE FILTERS HAVE PROVED UNSURPASSED.

Designed for easy economical space-saving installation, Hopkins power-line filters are available individually or in groups (preassembled in cabinets) for multiple-circuit applications. They are available in a choice of three basic series—each with top performance—in the frequency range needed for your circuit.

Send for complete information on Hopkins power-line filters


HOPKINS
Engineering Company

12900 Foothill Blvd., P. O. Box 191, San Fernando, Calif. 91341
Telephone: (213) 361-8691 • TWX 213-764-5998 • Cable: HOP

A Subsidiary of Maxson Electronics Corporation

ON READER-SERVICE CARD CIRCLE 131

First Ever!

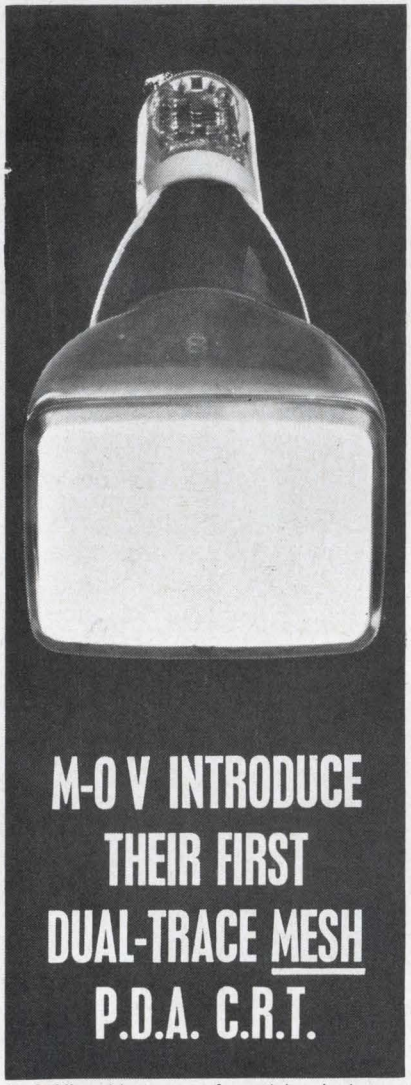

M-O V INTRODUCE THEIR FIRST DUAL-TRACE MESH P.D.A. C.R.T.

M-O V's wide range of precision instrument C.R.T.'s is now further extended by the introduction of a rectangular flat-face dual-trace oscilloscope tube with *mesh* P.D.A. This is the first time that such a tube has ever been produced. The M-O V range of dual trace C.R.T.'s now gives equipment designers the widest choice of high-brightness, high-sensitivity tubes in the world.

The new Dual-trace Tube has all these features:

* 10 kV (Va4) operation for high brightness and writing speed.
* High deflection sensitivities — Sy 5 V/cm, Sx 10 V/cm.
* Deflection blanking.
* Useful scan (each trace) — 6 cm x 10 cm.
* Independent astigmatism adjustment.
* Area of common scan (min.) — 5 cm x 10 cm.
* Rectangular flat face to save panel space 12 cm x 9 cm.
* Va3 — 1.5 kV.
* Available to order with round screen — 13 cm diameter.


This new tube joins M-O V's other dual trace precision instrument C.R.T's to form the widest range of such tubes in the world.

For full details write to:

Genalex
THE M-O VALVE CO. LTD.
N. American Sales Manager: David LaFrenais,
9 Codeco Court, Don Mills, Ontario, Canada.
Phone: 416 — 447 — 5511

ON READER SERVICE-CARD CIRCLE 880

Cable clamping

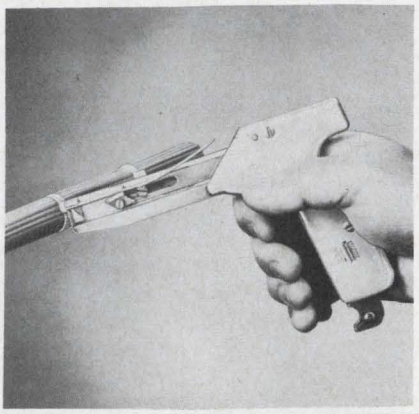

A line of adjustable nylon cable ties and clamps is offered. Snap-on clips and ties, a stud-cover system, and a new tying gun are included.


STA-STRAP cable clamps and the ingeniously mounted Pan-Ring tie can be handled by the Gun-Tool device. It meets MIL specs, and accepts any self-clinching ties, clamps, and markers.

Panduit, 17301 Ridgeland, Tinley Park, Ill. Phone: (312) 532-1800.

SEE AT BOOTH 4A36

Circle No. 573

X-Y positioning tables

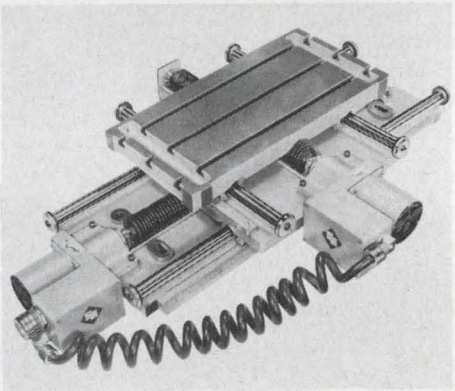

Digitally driven Slo-Syn X-Y positioning tables are complete two-axis positioning systems which can be installed on a macine or can be easily moved from machine to machine.


They are designed for use with machine tools or for automated assembly equipment. Ball nut lead screws give low friction and backlash, plus high accuracy.

Superior Electric Co., Bristol, Conn. Phone: (203) 582-9561.

SEE AT BOOTH 2G26

Circle No. 574

Permanent magnet

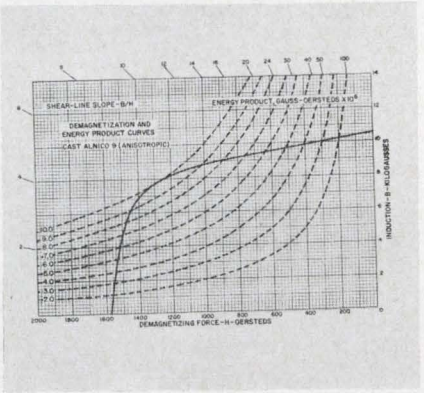


Alnico 9, a new permanent magnet material, has an energy product of typically 10.0 M.G.O. and a coercive force of 1580 H Oersteds, as shown on graph. Its straight line magnetic axis and high coercive force permits use in short sections such as flat squares, rectangles, discs and rings as well as cylinders, solid or cored, and blocks.

Thomas & Skinner, 1120 E. 23rd St., Indianapolis, Ind. Phone: (317) 923-2501.

SEE AT BOOTH M304-A

Circle No. 575

Heat/humidity cabinet

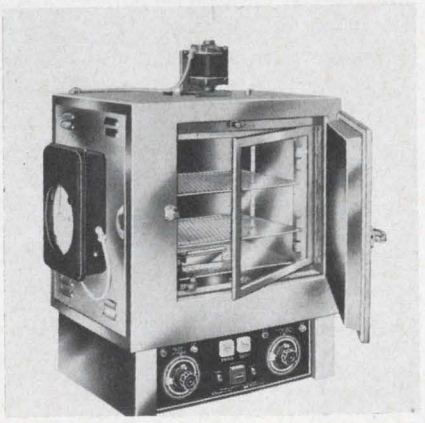

An air-cooled combination temperature/humidity cabinet is capable of meeting MIL-202C, method 106B and other stringent single steady state test requirements.


Independent wet and dry bulb POWER-O-MATIC 60 (R) saturable reactor control system gives +1/2°C, accuracy from +12°C to above ambient +93°C.

Blue M Electric, 138th & Chatham, Blue Island, Ill. Phone: (312) 468-7755.

SEE AT BOOTHS 3A07-8

Circle No. 576

GET SET...

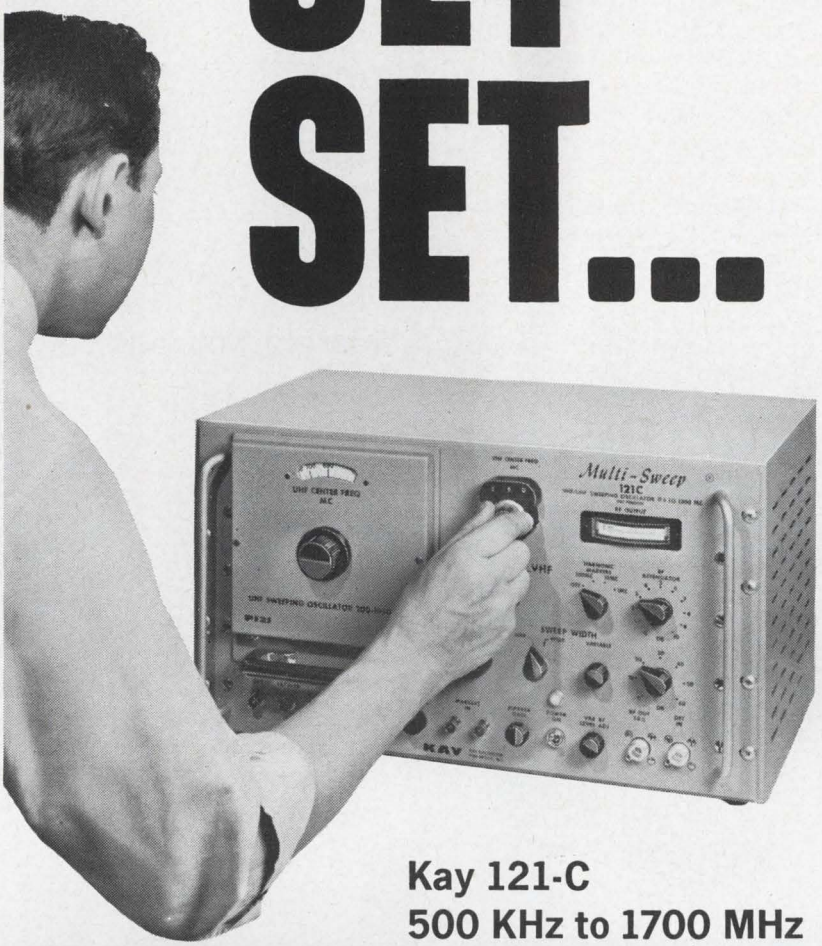


Kay 121-C
500 KHz to 1700 MHz

This solid-state instrument is an electronically swept VHF-UHF wide-sweep and marker generator which accepts a variety of UHF plug-ins to provide extended frequency ranges and sweep widths. With its plug-ins, the 121-C covers a range of 500 KHz to 1700 MHz, offers octave-wide sweeps at low UHF frequencies where most generators in this range are limited to narrow widths. Narrow sweep and wide sweep plug-ins cover special applications such as UHF-TV — full 440 to 920 MHz in a single wide sweep. A digital frequency dial provides smooth center frequency control and remarkable vernier adjustment for narrow sweep operation.

Performance characteristics include line-lock, cw, manual and variable sweep rates, and external input.

External modulation from dc up to more than 15 KHz, a built-in detector and switched attenuator are standard features.

Wide-Sweep



RF OUTPUT... *Set*

0.5 volt rms into 50 ohms
Flat: ± .25 db to 800 MHz
± .5 db to 1700 MHz



FREQUENCY... *Set*


digital frequency dial;
vernier control at all frequencies




SWEEP WIDTH... *Set*

5 KHz to 500 MHz
VHF: 50 KHz to 300 MHz
UHF: *P-121 — 124 Plug-ins

Marker Generator



harmonic (picket) birdie markers



single-freq. type birdie markers



***P-121:** 200 MHz to 1050 MHz
Sweep: 35 KHz to 350 MHz @ 800 MHz
5 KHz to 50 MHz @ 220 MHz



***P-122:** 900 to 1300 MHz
Sweep: 200 KHz to 400 MHz



***P-123:** 100 to 1000 MHz
Sweep: 5 KHz to any octave



***P-124:** 1300 to 1700 MHz
Sweep: 500 KHz to 400 MHz

KAY ELECTRIC COMPANY

Pine Brook, Morris County, New Jersey • (201) 227-2000

Visit Kay at the IEEE Show, Booths 3C11 - 3C17

ON READER SERVICE-CARD CIRCLE 881

Boron nitride

Reported to be highly moisture-resistant, HP Boron Nitride is intended for conventional and exotic firing problems in neutral or reducing atmospheres. Other advantages cited include a 5000°F firing temperature limit; 900 V/mil dielectric strength.

Availability: stock.

The Carborundum Co., Latrobe, Pa. Phone: (412) 537-3331.

SEE AT BOOTH 2J47-49.

Circle No. 500

Inserting machine

The simultaneous production of four printed circuit boards by a single worker is featured in the Dynasert Pantograph. The multiple-head system cuts to length, forms, inserts and clinches any axial lead component into printed area in 0.6 s.


United Shoe Machinery Corp., 140 Federal St., Boston, Mass. Phone: (617) 542-9100.

SEE AT BOOTH 1J17.


Circle No. 501

RFI/EMI FILTERS

FOR COMMUNICATIONS AND DATA LINES

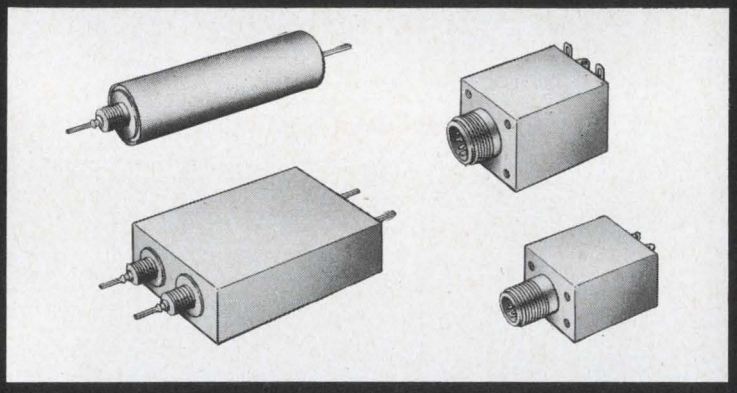

Reliability is the key word in literally thousands of filters currently in use on telephone, teletype, digital and audio transmission lines. ■ Your requirements for custom filter designs as well as standard products, can be met by Potter's extensive engineering capability and high performance criteria.

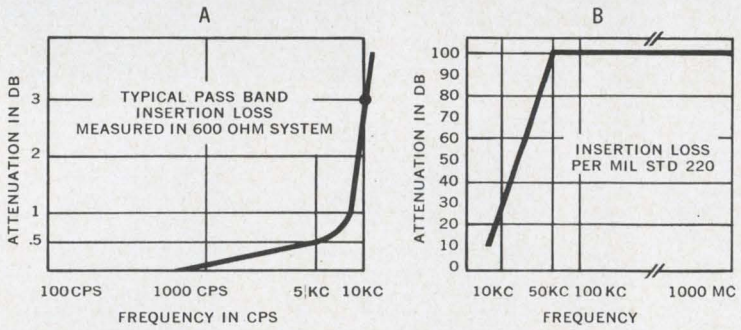


Graphs A and B show typical characteristics of Potter signal line filters. These filters are used on systems which must meet Defense Communications Agency criteria and provide maximum attenuation above the pass band with less than ½ db attenuation in the pass band. ■ Write for further information on these and other Potter filters.

THE POTTER COMPANY

Pioneering in Imagination Since 1925

7351 North Lawndale Avenue ▪ Skokie, Illinois

ON READER-SERVICE CARD CIRCLE 125

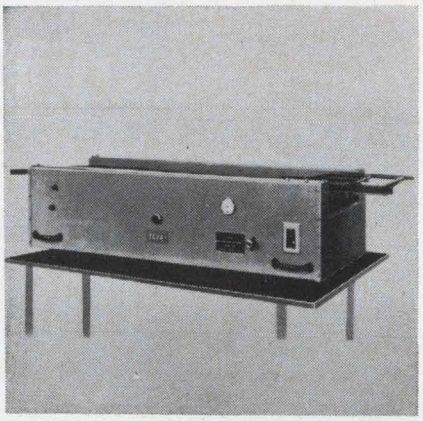


Soldering Machine

Adjustable speeds of 5-25 ft./min. are featured in the SSM. An automatic unit geared for printed-circuit board makers, it handles boards up to 8 x 9-in. The solder bath is accurately controlled to ±5 F. Solder level is not critical because the boards float on the solder surface preceeded by a skimmer.

P&A: $2600; 6 weeks. Zeva Electric Corp., 11 Park Pl., New York, N. Y. Phone: (212) 227-8288.

SEE AT BOOTH 4K15.

Circle No. 502

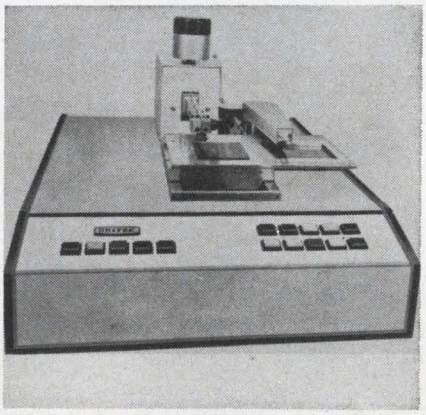

Flatpack welder

High-speed programed welding of flat packs to printed circuits at up to 300 welds per minute is the Autobond II programed welder's job. Featured are: weld programs up to 5 x 7-in., pulse amplitude of 0.2-2.0 volts, pulse durations of 1-10 ms, 2-20 ms, and 4-40 ms, and X-Y travel up to 6-in. either way.

A pulse transformer is an integral part of the weld head. Operating voltage is 100-130 Vac.


Unitek, 950 Royal Dr., Monrovia, Calif. Phone: (213) 359-8361.

SEE AT BOOTH 4M37.

Circle No. 503

ON READER-SERVICE CARD CIRCLE 242 ➤

This Wilcox Model 914 ATC transponder uses Allen-Bradley Type CB ¼-watt and Type EB ½-watt fixed resistors, Type G variable resistors, and Type R adjustable fixed resistors. The Model 914 transponder is for aircraft operating under ground control radar.

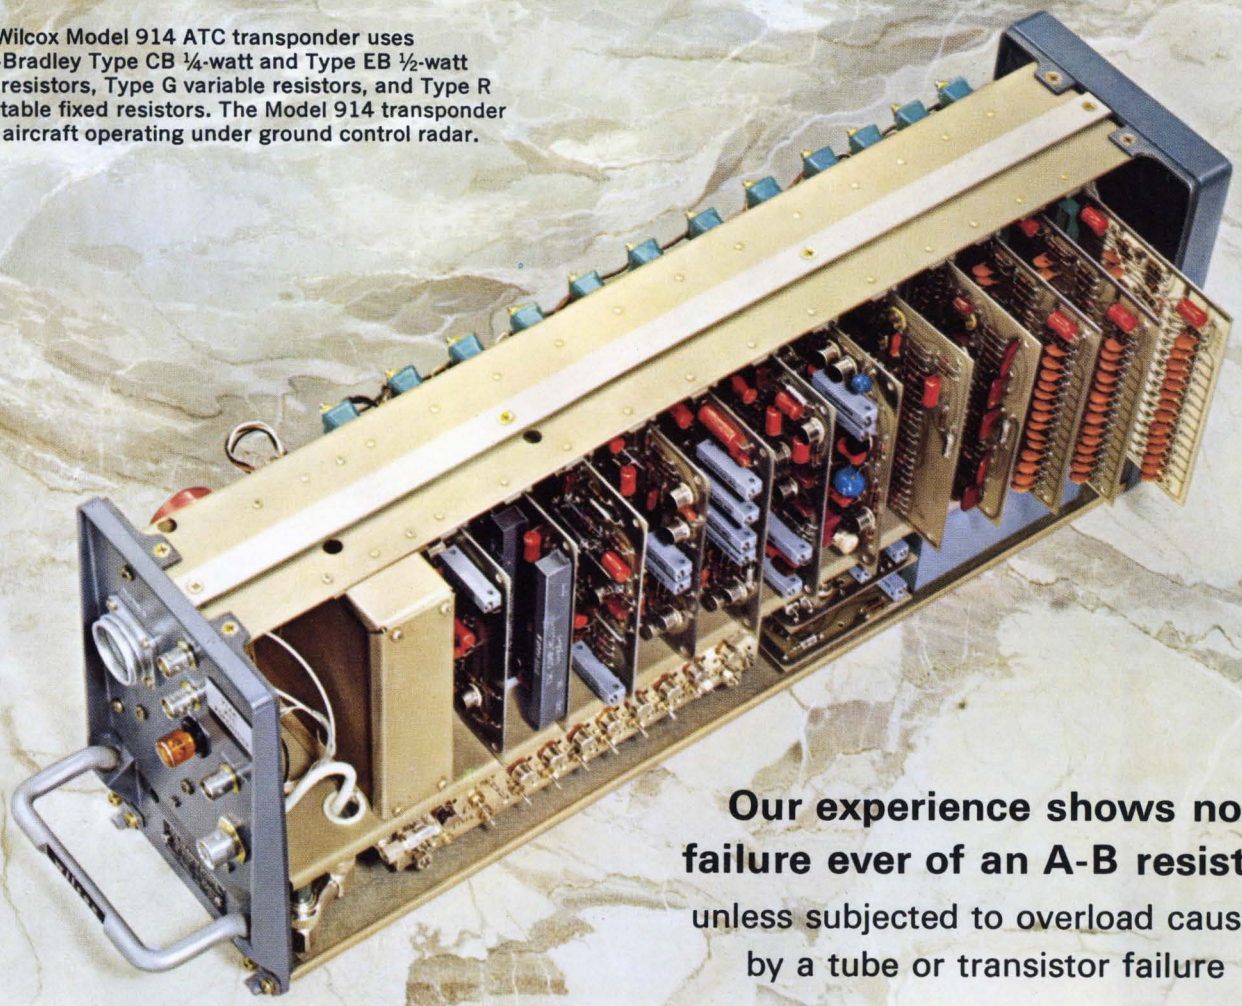


Our experience shows no failure ever of an A-B resistor


unless subjected to overload caused by a tube or transistor failure

Wilcox Electric Co., Inc.

Prompt shipment of HOT MOLDED FIXED RESISTORS in all standard EIA and MIL-R-11 resistance values and tolerances. Values above and below standard limits can be furnished. Resistors are shown actual size.

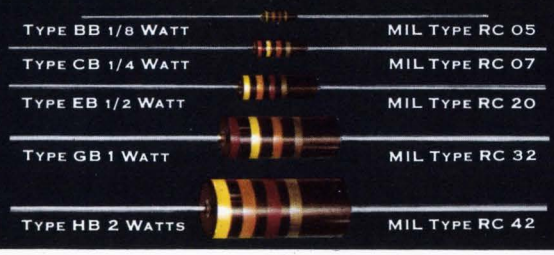

Type R Hot Molded Adjustable Fixed Resistors are rated ¼ watt at 70°C. Supplied in resistance values from 100 ohms to 2.5 megohms.

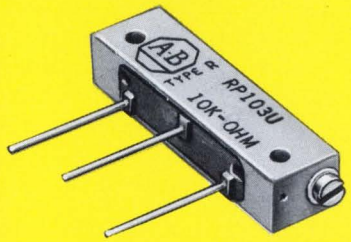

Type G Hot Molded Variable Resistors are rated ½ watt at 70°C. Resistance values from 100 ohms to 5.0 megohms.



"No failure ever" is an impressive record, especially since Allen-Bradley fixed and variable resistors have been used in Wilcox transponders for around ten years.

The reason for this consistently high performance is the unique hot molding process developed and used only by Allen-Bradley. In fixed resistors, it produces such complete uniformity that long term A-B resistor performance can be accurately predicted. Catastrophic failures don't occur with Allen-Bradley hot molded resistors.

Use of the hot molded resistance element in the Allen-Bradley Type G variable resistors assures very smooth operation—there are never any abrupt changes in resistance during adjustment. The Type G controls have a very low initial noise factor, becoming lower with use.

Type R adjustable fixed resistors also have a solid molded resistance track. Adjustment of resistance is so smooth, it approaches infinite resolution. Settings will remain fixed under severe vibration or shock. The Type R molded enclosure is dustproof and watertight—it can be potted after adjustment.

For more complete details on the full line of A-B quality electronic components, please write for Publication 6024: Allen-Bradley Co., 222 W. Greenfield Ave., Milwaukee, Wisconsin 53204.

Export Office: 630 Third Ave., N.Y., N.Y., U.S.A. 10017.

58-01-6E

A-B QUALITY

ALLEN-BRADLEY

QUALITY ELECTRONIC COMPONENTS



Watch those "HIDDEN" COSTS in an economy line of resistors

■ The "saving" is not pure "money in the bank" when you buy low cost, inferior grade resistors. Actually, the few pennies that you believe yourself to be "ahead" through purchasing resistors of uncertain performance can cost dollars in test line rejections, or worse, in customer disappointments with the product—a situation that is beyond repair.

How can you protect yourself against such accidents? Easy—standardize on Allen-Bradley resistors!

Allen-Bradley makes *only* one quality of resistors—a premium quality. The many manufacturers who have standardized on Allen-Bradley resistors find these resistors function also as an endorsement of the quality of the instrument in which they are used. Being produced by a unique hot molding process on highly specialized automatic equipment—designed and used only by Allen-Bradley—the resultant uniformity of characteristics from resistor to resistor—from one billion to the next—is not even approached by other resistor manufacturers. In fact, long term resistor performance is accurately predictable. And no user of Allen-Bradley resistors has ever encountered a catastrophic failure in service.

You'll be more fair with your customers when you permit your resistor dollar to buy for you the ultimate in dependability, performance, and uniformity of Allen-Bradley hot molded resistors. Allen-Bradley Co., 222 W. Greenfield Ave., Milwaukee, Wisconsin 53204. Export Office: 630 Third Ave., New York, N.Y., U.S.A. 10017.



HOT MOLDED FIXED RESISTORS are available in all standard EIA and MIL-R-11 resistance values and tolerances, plus values above and below standard limits. **Shown actual size.**

57-12-5E


A-B QUALITY

ALLEN-BRADLEY


QUALITY ELECTRONIC COMPONENTS

E|D Technology


Designing with Schottky-barrier diodes PAGE 178
Capacitance transducers: how to design them PAGE 188
FETs boost performance of consumer electronic systems PAGE 196
Minimize your NAND-gate logic circuits PAGE 203
How to design magnetic deflection amplifiers—part II. PAGE 210
Try carpet plotting for fast, accurate interpolation PAGE 226

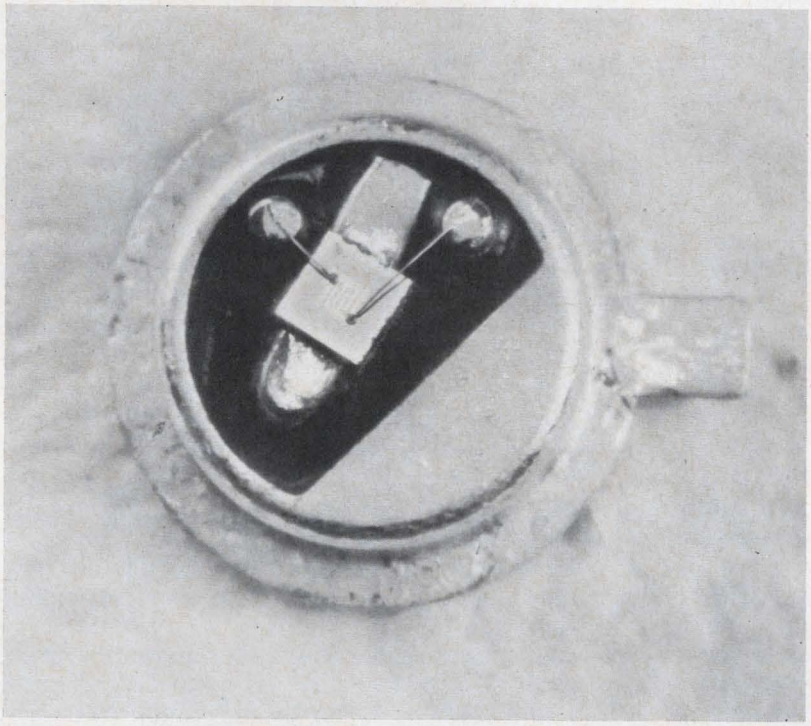

FETs are a hit in the home. 196

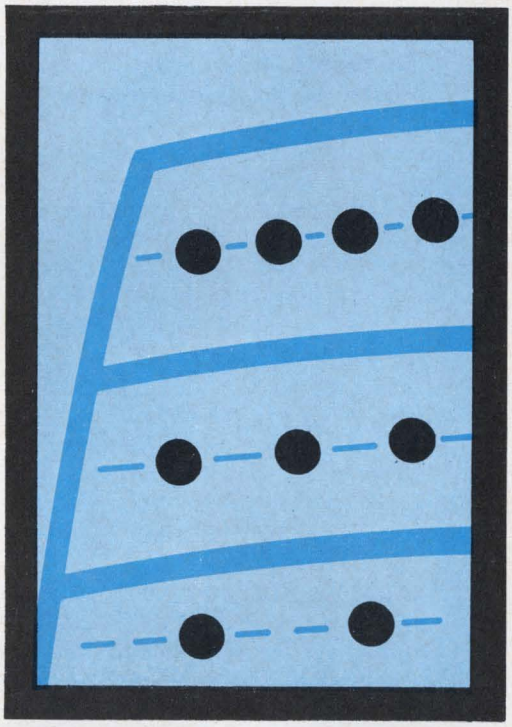

Carpet plotting is easy. 196

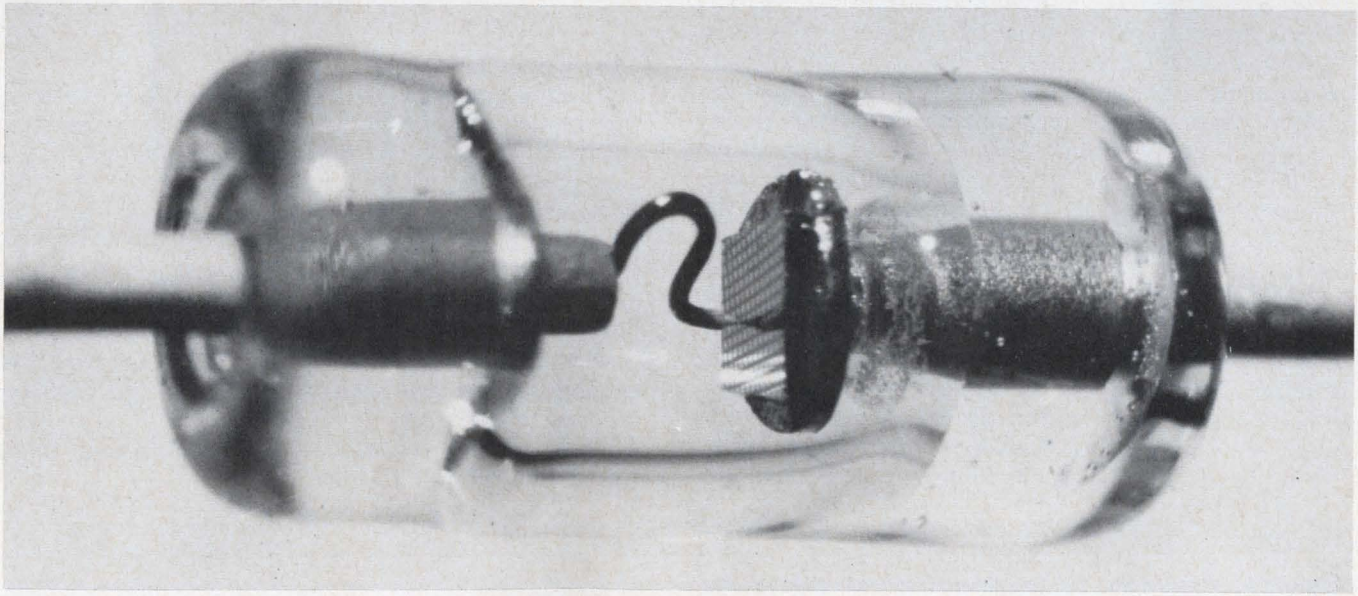

Schottky-barrier diode bridges the gap. 178

Hot-carrier diode opens new vistas for designers of high-frequency and microwave devices. Fast, quiet and well-behaved, it combines best of 2 'worlds.'

The hot-carrier, or Schottky-barrier, diode bridges the gap between the *pn* junction diode and the point-contact diode, and, in so doing, it makes possible new design approaches to many high-frequency and microwave devices.

A newcomer that combines the favorable properties of both *pn* and point-contact diodes, the hot-carrier already is finding widespread use in the design of microwave mixers and detectors.

What are its main properties and how does it work?

The hot-carrier diode has these desirable characteristics:

- Fast turn-on and turn-off.
- Low noise.
- Very uniform forward and reverse behavior.
- Lack of charge storage.

In pulse operations, for example, the new diodes are useful for fast gating, clamping, sampling, waveform generating and logarithmic conversion in the fractional nanosecond region.

In the microwave area, they are useful as mixers, detectors, power monitors and rectifiers, limiters, discriminators, harmonic generators, and ultra-fast switches and modulators at nanosecond rates.

The uniformity of forward characteristics between diodes permits a relatively easy and economic selection of matched pairs or quads for use in balanced circuit configurations, or where accurate tracking between circuits is required.

Essentially the hot-carrier diode is a rectifying metal-semiconductor junction. The metal-semiconductor interface can consist of a variety of metals in conjunction with either *n*-type or *p*-type silicon. In general, *n*-type silicon is preferred, because its higher electron mobility results in better high-frequency performance.

The diode is a more efficient rectifier[1] at high frequencies than a *pn* junction type is, because it does not store minority carriers during normal operation (Fig. 1). It is similar in concept and in operation to the ideal point-contact diode, inasmuch as both employ a Schottky barrier and both are based on majority-carrier conduction. In practice, however, their characteristics are quite different (Fig. 2). In the practical point-contact diode, a sharp metal whisker makes contact with the semiconductor element. The hot-carrier diode has a true Schottky-barrier, which is a planar-area contact between the metal and the semiconductor. The planar contact results in uniform contact potential and uniform current distribution throughout the junction. This, in turn, results in:

- Lower series resistance.
- Lower noise.
- Higher power capability.
- Greater resistance to transient pulse burnout.

George N. Kaposhilin, Applications Engineering Mgr., hp associates, Palo Alto, Calif.

Equivalent circuit shows current dependence

The hot-carrier diode's performance conforms closely with theory. Its low-level V-I characteristics can be accurately described by the following equation:

$$i = I_s\left[\exp\left(\frac{qv}{nkT}\right) - 1\right] \qquad (1)$$

where

I_s = saturation current (8×10^{-9} A for -hpa-2300 series).
q = electron charge (1.6×10^{-9} coulomb).
T = temperature (°K).
k = Boltzmann's constant (1.38×10^{-23} joule/°K).
n = diode ideality factor (1.05 for -hpa-2300 series).
v = the voltage across the diode junction (volts).

Since n is close to unity, at room temperature ($T = 300$°K) Eq. 1 can be simplified to:

$$i = I_s\left(\exp\frac{v}{26}\right) - 1, \qquad (2)$$

where v is now in millivolts.

The voltage v in Eqs. 1 and 2 is the portion of the applied external bias voltage that appears at the diode junction. At dc and low frequencies this voltage is equal to the total bias voltage, V_a. At microwave frequencies V_a is reduced by the presence of a series inductance and a junction capacitance. This is clear from the equivalent circuit of the diode (Fig. 1). The values of the parameters depend on the specific diode.

The junction resistance R_j and the junction capacitance C_j are both functions of the current through the diode.

The junction resistance can be obtained from Eq. 2 by differentiation:

$$R_j = \frac{dv}{di} = \left(\frac{26}{I_s}\right)\exp\left(\frac{-v}{26}\right) \qquad (3)$$

If v is much greater than 26, or if i is much

greater than I_s, further simplification is possible:

$$R_j = \frac{26}{i}, \qquad (4)$$

where i is in milliamperes.

The junction capacitance C_j can be obtained accurately from the depletion-layer capacitance expression for a step junction:

$$C_j = C_j(0)/\left(1 - \frac{v}{V_b}\right)^{1/2} \qquad (5)$$

where

$C_j(0)$ = the zero bias junction capacitance (typically 0.8 pF).
V_b = the built-in potential ($\approx$ 0.45 electron volts).

Typically the series resistance R_s is about 11 ohms, the package capacitance C_p is 0.15 pF and the package inductance L_p is 3 nH, if we assume zero lead length outside the glass envelope.

Mixing and detecting are main functions

Among the many applications of the hot-carrier diode, the most interesting are those of mixing and detecting. The high-frequency attributes of the diode and its characteristic behavior become most evident then. Each application imposes different requirements.

In mixers the diode's noise figure, conversion losses and IF and RF impedances are the critical factors.

In detectors we must distinguish between small-signal and large signal types. In small-signal detectors the most significant factor is sensitivity, which is affected by the diode's rectification efficiency, output impedance and noise properties. In large-signal types the emphasis shifts to the linear range of the V-I characteristic, its reverse resistance and breakdown voltage, and its series resistance.

Noise figure depends on mixer circuit


The noise figure of a receiving system, consisting of a mixer followed by a high-gain IF amplifier, is:

$$NF_o = 10 \log [L_m t_m + (F_{IF} - 1)L_m] = 10 \log L_m(F_{IF} + t_m - 1), \qquad (6)$$


where:

L_m = the effective mixer conversion loss.
t_m = the effective mixer noise temperature.
F_{IF} = the noise factor of the IF amplifier.


The terms L_m and t_m are characteristics of the mixer and are not the inherent conversion loss, L_d, and the noise temperature ratio, t_d, of the diode. However, it is common practice to state the diode's attributes in terms of its performance in a specific mixer circuit and, hence, to use the terms

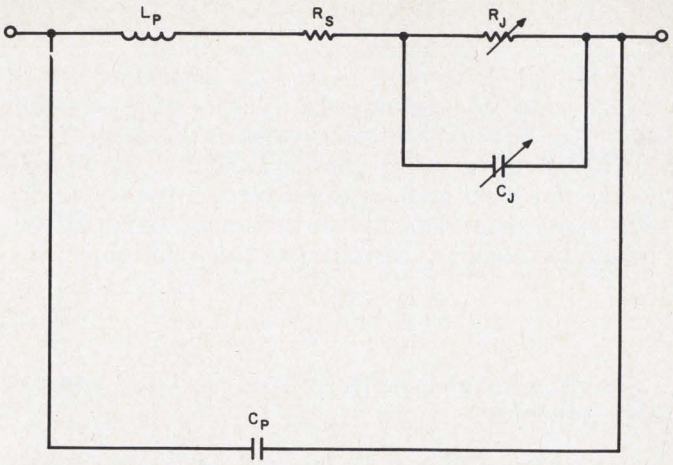

1. **Equivalent circuit** of hot-carrier diode shows important parameters. Typical values are: 11 ohms series resistance, 0.15 pF package capacitance, and 3 nH package inductance.

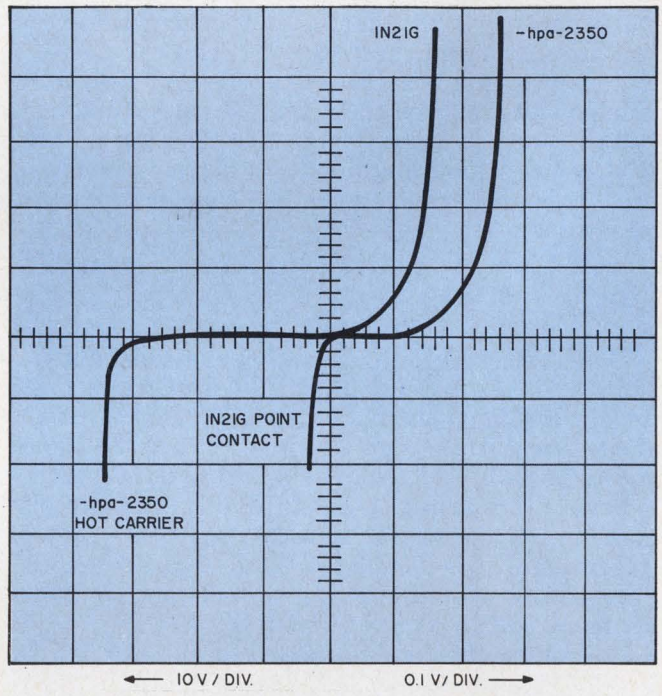

2. **Voltage vs current profiles** of a hot-carrier diode and a point-contact diode show the higher reverse breakdown voltage of the hot-carrier type.

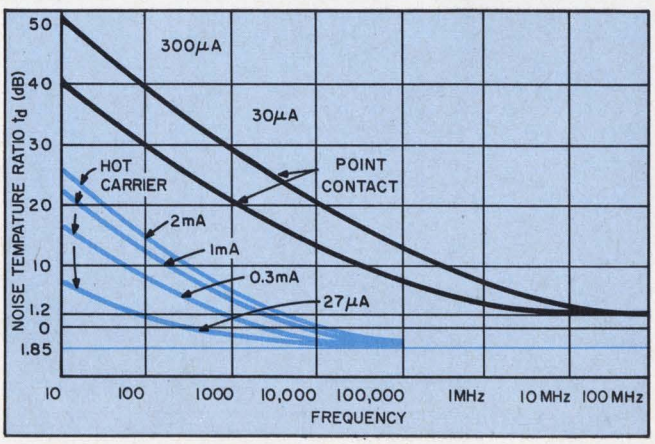

3. **The intristic noise temperature,** t_d, of hot carrier diodes is less than that of point-contact types. The asymptotic value of t_w is shot and thermal noises.

L_m and t_m as characteristics of the diode.

Although both factors can be measured, it is more useful to examine the relationship between these and the inherent properties of the diode.

The effective noise temperature, t_m, is related[3] to the intrinsic noise temperature of the diode, t_d. The expression depends on the image band. If the image frequency is terminated, this relation is:

$$t_m = \frac{2}{L_m}\left[t_d\left(\frac{L_m}{2} - 1\right) + 1\right] \qquad (7a)$$

For the image-open or shorted case, the expression becomes:


$$t_m = \frac{1}{L_m}\left[t_d(L_m - 1) + 1\right] \qquad (7b)$$

The noise temperature, t_d, is independent of the mixer's frequency. It depends on the quiescent bias current through the diode and on the IF. The variation of t_d (in dB) with the IF for several values of current is shown in Fig. 3 for both a hot-carrier and a 1N21G low-noise, point-contact diode. These curves show that t_d varies inversely with frequency at low frequencies and has a finite, and constant, minimum value at high frequencies. For the hot-carrier diode, t_d can be described accurately:[4]

$$t_d = t_w + \frac{K_n I_d}{f} \qquad (8)$$

The first term in this equation is a constant that stands for the shot and thermal noises. The second term represents the flicker, or 1/f, noise. I_d is the diode current. For an average hot-carrier diode, t_w is typically 0.8, which is lower than for the point-contact types. This is the result of the planar junction, which assures uniform contact potential. K_n is usually around 1.8 Hz/μA. By integrating over the band, we find that the noise temperature in a given band is:

$$t_d = t_w + \frac{K_n I_d}{B} \ln \frac{f_2}{f_1}, \qquad (9)$$

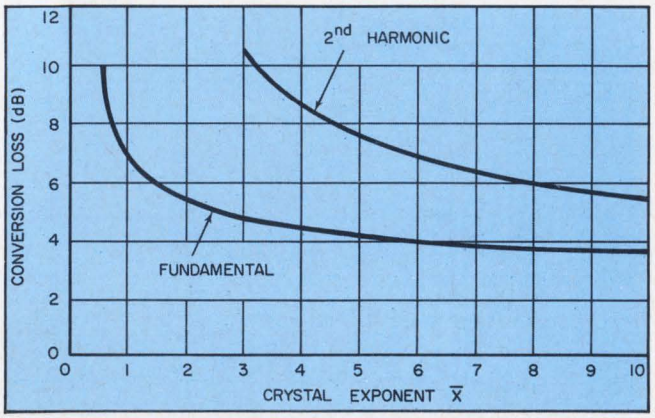

4. **The actual conversion loss** at the diode's junction may be expressed in terms of $\bar{x}$, which is d log i/d log v (a logarithmic relation of the diode's V-I characteristics). The loss decreases rapidly as $\bar{x}$ increases. These curves were plotted while the image frequency in the mixer was matched. As a result, the diode has wide dynamic range.

where:

B = the bandwidth ($f_2 - f_1$).
f_2 = the upper frequency.
f_1 = the lower frequency.

The noise characteristic in Fig. 3 and the conversion loss determine the noise figure of a mixer for any given IF and bandwidth. The conversion loss, L_m in Eq. 6, is the effective loss realized in a specific mixer. It is really a sum of three types of losses.

The first type of loss depends on the degree of match obtained at the RF and IF ports. It can be expressed as:

$$L_1 = 10 \log \frac{(S_1 + 1)^2}{4S_1} + 10 \log \frac{(S_2 + 1)^2}{4S_2}, \qquad (10)$$

where S_1 is the RF vswr and S_2 is the IF vswr.

The second loss represents a loss of signal power due to the series resistance, R_s, and the junction capacitance, C_j, in the diode. The amount of this loss can be evaluated from the diode's equivalent circuit. This loss is the ratio of the input RF signal power and the power delivered to the junction resistance:

$$L_2 = 10 \log \frac{P_{in}}{P_j} = 10 \log \left[1 + \frac{R_s}{R_j} + \omega^2 C_j^2 R_s R_j\right]. \qquad (11)$$

R_j is the time average value, established by the local oscillator (L.O.) drive. The loss becomes a minimum when R_j is equal to $1/\omega C_j$:

$$L_{2(min)} = 10 \log (1 + 2\omega C_j R_s). \qquad (12)$$


To achieve this value at a specific operating frequency, the L.O. drive level must be increased until the required R_j is reached. This level of drive is the optimum required at that frequency. For example, at 2 GHz it is approximately 1 mW for the -hpa- 2350 diode. The loss described by Eq. 11 is more pronounced at lower drive-signal levels than at high ones. This can be compensated for by introducing a constant dc bias on the diode in the forward direction. The increase in the drive signal brings along a decrease in the noise. However, care must be exercised in this trade-off to avoid introducing excessive noise with the dc bias current.

The third factor affecting the over-all conversion loss is the actual conversion loss at the diode junction. This depends mainly on the forward V-I characteristic. If the V-I characteristic is expressed as:

$$i = K v^{\bar{x}} \quad \text{for v} > 0,$$
$$i = g_b v \quad \text{for v} < 0, \qquad (13)$$

where $\bar{x} = d(\log i)/d(\log v)$, the reverse conductance is g_b and K is a constant factor, then the minimum available conversion loss is a function of $\bar{x}$ only.[5,6] For the image-terminated case, this function becomes.

$$L_{3(min)} = \left(1 + \frac{\sqrt{1 + \gamma_2 - 2\gamma_1^2}}{1 + \gamma_2}\right)\left(\frac{1 + \gamma_2}{\gamma_1^2}\right), \qquad (14)$$

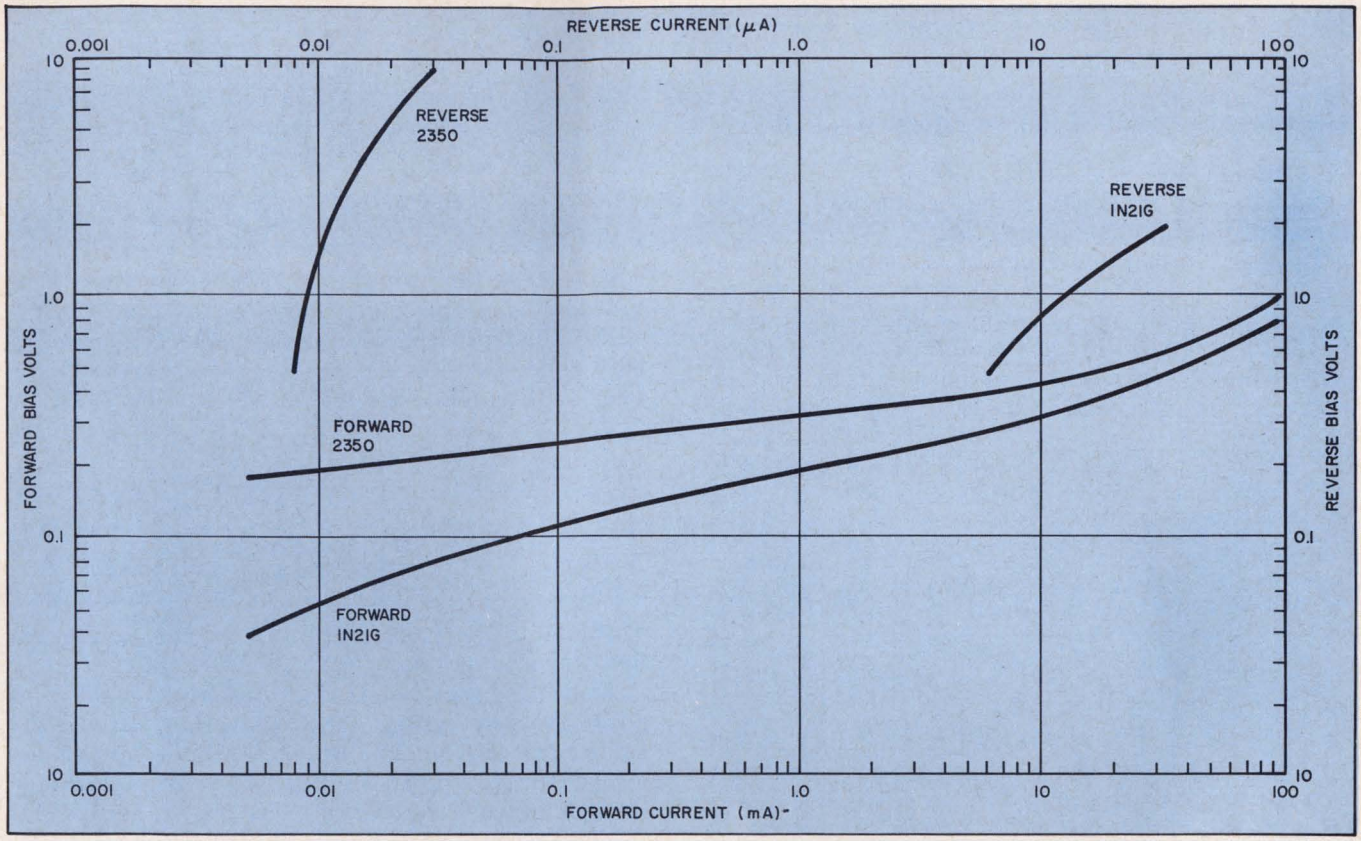

5. **The value of $\bar{x}$** is the slope of the log-log plot of the V-I characteristics, shown here. For hot-carrier diodes $\bar{x}$ is much larger and remains constant over a larger range of diode current than for point-contact types. This results in low conversion losses over a very broad range of local oscillator drive in mixers.

$$\text{where } \gamma_1 = \frac{\left(\frac{\bar{x}-1}{2}!\right)^2}{\frac{\bar{x}}{2}!\,\frac{\bar{x}-2}{2}!},$$

$$\gamma_2 = \frac{\left(\frac{\bar{x}-1}{2}!\right)^2}{\frac{\bar{x}+1}{2}!\,\frac{\bar{x}-3}{2}!}.$$

From the plot of Eq. 14 (Fig. 4), we can conclude that the conversion loss decreases rapidly for increasing $\bar{x}$. The value of $\bar{x}$ is the slope of the log-log plot of the V-I characteristics, and it can be determined from:

$$\bar{x} = \frac{\log \frac{i_2}{i_1}}{\log \frac{v_2}{v_1}}, \qquad (15)$$

where $i_2 > i_1$ and $v_2 > v_1$. From the plot of this equation (Fig. 5), it can be seen that $\bar{x}$ is about 8.8 for the hot-carrier diode and it remains high and constant over a large range of diode current (0.01 to 10mA). For the point-contact diode $\bar{x}$ is about 4.3, and its range is from 0.2 to 5mA. This means that the hot-carrier diode can have a low junction conversion loss over a very broad range of L.O. drive.

The curves in Fig. 5 imply two addition facts:

- High L.O.s level will yield a very large dynamic range, up to the point where the decrease in x will affect the conversion loss.
- Low L.O. drive levels will yield good sensitivity.

Besides these two conflicting restrictions, the drive signal is mainly limited by the need to minmize L_2.

The over-all conversion low is the sum of these three factors: $L_m = L_1 + L_2 + L_3$ dB.

Impedance depends on drive signal

In addition to the diode's noise properties, two more characteristics have bearing on the practical design of hot-carrier diode mixers. These are the RF and IF impedances of the diode.

At typical IF (30 to 60 MHz), the reactances due to L_p, C_p and C_j are negligible. Therefore the IF impedance is a pure resistance. The typical value of this resistance (given in Fig. 6) indicates that for the optimum L.O. drive of 1 mW, it is around 180 omhs. This is about one-half the value obtained for point-contact diodes, and it is in the range of the normal impedance levels of low-noise, transistorized IF amplifiers. This considerably reduces matching problems. For example, in the case of balanced mixers, the combined impedance of the two diodes is about 90 ohms, and practically no matching is needed.


At higher RF the impedance is influenced by C_p, C_j and L_p. Therefore the impedance becomes

complex and depends on the frequency, the drive signal and on the output RF load.


How to design small-signal detectors

As mentioned, the diode affects the detector's sensitivity by its rectification efficiency, output impedance and noise properties.

The rectification efficiency of the diode is usually stated as either its current sensitivity, β—meaning the ratio of incremental output current to the RF input power—or its voltage sensitivity, γ—meaning the ratio of incremental output voltage to the RF input power. The two are interrelated,

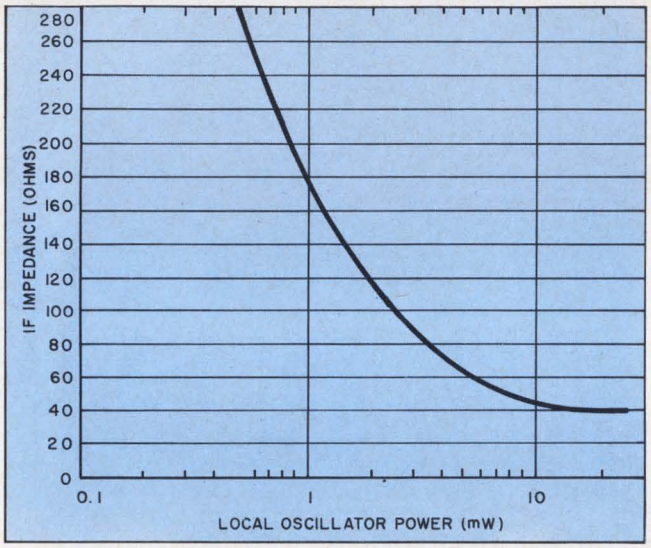

6. **At typical IF** (30 to 60 MHz) the impedance of hot-carrier diodes is a pure impedance and depends only on the level of the local oscillator drive signal. For -hpa-2350 diodes the impedance is around 180 ohms at the optimum local-oscillator level of 1 mW. In the case of balanced mixers the combined impedance is about 90 ohms, eliminating the need for extra matching circuits for IF amplifiers.

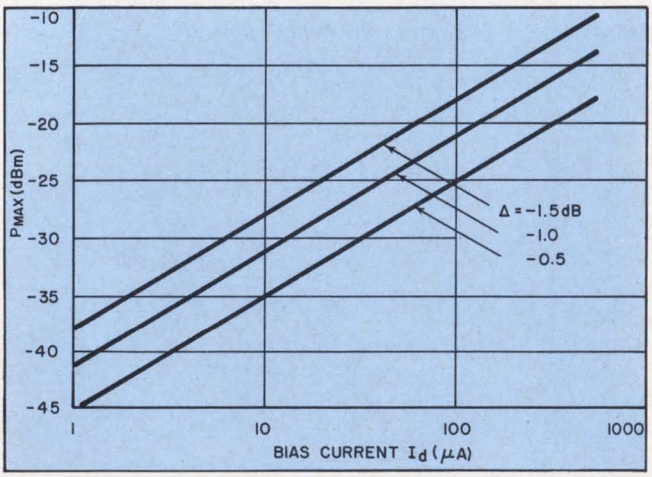

7. **Upper limit of square-law operation** in small-signal detectors depends on the amount of deviation from square-law detection, denoted by Δ. This deviation appears in Eq. 18, where the bracketed factor will become larger than unity.

as follows:

$$\beta = \frac{\Delta i}{P_{in}}, \tag{16}$$

and

$$\gamma = \frac{\Delta v}{P_{in}} = \beta R_v, \tag{17}$$

where R_v is the dynamic resistance of the diode, called video impedance or video resistance.

By a Taylor expansion of the diode's characteristic, represented by $i = I_s\,(e^{uv})$, where $u = q/nKT$ (Eq. 1), it can be shown that the current sensitivity is:

$$\beta = \frac{u}{2}\left[\frac{1+\left(\frac{Au}{4}\right)^2}{1+2\left(\frac{Au}{4}\right)^2}\right], \tag{18}$$

where A is the peak amplitude of the voltage at the diode junction.

At low signal levels the bracketed factor is approximately unity, and detection is in the square-law region. The upper limits of square-law operation are shown in Fig. 7, as the bracketed term deviates from unity by 0.5, 1 and 1.5 dB.


The low-level current sensitivity for these diodes is typically 18.4 μA/μW for an n of 1.05. For higher values of n, β will be correspondingly smaller. For the point-contact diode, the value of n at low signals is typically 1.7-1.9, and the corresponding current sensitivity is 11-10 μA/μW.

The current sensitivity, as defined above, is based on the junction characteristics of the diode and does not include the effects of the series resistance and the junction capacitance of the diode. These effects can be included by defining a conversion efficiency of the diode as follows:

$$\beta_c = \beta\left(\frac{P_j}{P_{in}}\right) \tag{19}$$

The factor P_j/P_{in} represents the ratio of the power delivered to the junction to the input power. This factor depends on the frequency and the bias, and it increases rapidly with the latter at low bias levels (Eq. 11).

In normal detector operation the self-bias-current is extremely small, resulting in low β_c. This situation can be improved by a forward external bias on the diode. It also lowers the RF and the output, or video, impedance of the diode. The lower RF impedance makes it easier to match the input impedance of the diode to the usually low impedance of the RF source (typically 50 ohms). The lower output impedance permits the use of a lower imput impedance in the amplifier and results in increased bandwidth for the output circuit. This is particularly beneficial when transistorized amplifiers, with low input impedances, are used. However, there is also a limit as to how much bias can be tolerated. This limit is set by the 1/f noise characteristics of the diode, shown in Fig. 3, and by the amplifier's noise properties.

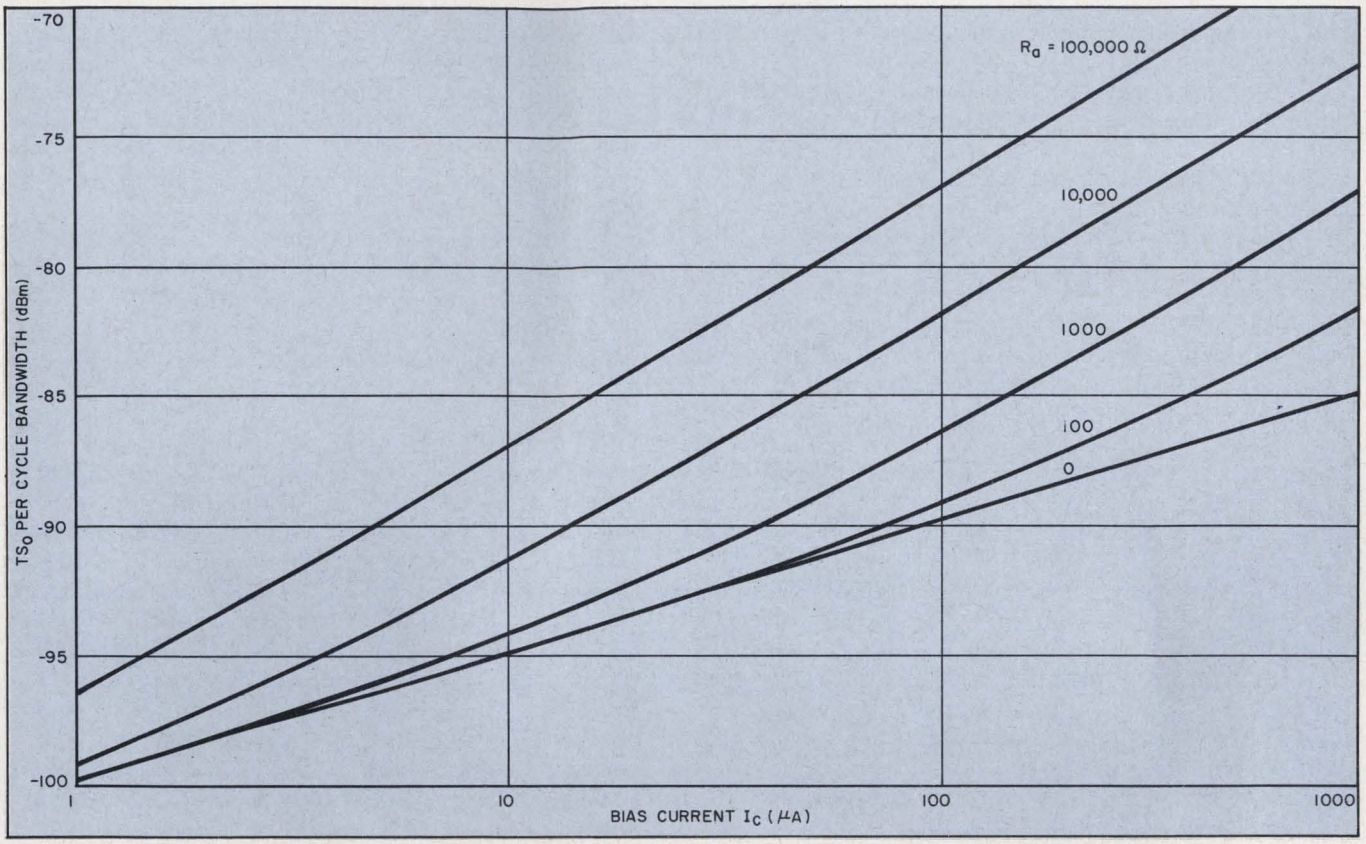

8. **The dc tangential sensitivity,** TS_o, decreases with increasing bias current and with increasing R_a. R_a is the noise resistance of the amplifier used in the detector. The flicker noise has been neglected.

Consequently a trade-off possibility is indicated. The optimum amount of bias depends on the effect of the conversion efficiency and the noise on the sensitivity of the detector.

Trade-offs to optimize sensitivity

The most common definition of sensitivity in industry, the tangential sensitivity (TS), will be used here, even though it is a highly subjective measurement and depends upon the operator. It corresponds to a signal-to-noise ratio of approximately 2.5. With Eqs. 16 and 18, the TS can be stated as:

$$TS = \frac{5i_n}{u\left(\frac{P_j}{P_{in}}\right)}, \qquad (20)$$

where i_n is the total noise current at the input to the amplifier. It includes the contributions of the diode junction (given by Eq. 9); of the diode's dynamic resistance, $R_v = R_j + R_s$; of the load resistance, R_L, and of the equivalent noise resistance of the amplifier referred to the input, R_a. With the simplifying assumptions that $R_a/R_L << 1$ and $R_L > 5\ R_v$, the following expression for i_n can be obtained:

$$i_n = \sqrt{\frac{4kT\beta}{R_v}\left(1 + \frac{R_A}{R_j}\right)} \qquad (21)$$

where β is the bandwidth of the output circuit. Substituting this into Eq. 20 and rearranging terms, we can express the TS as follows:

$$TS_{(dBm)} = 10 \log \left[\frac{5\sqrt{4kT}}{u}\frac{\sqrt{R_s + R_j}}{R_j}\sqrt{\frac{R_j + R_a}{R_j}}\right] + 10 \log \left[1 + \left(\frac{f}{f_c}\right)^2\right] + 5 \log B \qquad (22)$$

$$= TS_o + TS_f + 5 \log B,$$

$$\text{where } f_c = \sqrt{1 + R_s/R_j}\Big/\left(2\pi C_j \sqrt{R_s R_j}\right) \qquad (23)$$

($R_A = R_a$ + flicker noise, which starts to become important below 100 KHz).

The first bracketed term in this expression can be considered as the "zero frequency" tangential sensitivity, TS_o. This term depends on R_a and R_j. The latter is a function of bias current, and R_a is a constant for a given amplifier. The variation of TS_o with the bias for several values of R_a is shown in Fig. 8. TS_o decreases with increasing bias. (Fig. 9 shows the diode.)

The second bracketed term, here defined as TS_f, accounts for the variation in sensitivity with the RF frequency and the cut-off frequency. The latter term changes with the bias current. The effect of this dependence is an increase in sensitivity with increasing bias (Fig.10).

The last term in the expression accounts for the usual variation of sensitivity with bandwidth.

The optimum bias current for any given RF frequency and noise characteristic can be obtained by considering the variation of the slopes of TS_o and TS_f with bias. A plot of these slopes is shown in Fig. 11. The optimum bias current is found at


the intersection of the specified R_a curve with the required frequency curve. The values of TS_o and TS_f, corresponding to this bias point, are then obtained from Figs. 8 and 10, respectively. The final tangential sensitivity for a specified bandwidth is obtained from Eq. 22. A comparison of the predicted and measured *TS*s of the -hpa- 2350 diodes, at a 27-μA bias, is shown in Fig. 12.

The output resistance of the diode, R_v, is also established by the choice of bias current, since it is equal to $R_s + R_j$. For the best sensitivity and the highest square-law range, the load resistance should be as high as possible relative to the diode output resistance. Therefore the lower output resistance, made possible by the bias, results in a lower load impedance. Since the load is usually the input resistance of an amplifier, this places less stringent requirements on the input resistance of the amplifier.


The output resistance of the diode, in conjunction with the capacitance of the output circuit, also determines the bandwidth of the output circuit. The lower output resistance of the diode permits the use of higher output capacitances, which are needed to maximize the RF power delivered to the diode.

How to design large-signal detectors

In large-signal or linear detection the most important characteristics of the diode are its low series resistance, large linear range of the V-I characteristic, high reverse resistance, and high reverse breakdown voltage.

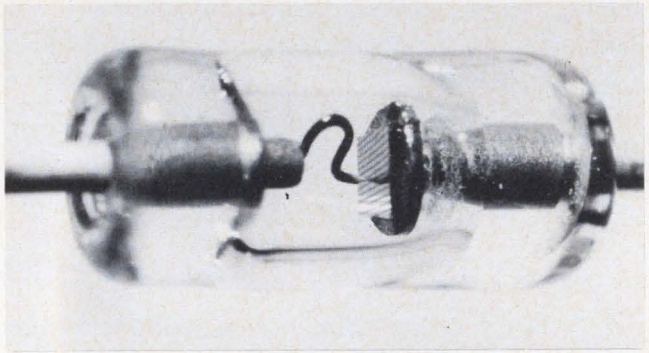

9. **Schottky-barrier diode** has a multiple pad surface which allows whisker contact to any one of the metal pads.

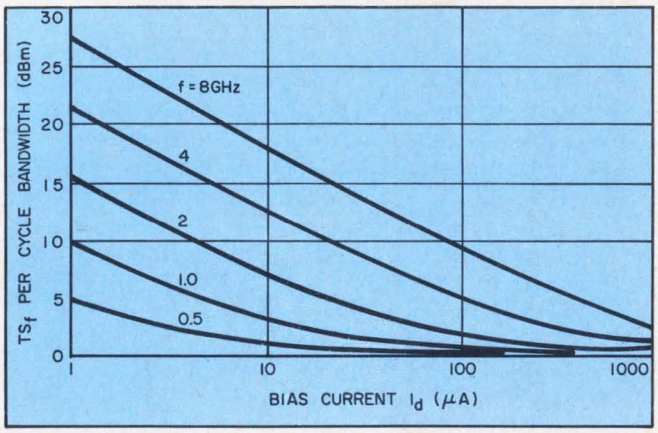

10. **The frequency-dependent sensitivity factor, TS** increases with increasing bias current. It also depends on the cut-off frequency, f.

The requirements for the RF input circuit for large-signal detectors are the same as for low-level detectors: The circuit must be designed for a good match or low vswr.

The RF bypass capacitance at the output of the diode must be high enough to provide a good short at the RF frequency, consistent with the RC requirements of the output circuit.

The RC time constant of the output circuit must be sufficiently small to assure that the output voltage follows closely the peaks of the modulated RF signal. The RC time constant is therefore a function of both the maximum modulation frequency and the index of modulation. Because of the high reverse leakage characteristics of point-contact diodes, the *RC* time constant is highly influenced by the reverse resistance of this diode, and it is dependent on the drive level. The extremely high and constant reverse resistance of the hot-carrier diodes relieves this restriction, and therefore the design of the output circuit depends only on the modulation requirements.

The linear range of the diode must be sufficiently large to assure linear detection at the crest and valley points of the modulated RF waveform, as determined by the modulation index. Because of the high levels of drive used in linear detection, the diode is usually substantially back-biased. Under these conditions, the ability to operate in the linear region at both the crest and valley points of the modulated waveform is determined by the reverse breakdown voltage. Higher reverse breakdown voltage of the hot-carrier diode allows operation at higher peak signal voltages, thereby assuring linear detection for larger modulation indexes or higher available power levels. For hot-carrier diodes, the minimum RF signal level at which peak detection begins is approximately 0.1 volt rms. The upper limit is that at which the peak-to-peak RF voltage equals the reverse breakdown voltage, or $BV_r/2\sqrt{2}$ volts rms. ■ ■

Acknowledgement:

The author wishes to acknowledge the very helpful assistance and technical advice of several members of the -hpa- technical staff. Particular thanks are owed to Mike Cowley for assistance in theoretical aspects of hot-carrier operation and to Hans Sorensen for the analytical analysis of detector operation.

References:

1. S. M. Krakauer, R. W. Soshea, "Hot-Carrier Diodes Switch in Picoseconds," Electronics, Vol. 36, No. 29 (July, 1963).


2. MIL-HANDBOOK-217, "Reliability Stress Analysis," U.S. Government Printing Office, Washington, D. C.

3. W. L. Pritchard, "Notes on a Crystal Mixer Performance," *IRE Transactions MTT*, January, 1955.


4. H. O. Sorensen, "Using the Hot-Carrier Diode as a Detector," *Hewlett-Packard Journal*, Vol. 17, No. 4 (December, 1965).

5. P. D. Strum, "Some Aspects of Crystal Mixer Performance," *Proceedings IRE*, Vol. 41, July, 1953.

6. R. J. Mohr, S. Okwit, "A Note on the Optimum Source Conductance of Crystal Mixers," *IRE Transactions MTT*, November, 1960.

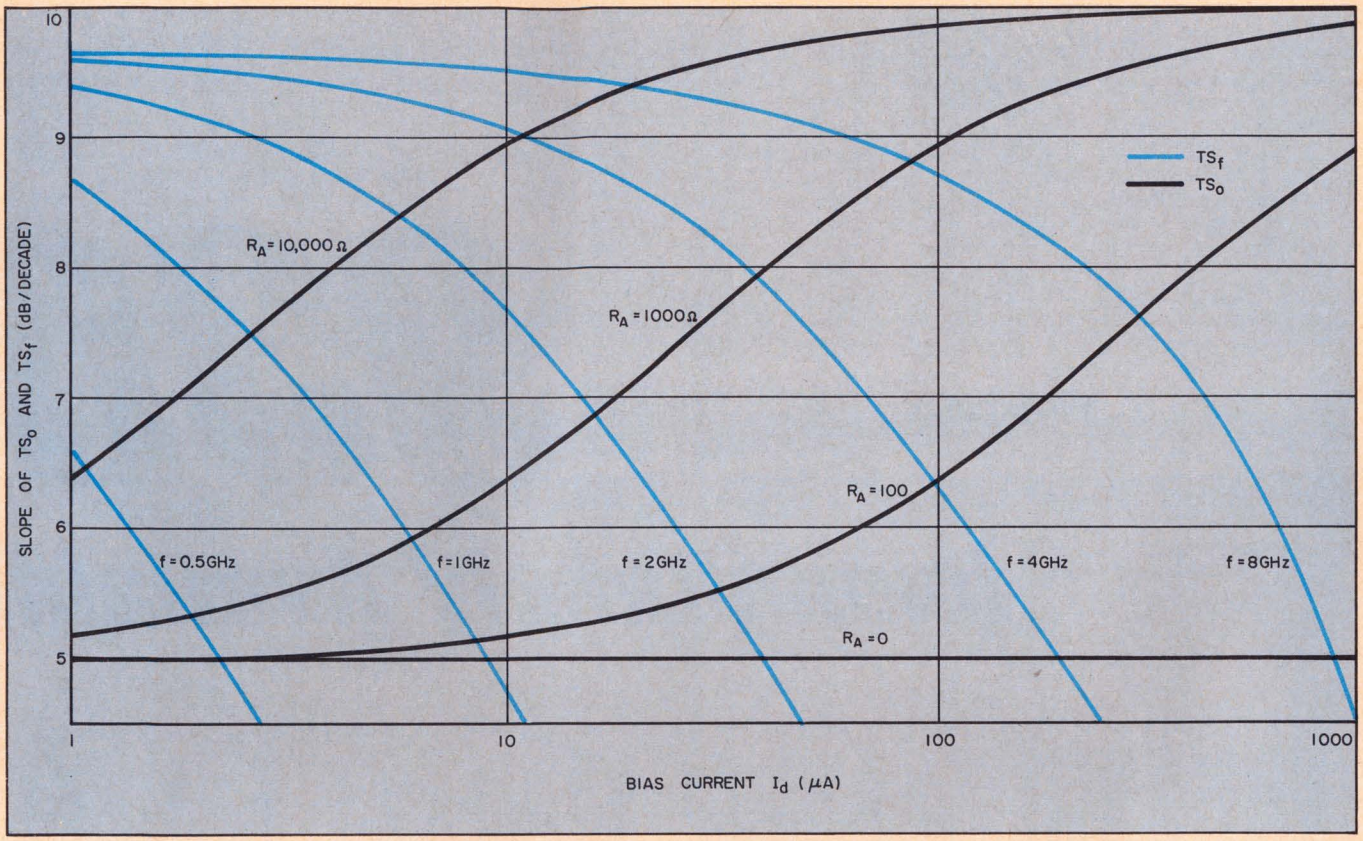

11. **Optimum bias current** for a specified frequency, **f**, and noise resistance, R_a, may be found from the intersection of these two sets of curves. The curves indicate the variation of the slopes of TS_o (solid lines) and TS_f (color), with the bias current. We can find TS_o and TS_f with the aid of Figs. 9 and 10.

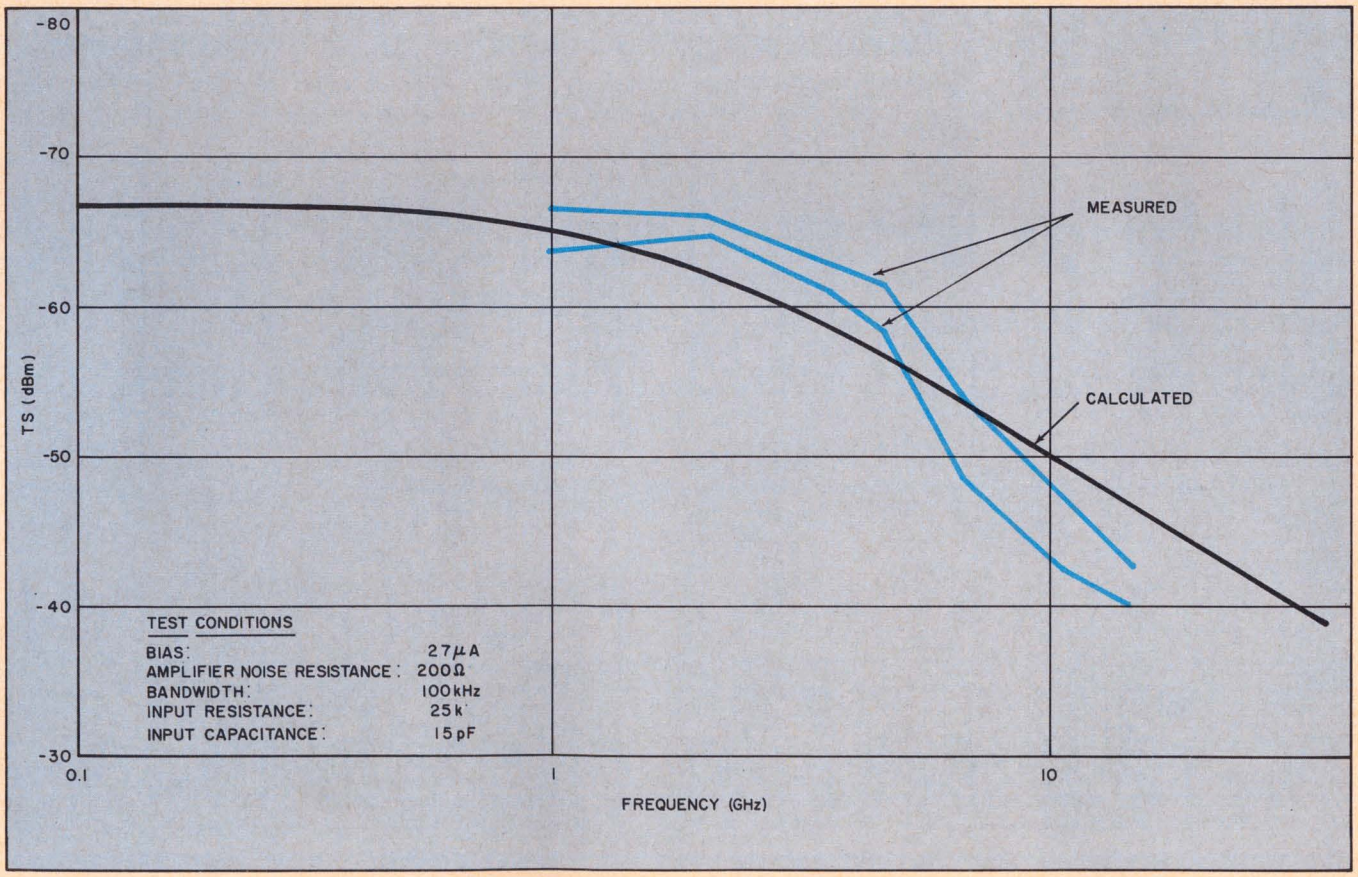



12. **A comparison of measured and calculated sensitivity values** for hot-carrier diodes indicates a close correlation. The test conditions were determined for an -hpa- 2350 diode.

LOOK TO THE LEADER
IN INTEGRATED CIRCUITS


930

Immediately Available

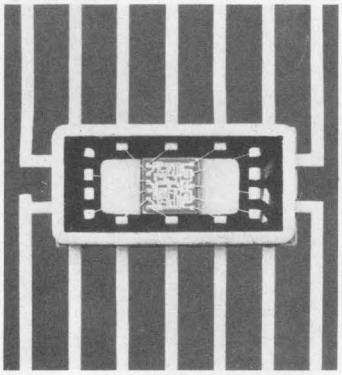





SN15930/SN15830
Dual 4-input Expandable NAND Gate




SN15931/SN15831
J-K/R-S Flip-flop




SN15932/SN15832
Dual 4-input Expandable Buffer




SN15933/SN15833
Dual 4-input Expander




SN15944/SN15844
Dual 4-input Expandable NAND "Power" Gate




SN15945/SN15845
High-performance J-K/R-S Flip-flop




SN15946/SN15846
Quadruple 2-input NAND Gate




SN15948/SN15848
Fast-rise-time J-K/R-S Flip-flop



SN15950/SN15850
Pulse-triggered Binary



SN15951/SN15851
"One Shot" Monostable Multivibrator



SN15962/SN15862
Triple 3-input NAND Gate

DTL
from Texas Instruments

Your production requirements for 930-series DTL integrated circuits can be filled by Texas Instruments – *today!* The full family of eleven circuit types is available off-the-shelf from TI and its nation-wide network of distributors.

TI's Series 15930 DTL integrated circuits are direct equivalents . . . pin-for-pin and spec-for-spec . . . of competitive types. You have a choice of temperature ranges — full military or industrial — in the standard TO-84 hermetically sealed flat package.


These units are available from the industry's largest and most advanced integrated-circuit manufacturing facility. TI's Series 15930 DTL circuits are being volume-produced to fulfill your largest requirements — whether they be 1,000 or 100,000 or 10,000,000 units.

For TI 930-series DTL circuits, contact your local TI sales engineer or distributor. He can also provide information on TI's full line of more than 125 types of digital and linear integrated circuits.

TYPICAL CHARACTERISTICS

Parameter	Basic Gate	Flip-flop
Propagation delay	25 nsec	50 nsec
Power dissipation	5 mw	20 mw
Fan-out	8	7
D-c noise margin	750 mv	750 mv
Supply voltage	4.5 to 5.5 v	4.5 to 5.5 v
Temperature range		
Series 15930	–55° to +125°C	–55° to +125°C
Series 15830	0° to 70°C	0° to 70°C

Typical circuit diagram for Series 15930/15830 NAND gate

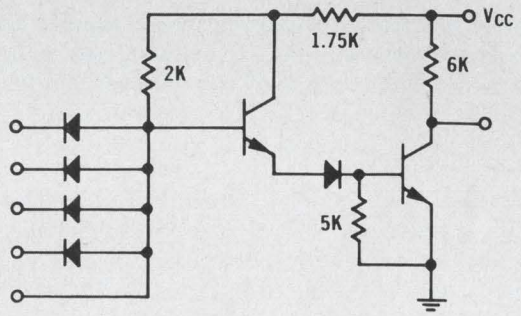

TEXAS INSTRUMENTS
INCORPORATED
13500 N. CENTRAL EXPRESSWAY
P. O. BOX 5012 • DALLAS 22, TEXAS

SEMICONDUCTOR PLANTS IN BEDFORD, ENGLAND • NICE, FRANCE • DALLAS, TEXAS

21719

ON READER-SERVICE CARD CIRCLE 133

Try capacitance transducers. You just might be surprised at the advantages. Here are equations and useful circuits for applying this versatile sensor.

If capacitance transducers had feelings, they might feel neglected. They have been available for decades, and they have certain inherent advantages; yet engineers have not exploited them nearly as much as other transducer types—such as, linear variable voltage transformers, potentiometers or strain gages. Why?

In large part the neglect has been due to difficulties encountered with associated circuitry and to misapplication. But, with care, these pitfalls can be avoided. The advantages of the capacitance transducer can then be used in a diversity of applications.

The principle of the capacitance transducer is simple. All that is required is that the physical parameter being measured or controlled be made to produce a capacitance change. This change is then sensed by one of many different types of electrical circuits. As shown in the accompanying table, many physical parameters can be sensed in this way.

Dielectric constant is frequency dependent

Basic capacitance theory is well enough known to forego repetition of it. However, there is one theoretical consideration of special significance for transducer purposes. That is the relaxation time associated with the dielectric constant of a material.

Normally the dielectric constant is considered in either a static electric field or in one where the frequency is low enough to permit the dielectric dipoles to achieve a steady-state condition during each cycle. The formation of the dipoles, however, consists of moving masses (the electrons and nuclei), which have inertia. It is thus apparent that as the electric field frequency is raised, a condition will be reached where the inertia of the dipole will be too great to respond to the change in the electric field. Consequently the apparent dipole moment will be reduced to its intrinsic value, or the one it would have without the presence of the

R. J. Levine, Technical Director, Penn Meter Div., Badger Meter Co., Philadelphia.

This article is adapted from paper 13.1-2-65, given at the 20th Annual Conference of the Instrument Society of America, Oct. 4-7, Los Angeles.

Capacitance transducer applications

Application	Remarks
Aircraft fuel gauges	Capacitance-type gauges were first developed for military aircraft in the early 1940's. Today they are virtually the only type of fuel and liquid-oxygen gauges used in aircraft.
Level detectors	These are either in the form of coaxial units—such as one tube inside the other, arranged so that the liquid rises between the plates —or as a metal tube with an insulating material, such as Teflon, coating the outside.
Interface detectors	These are used to detect the interface between two liquids having a large difference in dielectric constant, or between two liquids, one of which is conductive and the other nonconductive.
Pressure sensors	Capacitance method permits use of extremely small sections. This makes possible devices with very high frequency response characteristics and capable of being placed in very hot or corrosive environments.
Proximity sensors	Unlike magnetic proximity sensors, capacitance devices will sense the change in a given electric field of any material—magnetic or nonmagnetic, metallic or nonmetallic.
Moisture detectors	In these applications the capacitance transducer is arranged so that it senses a very small change in dielectric. Such devices have been used widely in detecting moisture in thin paper sheets, cloth and certain granulated materials, as well as in the oil industry, where they have detected small amounts of water in the oil being pumped out of the ground.

electric field.

This phenomenon is shown in Fig. 1 for a material of low density. Although the relaxation frequency (ω) varies with different materials, it generally lies at or above a frequency of about 10^9 cps. As a result, the apparent dielectric constant decreases from its original, or so called static, value (ϵ_s) toward its so called optical value (ϵ_∞), with the latter being equal to the square of the index of refraction. It can be shown that for low-density materials the relaxation frequency occurs at the value

$$\frac{\epsilon_s + \epsilon_\infty}{2}$$

This phenomenon can be recognized as one commonly associated with reactive circuits, where the quantities are vector rather than scalar. The dielectric constant can thus be considered to be made up of both a real and imaginary component, such that the real component (ϵ') is

$$(\epsilon_s + \epsilon_\infty)/2$$

and the imaginary component (ϵ'') is

$$(\epsilon_s - \epsilon_\infty)/2$$

The tangent of the angle of the ratio of these two components, tan δ, is the dissipation factor. An interesting plot showing this parameter in a pure dielectric, with the theoretical values indicated, is presented in Fig. 2.[1] This phenomenon at the sub-optical frequency is one that may be very useful in instrumentation, both as an analytical tool and as a means for sensing mass or flow.

Application dictates transducer configuration

To use capacitance techniques to sense the presence or amount of materials, or as pressure or displacement sensors, it is necessary to put the sensing elements into one of many different forms, so that they become transducers. The number of possibilities is limited only by the imagination and ability of the application engineer and designer. The most common forms—as well as some that are not so well known—are shown in Fig. 3a through 3k, where dimensions are given in inches, angles in degrees and capacitance in picofarads (pF). In the equations shown on these illustrations, all logarithms are to the base 10.


Fig. 3a shows the most common capacitor, which consists of two or more flat plates with or without a dielectric between them.

Since it is frequently necessary to protect the plates or electrodes of a capacitive transducer with a nonconductive coating, the expression for the capacitance of a device like this, with more than one dielectric, is given for both the flat plate (Fig. 3b) and the cylindrical form (Fig. 3d). It should be noted that, in general, the contribution of each dielectric is always the sum of 1 over each thickness divided by its dielectric constant. The maximum value of the capacitance is always equal to the capacitance that will be obtained if one of the dielectrics becomes a conductor, with the other dielectric being of the value and thickness chosen. The resulting function of capacitance vs changing dielectric constant is a curve that is asymptotic to the capacitance of the single dielectric device.


In the measurement of liquid level, a very common form of capacitance transducer is the one shown in Fig. 3c and 3d. Fig. 3c depicts one cylinder inside of another in the form of a coaxial capacitor. A linear capacitance versus liquid-level function is obtained as an insulating liquid rises between the two electrodes. However, if the liquid being measured is conductive, the inner electrode must be insulated to prevent it from being short-circuited, and the arrangement becomes that shown in Fig. 3d.

The curve in Fig. 4 shows the capacitance of such a device, with a 3/8-inch metal rod covered with a 1/16-inch-thick Teflon sleeve, sealed at the bottom. This is the sort of curve that is used by application engineers who specify capacitance probes for electrically nonconductive materials whose dielectric constants range between 1 and 50.

From a practical point of view, there are not many cases when the dielectric constant of the material suitable for capacitance gauging is over approximately 30, although some long-chained molecules with higher values are found in the chemical and pharmaceutical industries. Fig. 4 shows the variation in probe capacity, both as a function of different dielectric constants and as a function of the diameter of the outer electrode.







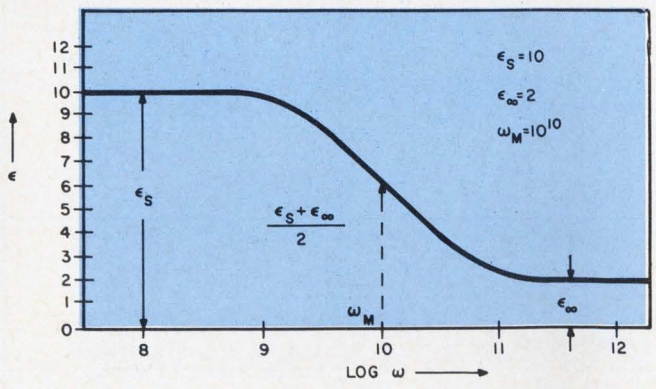






1. **Dielectric constant decreases** with increasing electric-field frequencies of about 10^9 Hz and higher. This is shown for a low-density material.

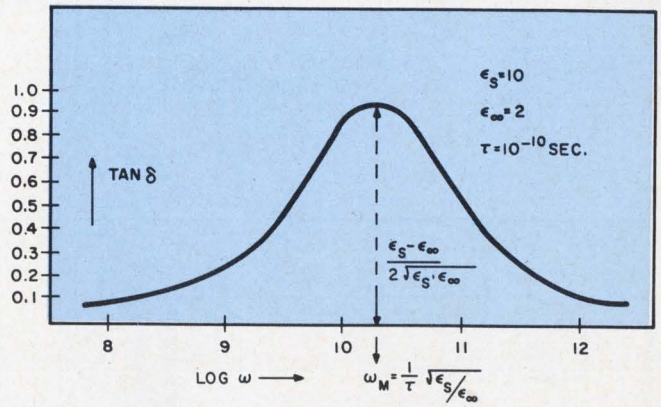

2. **Resonant-like characteristic** is exhibited by the dielectric constant when it is considered to be made up of a real and an imaginary component.

3. Transducer arrangements and capacitance formulas.

TRANSDUCER ARRANGEMENT	CAPACITANCE FORMULA	NOTES
a. PARALLEL PLATES 	$C = \frac{0.225 \epsilon A(N-1)}{t}$ pF	A = in^2 N = NUMBER OF PLATES ϵ = DIELECTRIC CONSTANT
b. PARALLEL PLATES (MULTIPLE DIELECTRICS) 	$C = \frac{0.225A}{\frac{t_1}{\epsilon_1} + \frac{t_2}{\epsilon_2} + \cdots}$ pF	
c. COAXIAL CONCENTRIC 	$C = \frac{0.614 \epsilon \ell}{\text{LOG } D/d}$ pF	
d. COAXIAL CONCENTRIC TWO DIFFERENT DIELECTRICS BETWEEN PLATES 	$C = 0.614\ell \left[\frac{\epsilon_1 \epsilon_2}{\epsilon_1 \text{LOG} \frac{D}{d_2} + \epsilon_2 \text{LOG} \frac{d_2}{d_1}} \right]$ pF	
e. ECCENTRIC CYLINDERS 	$C = \frac{0.614 \epsilon \ell}{\text{LOG} \frac{(\frac{D}{2})^2 - b^2}{D/2 \times d/2}}$ pF	
f. ROD NEXT TO INFINITE FLAT WALL 	$C = \frac{0.614 \epsilon \ell}{\text{LOG} \frac{4h}{d}}$ pF	ϵ SURROUNDS ROD. h MUCH GREATER THEN d
g. INSULATED ROD NEXT TO INFINITE FLAT WALL 	$C = 0.614\ell \left[\epsilon_1 \text{LOG} \frac{4h}{d_2} + \epsilon_2 \text{LOG} \frac{d_2}{d_1} \right]$ pF	ϵ_1 COMPLETELY ENCLOSES ROD ϵ_2 BETWEEN ROD AND WALL. h MUCH GREATER THEN d_2.

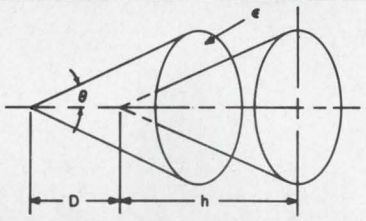TRANSDUCER ARRANGEMENT	CAPACITANCE FORMULA	NOTES
h. TWO PARALLEL CYLINDERS 	$C = \frac{0.614\epsilon\ell}{\text{LOG}\frac{2A}{d_2}}$ pF $A = \frac{2b^2}{d_1}$	$b \gg d_2 > d_1$
i. ROTARY PARALLEL PLATES 	$C = 0.00196\epsilon\left[\frac{(R^2-r^2)a}{d}\right]$ pF	
j. SEGMENT OF ROTARY CYLINDER 	$C = 0.00196\epsilon\ell\left[\frac{(R+r)a}{R-r}\right]$ pF $R-r \gg r$	
k. COAXIAL CONES 	$C = \frac{1.41h}{\text{LOG}\left[1+2\frac{D}{h}\cos^2\theta\right]}$ pF	ϵ BETWEEN THE CONES

(All logarithms are to base 10.)

This outer electrode, in practice, is generally the wall of the tank, which is at ground potential. It is interesting to note how quickly the effect of the outer wall falls away as the ratio of the probe-to-tank diameter increases.


In using the curve of Fig. 4, the application engineer determines the capacitance of a given dielectric constant and tank diameter, and he substracts from it the capacitance of a dielectric constant of 1, representing the case with the tank empty. The usable capacitance function then is the change in capacitance as the material is introduced into the tank.

From the expression given in Fig. 3d, one can see that there is a linear function between the level of the material and the output capacitance. It is, however, not a linear expression for increasing dielectric constant. This, however, is not of serious consequence once a given material is chosen, so long as either the dielectric does not change or the device is used in such a manner as to discriminate between the presence or absence of the material—as in discrete level sensing. If the dielectric constant does change, there are a number of methods that can be used to compensate for it and provide true level sensing.


The formula in Fig. 3e for an eccentric cylinder is presented not so much as a practical formula for a capacitance transducer but rather to enable the designer to determine the effect of eccentricity of the center electrode when employing coaxial capacitors. A plot of capacitance vs. the distance from the center axis will show that this type of capacitor is extremely stable as the center electrode is moved over short distances, and also as the diameters change as a result of the expansion of the electrodes with temperature.

The arrangements of Figs. 3f and 3g are for a cylinder next to a flat wall. The equations for these are similar to those for the coaxial arrangements (Figs. 3c and 3d). The curves in Fig. 5 are for the arrangement of Fig. 3g. As would be expected, they are similar to those of Fig. 4, except that their absolute values are lower. This type of curve can be used when the sensor is near a flat wall, when the eccentricity in a tank is great, or when an attempt is being made to determine the capacitance of a small cylinder or rod next to an irregularly shaped wall.


The arrangements in Figs. 3i and 3j are useful for determining the effect of rotary displacement of plates or sections of cylinders. These types of

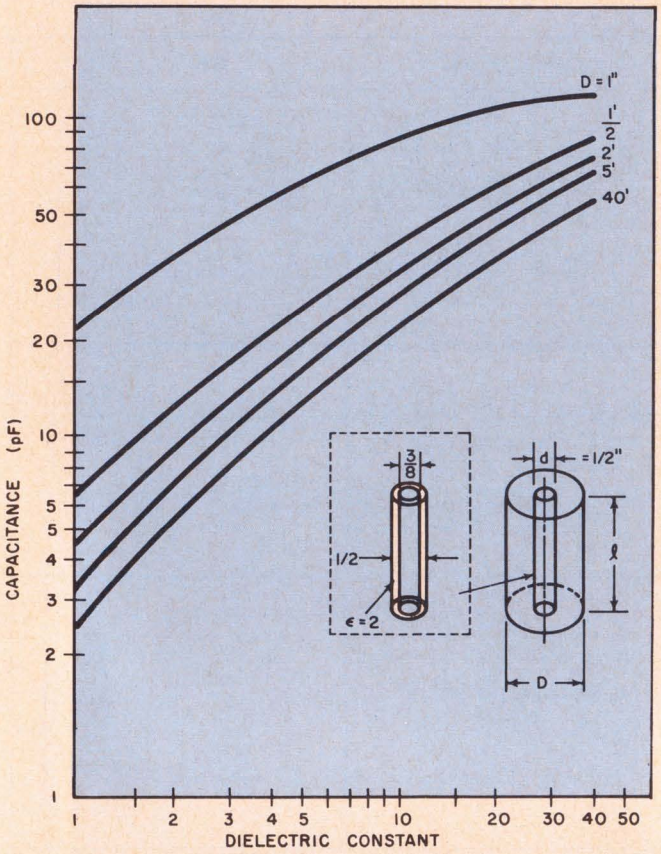


4. **Probe capacitance** varies as a function of dielectric constant as well as the diameter of the outer electrode.

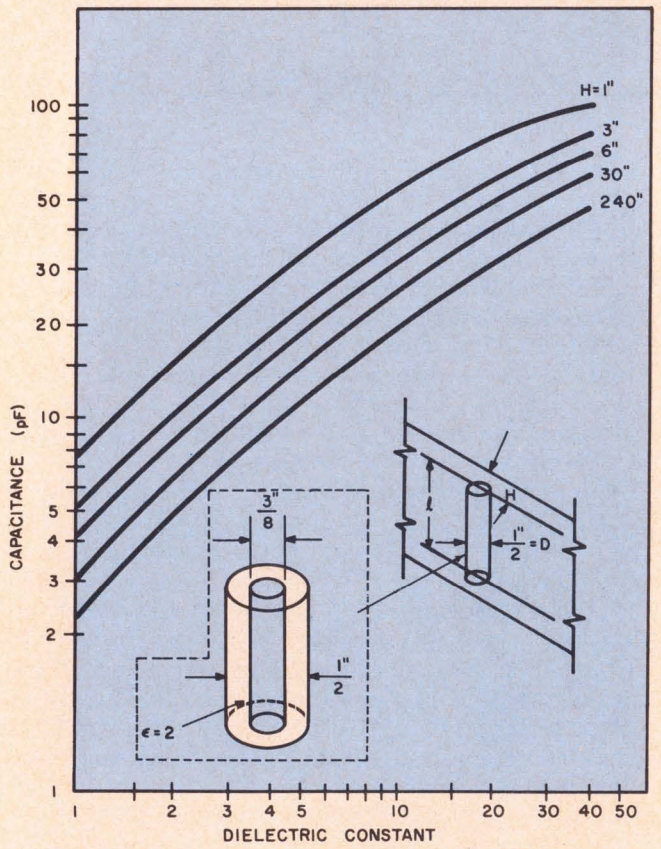

5. **For a cylinder next to an infinite wall,** the capacitance variations are similar to those for the coaxial-cylinder case, although the absolute values are lower.

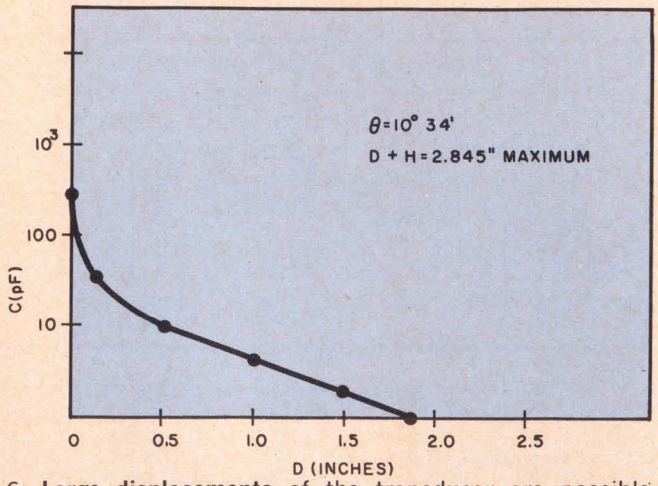

6. **Large displacements** of the transducer are possible with the coaxial-cone arrangement, because of the minimizing of fringing effects.

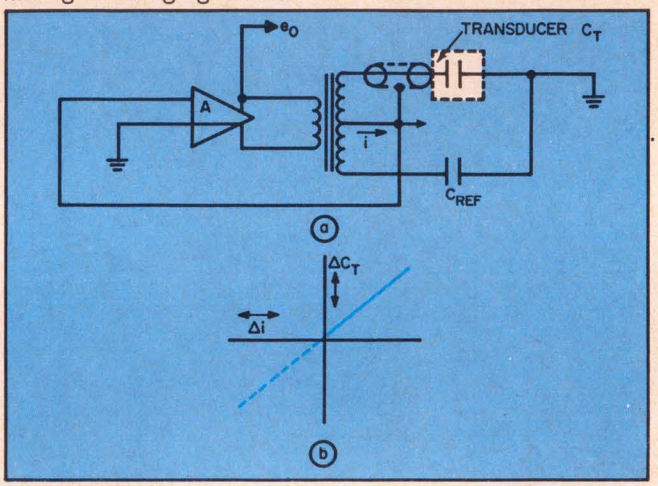


7. **Basic RF oscillator circuit** has a disadvantage in that it responds to the capacitance of the lead connecting the transducer to the measuring circuit.

sensors are most frequently used in transducers with a mechanical input that is rotary rather than linear, as is the case with pressure transducers or tuning capacitors.


An interesting capacitance transducer form[2] is shown in Fig. 3k. There are two coaxial cones, one fixed and the other moving along the central axis common to both. In previously discussed transducer arrangements, the function of capacitance vs. displacement of the electrodes was generally a linear one. However, it is only linear so long as fringing effects are discounted. When a capacitance transducer is to be used over a very wide dynamic range, the fringing effects cannot be discounted, with the result that the amount of useful displacement of the transducer is limited. With coaxial cones this is very much less the case, since the electric field between the two cones is designed to be self-containing rather than spreading, as in the other devices. With this configuration a variation in capacitance of over 100-to-1 can be produced by a mechanical change of slightly over 10-to-1 (Fig. 6).[2]

Many measuring circuits possible

The measuring circuits associated with all

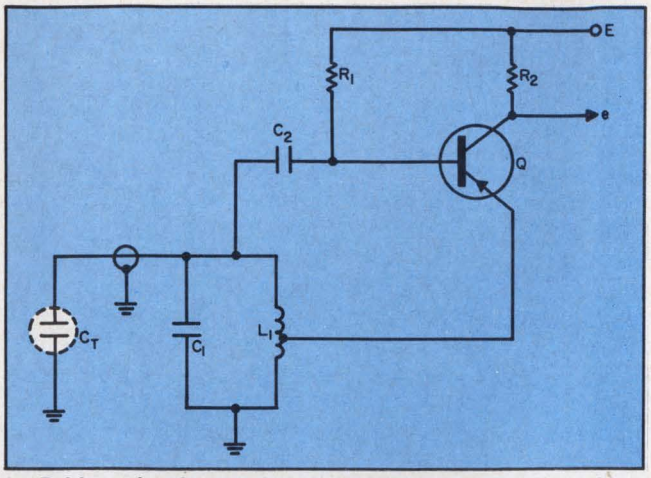

8. **Bridge circuit** can be placed hundreds of feet from the transducer. This is because the transducer lead is not in parallel with the capacitance of the transducer.

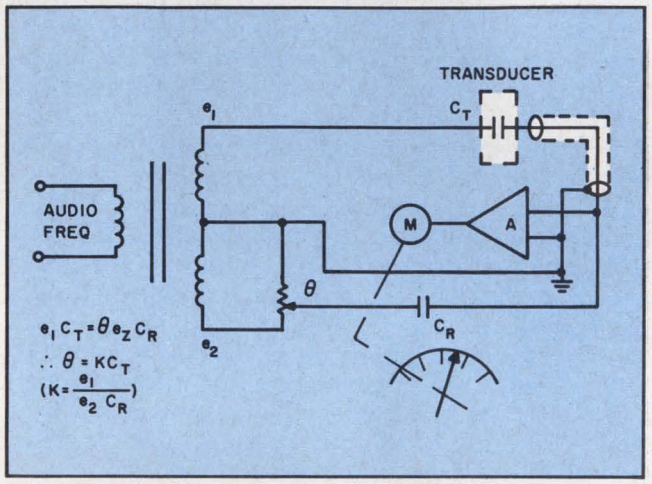

9. **Self-balancing servo type of bridge circuit** provides a continuous measurement of capacitance. The capacitance value is indicated by a motor-driven potentiometer.

capacitance transducers are devised to measure a change in capacitance, since no transducer of this type starts with a zero value. Consequently all of the circuitry must be set up to provide a zero offset, or otherwise take into account the starting, or zero, capacitance.

RF oscillator circuits are oldest

The oldest type of capacitance transducer circuit employs a radio-frequency oscillator. The circuit can take any of a number of different forms, but always it includes a parallel capacitance and inductance leg. In this circuit the capacitance transducer is either the complete capacitance of the oscillator circuit, or it is in parallel with the primary capacitance, so that when the capacitance changes, the oscillator frequency changes. By proper selection of the values of L and C, the oscillator may be made to start and stop oscillating as the capacitance of the transducer changes through some predetermined value.

One form of this circuit is shown in Fig. 7. The circuit is very simple, frequently requiring only one transistor or vacuum tube. In the most commonly used forms, however, it suffers from one serious drawback. This is caused by the fact that both the capacitance transducer and the capacitance of the lead going to the transducer are in parallel with the oscillating circuit. So the circuit will respond not only to the capacitance changes of the transducer but also to the capacitance changes in the shielded wire or coaxial cable. With such circuits calibration must be done with the wire in place and then the effect of the wire balanced out.

In the event it is necessary to place the transducer any distance from the electronic circuitry, the value of the capacitance of the wire becomes much larger than the value of the capacitance change being produced. Under these conditions the system has a tendency to become unstable. Nevertheless circuits of this general type are widely used, and they are completely practical for many applications where the transducer is a simple Teflon-coated probe and where the process is being controlled in an ON-OFF manner.

Bridge circuits can measure continuous changes


Bridge circuits are capable of measuring both discrete and continuous capacitance changes. Such circuits were pioneered by a number of companies that manufacture military fuel-quantity gages.

One form currently in wide use for ON-OFF control in a number of different variations is shown in Fig. 8. The circuit consists of an oscillating bridge-detector, generally operating in the audio-frequency range. The transfer function of the circuit is shown in Fig. 8b. The circuit is arranged so that oscillation occurs when the differential capacitance exceeds a certain value. The oscillation is then used to operate subsequent drive circuits or relays.


This circuit has two features not found in that of Fig. 7. The transducer-lead shield is not in parallel with the capacitance of the transducer, and therefore has only minor effects on the operation of the circuit. Since the operating frequency is low, long sections of shielded wire can be used, making it practical to place the transducer hundreds of feet from the circuit. The other advantage is that the operating point can be readily changed, or even switched to produce a differential effect, by simply changing the value of the reference capacitor.

Another type of bridge circuit for continuous measurement of capacitance is shown in Fig. 9. This is essentially a self-balancing servo, where the position of the motor-driven potentiometer is directly proportional to the value of the transducer capacitance (C_t). Note again that the lead going to the high-impedence electrode of the transducer is not in parallel with the transducer, so that the electronics may be placed at a considerable distance. Practical values here range into the thousands of feet, when the operating frequency is under 1 kHz and the probe capacitances are on the order of the 100 pF.


Modifications of Fig. 9 substitute an all-electronic, self-balancing network for the electro-

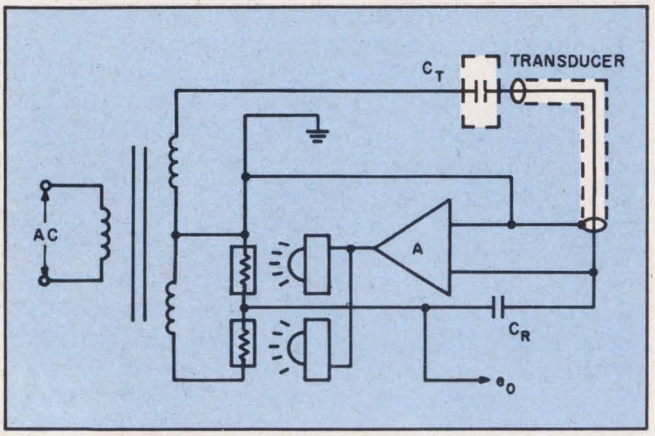


10. **Light-sensitive resistors** and light sources can be used as the balancing elements in an electronic self-balancing bridge network.

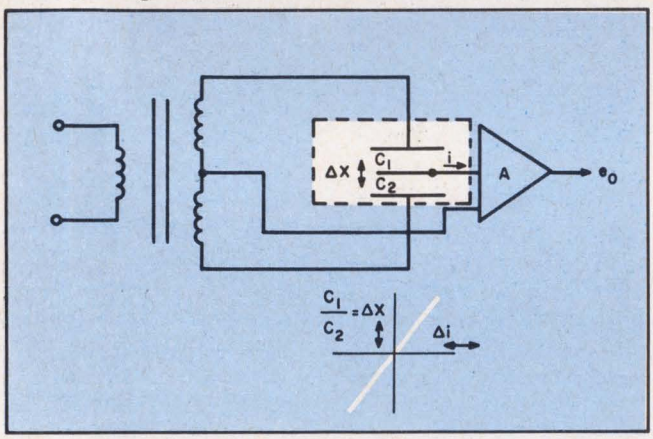

11. **Output current** in this ratio-type arrangement is proportional to the displacement of the common electrode of the transducer.

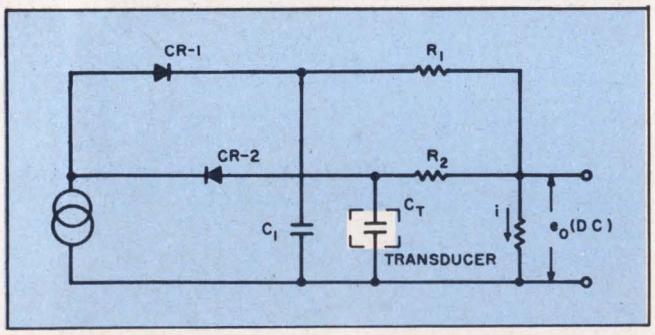

12. **Dc output voltage** that is a linear function of transducer capacitance is produced by this rectifier-type circuit. Either one or both of the capacitors may be a transducer.

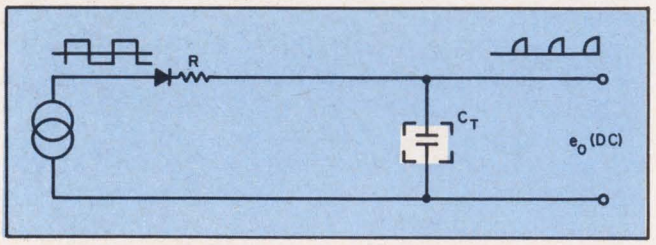

13. **Integrator network** is formed by resistor R and the transducer in this circuit.

mechanical self-balancing servo. A variety of methods can be used to generate a rebalance voltage proportional to the transducer capacitance.

In Fig. 10 one such method is shown, where the rebalance is a potentiometer made up of light-sensitive resistors. The output is the junction between the resistors. For practical use, some means of either stabilizing the input bridge voltage, or using a stabilized output voltage or a ratio, is required different. Several means are possible.

A bridge circuit for transducers used for pressure measurement is shown in Fig. 11, where the capacitor output is a ratio rather than a differential signal. If the current is taken as the output, then the displacement of the common electrode of the capacitor (x) is a linear function of the output current.

An interesting and extremely simple circuit[3] is that in Fig. 12. It uses a low-frequency ac or rf exitation, but it produces a dc current or voltage directly. The output is a linear function of either of the capacitors, each of which may be transducers, or of both of the capacitors connected as a differential transducer. With a drive signal of 46 volts rms at 1.3 MHz, a variation of -7 to $+7$ pF will cause a change in the output voltage of from -5 to $+5$ volts dc into a 1-megohm load. This sensitivity is at least 10 times greater than that of most of the other circuits described.

A somewhat simplified form of the network of Fig. 12 is shown in Fig. 13. In this case the transducer is used merely as one element of an integrator. This circuit requires carefully regulated sine- or square-wave inputs, followed by a high-impedance voltage amplifier. If the frequency is high enough and the conditions specified above are met, this can be a very simple method of measuring a multitude of capacitance transducers, since they may all use a common supply source.

One final class of circuits has been used for capacitance transducers. These, like the one in Fig. 7, use an oscillator. However, rather than operating as ON-OFF devices, they use the capacitor to modulate the carrier frequency. Since the modulation is FM, the advantages of low noise and good fidelity may be obtained. This type of circuit is especially useful for rf telemetry.

These, then, are examples of some of the more practical measuring circuits for capacitance transducers. There are, of course, endless variations. ■ ■


References

1. C. J. F. Bottcher, *Theory of Electric Polarization*, Elsevier Publishing Co., Amsterdam, the Netherlands, 1952, p 28-48 and 228-291.

2. M. C. Selby, "Analysis of Coaxial Two-Terminal Conical Capacitor," *Monograph 46*, April 1962, U.S. Dept. of Commerce, NBS, Washington, D. C.

3. K. S. Lion, *U.S. Patent No 3,012,192.*

ON READER-SERVICE CARD CIRCLE 224 ➤

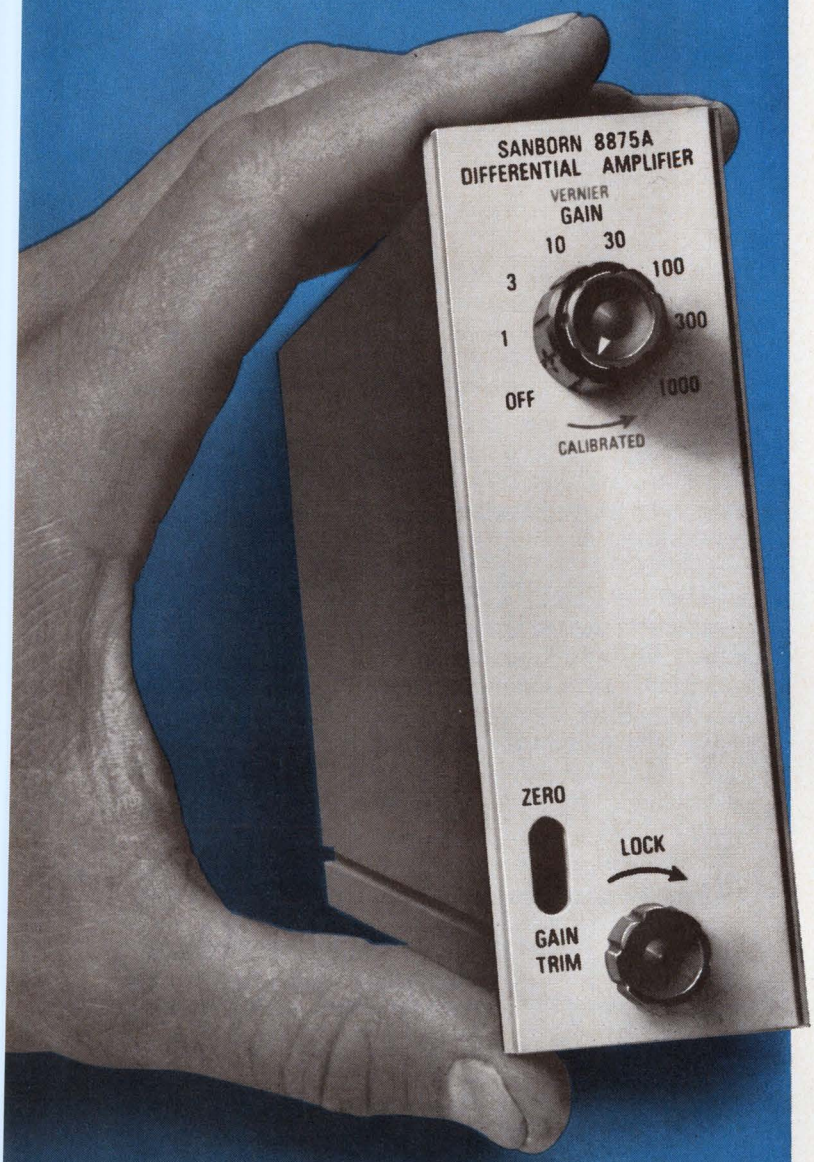


NEW wideband DC data amplifier for $495

including integral power supply

★ SOLID-STATE ★ DC — 75 KC
★ GAIN OF 1000 ★ NO CHOPPER

Precisely measure thermocouple, strain gage and similar low level dc outputs with this high performance new Model 8875A Data Amplifier. Use it with modern data acquisition systems employing analog-to-digital converters, digital printers, magnetic data recorders, oscillographs, digital voltmeters, and other readout instrumentation. The new 8875A is a solid-state wideband dc amplifier with an output of ±10 v, 100 ma and features dc — 75 kc bandwidth, 1000x amplification, ± 0.1% gain accuracy, ± 0.01% gain stability, and 120 db common mode rejection — *at $495 including power supply.*

This new Sanborn amplifier measures just 4-3/4" high by 1-9/16" wide by 15" deep, weighs 3.5 lbs., including integral power supply. For multi-channel use, ten units can be mounted in a 5" x 19" modular cabinet which contains input and output connections, power cable, on-off switch, cooling, fuse, and mating connectors for ten amplifiers. These modules can be stacked, or equipped with tilt stands for bench-top use. When used individually, the completely enclosed amplifier requires no cooling.

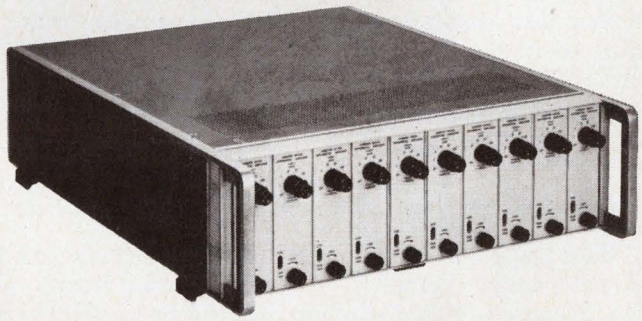

SPECIFICATIONS

Bandwidth:	dc to 75 kc within 3 db.
Gain:	from 1 to 1000 in seven fixed steps
Gain Accuracy:	±0.1%.
Gain Stability:	±0.01%.
Vernier Gain:	continuously adjustable between fixed steps.
Gain Trim:	±3% with sufficient resolution for setting any one gain to ±0.01%.
Common Mode Rejection:	120 db from dc to 60 cps, 40v p-p tolerance.
Output Circuit:	±10 volts across 100 ohms and 0.2 ohms max. output impedance at dc.
Drift:	±3 μv referred to input, ±0.2 mv referred to output.
Non-Linearity:	Less than 0.01% full scale value, 10 volts.
Overload Recovery Time:	recovers to within 10 μv R.T.I. +10 mv R.T.O. in 10 msec. for 10 v overload.
Power:	115/230 volts ±10%, 50-400 cps, 6 watts.

Available options: Switch-selected filtering, dual output (±10v, ±10ma; ±10v, ±100ma; a short on one output has negligible effect on the other output).

For complete specifications and application assistance, call your local HP/Sanborn field engineering office, or write: Sanborn Division, Hewlett-Packard Company, 175 Wyman Street, Waltham, Mass. 02154.

HEWLETT PACKARD hp SANBORN DIVISION

See HP at IEEE—March 21-24
Third Floor—New York Coliseum

New FETs replace tubes in audio equipment on a one-for-one basis. The advantages include higher gain and reduced distortion, with little parameter drift.

A new breed of junction field-effect transistors —FETs with high breakdown-voltage ratings—is putting the squeeze on vacuum tubes heretofore used in line-operated audio equipment. Unlike most bipolar transistors (which typically show a 2:1 substitution ratio), the FETs can replace the tubes on a one-for-one basis.

Among the audio-circuit applications for this FET type are source-followers for pre-amplifying and buffering, phase-splitters, high-fidelity drive stages and phase inverters. A close look at the design, characteristics and ensuing performance of each demonstrates the advantage of FET usage here.

The FET approach yields high gain, lower noise, less distortion and little parameter drift. Moreover the temperature stability of the FET obviates the need for a compensating circuit adjustment for wide-range, ambient temperature environments.

Source-follower leads the way

The FET source-follower circuit is incorporated directly or in essence in each of the audio stages in the accompanying diagrams. In the basic follower configuration (Fig. 1a) the output, or source, follows the input, or gate, because of the negative series voltage feedback arrangement. This type of feedback* decreases output impedance and increases input impedance. The feedback factor of the circuit is, by definition, equal to unity, since all of the output signal is applied in series with the input signal.

If A is the gain before feedback of a standard common-source amplifier, the gain with feedback of the source-follower or common-drain circuit is denoted by A' and is given by

$$A' = A/\ (1 + A). \qquad (1)$$

The input impedance R_{in}' with feedback is readily derived[1] as

$$R_{in}' = R_{in}/\ (1 - A'), \qquad (2)$$

where R_{in} is the input impedance without feedback and A' is the voltage gain of the source-follower. Similarly the output impedance is given by (approximately)

$$R_o = 1/g_m, \qquad (3)$$

where g_m is the effective circuit transconductance.

*One of four possible feedback configurations. The others are series-current, shunt-voltage and shunt-current feedback.


William A. Rheinfelder, Applications Consultant, Dickson Electronics Corp., Scottsdale, Ariz.

The factor $1/(1 - A')$ may be used as a figure of merit for source followers. When A' is closest to unity, this factor is a maximum, and therefore the feedback is highest. This is achieved when the gain without feedback (the gain from gate-to-source to source-to-ground) is largest. This mode of operation entails use of the same design procedures as are used for FET voltage amplifiers,[2] with respect to bias and load resistance and supply voltage.


The influence on performance of this gain-without-feedback factor (A) is plainly seen; measurements on the circuit of Fig. 1a agree with Eqs. 1 to 3. For example, a value of $A = 70$ leads to a gain with feedback of 0.985 and an impedance multiplication factor of 666. The latter figure represents more than 6000 MΩ with a gate impedance of 10 MΩ (neglecting shunted gate-to-drain resistence). The output impedance is of the order of 500 Ω, for a transcondance of 2000 μ-mhos.

An undistorted view of loading

The output capability for the source-follower is identical to that of a common-source stage; however, the distortion below overload is considerably better in the former because of the feedback. The

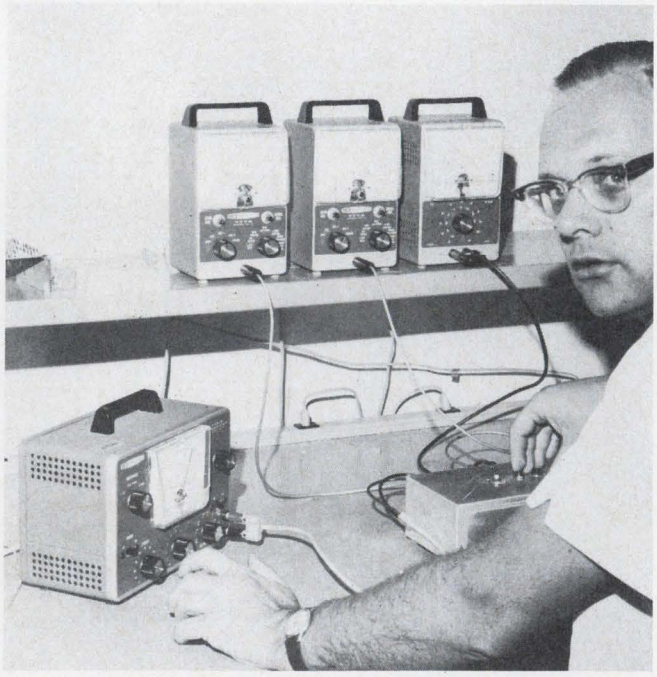


A FET with filaments? That's an inaccurate definition of a vacuum tube. "Besides," says author Rheinfelder, "this FET audio stage provides more gain, less distortion, lower noise, and less drift than its tube and bipolar counterparts."

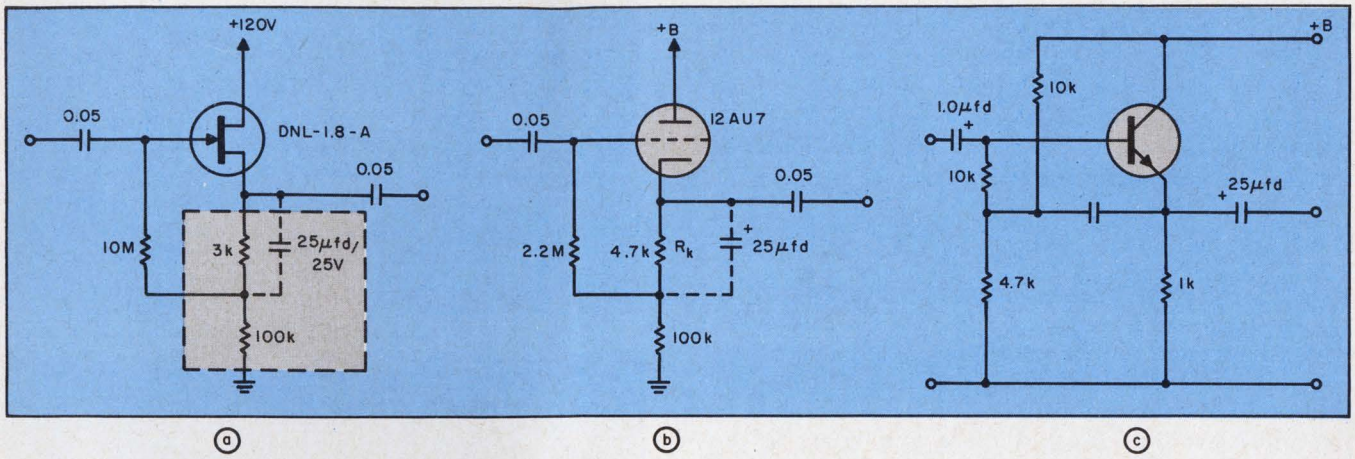


ⓐ ⓑ ⓒ

1. **The FET source-follower stage** is a basic audio circuit (a). It exhibits high input impedance and low output impedance because of the negative feedback employed in the source. Use of the FET yields higher gain and lower distortion and drift than in vacuum tube (b) and bipolar (c) counterparts. Input impedance of the tube cathode-follower approximates that of the FET, but the single-stage bipolar circuit features only 200 kohms input impedance.

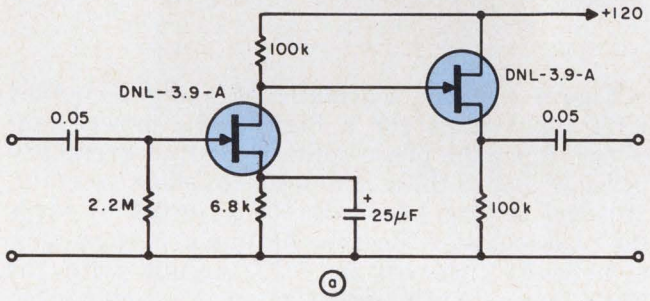

ⓐ

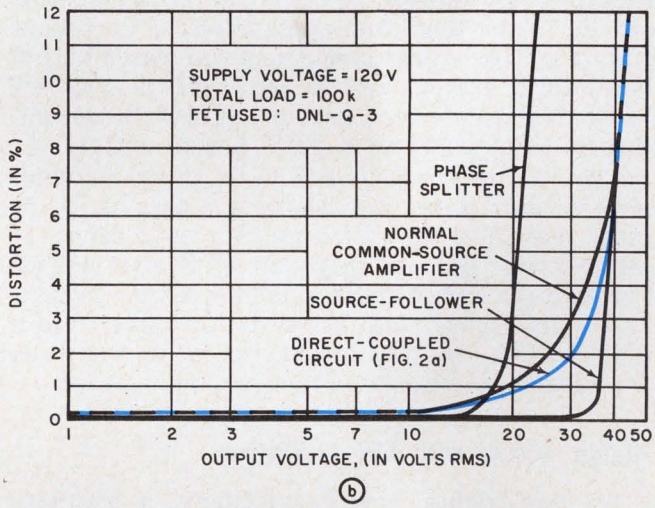

ⓑ

2. **Direct-coupled source-follower circuit** employs a FET to obtain a high gain-bandwidth product (a). This stage makes for an excellent audio preamplifier output stage. A comparison of its overload characteristics with those of other basic audio circuits (b) shows its low-distortion and high-output capability.

source-follower is especially useful whenever an extremely high input impedance or a low output impedance is desired. It should not, however, be applied in all cases. To cite a few, it should never work into a load smaller than 100 kΩ, or be used with a generator resistance higher than the input resistance before feedback (10 MΩ in Fig. 1a).

Tests indicate that optimum performance is obtained with the source set at 65% of the supply voltage. This condition is obtained by a 3-kΩ bias resistor for the Dickson DNL-1.8A FET. This bias resistor may be bypassed to avoid local (current) feedback. However, the improvement rendered by the bypass is hardly noticeable and rarely needed. The frequency response of the source-follower in Fig. 1a is down 3 dB at 290 kHz with a source resistance of 100 kΩ. This corresponds to a total input capacitance (including socket) of 5.3 pF.

The performance with tube (Fig. 1b) and bipolar (Fig. 1c) counterparts of the FET source-follower is below that obtained with the FET. For example, gain is lower, distortion higher and the tendency to drift (with temperature and time) is considerably greater.

Moreover the input impedance of the tube circuit is slightly less than that of the FET, and filament power is needed. With a single-stage bipolar transistor, the input impedance is of the order of 200 kΩ—far below the FET figure. However, the bipolar's output impedance is much lower.

TABLE 1. Source-follower performance (fig. 2a)

Drain Resistance	Source Resistance*	Gain	3dB Bandwidth
(k)	(k)	(dB)	(kHz)
100	6.8	35.6	30
220	15.0	39.0	23
470	39.0	41.2	15
100	7.5**	20.5	—

*For Dickson FET type DNL-3.9-A

**Unbypassed

Pre-amp uses direct-coupled follower

The optimum gate voltage of a source-follower is usually very near one-half the supply voltage, as is the case with a common-source amplifier. Consequently a direct-coupled circuit (Fig. 2a) is attractive for applications requiring low-output

impedance or a high gain-bandwidth product. Typical of these would be an audio preamp's output stage, and as a basic building block in dc amplifiers. The representative bandwidths and gains of this circuit are given in Table 1. Its overload characteristic is plotted in Fig. 2b alongside those of other basic audio stages.

Phase-splitter halves load

A typical FET phase-splitter is diagrammed in Fig. 3. This is an adaptation of the source-follower, with the load split equally between drain and source. Resistors of 47 kΩ were found to be best for performance, independent of the FET used or the supply-voltage level. This is analogous to the 100 kΩ load which is best for conventional FET source-followers.

Because the output signal is split, only half of it is now available; however, the feedback is nearly as effective. Figure 2b also shows how distortion is rapidly reduced below the overload level with this circuit. Note that the application of a higher supply voltage would result in an increased output level, until breakdown in the FET is reached. With available devices, as much as 30 volts' output can be obtained from a FET phase-splitter.


The results are comparable to those available with vacuum tubes. For example, a pair of EL 84 tubes used in a 15-watt amplifier need drives of about 5 volts each, while a pair of EL 34s deliver 100 watts in a push-pull circuit for a drive level of 23.4 volts each. Such a drive is available from a FET with a 160-volt breakdown, with less than 1% distortion when a 160-volt supply is used.

Higher quality with FET hi-fi-driver

In high-fidelity power amplifiers, a standard high-quality tube system used to consist of a voltage amplifier, a phase-splitter or inverter, driver stages and a push-pull output stage. Recently an improved circuit version dropped the need for driver stages: Phase splitters were used to drive the output stages directly. This concept, which used a pentode in the first stage, led to better balance and extra gain. However, the pentodes often show excessive drift in the screen characteristics. In turn, this results in increased distortion levels, even with over-all feedback. Bipolar transistor designs also fail to combine superior performance with circuit simplicity.

Present solid-state high-fidelity amplifiers, using bipolar transistors, exhibit amplifier performance that is close to that obtained with vacuum tubes. However, this is accomplished with a great many more stages and more complex circuitry, including multiple-feedback loops and special temperature compensation. Even with this bipolar armada, production spreads in the devices produce distortion at levels of 20 to 30 dB below rated output (normal listening levels). In some cases this figure exceeds 10%.

FETs, with their high gain and low distortion characteristics, fill the bill nicely.

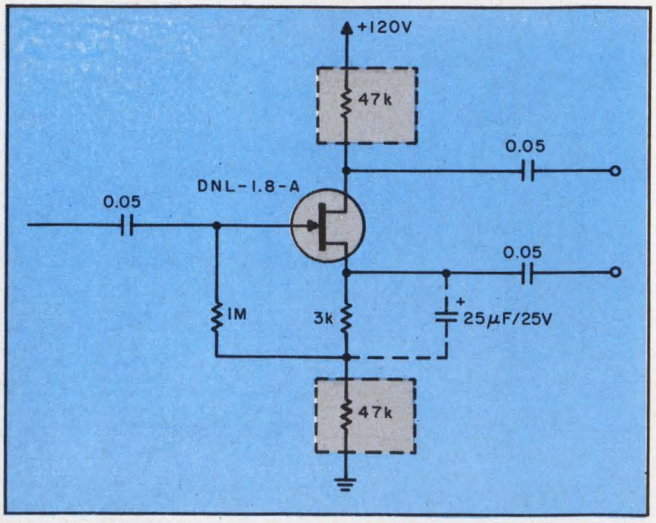

3. **Phase-splitting can also be achieved** with a FET. The circuit basically is a source-follower, with the load shared by both the drain and source. Lower distortion levels (in comparison with higher-driven tube counterparts) are achieved.


Figure 4 is the schematic of a direct-coupled FET input stage for a high-fidelity power amplifier. Since the phase-splitter's output capability is below that of the common-source stage (see Fig. 2b), the biasing here must be adjusted to favor the phase-splitter. Because optimum performance is normally achieved in FET circuits with the drain-to-source voltage at 45% of the supply level, the gate voltage should run at about + 33 volts dc. Note that this is not the optimum drain voltage of the first stage, which is + 55 volts.

Somewhat improved performance in the first stage can be achieved by lowering the supply voltage (for the first stage) with the components shown in Fig. 4 in dashed form. These are not extra components, because they are usually needed for decoupling and line-filtering purposes. Because of the compromise taken in decoupling, the performance here is not quite as good as with either stage alone or with both capacitively coupled. However, the phase shift at low frequencies is better in this circuit than in the two others. In any event the FET circuits (Figs. 2a and 3a) offer better performance than the best tube counterparts (Table 2).


Look to the source for inversion

The FET source-coupled-phase-inverter circuit (Fig. 5) may be used to obtain a higher output level. However, balance of better than 10% is realized only with a large source impedance, typically of the order of 100 kΩ. It is possible to use the output characteristic of a transistor for this purpose, but then one more bipolar is needed. The use of a resistor leads to a large voltage drop, which reduces the output capability. Separate bias resistors are sometimes used for better dc-balance, but this entails extra components.

Note that this FET circuit has no better output capability than the FET direct-coupled phase-

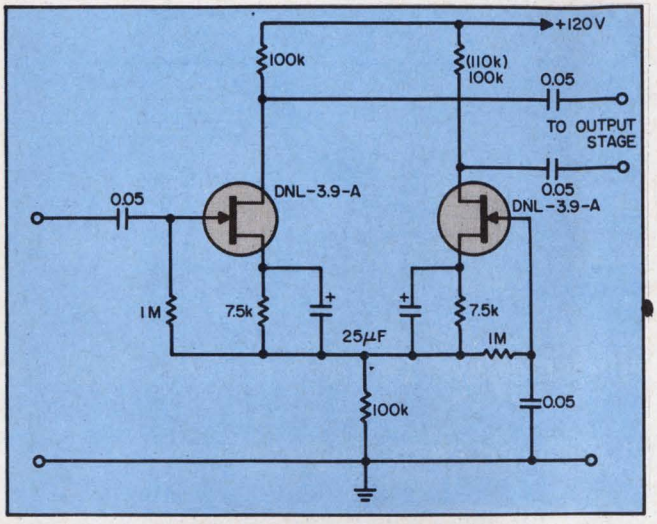

4. **Hi-fi power amplifiers may be driven** by this direct-coupled FET phase-splitter. High gain and low distortion are provided by the phase-splitter and source-follower FET combination. The dashed components are used for filtering.

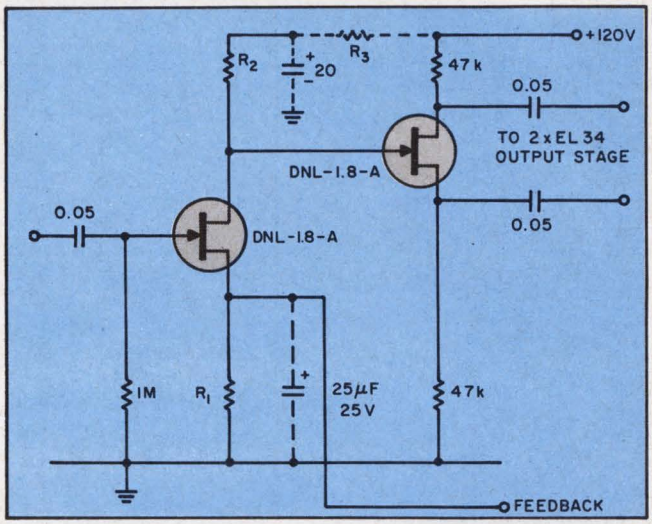

5. **To obtain higher output levels** in audio stages, a FET source-coupled phase inverter may be put to work. However, the balance here is not sharp, unless the generator source impedance is 100 kohms or more.

splitter, and it has less gain and requires well-matched FETs. It therefore appears that the best over-all circuit is the one given in Fig. 4. Should more output capability be required, a higher supply voltage and a higher breakdown-rated device would be the logical means of obtaining it.

Bias key to amplifier design

The techniques used in FET audio-circuit design closely resemble those used with vacuum tubes.[3] The key elements of design are the bias, the load and the supply. In essence, the FET common-source amplifier is a major part of each of the five audio stages under consideration.

Here is the step-by-step procedure for designing a FET common-source amplifier:

1. Use a device with a closely specified bias point.
2. Load resistance is a compromise between distortion and gain. A value of 100 kΩ is the best all-around figure; it results in the lowest distortion. A 47-kΩ value produces wider bandwidths, but less gain and more distortion, than the 100 kΩ. A 220-kΩ resistor yields more gain, but there is more distortion and less bandwidth than with 100 kΩ. For audio work, 100 kΩ appears best, regardless of the particular FET or the supply voltage.
3. Supply voltage should be picked for maximum output voltage and gain. The gain increases 3 dB every time the supply voltage is doubled. Output voltage increases directly with supply voltage. Therefore use the highest supply voltage possible.

Note that maximum supply voltage is determined by breakdown, because the audio-output voltage shows no further increase with supply voltage once breakdown is reached. Observe that damage to the device is of no consideration with load resistances on the order of 100 kΩ. The maximum supply voltage is then about 2.2 times the breakdown voltage, because the drain voltage under optimum conditions is very close to 45% of the supply.


For standardization, supply voltages at 30, 60, 120 and 240 volts have been chosen, with 120 volts as the first choice. This implies a breakdown of 55 volts for small-signal and 110

TABLE 2. Phase-splitter performance (fig. 4)

Supply Voltage	R_1	R_2	R_3	Coupling	Output	Distortion	Gain
(volts)	(K)	(K)	(K)		(volts)	(%)	(dB)
200	7.5	220	0	ac	30	3.4	43.0
120	5.6	220	0	ac	15	1.9	40.7
120	2.1	100	0	ac	15	2.1	37.9
120	2.1*	100	0	ac	15	0.97	29.3
120/200**	7.5	220	—	dc	30	3.5	40.4
120	12.0	220	220	dc	20	5.5	—
120	5.0	100	100	dc	20	6.0	—

*unbypassed

**first and second stage, respectively

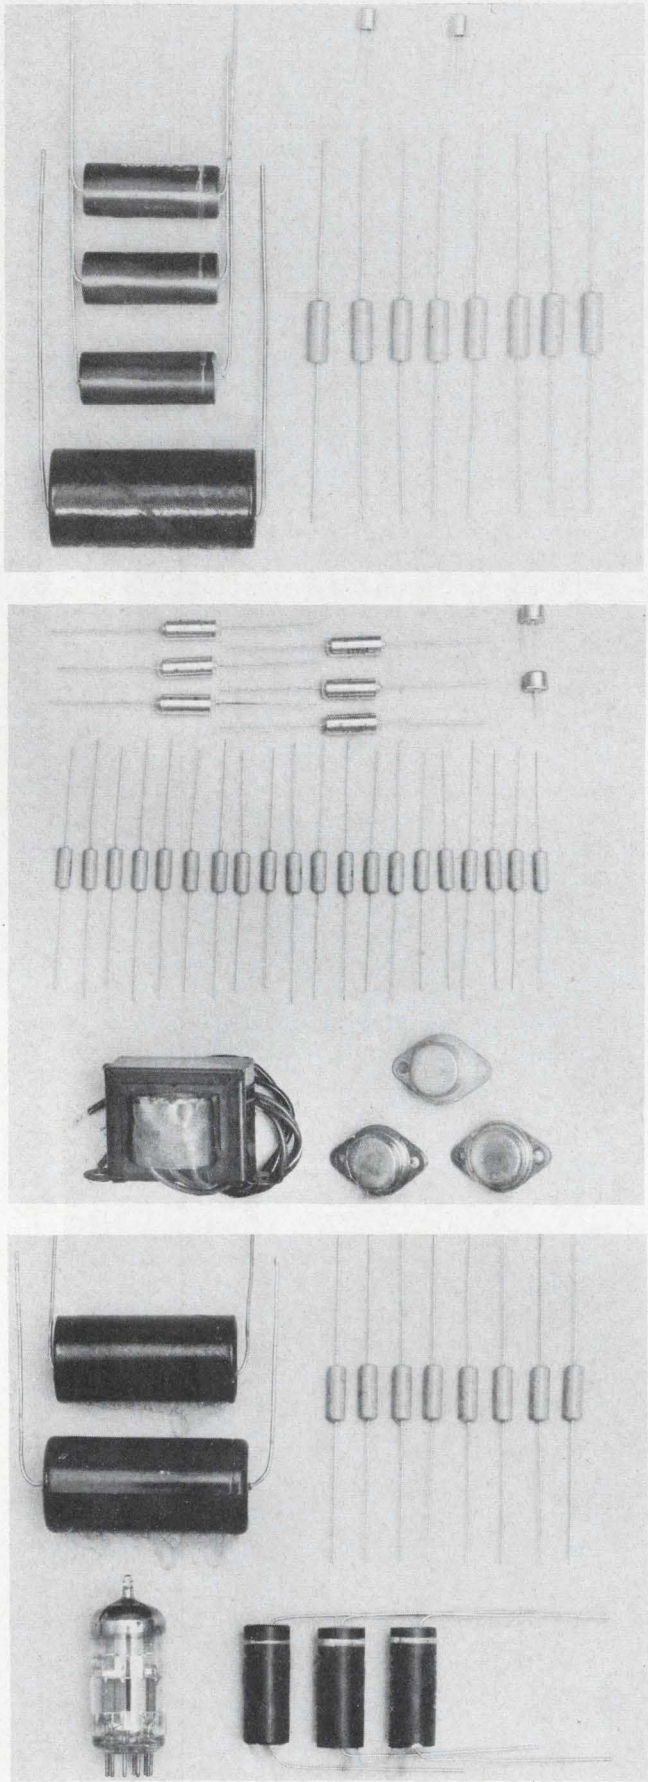

Reap another beneFET! In addition to the superior performance FETs offer in audio equipment, they require (top) less in the way of associated components and size than bipolar (middle) and tube (bottom) counterparts.

TABLE 3. Phase-inverter performance (fig. 5)

Supply Voltage	R_D	R_S	Output Voltage	Distortion	Gain
(volts)	(k)		(volts)	(%)	(dB)
240	100	(k) 100	25	2.0	27.8
120	100	22*	25	4.0	25.0

*Unbalance-1.5 dB

volts for large-signal applications.

Gate circuit closes design


4. Gate bias is the last remaining parameter. It is best set by a resistance in series with the source terminal of a FET (analogous to the cathode resistor with tubes). To obtain correct biasing, a bias-point with a narrow tolerance must be specified. The source resistor is then determined by dividing the optimum gate bias by the drain current. Drain current is given by supply voltage minus drain voltage divided by load resistance. For example, with a 120-volt supply, the drain voltage is 55 volts. Dividing the 65-volt difference by 100 kΩ, we get a drain current of 0.65 mA. If the optimum gate bias is −2.7 volts, this requires a self-bias resistor of 2.7/0.65 = 4.15 kΩ. Choose either 3.9 or 4.3 kΩ if standard values are desired.

   As an alternative, the manufacturer's data sheet may be used. Take the resistance values from the sheet, which lists optimum load and bias resistances, supply voltages, distortion, gain and other data for a practical circuit. However, only a few FET manufacturers provide this information at present.
5. Note that a source-follower is designed in exactly the same way as a common-source amplifier, with respect to bias, load resistor and supply voltages. In a phase-splitter the load resistor is split into two equal values. Because of the 100% feedback factor ($\beta = 1$) of a source-follower, the exact bias point is less critical. This permits a direct-coupled design, as in Fig. 4, where the signal and bias voltage levels are close. The elimination of distortion caused in interstage networks (diagonal loading) helps to offset the distortion caused by operation not quite at the optimum bias point.


Observe that common to each of the circuits covered is the element of design simplicity. In comparison, to its tube and (especially) bipolar counterparts, the FET requires little in the way of auxiliary components. With power-FETs waiting in the wings (devices capable of handling a few amperes under line voltage operation), this simplicity feature will become even more eminent. • •

References:

1. Radiotron Designer's Handbook, 4th ed., RCA, p. 322.
2. "Design of FET Voltage Amplifiers," Engineering Report No's. 3 & 8, Dickson Electronics Corp., Scottsdale, Ariz.
3. Op. Cit. (Reference 1), Chapters 7.2, 12.2 and 12.3.

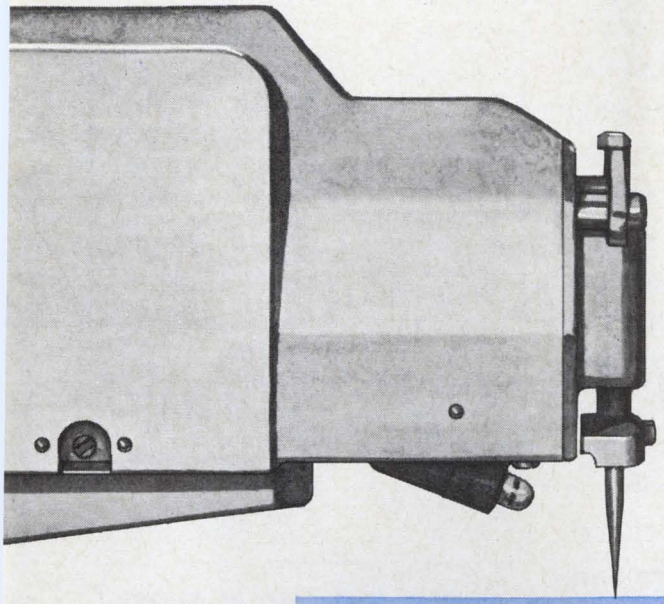

CHALLENGE US!

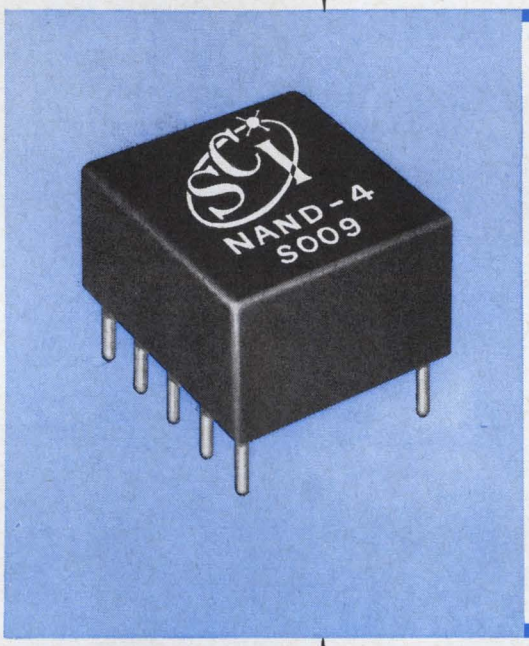

SPACE CRAFT, INC.
8620 SO. MEMORIAL PARKWAY
HUNTSVILLE, ALABAMA 35802

Gentlemen:

Consider yourselves challenged. Send me your short form specification sheet for custom-welded modules. I'll fill it out. Then you quote a price and give me whatever suggestions you may have for improving the module.


Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

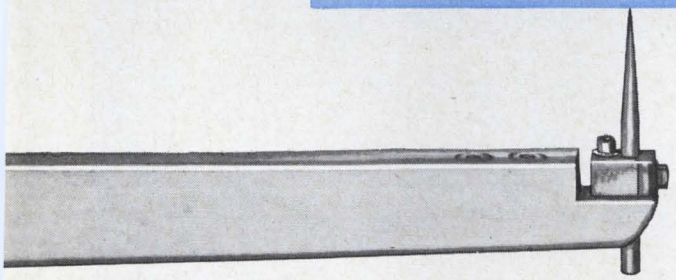

If you would like your system to have the reliability and size reduction advantages of custom welded modules but think you can't afford it, challenge us! Whether you need to design an all-new circuit, to adapt an existing design to welded packaging or to locate a qualified vendor for production quantities of your circuits, Space Craft will perform for you at surprisingly low cost. To call our hand, just use the coupon above.

SPACE CRAFT, INC.

8620 SO. MEMORIAL PARKWAY / HUNTSVILLE, ALABAMA 35802
TELEPHONE: (205) 881-1611 TWX: (510) 579-2234

ON READER-SERVICE CARD CIRCLE 225

Delco Radio's new 400V silicon power transistors will change your thinking about high voltage circuitry. You can reduce current, operate directly from rectified line voltage, and use fewer components. Our standard TO-3 package stays cool (junction to heat sink 1.0°C per watt). And price is low—less than 3c a volt even in sample quantities—for wide ranging applications. Vertical and horizontal wide-screen TV outputs, high voltage, high efficiency regulators and converters. Your Delco Radio Semiconductor distributor keeps them on ice. Call him today for data sheets, prices and delivery.

The heat's off high energy circuits

See them and others at the I.E.E.E. Show
BOOTHS 1D03-1D05

RATINGS	DTS 413	DTS 423
VOLTAGE		
V_{CEO}	400 V	400 V
V_{CEO} (Sus)	325 V (Min)	325 V (Min)
V_{CE} (Sat)	0.8 (Max)	0.8 (Max)
	0.3 (Typ)	0.3 (Typ)
CURRENT		
I_C (Cont)	2.0A (Max)	3.5A (Max)
I_C (Peak)	5.0A (Max)	10.0A (Max)
I_B (Cont)	1.0A (Max)	2.0A (Max)
POWER	75 W (Max)	100 W (Max)
FREQUENCY RESPONSE		
f_t	6 MC (Typ)	5 MC (Typ)

FIELD SALES OFFICES

UNION, NEW JERSEY*
Box 1018 Chestnut Station
(201) 687-3770

CHICAGO, ILLINOIS*
5151 N. Harlem Avenue
(312) 775-5411

SYRACUSE, NEW YORK
1054 James Street
(315) 472-2668

SANTA MONICA, CALIF.*
726 Santa Monica Blvd.
(213) 870-8807

DETROIT, MICHIGAN
57 Harper Avenue
(313) 873-6560

General Sales Office:
700 E. Firmin, Kokomo, Ind.
(317) 457-8461—Ext. 2175

*Office includes field lab and resident engineer for application assistance.

DELCO RADIO
Division of General Motors • Kokomo, Indiana



ON READER-SERVICE CARD CIRCLE 180

Simplify NAND-circuit synthesis in your next logic design. Here are various methods for implementing a logic function entirely with NAND gates.

With NAND gates enjoying widespread popularity as basic logic elements, designers are often faced with a problem: How to synthesize minimized logic circuits consisting entirely of NAND-gate circuitry. A variety of solutions are available.

The simplest method of implementing a logic function with NAND blocks is to plot the function on a Karnough map, obtain the minimized form and convert this to a NAND form, using De Morgan's theorem ($\overline{AB} = \overline{A} + \overline{B}$, $\overline{A + B} = \overline{A}\,\overline{B}$). An example of this is shown in Fig. 1. Although the minimal form of the function is easily converted to a form that can be directly implemented by NAND circuits, the result contains both the complemented and uncomplemented forms of the input variables. Additional inverters are needed if only the uncomplemented input functions are available.


Another technique, which provides greater flexibility, is to alter the output function equation directly. This method of synthesis is shown in Fig. 2—for transforming an AND/OR circuit to a NAND circuit.

Fig. 2 demonstrates that in the transformation from AND/OR to NAND circuitry, any variables present at odd levels are complemented. This is based on an output function whose last level is an OR. Fig. 3 shows another transformation. This type of AND/OR to NAND transformation holds true for more complex functions, where the output level is defined as the first, or odd, level of logic, the second level is even, the third odd, and so on.


Figs. 2 and 3 illustrate the ease of transforming from AND/OR to NAND logic, but again with the disadvantage of requiring both the functions and their complement. This requirement may be eliminated if the equation can be rearranged so that all complemented functions are at odd levels of logic. Then the complements can be dropped in the transformation, as was previously shown. Fig. 4 demonstrates how the equation for Fig. 3 might be rearranged, so that complemented functions or inverters would not be needed. Certain theorems

James A. Walker, Engineer, Westinghouse Defense and Space Center,* Baltimore, Md.

*The author is now with Fairchild Hiller Corp., Bladensburg, Md.

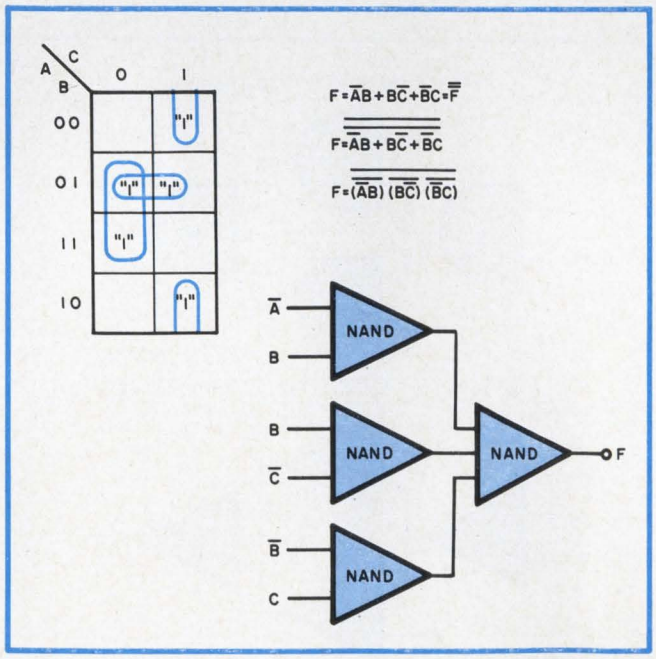

1. **DeMorgan's theorem** can be used for quick conversion of a function to a NAND form. But the results contain complemented and uncomplemented variables.

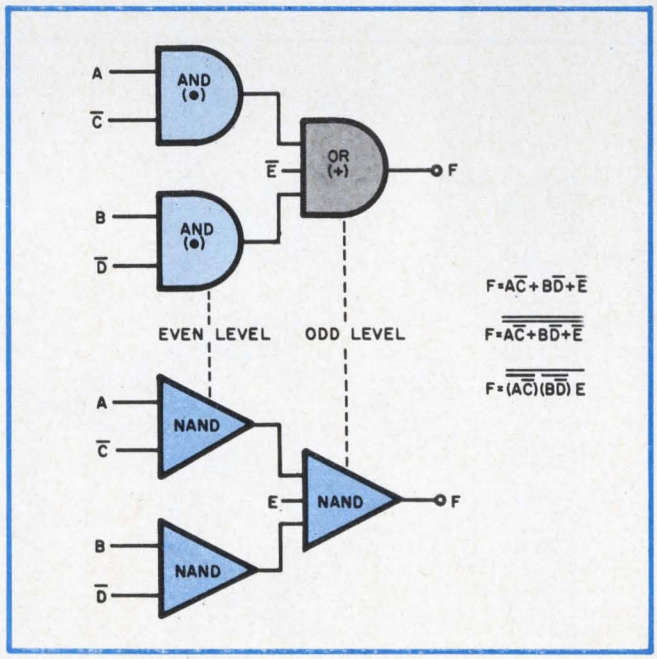

2. **AND/OR TO NAND transformation** results in the complementing of all variables that are present at odd levels. Variables at even levels are not.

are very useful for separating the complemented variables to odd logic levels (see box).

It should be realized that the foregoing methods do not always insure complete elimination of the need for inverters. More important, the logic designer cannot easily see whether or not his circuit is a minimized one.

Map factoring may be best

Probably the best method to date for design of NAND logic is one developed by Gerald Maley and John Earle.[1] It utilizes map factoring to obtain a minimum form that contains only uncomplemented variables. This is done by using only those map loops that contain uncomplemented variables. Fig. 5 shows these allowable loops for three- and four-variable maps.

The example in Fig. 6 demonstrates the principle of the mapping method. If a loop function A (allowable loop) is the input to a NAND gate (1) and the output of this gate is fed into a second NAND gate (2) along with another loop function (B), the output of gate *2* will be loop B inhibited by loop A, with a complement over the resultant loop (C). This complement over the resultant loop gives the loop the power of inhibition, if it in turn is fed into a third NAND gate along with some other loop function. When this method is used, either all of the "1" blocks or all of the "0" blocks of the map are generated. It must be remembered that when these resultant loops are generated, they are complemented.

Figs. 7 and 8 show how the "1" blocks of a simple function are generated and then combined to form the output function. When the loops representing the "1" blocks are fed into the output NAND gate, we are essentially inhibiting unity (a "1" or an open circuit input to the output NAND gate) with these loops. The output of the NAND represents the "0" blocks complemented ("$\overline{0}$"), or the "1" blocks.

In Fig. 7 the BC loop is generated (loop *1*) and

Useful theorems for separating complemented variables


1. **Distributive law:**
   $\overline{A}\overline{B}+CD=(\overline{A}+CD)(\overline{B}+CD)$
   This form now requires the addition of a constant (0) to change the output level to an OR function.

2. **Addition of a constant:**
   $(\overline{A}+CD)(\overline{B}+CD)=(\overline{A}+CD)(\overline{B}+CD)+0$
   This 0 at the output level (an odd level) changes to a 1, or an open circuit input, in the transformation to NAND.


3. **Association:**
   $A(B+\overline{C}+\overline{D})=A[B+(\overline{C}+\overline{D})]$
   Isolating the complemented variables allows the use of partial multiplication to separate them to an odd logic level.

4. **Partial multiplication:**
   $A[B+(\overline{C}+\overline{D})]=AB+A(\overline{C}+\overline{D})$
   The use of this theorem puts complemented variables at an odd logic level and uncomplemented ones at an even logic level.


5. **Addition of redundant terms:**
   By adding redundants to two or more terms, we can make them identical and create the need for only 1 gate.
   $A(\overline{B}+\overline{C})+B(\overline{A}+\overline{C})+C(\overline{A}+\overline{B})$
   $=A(\overline{A}+\overline{B}+\overline{C})+B(\overline{A}+\overline{B}+\overline{C})+C(\overline{A}+\overline{B}+\overline{C})$

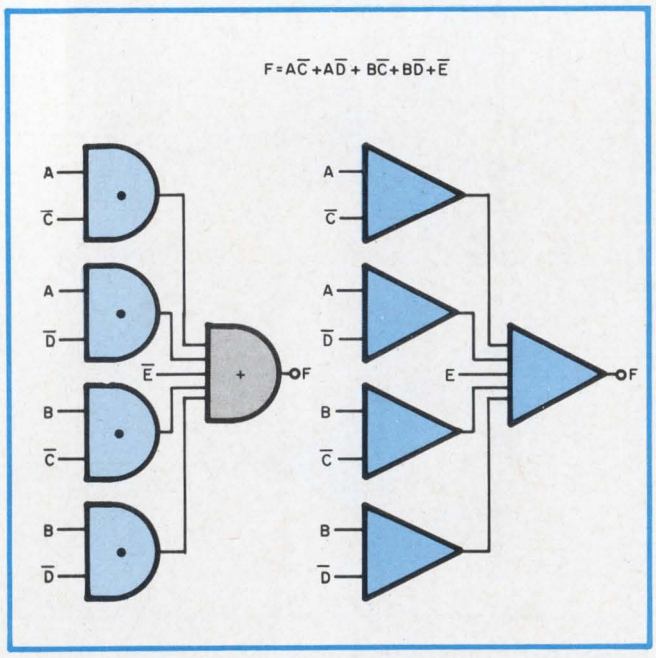


3. **Complemented variables** appearing at even levels remain complemented.

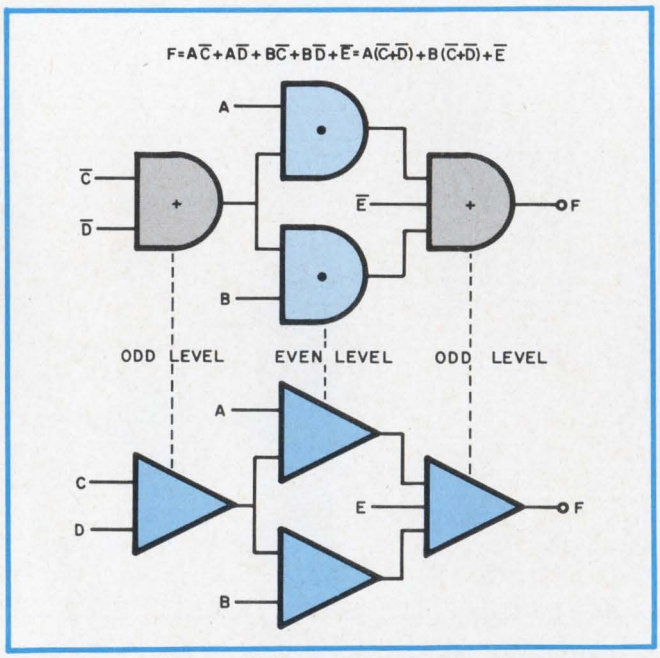

4. **By rearranging the function equation,** complemented variables can often be located at odd logic levels.

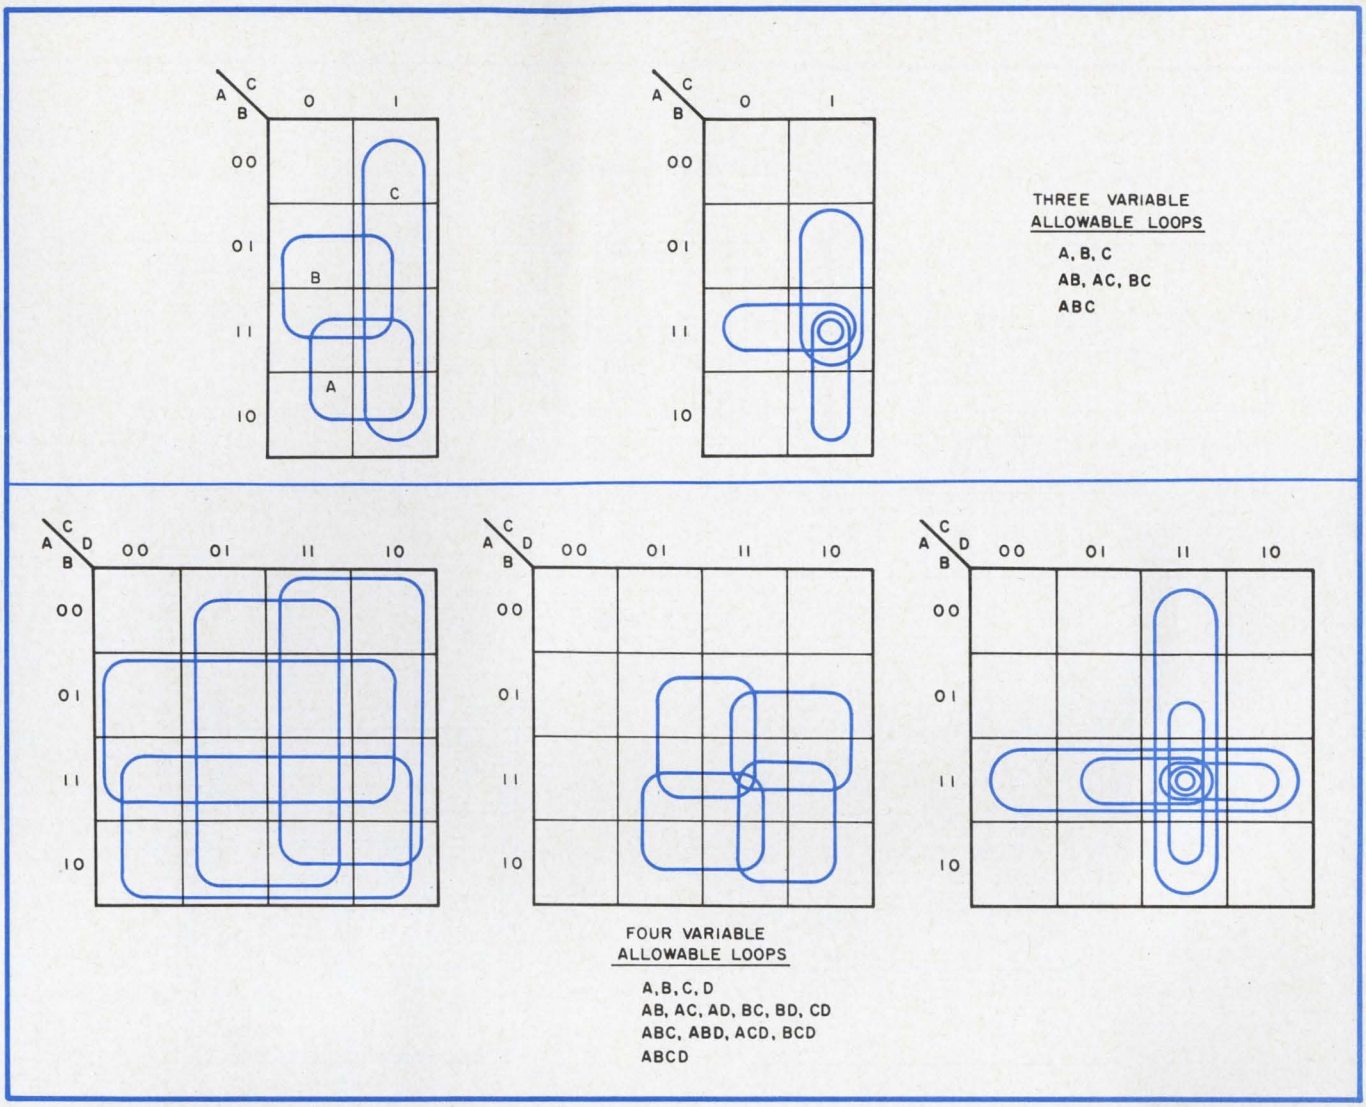

5. **Map-factoring method** makes use only of map loops that contain uncomplemented variables. For functions containing three variables there are seven allowable loops; and for those with four variables there are 15 loops.

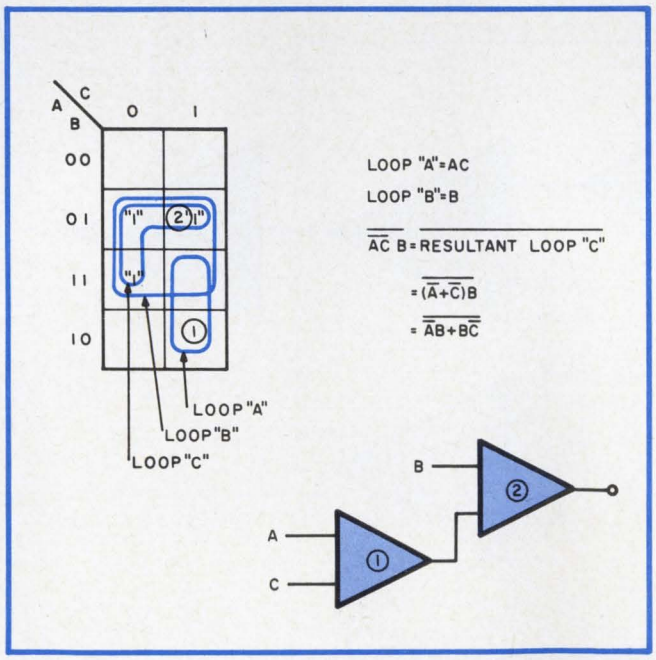

6. **Either all "0" or all "1" blocks** of the map must be generated when using the map-factoring method.



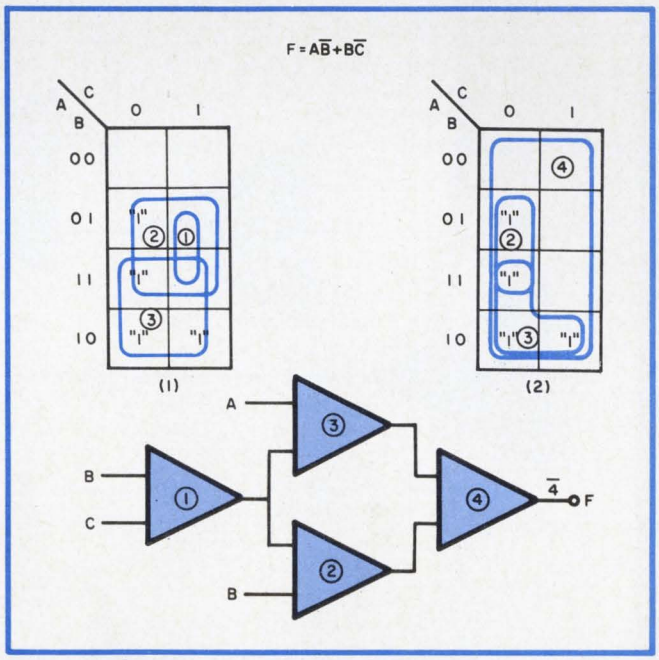


Fig. 7. **Each NAND block** corresponds to one of the loops generated on the map by the inhibiting process.

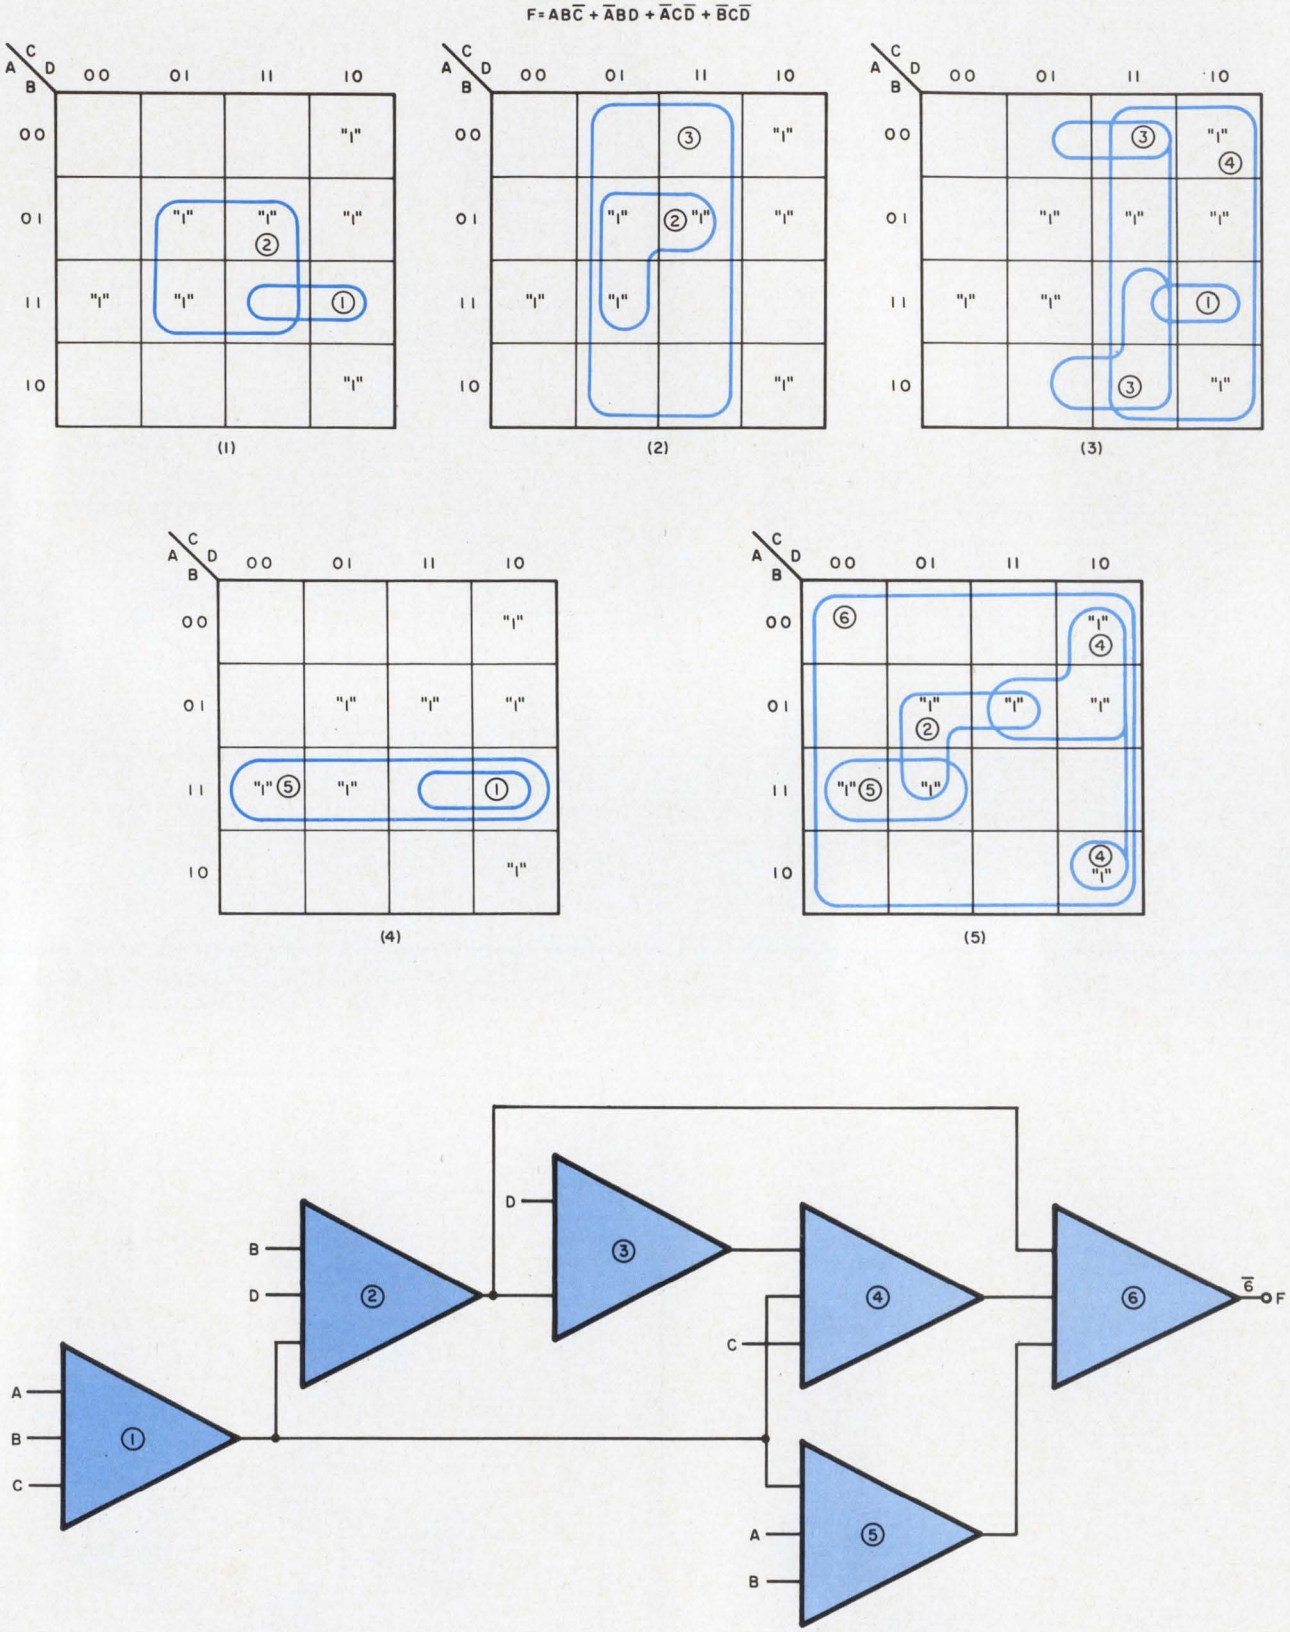

8. **Complexity of the map-factoring method** increases with the number of variables. Here, five loops are required in order to generate all of the "1" blocks of the map and produce the desired NAND function.

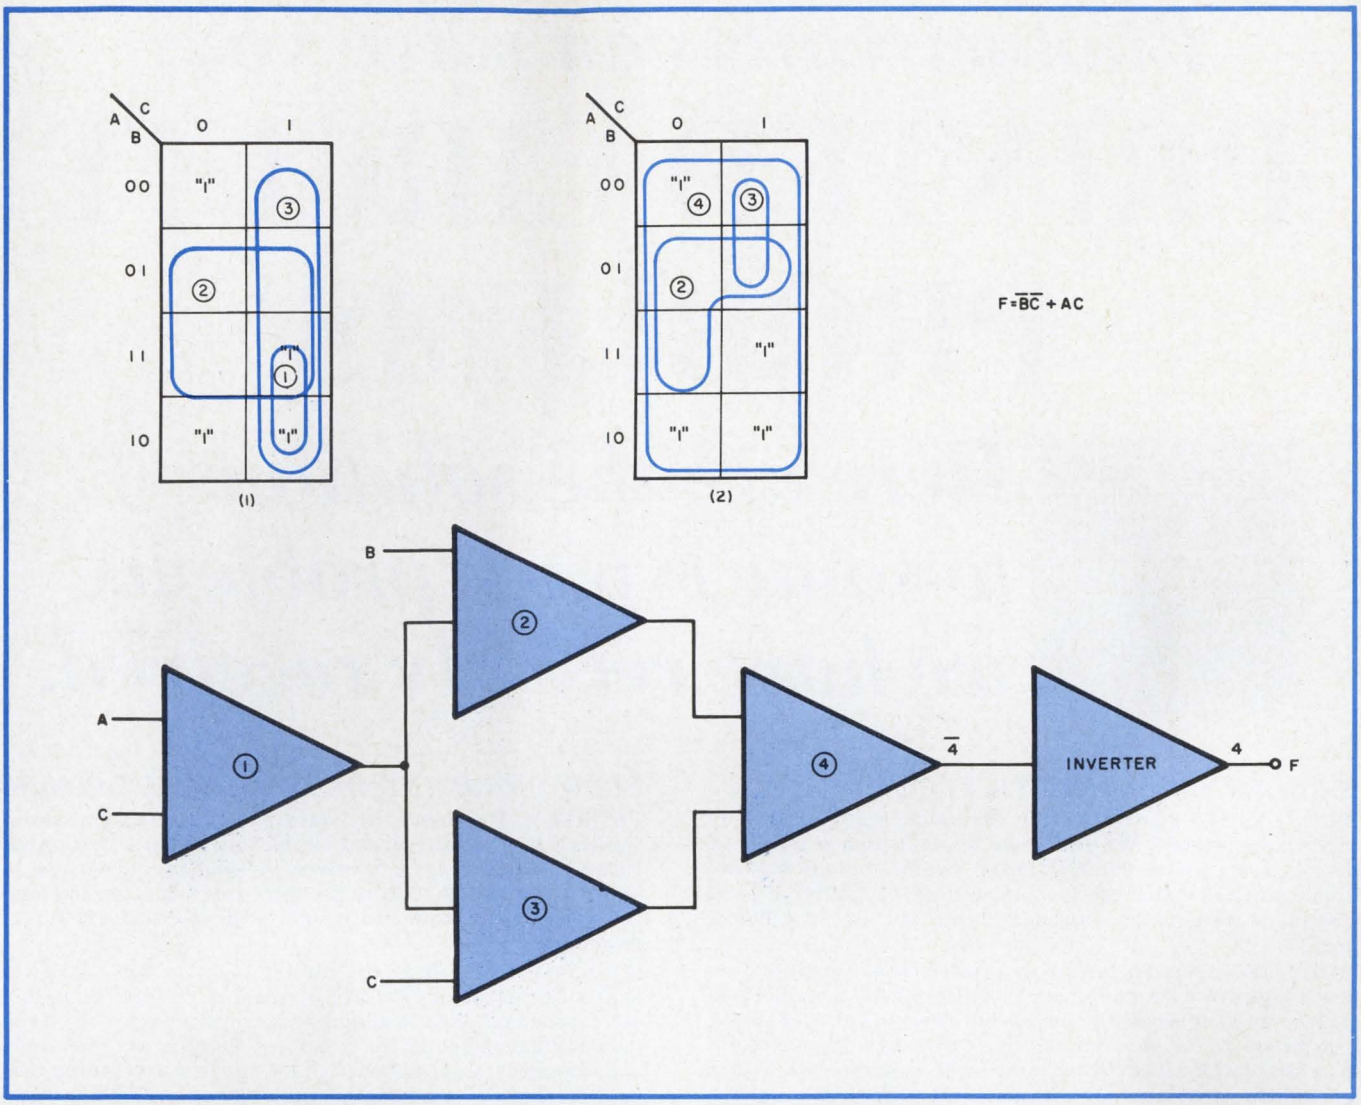

9. **Inverter is needed** at the output when "0" blocks are generated by the map-factoring method. This is because the output produced by the map factoring results in the "1" blocks complemented, or "$\bar{1}$."

used to inhibit loop B, resulting in the BC loop (loop *2*). The BC loop is also used to inhibit the A loop, resulting in the $A\overline{C} + A\overline{B}$ loop (loop *3*). The use of redundancy (the $AB\overline{C}$ term is contained in both loops *2* and *3*) helps to simplify the circuitry here. Finally unity is inhibited by the "1" loops in the output NAND, resulting in the "$\bar{0}$" blocks, or the "1" blocks, as the output function.

Fig. 8 shows a more complex example. Loop ABC (loop *1*) is first generated and used to inhibit loop BD, resulting in loop *2*. Loop *2* is then used to inhibit loop D, resulting in loop *3*. Loops *1* and *3* are both used to inhibit loop C, resulting in loop *4*. Finally loop *1* is again used to inhibit loop AB, resulting in loop *5*. All of the "1" blocks have been looped, and these loops are now used to inhibit unity in the output gate, resulting in the generation of the desired function.

In some cases it may be simpler to generate the "0" blocks. In this case the "0" blocks in the output NAND are used to inhibit unity, and the output represents the "1" blocks complemented ("1"). For this case an inverter stage is needed at the output to complement "$\bar{1}$" and generate the "$\bar{\bar{1}}$," or "1," blocks. Fig. 9 demonstrates this approach.


Although the mapping method becomes inherently cumbersome as the number of variables increases, it can be very useful in solving problems with a small number of variables. In addition it often can guide the designer to a good solution that may not have been achieved with another method.

The mapping method described here also has several advantages when used in the design of sequential circuits, in addition to the expected aid in circuit synthesis. First, when the output function is derived from the output matrix, any resulting feedback loops may form an R-S flip-flop that can be implemented with a standard integrated circuit block. Second, static hazards, which can be more easily seen on a map, can be eliminated by the use of redundant loops. ■ ■

Reference:

1. G. A. Maley and J. Earle, *The Logic Design of Transistor Digital Computers* (Englewood Cliffs, N. J.: Prentice-Hall, 1963).

Photocircuits can solve your
PRINTED CIRCUIT PROBLEMS



Here are the solutions to some typical problems we have recently received.

CONCERN OVER MULTILAYER CAPACITY

PROBLEM: A system we are designing requires over 40 multilayer boards. We anticipate a production schedule of five systems per month. Our initial vendor surveys indicate this quantity is too large for the multilayer capacity of local suppliers. Is ours an unusually large multilayer requirement?

SOLUTION: Not for the larger printed circuit manufacturers who have been supplying multilayers for a number of years and have noted the increasing demand for this versatile product. As an example, five years ago Photocircuits was able to fill all customer multilayer requirements with a capability of 50 average size parts per month. Two years ago we had to increase our capacity to 500 parts per month. The newest multilayer facility at our Glen Cove plant is capable of producing over 5000 parts per month. If your boards are typical of those we have made for other systems use, only 5% of our total multilayer capacity would be needed to meet your requirements.

BOARD BREAKAGE

PROBLEM: We are presently using XXXP base material for the printed circuits in our equipment. Production line handling and power driven assembly tools result in cracked and broken boards which have to be scrapped. We can't afford G-10 or epoxy paper. Are there any available low cost materials with high impact strength?

SOLUTION: Photocircuits' new CC-4 additive printed circuit process allows the use of new and unique base materials which are not available as foil-clad laminates. One which seems particularly well suited for your application is a low cost, polyester glass mat material, GL-52R, which was specially developed for use with the CC-4 process. This new material has electrical and mechanical properties superior to XXXP and epoxy paper. Although GL-52R is no more expensive than XXXP, it has an impact strength almost ten times greater. Commercial users have found that breaking, cracking and crazing during assembly and manufacturing are greatly reduced with this material.

SLOW PRICE AND DELIVERY QUOTATIONS

PROBLEM: We often need a quick price and delivery quotation on a number of types of circuit boards for a new application. The time cycle involved in sending out prints to manufacturers and waiting for their reply is often too long for our schedule. How can we get price and delivery information faster?

SOLUTION: Our Standard Circuit Division was set up to help medium quantity users of printed circuits eliminate red tape and delays in quoting and procurement. By only manufacturing boards to a limited number of choices in such areas as base materials, platings and tolerances, the paperwork and communication problems of buying a custom-made component are drastically reduced. The Standard Circuit concept simplifies design and procurement to the point where boards can be ordered from a catalog. The published prices and fixed delivery schedules included in the Standard Circuits catalog should solve your problem. Write us for a copy.

ARTWORK FOR MULTILAYER CIRCUITS

PROBLEM: We've always prepared the master patterns for our printed circuit boards. We have our first application for multilayers and wonder if there are special or unusual requirements for the artwork?

SOLUTION: It would be wise to talk to an Applications Engineer from a reliable printed circuit manufacturer with multilayer experience before beginning the artwork. In addition to requiring much more stringent tolerances and tooling symbols, multilayer artwork almost always requires special attention because of the particular manufacturing process used. Since the artwork for one board may require individual patterns for as many as 15 layers, cost-cutting opportunities should be carefully investigated. Photocircuits' Master Circuit System, for example, uses automatic equipment to produce photographic glasswork for each layer with perfect registration and can save as much as 50% over regular drafting techniques.

(If you have a problem in printed circuitry, let us hear from you.)

Photocircuits
CORPORATION
Glen Cove, New York • Anaheim, California

ON READER-SERVICE CARD CIRCLE 136

ON READER-SERVICE CARD CIRCLE 240 ➤



Stackpole Rotary Switches Specially Designed to Guard Against EXPOSURE—CONTACT CONTAMINATION—PRODUCTION DAMAGE

COMPETITIVELY PRICED — This completely enclosed, rugged switch costs no more than the open clip type.


SAMPLES IN 3 DAYS—to your exact specifications. Send your drawing and prove it to yourself.

ORDERS IN 2 TO 3 WEEKS—On-time delivery of uniform, high quality production quantities to meet your schedule.

SEND YOUR DRAWING FOR A QUOTATION AND SAMPLE. Take advantage of Stackpole quality, price and service. For additional information and technical data write: Electro-Mechanical Products Division, Stackpole Carbon Company, St. Marys, Pennsylvania 15857. Phone: 814-834-1521. TWX: 510-693-4511.

STACKPOLE
ELECTRO-MECHANICAL PRODUCTS DIVISION

Check your lacing tape requirements here



- ☐ **HIGH TEMPERATURE** — General use Gudebrod Tapes are unaffected by temperatures to 250°F.; specially designed tapes are essentially stable in excess of 1500°F.
- ☐ **LOW TEMPERATURES** — Most popular Gudebrod Tapes are stable down to −67°F., others are designed to take temperatures as low as −100°F.
- ☐ **BURNPROOF** — Gudebrod has lacing tapes of completely fireproof materials, others will not support a flame.
- ☐ **OUTER SPACE** — Gudebrod has a tape that won't outgas in outer space—especially suitable for space, or industrial applications in vacuum.
- ☐ **FUNGISTATIC** — Whenever possible with the material of construction Gudebrod guarantees its tapes to be fungistatic or fungicidal.
- ☐ **MIL-T-713A** — Gudebrod's Gudelace 18 meets all requirements of specification MIL-T-713A, type P, class two. Other Gudebrod Tapes meet or surpass these specs.
- ☐ **TENSILE STRENGTH** — All Gudebrod Tapes are available in a number of widths and thicknesses to meet varying size requirements.
- ☐ **CUT LENGTHS** — Gudebrod Tapes can be supplied in handy dispenser packs of cut lengths to suit your harnessing needs.
- ☐ **COMPATIBLE MATERIALS** — From the wide range of basic materials and finishes used in Gudebrod Tapes the selection of a tape compatible to your insulation is easy.
- ☐ **COLOR CODED TAPES** — For complicated circuitry, color coding with Gudebrod Lacing Tapes makes assembly and tracing easy.
- ☐ **SPECIAL APPLICATIONS** — Gudebrod will work with your engineers to develop a special tape to meet sophisticated requirements.

THEN GET THE RIGHT TAPE FROM **GUDEBROD!**

Perhaps you are regularly using Gudebrod Gudelace 18, the standard, wax impregnated nylon tape that's known round-the-world for its non-slip knotting (meets MIL-T-713A specs, too). You are doing well then—with the finest tape and saving money on harnesses, too!

But when you are making gear for tropic or arctic use, if you are involved with outer space or special industrial applications—come to Gudebrod. Here is your one best source for lacing tape information. Ask for a copy of our Product Data Book describing the more than 200 different tapes in our regular stock. In it you'll probably find the tape that fits your requirements—but if you don't, inquire about having one made to your particular specifications.

Area Code 215, WA 2-1122

GUDEBROD BROS. SILK CO., INC.

FOUNDED IN 1870

Electronics Division

12 SOUTH 12th STREET, PHILADELPHIA, PENNSYLVANIA 19107


See us at the IEE Show - Booth 4A24

ON READER-SERVICE CARD CIRCLE 210

Why does Bodine use forged bronze gears in its motors?



—to be sure Bodine motors are durable, dependable

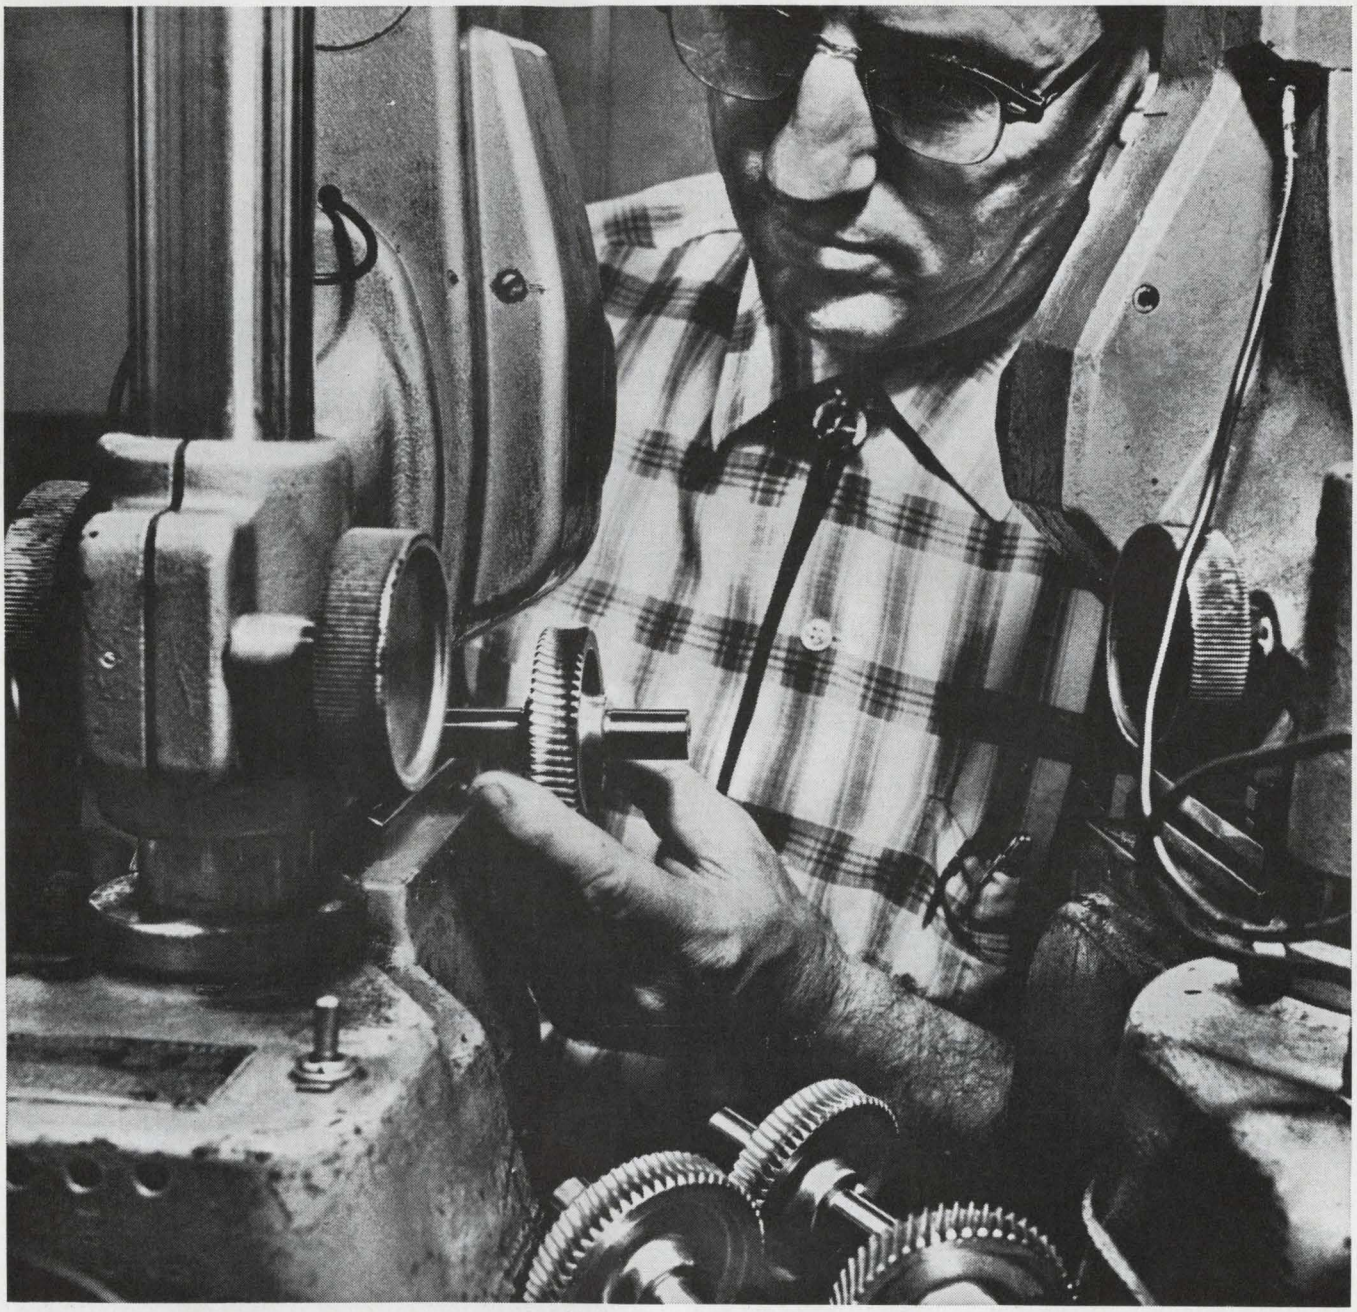

We use forged, heat treated bronze for gears in Bodine motors designed to withstand shock loads. We hob them ourselves, taking full advantage of bronze physical properties.

Forged bronze is an excellent material for fractional horsepower motor gears. It has a consistent grain structure which results in long, uniform wear. It is free of hard or soft spots and can be machined to very close tolerances.

Bodine's attention to details and control of quality at every stage of manufacture results in gears—and all other motor parts—that perform dependably for long periods.

Doesn't your product deserve a high quality motor? A Bodine motor. Bulletin S describes over 275 stock types and sizes from 1/2000 to 1/6 hp. Write Bodine Electric Company, 2528 West Bradley Place, Chicago, Illinois 60618.

Speed Inquiry to Advertiser via Collect Night Letter

ON READER-SERVICE CARD CIRCLE 137

Bodine motors wear out—
it just takes longer

BODINE
fractional/horsepower
MOTORS
... the power behind the leading products

Use magnetic deflection to iron out problems in display systems. It offers wider design freedom and as good a frequency response as electrostatic methods.

Part 2 of a two-part article

It is no longer difficult to obtain moderately high bandwidth and fast speed from a magnetic-deflection display system. For large display tubes, these key performance criteria can be made to equal those obtained with electrostatic deflection when the amplifier-yoke complex is connected in a feedback loop.

Magnetic-deflection methods top electrostatic approaches when it comes to design freedom, reliability, size of the system, power-supply requirements and quality of the display itself. Having examined these characteristics and the general design considerations, (ED, March 1, p 46), we turn to the analysis and actual design of a number of practical stages.

Emitter-follower circuits are often used to obtain single-ended deflection. These are characterized by a feedback arrangement and a preamplifier, wherein the yoke is part of the output amplifier stage (Fig. 1). Analysis shows the preamp, not the yoke, to be the bandwidth-limiting factor. Note that negative feedback is obtained by placing a small current sampling resistor (R_L) in one coil lead. Its voltage drop is therefore proportional to the coil current.

To ease the analytical treatment, the gain-frequency curve of the amplifier is assumed to have a single breakpoint at the angular frequency $\omega_o = 2\pi f_o$ (or an equivalent time constant $T_c = RC = 1/\omega_o$) and a constant slope of 6 dB per octave. This approximation will result in slightly shorter settling times than are usually experienced in multistage amplifiers. Since R_L is small with respect to R_2 (a practical ratio is 1:1000), its loading effect and that of the coil capacitance on the coil circuit are neglected. The coil resistance (R_c) is assumed to be zero, which is a valid assumption for low-inductance yokes. If R_c is relatively large (as with high inductances), simple scaling methods can be applied to include its effect. Finally the amplifier input impedance is assumed to be infinite.

Step inputs require damping

To derive the input-to-output relationship of the amplifier-yoke complex, $G(s)$ is used as the forward transfer function. It comprises both the amplifier with its time constant $T_c = RC$ and the coil circuit, described by the coil time constant $T_L = L/R_L$ (Fig. 2a). $C(s)$ is the system output voltage measured at the series resistor R_L, and it therefore represents the coil current. $R_o(s)$ is the reference input, or the effect of input voltage $E_1(s)$ at the summing point.

The transfer function for the circuit is

$$\frac{C(s)}{R_o(s)} = \frac{G(s)}{1 + G(s)H}, \qquad (1)$$

where $G(s) = A/(1+sT_c)(1+sT_L)$, $H = R_1/(R_1+R_2)$ and $R_o(s) = E_1(s)\,R_2/(R_1+R_2)$. In these relationships, A is the preamplifier open-loop gain, T_c is the amplifier time constant with $T_c = RC = 1/\omega_o$, $T_L = L/R_L$ is the coil time constant, and ω_o is the 3 dB point of the gain-frequency curve.


The input-to-output transfer function is therefore

$$C(s) = \frac{E_1(s)\,n\,A}{A + (1 + n)\,(1 + sT_c)\,(1 + sT_L)}, \qquad (2)$$

where $n = R_2/R_1$.

If the system input is a step function defined as $E_1(s) = E_1/s$, the transfer function becomes

$$C(s) = \left(\frac{E_1 An}{1 + n + A}\right) \frac{1}{s\left[s^2\frac{(1+n)T_cT_L}{1+n+A} + s\frac{(1+n)(T_c+T_L)}{1+n+A} + 1\right]} \qquad (3)$$

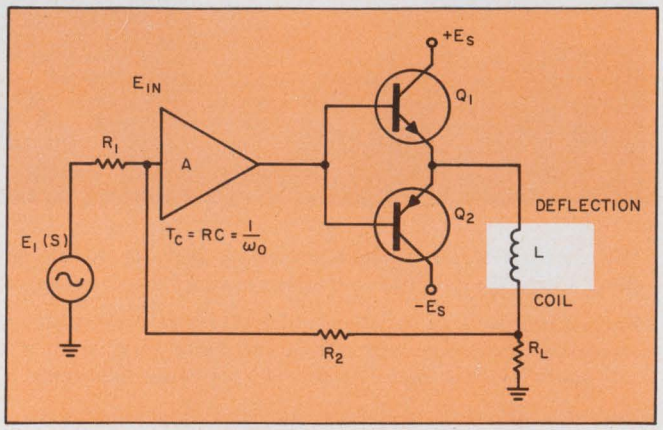

1. **In a single-ended deflection system** the yoke is connected to the output of an emitter-follower stage. A voltage-drop sample of coil current is then fed back to the preamplifier. Observe that the preamp is the limiting factor on over-all bandwidth.

A. E. Popodi and **R. M. Williams**, Design Engineers, Westinghouse Electric Corp., Defense and Space Center, Baltimore. (Mr. Williams is now with Saunders Associates, Nashua, N. H.)

The solution (to Eq. 3)* for the unit step becomes

$$C(t) = \frac{E_1 An}{1 + n + A}$$

$$\left[1 + \frac{1}{\sqrt{1 - \xi^2}} e^{-\xi\omega_1 t} \sin(\omega_1\sqrt{1 - \xi^2} \cdot t - \Psi)\right] \quad (4)$$

where

$$\xi = \frac{1 + m}{2\sqrt{m}} \sqrt{\frac{1 + n}{1 + n + A}}, \omega_1 = \sqrt{\frac{1 + n + A}{(1 + n)T_C T_L}},$$

$$n = \frac{R_2}{R_1}, m - \frac{T_L}{T_C}, \text{ and } \Psi = \tan^{-1}\frac{(1 - \xi^2)^{\frac{1}{2}}}{-\xi}$$

Note that ξ is the damping ratio, which determines whether the system is overdamped, critically damped or underdamped. This depends on whether ξ is larger, equal to or smaller than unity.

Equation 4 shows that for $\xi<1$ the final output level of $nAE_1/(1 + n + A)$ is reached within a given accuracy after a number of exponentially decaying sinusoidal oscillations (Fig. 2b). Typically the gain A is usually large with respect to n but may not be large with respect to m. Thus, the value for ξ is usually smaller than unity (for example, $\xi = 0.4$ corresponds to a 25% overshoot).

The exponential term $e^{-\xi\omega_1 t}$ describes the maximum deviations from the steady-state output or the worst-case error. The actual error will then always be equal or less than $e^{-\xi\omega_1 t}$. The peak error is therefore $\varepsilon\% = e^{-\xi\omega_1 t} \times 100$ and since $\xi\omega_1 =$

$$\frac{1 + m}{2} \frac{t}{T_L},$$

the peak error is


$$\epsilon\% = e^{-\frac{1+m}{2}\frac{t}{T_L}} \times 100 \quad (5)$$

Figure 2c shows a normalized plot of the error vs time curve for various time-constant ratios. It can be used to determine the settling time of an underdamped system. If, for instance, $T_L = T_c$ or $m = 1$, the coil current is within 1% of its final value after an elapsed time of 4.5 T_L. It is interesting to note that in a second order system the settling time is independent of amplifier gain A and feedback ratio n, as illustrated. These two parameters, in conjunction with m, influence only the frequency of the oscillations. This frequency is given by f_o equal to


$$\frac{\omega_1\sqrt{1 - \xi^2}}{2\pi} = \frac{1}{4\pi T_L}\sqrt{\frac{4Am - (1 + n)(m - 1)^2}{1 + n}} \quad (6)$$

Rewriting the exponent of Eq. 5 as $(1 + m)/2T_L = 0.5\ (T_L+T_c)/T_c T_L$, we note that if $T_L = T_c$, both time constants have an equal effect on settling time. To increase the display bandwidth, either the amplifier time constant T_c or the coil

*The time function for the normalized quadratic equation (which resembles Eq. 3) $1/[s\ (s^2/\omega_1^2 + 2\xi s/\omega_1 + 1)]$ is found in Nixon, "Handbook of Laplace Transformation," p 71.

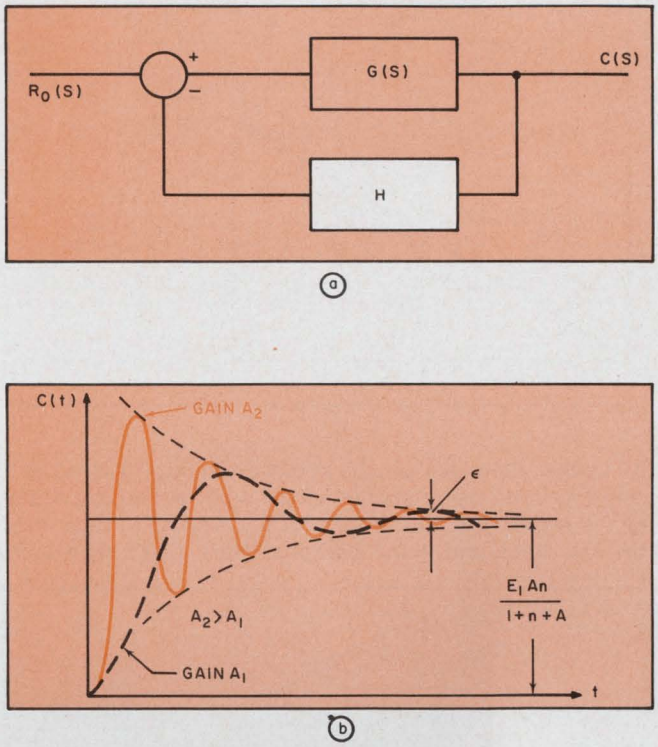


2. **The forward transfer function** of the amplifier-yoke complex is determined by using the block diagram of the feedback system (a). As the gain is varied, the coil current goes through a number of different decay cycles before leveling off at its steady-state value (b). Maximum deviation from steady state, defined as the error ϵ, is a function of the system time constants (c). Here the plot of error vs time is based on m, the ratio of coil time constant (T_L) to amplifier time constant (T_c), and the damping ratio, ξ.

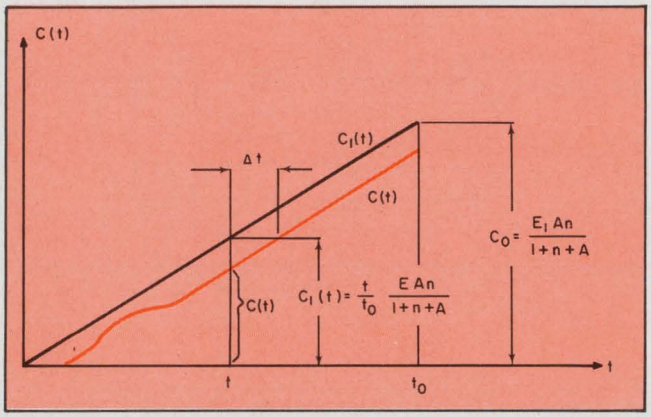

(a)

3. **Longer time lags are the result** of a ramp (instead of a step) function being applied to the input of Fig. 2a. A plot of the resulting output waveform (a) is used to determine the transient and error portions. Here $C_1(t)$ represents the ideal case and C(t) the actual signal. The amount of ramp delay is a function of both amplifier gain and bandwidth, and (of course) the system time constants (T_L and T_o) (b).

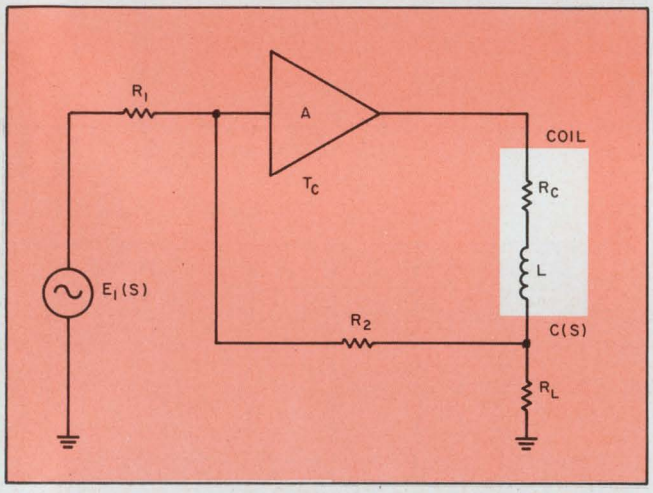


4. **Greater coil inductances exhibit large resistances.** For larger yokes, the resistor's influence on the transfer function must now be considered. Here R_c denotes the coil resistance, which modifies the gain and feedback values, according to its comparison with the load.

time constant T_L may be decreased. The latter can be achieved by either lowering the coil inductance or increasing the current sampling resistor R_L. Both measures, however, will affect the amplifier response. In the first case the amplifier must exhibit the same bandwidth at higher current levels. In the second case the same phenomenon is observed at higher voltage levels. In general, it is more economical to lower the amplifier time constant T_c to achieve higher bandwidths.

Ramp produces time delay

Because of the limited bandwidth and gain of the deflection system, a time lag exists between a linearily rising input signal and the coil current. This may be improved if a ramp voltage is used as the input. If the input is given by $e_1(t) = E_1 t/t_o$, where t_o is the ramp duration and E_1 is the input voltage at the end of ramp, its Laplace function is $E_1(s) = E_1/s^2 t_o$. With the use of this term, the input-to-output transfer function becomes

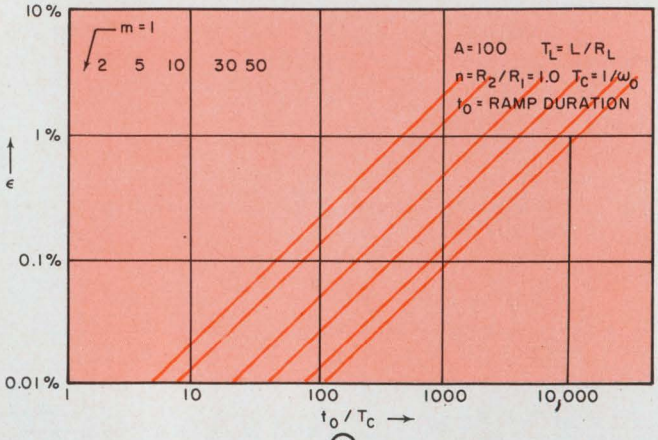

(b)

$$C(s) = \frac{E_1 An}{t_o(1+n+A)} \left\{ \frac{1}{s^2\left[s^2 \frac{(1+n)T_c}{1+n+A} T_2 + s \frac{(1+n)(T_c T_L)}{1+n+A} + 1 \right]} \right\} \quad (7)$$

The solution in the time domain is*

$$C(t) = \frac{E_1 An}{t_o(1+n+A)} \left[t - \frac{2\xi}{\omega_1} + \frac{1}{\omega_1\sqrt{1-\xi^2}} e^{-\xi\omega_1 t} \sin(\omega_1\sqrt{1-\xi^2}\, t - \Psi) \right] \quad (8)$$

where

$$\Psi = 2\tan^{-1}\frac{\sqrt{1-\xi^2}}{-\xi}, \quad \xi = \frac{1+m}{2\sqrt{m}}\sqrt{\frac{1+n}{1+n+A}},$$

$$\omega_1 = \sqrt{\frac{1+n+A}{(1+n)T_c T_L}}, \quad n = \frac{R_2}{R_1}, \quad m = \frac{T_L}{T_c}, \quad T_L = \frac{L}{R_L},$$


$$T_c = \frac{1}{\omega_0} \text{ and } e_1(t) = E_1\frac{t}{t_0}.$$

The first term in the equation represents the ideal amplifier output without any time delay. The second term is the current, or time lag, and the last part describes the exponentially decaying transient portion. Fig. 3a shows the actual output signal, denoted by $C(t)$, versus the ideal output $C_1(t)$. At the end of ramp the ideal output signal is given by C_o. This value is calculated from Eq. 8 for $t = t_o$ and by neglecting the second and third term. The relative error at a given time t can be defined as the difference between the ideal and actual output signal divided by the ideal end-value. This is expressed as:

$$\epsilon\% = \frac{C_1(t) - C(t)}{C_o} \times 100, \quad (9)$$

where $C_1(t)$ is the ideal ramp output without time delay, $C(t)$ is the actual output at time t and C_o is the ideal ramp output at the end of sweep. The relative error ϵ actually denotes an output volt-

*op. cit., Nixon, p. 76.

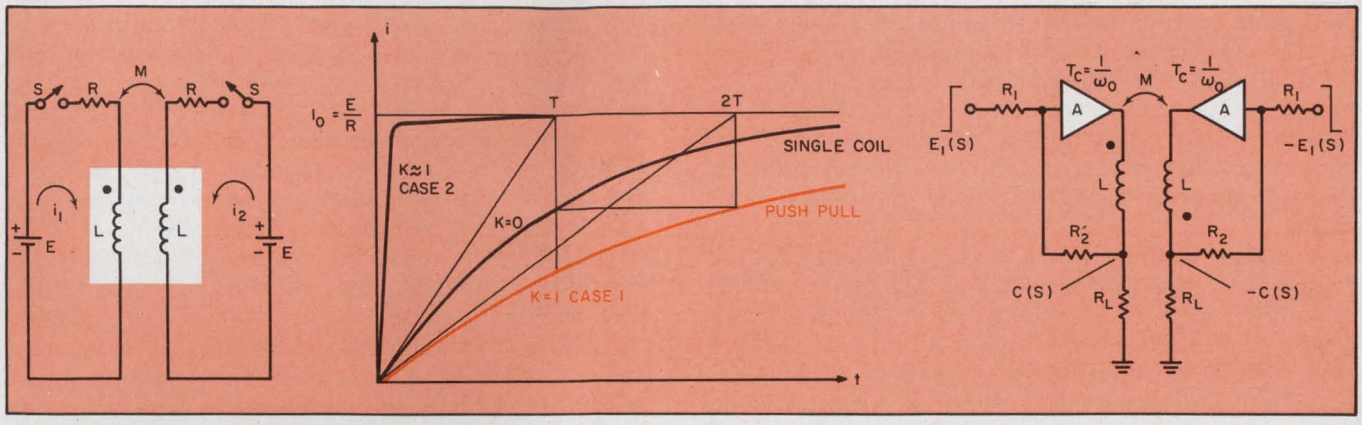

ⓐ ⓑ ⓒ

5. **Push-pull circuits are sometimes preferred** to single-ended deflection stages (a) because they offer constant load, less stringent power supply needs and ease of display referencing. Bandwidth and current rise time with the push-pull circuit configuration are essentially the same as with single-ended deflection (b). Actual amplifier circuit (c) shows the input-output transfer connections used in this mode.

age ratio, but because of the linear input-output relationship, it also represents the relative time lag Δt, referenced to the ramp duration t_o. If $t >> t_c$, the transient in the expanded Eq. 9 can be neglected, and the relative delay becomes

$$\epsilon\% = \frac{T_L + T_c}{t_o}\left(\frac{1+n}{1+n+A} \times 100\right) \qquad (10)$$

Equation 10 shows that the ramp delay is proportional to the ratio of the sum of amplifier and coil time constants to the ramp duration. Since amplifier gain A is generally large compared with n, the ramp delay is inversely proportional to A. Figure 3b is a plot of the ramp delay for different amplifier bandwidths and coil time constants, with as assumed gain of 100. If A were 1000, the delay would be 10 times smaller than indicated, assuming a constant-bandwidth situation.

As stated before, the coil resistance has been neglected in the preceding calculations. This is a valid assumption for low-inductance yokes. For large inductances, the coil resistance must be considered. Figure 4 shows the equivalent circuit for this case, where R_c denotes the dc coil resistance. The input-to-output transfer function is:

$$C(s) = \frac{E_1(s)\ \ (\alpha A n)}{\alpha A + (1+n)(1+sT_c)(1+\alpha s T_L)}, \qquad (11)$$

where $\alpha = R_L/R_L + R_c$, and $n = R_2/R_1$.

A comparison between Eqs. 2 and 11 shows that all formulas and curves previously derived for the case $R_c = 0$ can be used if the amplifier gain A and coil time constant T_L are replaced by αA and αT_L, respectively.

Push-pull offers design freedom

Push-pull operation of the deflection coil offers several advantages over single-ended deflection. Among these are a constant load on power supplies, less stringent ripple and regulation requirements, and ease of display referencing. From a bandwidth point of view, however, push-pull is virtually identical to the single-ended method.

To calculate the rise time of each half-axis current of a push-pull yoke and to demonstrate the interaction between the half axis coils, the equivalent circuit of Fig. 5a will be analyzed. For convenience, perfect circuit symmetry is assumed. Each half-axis deflection coil has an inductance L and a mutual inductance M defined by $M = kL$, where k is the coupling coefficient. For deflection yokes, k is approximately unity (practical values range from 0.92 to 0.96). When the switches (S) are closed simultaneously, the following applies:

$$i_1 R + L\frac{di_1}{dt} + M\frac{di_2}{dt} = E \qquad (12a)$$

$$i_2 R + L\frac{di_2}{dt} + M\frac{di_2}{dt} = E \qquad (12b)$$

Solving for i_1, the half axis coil current, produces

$$i_1 = I_o\left(1 - e^{-\frac{t}{T(1+k)}}\right), \qquad (13)$$

where $I_o = E/R$, $k = M/L$ and $T = L/R$. If the polarity of one coil is reversed without changing the source polarities, the terms containing M reverse sign, and the half-axis current becomes

$$i_1 = I_o\left(1 - e^{-\frac{t}{T(1-k)}}\right). \qquad (14)$$

A comparison of Eqs. 13 and 14 shows that in the former, the apparent coil inductance, as seen from the driving source, is approximately $2L$ because of the mutual coupling. In Eq. 14 it is very small, and the coil current rises very fast. But typical push-pull operation is accurately given by Eq. 13 because the driving voltages are out of phase and one coil polarity is also reversed simultaneously. Fig. 5b shows the current rise times for both cases, with the coupling coefficient k close to unity, as opposed to single-ended deflection, where k is zero.


Note that a 2:1 increase in rise time is evident if a single-ended coil is replaced by two push-pull coils of equal inductance. To maintain the response time, each half-axis inductance should be reduced by 50%. The number of turns per half axis is then 0.707 times smaller, and each half-axis

deflection current is 70.7% of its previous value. In this case the push-pull connection is less economical than the single-ended. Note also that if rise-time specification tolerate the larger inductance, it is then desirable to double the series resistor R_L. This effectively halves the coil current, thereby keeping the total power dissipation constant.


A better evaluation of what push-pull entails comes with the presentation of a more complete schematic. Figure 5c illustrates a true push-pull deflection amplifier with opposite coil and voltage polarities; it is functionally equivalent to Fig. 5a. Rise time and ramp delay for this circuit can be obtained from the previously derived formulas for single-ended deflection, provided the coil inductance value L is replaced by $L(1 + k) \approx 2L$.

Overdrive affects settling time

The exact determination of current settling-time presents great difficulties for several reasons. Because of the large number of poles in the actual feedback loop, high-order equations must be solved. These render the purely analytical method impractical. A graphical approach, such as the root-locus, can be adopted to predict the stability of a multi-pole system under steady-state conditions. It can also be used to reduce a more complex system to an equivalent, second-order system which can then be treated analytically.

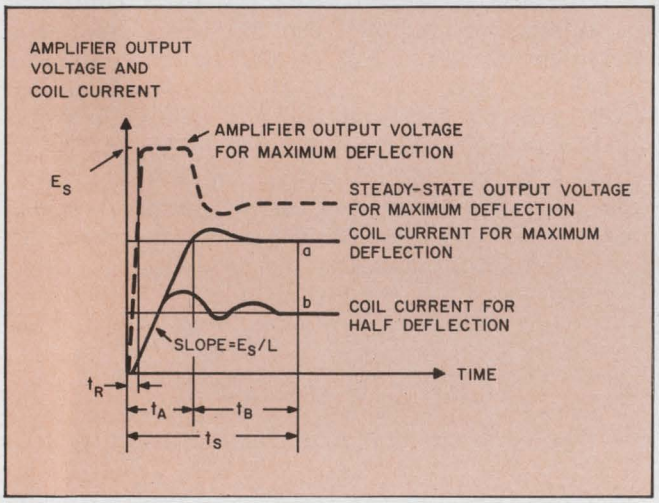

6. **Overdriven stages aren't faster!** The plot of output vs time for various overdrive conditions shows that settling time t_s remains fairly constant. Since overdriving does not speed up the settling time, it is not a recommend operating mode. Moreover, greater power is called for.

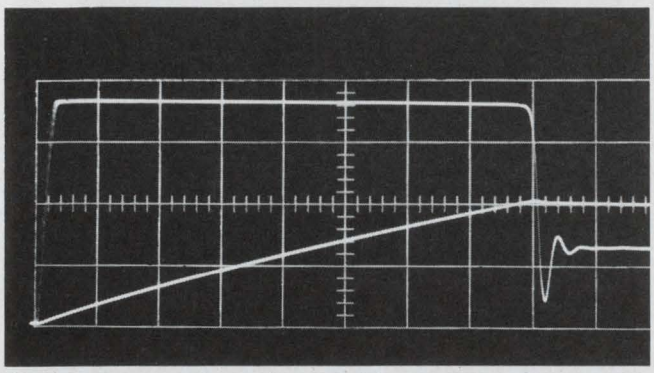

7. **Step-up display performance:** Coil voltage and coil current data taken from a single-ended deflection amplifier show good agreement with calculated values. For E_s=18 volts, L=25 μh, R_L=0.5 ohms and T_c=50 ns, the system exhibited a settling time of 17.0 μs. One vertical centimeter represents 5 units (volts and amps) and each horizontal centimeter 2 μs. Voltage is displayed as a step function and current as a ramp.

However, the root-locus method is valid only for small-signal analysis. For step inputs (for example, maximum center-to-edge deflection), both of the above methods are inadequate, because the deflection amplifier does not operate in its linear region. It is therefore necessary to consider separately the overdriven state of the amplifier and its contribution to settling time.

From Fig. 1 it can be seen that amplifier input voltage $E_{in}(s)$ is a function of the difference between signal input $E_1(s)$ and feedback voltage $C(s)$. Since $E_1(s)$ is instantaneously applied and $C(s)$ can only rise linearily toward its theoretical peak value E_s, the amplifier is initially heavily overdriven. Its output is equal to the supply voltage E_s. This condition will last until the feedback voltage is large enough to reduce $E_{in}(s)$ below the saturating level. Up to this point the coil current rises linearily with a rise time t_A of curve a in Fig. 6. This is due to the constant voltage E_s applied to the coil circuit consisting of L and R_L.

After a time t_A has elapsed, negative feedback assumes control, and it takes another time period (t_B) for the current to settle to within a given percentage of its final value. Time t_B can be obtained from the curves derived for the simplified, single-pole amplifier. The total settling time is then the sum of t_A and t_B.

Although the above calculations were made for the full deflection case, the total settling time $t_s = t_A + t_B$ remains relatively constant for lower input drives. In this case, t_A decreases but t_B increases because of the lower system damping constant the less-overdriven amplifier.

Figure 6 also shows the amplifier output voltage for full deflection. Because of the heavy initial overdrive, the amplifier output voltage rises fast to its maximum potential, which is approximately equal to E_s. As the feedback regains control of the output current, the amplifier output drops in an oscillatory manner to its steady-state level. Because of the overdrive and its associated phase delay, both output voltage and current are out of phase. In addition the slightly underdamped system returns to its settling level faster, and the oscillations are cancelled more rapidly (than with less overdrive).

If a single-deflection coil is connected in the collector circuit of the output stage, two different conditions exist. For a fast current increase, the output transistor is in saturation and the full supply voltage is applied to the coil. For a fast current decrease, however, the base of the output transistor is driven to cutoff, and the coil voltage at the collector terminal rises above the supply voltage because of the stored energy in the coil. This action continues until clamping at the protec-

tive diode occurs. Therefore the rise and fall times may not be equal.

In push-pull applications, however, this dissymmetry does not exist. Because of the tight coupling between the two half-axis coils, the voltage at the turn-off side is controlled by the turn-on voltage, which naturally cannot exceed E_s.

Practical example gives time data

An actual design problem in which the settling time is to be calculated will now be presented. This will demonstrate the design techniques and show how the various parameters operate.

Given is a single-ended deflection amplifier with an open loop gain (A) of 310 and whose first breakpoint of the gain-frequency curve (3dB point) is at f_o = 3.1 MHz. The supply voltage of the output stage is 18 volts. E_1, the peak input signal for full deflection (edge-to-edge) is 10 volts. Coil inductance L = 25 microhenries, sampling resistor R_L = 0.5 ohms, R_1 = 2k and R_2 = 1k (see Fig. 1). Let us now determine the 0.1% settling time of the deflection current.

Step 1. Find time t_A. Since the open loop gain of the amplifier is generally high, $E_{in}(s)$ can be neglected, and the peak feedback voltage $C(s)$ for full deflection can be found from $C(s) = E_1(s)R_2/R_1$. Thus $C(s)$ = 10 (1/2) = 5 volts. The peak coil current is $\Delta i = C(s)/R_L = 5/0.5 = 10$ amps. During time t_A, the full supply voltage of 18 volts is applied to the coil circuit. The time required to reach the final current level (10 amps) is given by $\Delta t = \Delta iL/E_s$. Thus t_A becomes $t_A = (10)25/18 = 14$ μs.


Step 2.

Find time t_B. To obtain an approximate value for the settling time, it is assumed that the current overshoot for full input drive is less than 5% and that the amplifier has a single breakpoint at the frequency f_o. The latter assumption means that the calculated settling time t_B will be smaller than the actual value, because the addition of amplifier poles increases the settling time. During its linear operating mode the amplifier has to settle from the initial overshoot level of 5% to within 0.1% (which corresponds to the signal settling from 100% to 2%).

The settling time t_B can be found from Fig. 2c, or, since m is large, more accurately from Eq. 5. Thus $\epsilon = e^{-(1+m)t_B/2tL} \times 100\%$ is used. Since an exponential function e^{-x} decays from 100% to 2% for x = 3.91, time t_B can be found from $t_B(1+m)/2T_L$ = 3.91, or t_B = 0.39 μs. The total settling time of the system is $t_s = t_A + t_B = 14 + 0.39 = 14.39$ μs.

Actual test results (see photograph in Fig. 7) show good agreement between measured and calculated rise time. The measured values for t_A and t_B are 16.0 and 1.0 μs, respectively. Time t_A is longer than calculated, because the loss in the load resistor R_L and the initial voltage rise time t_R were not considered. Time t_B is longer, because the amplifier time constant is actually larger if the higher-order poles are not neglected. ■ ■

NORTRONICS SETS THE STANDARDS AGAIN!

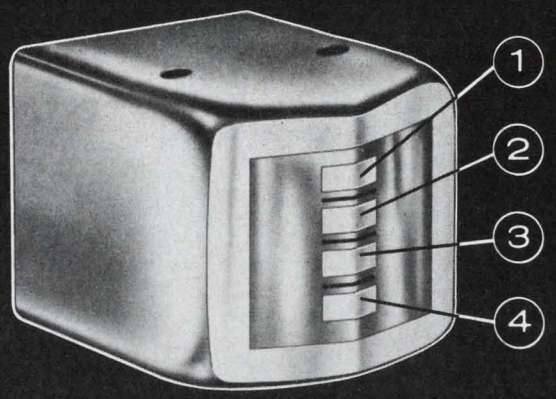

4-CHANNELS IN-LINE FOR 1/4" TAPE... AT LOW COST!

Laminated Core "BQQ" Heads Available "off-the-shelf"!

Here's a low-cost compact instrument quality 4-channel in-line record/reproduce magnetic tape head that offers exceptional multiple-channel performance and long dependable service... LOOK...

- 50 DB interchannel crosstalk rejection—each channel is completely isolated by shielding.
- Outstanding high frequency performance—featuring Nortronics premium laminated low loss core structure and precision deposited quartz gaps.
- Intimate tape-to-gap contact—from the unique Nortronics hyperbolic face contour.
- Reduced oxide build up—only a highly polished all-metal face can provide this feature.
- Superb shielding against external magnetic fields.
- ...and delivery is fast!

WILL FIT EXISTING 4-TRACK SYSTEMS

Available in a wide range of impedances to match all types of circuits. Types include Record only, Record/Reproduce or Playback only — gaps from 50-500 micro-inches. Ideal for Audio-Duplication, Background Music and 4-channel "in-line" stereo.

The "BQQ" magnetic head is another result of the "engineering-in-depth" policy which has made Nortronics the world's largest manufacturer of laminated core tape heads.

Write for Form 7177A for Complete Information.

Nortronics®


8185-K 10th Ave. No., Minneapolis, Minnesota 55427

ON READER-SERVICE CARD CIRCLE 138



We have a way with wire

(any way you want it)



For example. Let's take a spool of wire. We can straighten it and cut it. (Diameters from .004 to .125, in lengths from .020″ to 12 feet). And form it into shapes of all kinds. Or coil it. Head it in sizes as fine as .008″. Upset it even in multiples as fine as .009″. Or flatten it wherever you want. Pierce it to specs. Swage it in many ways. Or chamfer one end or both ends–make a full radius on .025″. And even give you any combination you may want.

Our range is from fine of .004″ to heavy .125″. Parts shown are subject to type of wire and temper. Send us your drawings and specs for an estimate. No obligation. And if you need **small metal stampings,** we do that too.

Write for free Bulletin 501

ART WIRE AND STAMPING CO.

17 Boyden Place, Newark, N. J. 07102

ON READER-SERVICE CARD CIRCLE 139

sampling made simple

with your existing Type 530, 540, 550, or 580* Series Oscilloscopes

Here's a new dc-1 GHz sampling unit with operation practically as simple as conventional plug-ins—as you can see by the front panel of the sampling plug-in. You need no pretriggers or external delay lines—the 1S1 unit has internal triggering with a built-in delay line.

Many other features add to the capabilities and operating ease of the Type 1S1, such as: A tunnel-diode trigger circuit that insures stable triggering through 1 GHz • A single control to select the sweep rate and magnify the display up to X100 when desired • Direct readout of the sweep rate even when magnified • A dc-offset control that permits observation of millivolt signals in the presence of up to ±1 volt input levels • Less than 1 mV noise in the display, with a smoothing control for further reduction • Output signals available at the front panel for driving chart recorders—and for powering an auxiliary time domain reflectometer pulser unit.

BASIC CHARACTERISTICS


RISETIME ≤0.35 ns. SENSITIVITY from 2 mV/cm through 200 mV/cm, in 7 steps. DYNAMIC RANGE ±2 V. Safe overload is ±5 V. DC OFFSET range is greater than ±1 V. SWEEP RATES from 100 ps/cm to 50 μs/cm, with ±3% accuracy normal or magnified. SAMPLES/CM continuously variable. TRIGGERING ac-coupled, ± internal, ± external, and free run. DISPLAY MODES are repetitive, single display, manual scan, or external scan. VERTICAL OUTPUT is 200 mV per displayed cm through 10 k. HORIZONTAL OUTPUT is 1 V per displayed cm through 10 k.

Type 1S1 Sampling Plug-In Unit	$1100
Type 281 TDR Pulser Unit	$95

U.S. Sales Prices, f.o.b. Beaverton, Oregon

**used with Type 81 Plug-In Adapter.*

For a demonstration, call your Tektronix field engineer.

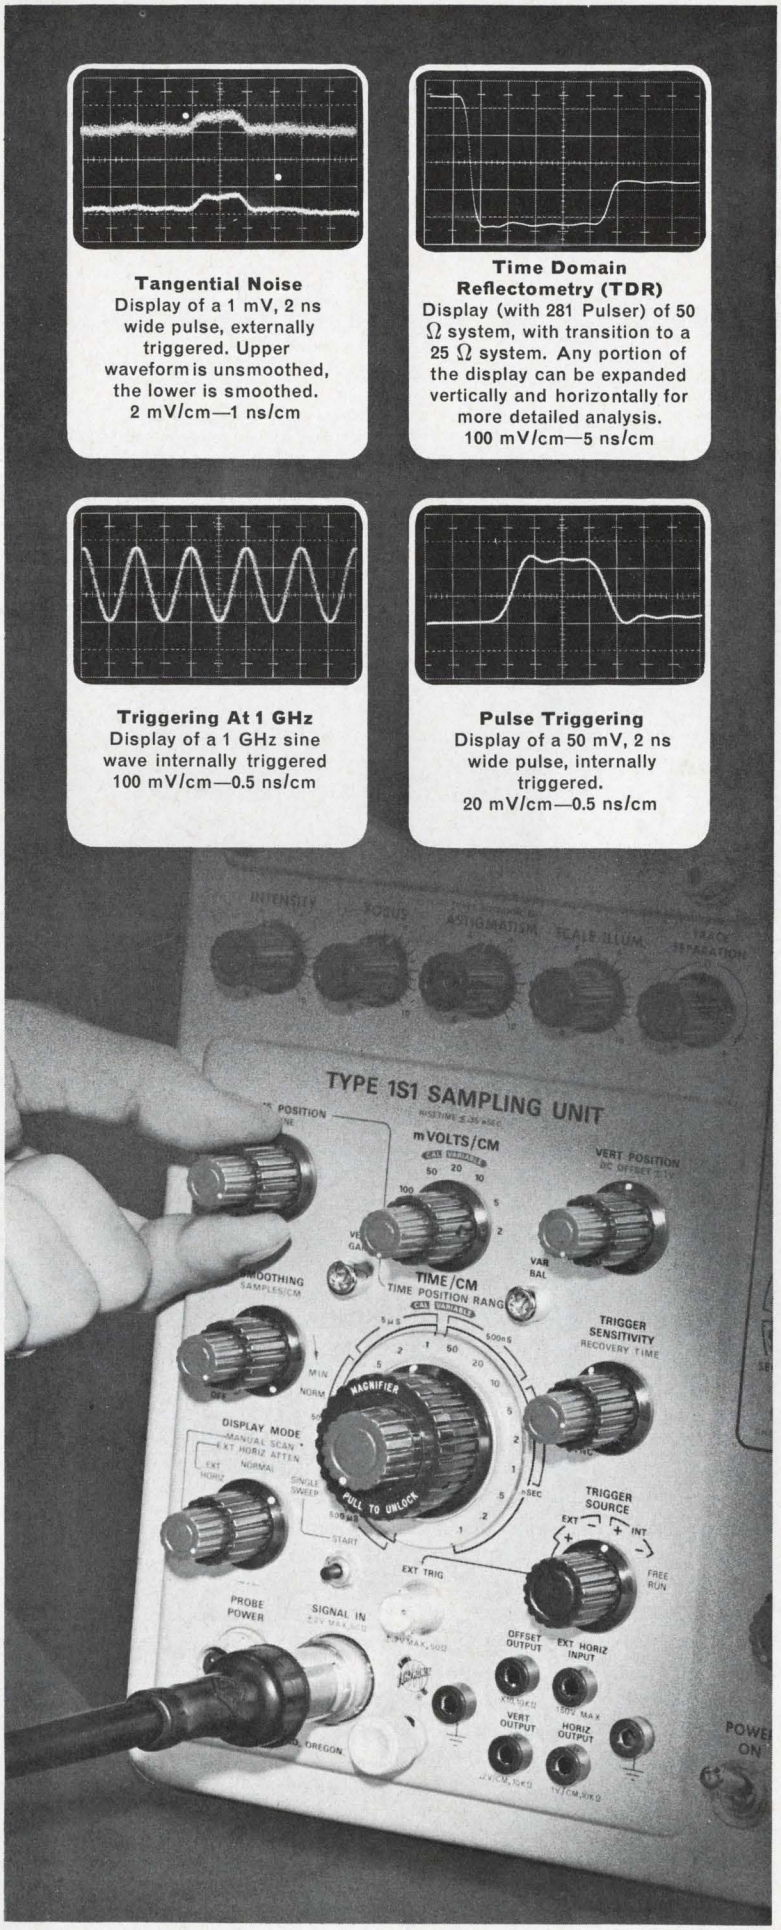

Tektronix, Inc.

SEE THE LATEST TEKTRONIX INSTRUMENTS AT IEEE—BOOTH 3F09-3F17

ON READER-SERVICE CARD CIRCLE 140

Buying a spectrum analyzer? Both conventional and plug-in units are available; so make sure you choose the type best suited to your needs.

Which superheterodyne spectrum analyzer is best? Conventional, with self-contained CRT and associated circuits? Or plug-in analyzer, which converts a standard oscilloscope into a spectrum analyzer?

From the standpoint of cost alone, the plug-in is usually cheaper in practice. It also has a decided size and weight advantage over a conventional analyzer. But that doesn't mean it would be the best choice for you.

Only when considered in the light of a particular application can the two types be properly compared. Both have advantages and disadvantages, and neither is inherently better than the other.

Sampling principle used

The superheterodyne spectrum analyzer, whether conventional or plug-in, is based on a sampling process. The incoming signal is heterodyned with the output of a swept-frequency local oscillator, and the difference frequency is sampled by a stationary narrowband IF amplifier. In this way the frequency-domain signal is converted to a time-domain signal, which can readily be displayed on an ordinary time-domain oscilloscope.

Plug-ins have advantages


By its very nature, a plug-in spectrum analyzer is smaller and lighter than a conventional analyzer, since it must fit into the available space of some standard oscilloscope. The conventional spectrum analyzer has its own separate scope.

The matter of cost is somewhat more subtle. The plug-in analyzer uses the power supplies, CRT, saw-tooth generator, trigger circuits, etc. that are in the main frame of a standard oscilloscope. So the cost of these elements must be added to that of the plug-in itself, if a true cost comparison is to be made. Nevertheless, because the volume of standard scope sales is at least 20 times that of spectrum analyzer sales, the cost of an oscilloscope is usually considerably less than that of the scope portion of a conventional spectrum analyzer. Thus a plug-in analyzer/scope combination can usually be obtained at a saving in cost over a conventional unit.

Plug-ins provide flexibility

One of the greatest advantages of plug-in analyzers is their increased flexibility. Most can be used with a variety of scopes. Instead of requiring a separate analyzer for every different application, a single plug-in can be used for widely divergent applications by merely mating it with a suitable type of scope.

One example of this flexibility is in the aligning of radar sets. The point of interest is the adjustment of pulse width and pulse shape to obtain a desired output spectrum. With a conventional spectrum analyzer, it is not possible to observe the modulating pulse and the output spectrum concurrently; however, with the use of a dual-beam scope and a spectrum analyzer plug-in, this becomes a simple matter.

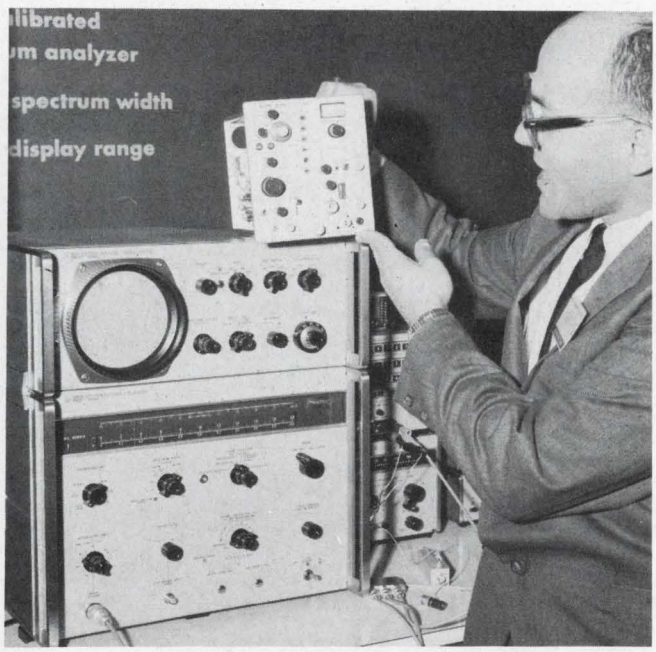

Significant size difference between a plug-in and a conventional spectrum analyzer is demonstrated by the author.

Morris Engelson, Project Engineer, Tektronix, Inc., Beaverton, Ore.

Another example occurs in oscillator stability measurements, where it is highly desirable to observe the spectrum over a long period of time (minutes and sometimes hours). The only way to do this with a conventional spectrum analyzer is to take photographs at periodic intervals and then compare the photographs to determine total drift. An easier method is to use a storage scope and spectrum analyzer plug-in, thus permitting the simultaneous display of all the desired information on the CRT.

Plug-in analyzers can also take advantage of many other features that are standard on most scopes but are not available on the scope portion of a conventional spectrum analyzer. These include wide-range calibrated time base, versatile triggering, Z-axis modulation capability and sweep expansion.

Such additional features permit many novel measurements for the spectrum analyzer plug-in that are difficult or impossible to make with a conventional spectrum analyzer. For example, one of the parameters of interest in pulsed RF investigations is the modulating pulse repetition rate. Only a spectrum analyzer with a calibrated time base is capable of supplying this information.

Another example involves the troublesome problem of radio frequency interference from equipment operating in the vicinity of the measurement site. Versatile triggering of the scope can be very helpful in such cases, if a trigger from the signal under observation is available. Once the sweep is triggered to run in synchronism with the desired signal, most other signals will tend to drift across the CRT, making identification of the desired spectrum much easier.

Plug-ins have disadvantages, too

But let's not forget that the plug-in spectrum analyzer also has certain disadvantages. These stem from the small volume available in the plug-in, and they include:

- No RF attenuator.
- Restricted frequency range.
- More crowded front panel.

The state of the art in attenuators and local oscillators is such that sufficient space is simply not available to incorporate all the hardware that certain applications require.

What about conventional analyzers?

The conventional, or self-contained, spectrum analyzer has all of the advantages offered by unrestricted size, weight and power consumption. Front panels are larger, accessories, such as attenuators, are incorporated as part of the package, and the number of local oscillators is limited only by economic factors. For many applications these features are important, and the conventional rather than the plug-in spectrum analyzer is the logical choice. An example of this is spectral measurements of high-power radar sets, where many kilowatts of peak power are involved. This power usually has to be attenuated if the spectrum analyzer is not to be damaged. Disregarding economics, the conventional analyzer is the logical choice because of its built-in attenuator.

In other applications the frequency range to be investigated may be quite large. Here, the conventional spectrum analyzer again has the advantage, since it can contain several RF oscillators and cover the required frequency range. The plug-in, on the other hand, is limited.

As for the performance of a spectrum analyzer, whether conventional or plug-in, it is determined by a series of parameters. But various manufacturers define these in different ways. When comparing specifications, therefore, you may encounter anomalies. They can best be resolved by getting in touch with the respective manufacturers.

Analyzer performance parameters

1. Frequency range: The total frequency coverage of the instrument. To analyze the frequency range thus defined, it is usually necessary to tune or band-switch by hand the frequency determining elements of the spectrum analyzer.

2. Dispersion (sweep width): The frequency difference that can be analyzed in one sweep. The dispersion can be considered as that frequency width over which sampling can be performed. The dispersion is always equal to or less than the frequency range.

3. Resolution: The minimum frequency difference between signals that can be discerned on the analyzer display. The resolution can be considered as the bandwidth of the window that is performing the sampling. Different makers and users tend to define the resolution bandwidth in a different way. Some consider that the resolving capability is defined by the IF amplifier 3-dB bandwidth, while others consider that the 6-dB bandwidth is more realistic.

4. Sensitivity: The minimum, or smallest, signal that can be observed, in view of the masking effect of the noise generated by the spectrum analyzer itself.

5. Maximum signal input: The maximum, or largest, signal that the system can handle without saturation or other degradation.

6. Total dynamic range: The ratio of maximum signal input to sensitivity.

7. Display dynamic range: The maximum signal difference that can be displayed simultaneously on the CRT screen. The display dynamic range can never be greater than the total dynamic range.

8. Sweep speed, or rate: The rate at which the sampling is performed.

Bibliography:

1. Engelson, M., et al. "Separate Frequencies with a Spectrum Analyzer." ELECTRONIC DESIGN, May 3, 1965, p 64.
2. Feigenbaum, M. "Introduction to Spectrum Analyzers." MICROWAVES, April, 1963, pp 56-60.
3. Frisch and Engelson. "How to Get More Out of Your Spectrum Analyzer." MICROWAVES, May, 1963, p 28.
4. "Microwave Spectrum Analysis." EDN, September, 1965, pp 162-170.

Plug-in analyzer specifications

Here is a list of specifications for available plug-in spectrum analyzers. The instruments are grouped according to manufacturer. Within these groups, they are listed in ascending order of maximum frequency capability. The specifications listed are as given by the manufacturers.

Specifications for conventional spectrum analyzers are given in ELECTRONIC DESIGN's 1965 Test Equipment Reference Issue, copies of which are available for $5.

Mfr	Model No	Frequency Range	Dispersion Range	Resolution Bandwidth	Max Signal Input (volts)	Price approx $	Compatible Oscilloscopes
ANALAB	SA101-1	dc - 20 kHz	100 Hz - 6 kHz	10 - 100 Hz	500	875	Analab: 1100, 100R, 1120, 1120R, 1220, 1220R
	SA101-2	dc - 100 kHz	500 Hz - 30 kHz	35 - 250 Hz	500		
	SA101-3	dc - 500 kHz	2.5 - 150 kHz	150 Hz - 2 kHz	500		
FAIRCHILD	74-91A	10 Hz - 23 kHz	100 Hz - 6 kHz variable; 20 kHz fixed	10 - 100 Hz	240	820	Fairchild: 765, 765H, 766, 766H, 767, 767H, 765MH, 777
	74-92A	35 Hz - 115 kHz	500 Hz - 30 kHz variable; 100 kHz fixed	35 - 250 Hz	240		
	74-93A	150 Hz - 575 kHz	2.5 - 150 kHz variable; 500 kHz fixed	150 Hz - 2 kHz	240		
	74-94A	1 kHz - 2.3 MHz	10 - 600 kHz variable; 2 MHz fixed	1 - 8 kHz	240	950	
	74-96A	600 kHz - 36 MHz	100 Hz - 100 kHz	10, 35 and 100 Hz, and 2 kHz	0 dBm without RF attenuation; +25 dBm with	1250	
	74-97A	10 MHz - 4 GHz	10 kHz - 50 MHz	1 - 100 kHz	-30 dBm	ina	
MICROWAVE PHYSICS	MPR-U/TB	0.5 - 5 GHz	500 - 4500 MHz	5 - 10 MHz	0 dBm	1795	Tektronix: 530, 540, 550 series
	MPR-U/TA						Tektronix: 560 series
	MPR-X/TB	2 - 12 GHz	500 - 10,000 MHz	15 MHz	0 dBm	1795	Tektronix: 530, 540, 550 series
	MPR-X/TA						Tektronix: 560 series

Notes

1. For single sideband applications.
2. At specified sensitivity. Up to 108 MHz with harmonics, at reduced sensitivity.
3. Internal local oscillator.
4. Automatically programed when dispersion range is selected.
5. External local oscillator.

Abbreviations


ina Information not available

Mfr	Model No	Frequency Range	Dispersion Range	Resolution Bandwidth	Max Signal Input (volts)	Price approx $	Compatible Oscilloscopes
NELSON-ROSS	PSA-016	0.5 Hz - 2 kHz	10 - 600 Hz variable; 2 kHz fixed	0.5 and 50 Hz	500	945	Tektronix: all that use letter series plug-ins
	PSA-026					1150	Tektronix: 560 series
	PSA-036						Hewlett-Packard: 140A
	PSA-011	10 Hz - 20 kHz	100 Hz - 6 kHz variable; 20 kHz fixed	10 - 100 Hz	500	555	Tektronix: all that use letter series plug-ins
	PSA-021					760	Tektronix: 560 series
	PSA-031		100 Hz - 6 kHz				Hewlett-Packard: 140A
	PSA-012	35 Hz - 100 kHz	500 Hz - 30 kHz variable; 100 kHz fixed	35 - 250 Hz	500	625	Tektronix: all that use letter series plug-ins
	PSA-022		500 Hz - 30 kHz			830	Tektronix: 560 series
	PSA-032						Hewlett-Packard: 140A
	PSA-013	150 Hz - 500 kHz	2.5 - 150 kHz variable; 500 kHz fixed	150 Hz - 2 kHz	500	645	Tektronix: all that use letter series plug-ins
	PSA-023		2.5 - 150 kHz			850	Tektronix: 560 series
	PSA-033						Hewlett-Packard: 140A
	PSA-014	1 kHz - 2 MHz	10 - 600 kHz variable; 2 MHz fixed	1 - 8 kHz	500	845	Tektronix: all that use letter series plug-ins
	PSA-024		10 - 600 kHz			1050	Tektronix: 560 series
	PSA-034						Hewlett-Packard: 140A

Mfr	Model No	Frequency Range	Dispersion Range	Resolution Bandwidth	Max Signal Input (volts)	Price approx $	Compatible Oscilloscopes
NELSON-ROSS (con't)	PSA-201 (1)	600 kHz - 36 MHz (2, 3)	5 ranges selectable from 10 Hz/cm to 1 kHz/cm; variable from 1 to 10 kHz/cm	note (4)	−100 dBm (threshold) to −46 dBm (full scale in log); +2 dBm with attenuator	1600	Tektronix: all that use letter series plug-ins
	PSA-231 (1)		7 ranges selectable from 10 Hz/cm to 10 kHz/cm			1700	Hewlett-Packard: 140A
	PSA-200 (1)	500 kHz - 100 MHz (2, 5)	5 ranges selectable from 10 Hz/cm to 1 kHz/cm; variable from 1 to 10 kHz/cm	note (4)	−100 dBm (threshold) to −46 dBm (full scale in log); +2 dBm with attenuator	800	Tektronix: all that use letter series plug-ins
	PSA-230 (1)		7 ranges selectable from 10 Hz/cm to 2 kHz/cm			900	Hewlett-Packard: 140A
	PSA-311	1 - 300 MHz	10 kHz/cm to 10 MHz/cm	5, 10, 50 and 100 kHz	−30 dBm	1200	Tektronix: all that use letter series plug-ins
	PSA-331					1300	Hewlett-Packard: 140A
	PSA-510	10 MHz - 15 GHz (5)	0 - 1 GHz	5, 10, 50 and 100 kHz	−30 dBm	1250	Tektronix: all that use letter series plug-ins
	PSA-530					1350	Hewlett-Packard: 140A
TEKTRONIX	1L10	1 - 36 MHz	Calibrated: 10 Hz/cm to 2 kHz/cm; Search: 20 kHz +1 kHz/MHz dial freq.	10 Hz - 1 kHz; Search: 10 kHz	¼ watt (+24 dBm)	1200	Tektronix: all that use letter series plug-ins
	3L10					1300	Tektronix: 561 561A 564
	1L20	10 - 4200 MHz	1 kHz/cm to 10 MHz/cm; 10 kHz - 100 MHz full screen	1 - 100 kHz	−30 dBm	1995	Tektronix: all that use letter series plug-ins
	1L30	925 MHz - 10.5 GHz					

And now E-I is *expanding* its Engineering Service on

CUSTOM and SPECIAL SEALING

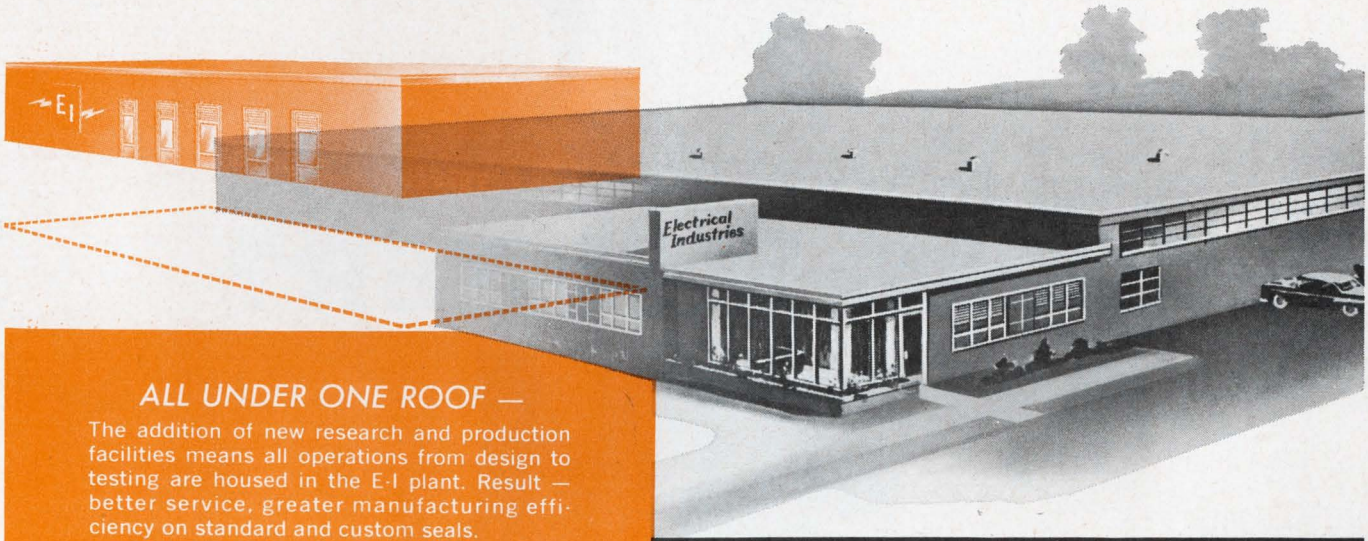

ALL UNDER ONE ROOF —

The addition of new research and production facilities means all operations from design to testing are housed in the E-I plant. Result — better service, greater manufacturing efficiency on standard and custom seals.


See us at the I.E.E.E. Show
BOOTHS 2F31-2F33

Industry's Most Complete Line of Sealed Terminations *plus* On-the-spot Engineering Assistance Nationwide!

The Electrical Industries line of hermetically sealed components is recognized industry-wide for high reliability and broad design versatility. E-I offers designers the flexibility and economy of standardized production on all types of seals from single and multilead terminals to subminiature closures.

For proven performance in both commercial equipment and space age projects, specify the seals employed by leading manufacturers. Fast nationwide field service is available to help work out your design problems.

Write on company letterhead for a copy of the new Electrical Industries Catalog GC 65, or send details or sketches for recommendations on any sealing requirements.

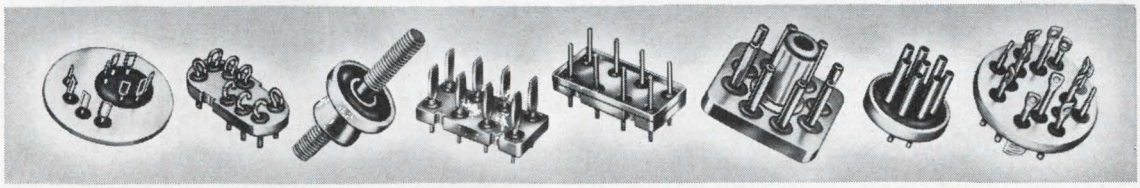

The products illustrated above are typical of the thousands of special-application hermetic seals and components made to customers' exacting specifications; also shown are customer-manufactured parts that have been hermetically sealed by Electrical Industries.

A Division of Philips Electronics and Pharmaceutical Industries Corporation

ELECTRICAL INDUSTRIES


MURRAY HILL, NEW JERSEY 07971—Telephone: (201) 464-3200

PATENTED IN U.S.A., NO. 3,035,372; IN CANADA, NO. 523,390; IN THE UNITED KINGDOM, NO. 734,583; OTHER PATENTS PENDING

ON READER-SERVICE CARD CIRCLE 141



Philter or FILTER?

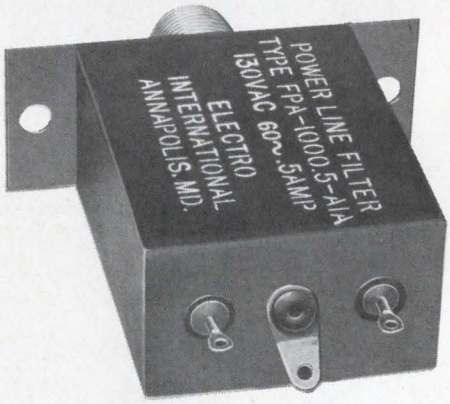

Some RFI filters are a little like good luck charms. Install them, cross your fingers, and hope they work.

But that was before Electro International offered their Power Line Filter series—tested and warranted to eliminate interference as specified by applicable military and commercial specifications. These current carrying filters were developed as a result of Electro International's basic work in controlling RFI. Because they could not find a supply of filters which would reliably reject broadband RFI, they built their own, to meet their own critical standards. Now, these same high attenuation filters are available to you, with inherent quality that means you can be confident that each will perform as a reliable component of your system.

TYPE	CURRENT RATING	INSERTION LOSS			CASE SIZE**			MOUNTING FLANGES
		DB	FROM	TO	WIDTH	LENGTH	DEPTH	
	(Amperes)					(Inches)		
FPA-1000.5-A1 (*)	½	40	0.150 MC	1 KMC	1¾	2¼	1	
FPA-1000.5-B1 ( )	½	60	0.150 MC	1 KMC	1¾	2½	1	
FPA-1000.5-C1 ( )	½	80	0.150 MC	1 KMC	1¾	3½	1	Mounting (A)
FPA-1000.5-D1 ( )	½	60	0.100 MC	1 KMC	1¾	2¼	1½	
FPA-1000.5-E1 ( )	½	70	0.100 MC	1 KMC	1¾	2½	1½	
FPA-1000.5-F1 ( )	½	100	0.100 MC	1 KMC	1¾	3½	1½	Mounting (B)
FPA-1001-F1 ( )	1	60	0.300 MC	1 KMC	1¾	3½	1½	
FPA-1003-G1 ( )	3	60	0.300 MC	1 KMC	2¼	2¾	1½	
FPA-1005-K1 ( )	5	60	0.300 MC	1 KMC	3	3½	1½	Mounting (C)
FPA-201 ( )	1	70	0.150 MC	1 KMC	2 5/16	2 11/32	1⅝	
FPA-203 (C)	3	60†	0.150 MC	1 KMC	3 1/16	3 9/16	1 9/16	(C) MTG. ONLY
FPA-205 (C)	5	60†	0.150 MC	1 KMC	3 1/16	3 9/16	1 9/16	(C) MTG. ONLY

**Not including mounting brackets, terminals and connectors † 80 db at 0.400 kc to 1 kmc
* ( ) Letter assigned according to method of mounting desired by customer.

The BIG "E"

ELECTRO INTERNATIONAL, INC.

Write or call collect for detailed specifications, prices, and prompt delivery: Electro International, Inc., Box 391, Annapolis, Maryland 21404. TEL. 301-263-2661, TWX 301-267-8275.

A DIVISION OF HONEYWELL


VISIT ELECTRO INTERNATIONAL AT THE IEEE SHOW—BOOTH NO. 2A36

ON READER-SERVICE CARD CIRCLE 142

Where do you go when you need...

...a new linear analog circuit? Norden.

Norden engineers have devised computer-aided techniques that can turn the most complex requirements into integrated microcircuits in only a few days.
Norden "Master Dice" breadboards contain all elements required by a wide variety of advanced microcircuits, but *without* interconnections.
Simply tell Norden what connections you want. Within hours, we'll show you a low-cost, fully integrated microcircuit.
You can have quantity production quickly following your acceptance tests.




...a brush-type encoder, guaranteed for 7.5 million revolutions? Norden.

Only Norden produces the new Binary E Series brush-type encoders, *guaranteed* a life of 7.5 x 10^6 revolutions.
The longer life of this new family frequently allows them to replace non-contacting encoders. This can mean substantial savings—Norden Binary E Series cost up to 75% less installed than non-contacting encoders. Available in 7-, 13-, and 19-digit models.

...a Size 11 encoder that can really take it? Norden.

Norden's new Size 11 encoder was subjected to the most punishing qualification tests ever devised: temperature ranging from —80°C to +70°C, altitudes from sea level to 50,000 feet, extremes of vibration and acceleration, salt water baths and dust blasts.
Size 11's registered more than 850 million error-free operations at varying speeds.
These high-performance encoders can meet your most demanding requirements.

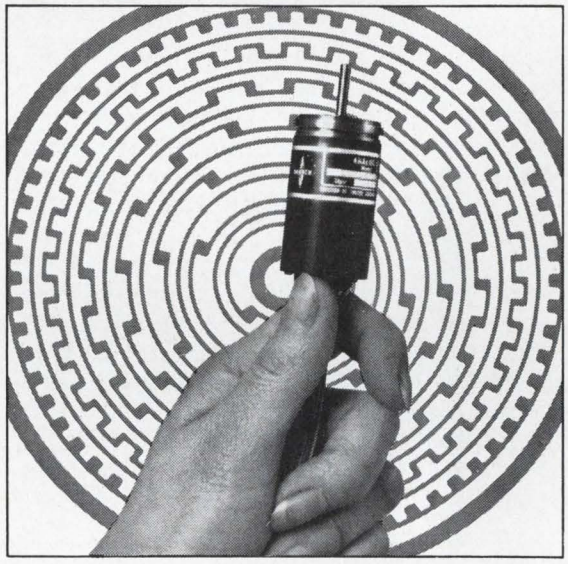

Since the answer to all three questions is Norden, why not phone or write us? Norden Division of United Aircraft Corporation, Norwalk, Connecticut 06586. (203) 838-4471.

Norden DIVISION OF UNITED AIRCRAFT CORPORATION
NORWALK, CONNECTICUT

See us at Booths 2C43-50, IEEE Show.

ON READER-SERVICE CARD CIRCLE 143

Carpet plotting is easy, and it increases interpolation accuracy. Simple to construct, the plots allow visual pinpointing between families of curves.

Are carpet plots "foreign" to you? Or maybe you shy away from them because the graphs seem hard to set up? A simple, mechanical retracing process should prove helpful to you in constructing and using these plots.

Basically carpet plotting is just another way of presenting a three-variable function that is usually plotted as a family of curves. Carpet plotting adjusts the family of curves to provide accurate visual interpolation within each curve.

Carpet plots are easy to construct. Leave the first curve of the family intact. Then merely step each successive curve the equivalent of 10 minor units on the graph paper. This forces the family of curves into a carpet format.

Typical applications include the use of such plots to determine the operational characteristics of vacuum tubes and semiconductors.

Since carpet plotting is based on linear stepping, the process can be used for all rectangular coordinate format graphs, semi-logarithmic format graphs and even polar coordinate format graphs. However, because of the linear stepping process, the method is not applicable to double logarithmic function plots.

To see how easy the method works, construct a sample carpet plot, with a large grid presentation for simplicity. (It is recommended that 8-1/2 x 11 inch graph paper be used, with a scale of 10 x 10 to the half-inch or 10 x 10 to the centimeter.)

The plotting consists of six steps:

1. **Draw a family of straight lines** from the x-y origin, as shown in Fig. 1. Four random straight lines are used in this sample, to keep the plotting simple. Since the family plot will be expanded in later steps, the x axis is limited to cover only one-half of the graph paper.

2. **Place another sheet of graph paper** of the same grid on top of the first. Trace the y axis (independent variable in this case) and copy the scale. Next add line $b = 4$, and highlight $x = 1$, 2 and 3, as shown in Fig. 2.


3. **Slide the top graph 10 small units** (one major division) to the left, maintaining the coordinate scale digits in correct position, and line up the vertical and horizontal grids accurately. Trace line $b = 3$, and highlight $x = 1$, 2, 3 and 4, as shown in Fig. 3.

4. **Repeat step** 3 for $b = 2$ and $b = 1$ to produce a graph similar to that in Fig. 4. Note that the original grid line, $x = 1$, is no longer a single vertical line but a series of points on $b = 4$, 3, 2 and 1, as a result of the stepping process.


5. **Join the highlighted marks** for $x = 1$ with a smooth curve or straight line, as the case may be (Fig. 5). Whether a line or curve is required depends upon the family of lines or curves selected. In the example shown here the points fall in a straight line.

6. **Repeat step** 5 for $x = 2$, 3 and 4 and $x = 0$. Note that $x = 0$ is now a horizontal line running between $b = 4$ and $b = 1$ and not the x-y origin shown in Fig. 1. Also observe that the graph paper's minor vertical grid lines separate the x and b variable curves into 10 divisions, as indicated in the upper portion of Fig. 6. Only the vertical grid lines are used to construct the intermediate values of x and b, since the selected family division steps were based *only* on the vertical grid scale.


Edgar R. Bourke 2d, Raytheon Company,
Space & Information Systems Div., Lexington, Mass.

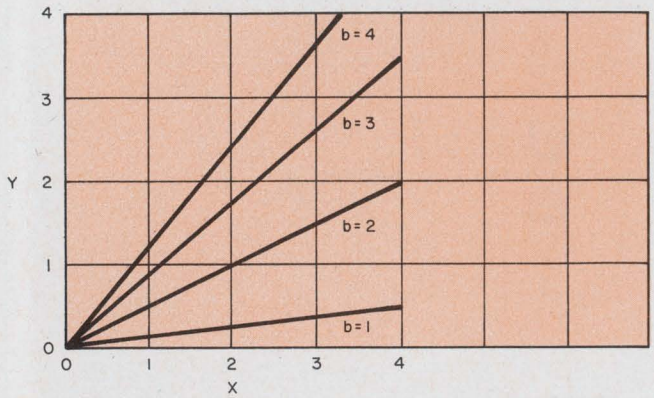


1. **Sample plot to be used** in demonstration of carpet plotting.

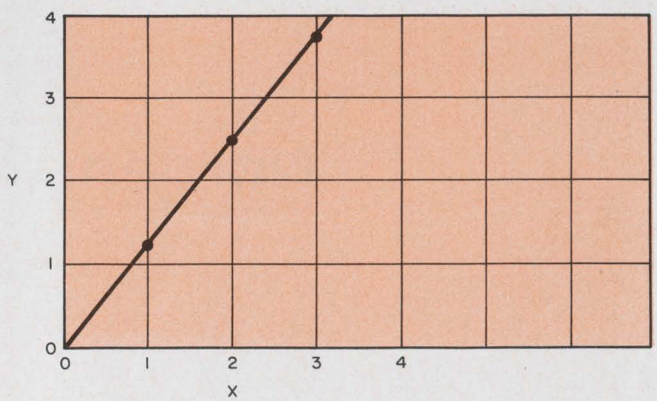


2. **Overlay made by tracing** scale and b = 4 curve from Fig. 1.

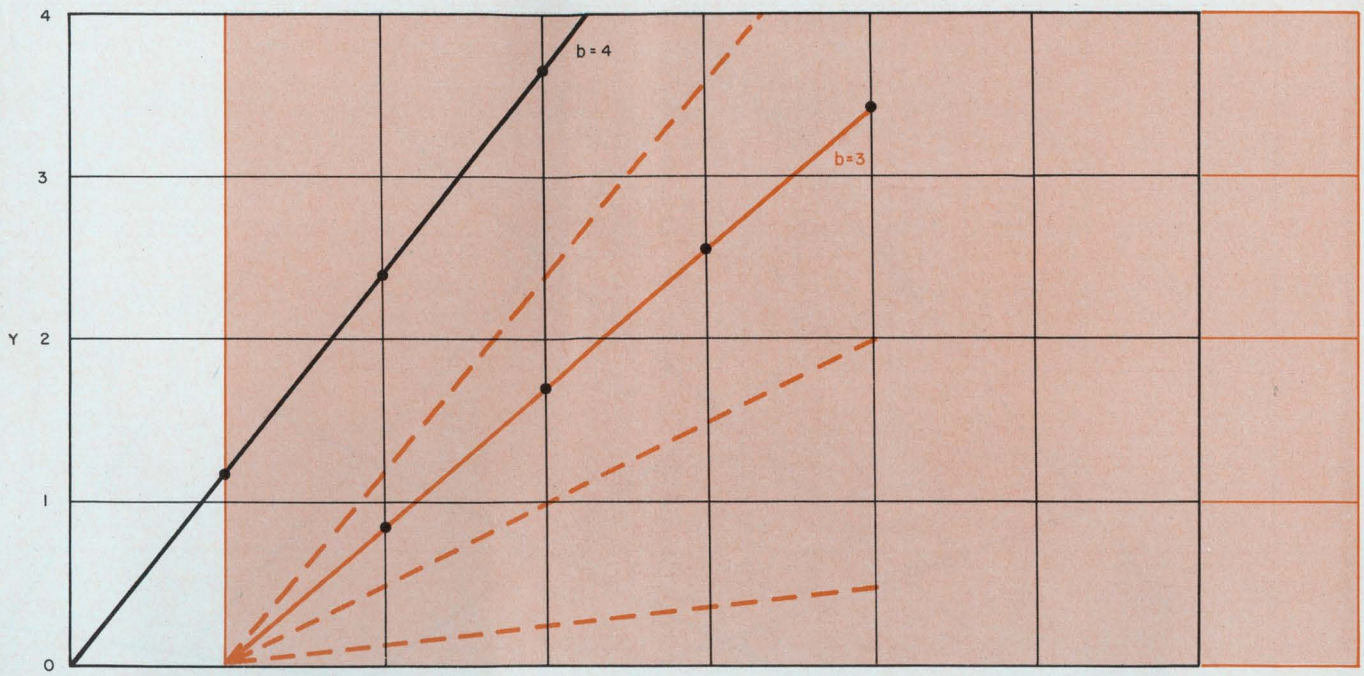


3. **Superimposition of Figs. 1 and 2.** The line b = 3 is traced on the overlay and the points X = 1, 2, 3 and 4 are highlighted. The top graph has been slid 10 small units (one major division) to the left.

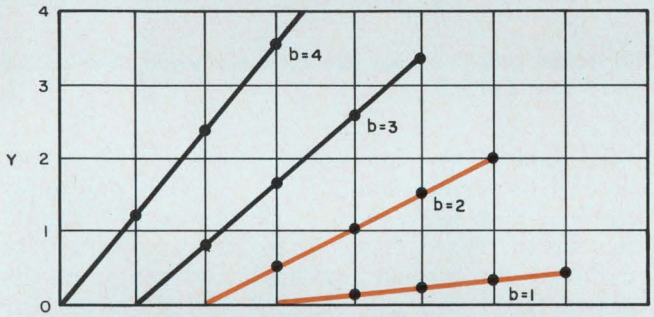


4. **Third step** shows tracing of lines for b = 2 and b = 1.

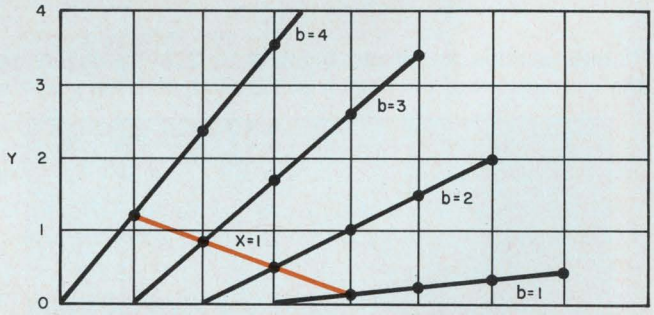


5. **Joining of X = 1** yields a straight line.

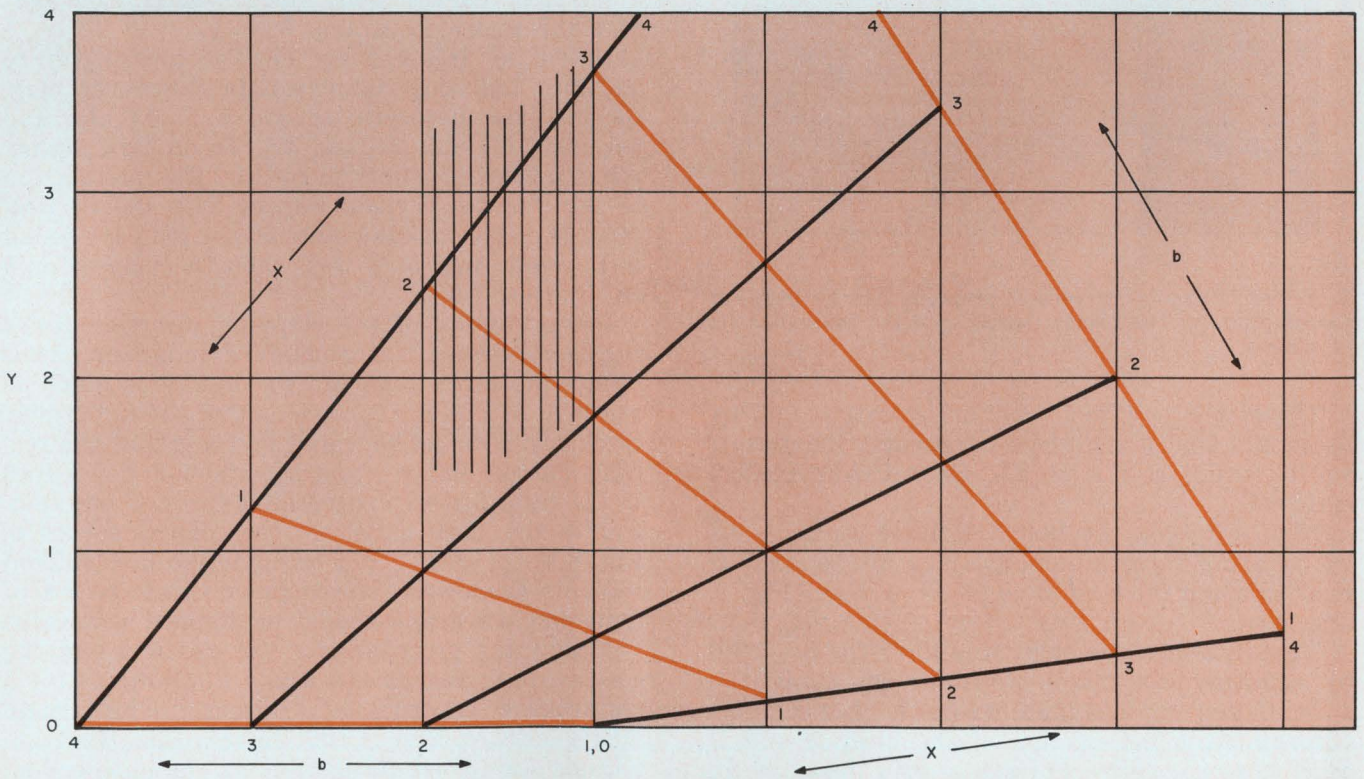

6. **Joining of X = 0, X = 2, X = 3, and X = 4** points on overlay. Interpolation is the next step.

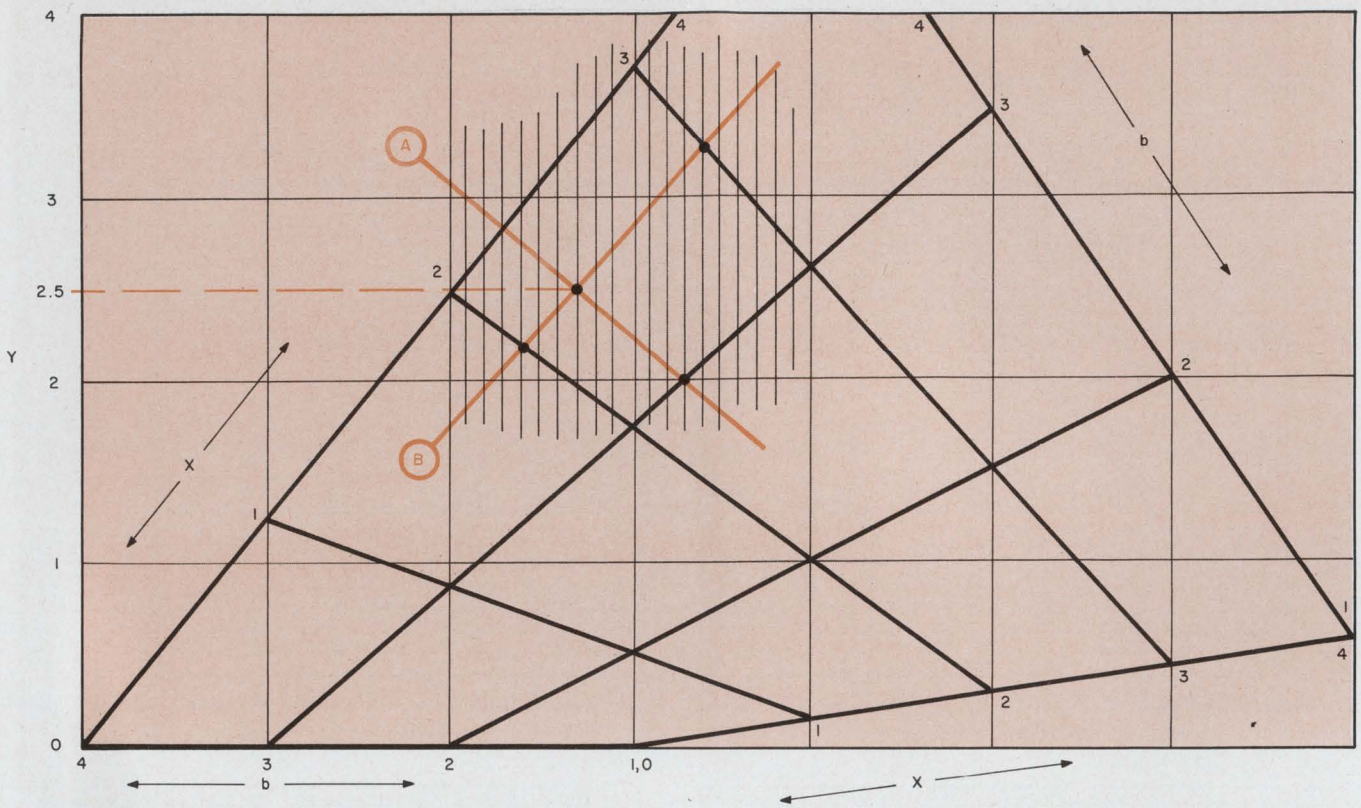

7. **Interpolation for** points where X = 2.3. By observing the intersection of the lines A and B relative to the graph's horizontal grid lines, we can fix the y value of b = 3.6 and X = 2.3 at 2.5.

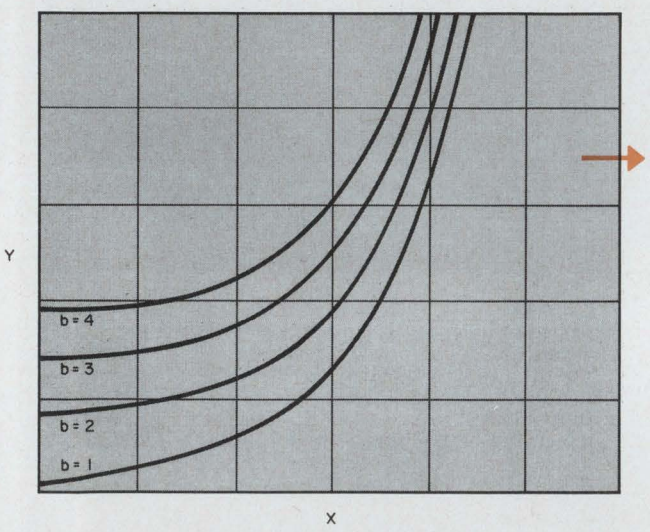

8. Either horizontal or vertical stepping can be used for carpet plotting. The choice depends on the particular set of curves.

The plot is now ready for interpolation, and let us assume that it is desired to establish the y value for $b = 3.6$ and $x = 2.3$. Only two steps are involved.

First, establish the curve (or line) for $x = 2.3$ by counting three minor divisions in the vertical grid up along the $b = 3$ and $b = 4$ lines (Fig. 7, line A).

Next establish the curve (or line) for $b = 3.6$ by counting six minor divisions up along the $x = 2$ and $x = 3$ line. (Fig. 7, line B). By observing the intersection of the lines A and B relative to the graph horizontal grid lines, we fix the y value of $b = 3.6$ and $x = 2.3$ at 2.5.

To expand the functional scope of the carpet plot, let us assume that the $b = 2$ line was missing. The step between $b = 3$ and $b = 1$ should then be increased from 10 to 20 minor units, to maintain the proper interpolative scale of the carpet. After the $x = 1$, 2, 3 and 4 curves (or lines) are added to the plot, the intersection of the x variable curves with the 10-unit scale permits the inclusion of line $b = 2$.

Extending this concept enables the plotter to add any additional intermediate curves. It may, for instance, be useful to add $x = 0.5$, 1.5 and 2.5, and $b = 1.5$, 2.5 and 3.5. To do this, simply join the locus of points formed by the intersection of the x and b variable curves with the vertical grid. The appropriate points on the grid are found in the same way as y was when the values for b and x were given.

Determination of the stepping direction for a family of curves is a matter of judgment; it is always desirable to spread the family as much as possible. In Fig. 8 it is obvious that the uppermost black curve should be traced first and that the rectangular coordinate graph paper should be stepped to the right for each succeeding curve of the family. On the other hand, for the colored curves in Fig. 8 the x axis should be made the independent variable, the lowest colored curve should be traced first, and the graph should be stepped vertically.


Finally the procedure for the use of a semi-log coordinate format is essentially the same as for a rectangular coordinate format. The main difference, however, is that in this case the logarithmic scale must *always* remain the independent variable scale. ■ ■

Prompt delivery From Hyvac, on your High Voltage Vacuum Relays... specialists in vacuum electronic components

VACUUM RELAYS










HYVAC TYPE	HC-1†	HVS-1	HVS-4	HVS-10	H-5	H-7	H-8	H-9
Contact arrangement	SPDT	SPDT	SPDT	SPDT	SPST N.O.	SPDT	SPDT	SPST N.C.
Rated Operating Voltage (KV)	2.5	17	17	17	5	5	15	15
Test Voltage (KV)	5	22	22	25	7.5	7.5	20	20
Continuous Current, max. (amps RMS)	18	7	8	8	4	4	15	15
Contact resistance, max. (ohms)	0.010	0.015	0.020	0.015	0.015	0.020	0.015	0.015
Operating time, max. (ms)	6	20	15	20	10	10	15	15
Coil resistance (ohms ± 10% @ 25°C)	335	128	40	65	250	200	250	250
Coil voltage (vdc, nominal)	26.5	28	24	40	24	24	26.5	26.5
Nominal Dimensions (inches — L × H)	.925D x 1¼	4¾ x 5	4¾ x 4½	4¾ x 3¼	¾ x 2	2⅞ x 2½	1⅛D x 2¾	1⅜D x 2¾
Mounting Style*	threaded base	foot bracket	foot bracket	foot bracket	foot bracket	foot bracket	threaded base	solder flange
Approximate unit price (1-9 pcs)	$59	$55	$48	$55	$62	$62	$98	$98

*Other styles available †Ceramic envelope










HYVAC TYPE	H-11/S2	H-12	H-16	H-17	H-18	H-19	H-20**	H-35
Contact arrangement	SPST NO.	SPDT	DPDT	SPDT	DPDT	DPDT	SPST, N.C.	SPDT
Rated Operating Voltage (KV)	12-air 18-oil	8-air 12-oil	12-air 18-oil	25-air	10	20	28	35
Test Voltage (KV)	15-air 20-oil	12-air 15-oil	15-air 20-oil	30-air	12	30	30	40
Continuous Current, max. (amps RMS)	15	15	15	25	10	20	75	10
Contact resistance, max. (ohms)	0.015	0.015	0.030	0.015	.020	.010	.003	0.015
Operating time, max. (ms)	18	18	20	25	15	40	25	30
Coil resistance (ohms ± 10% @ 25°C)	250	250	120	120	265	265	118	50
Coil voltage (vdc, nominal)	26.5	26.5	26.5	26.5	24-28	24-28	26.5	28
Nominal Dimensions (inches — L × H)	1D x 1 13/16	1 1/16 x 1 13/16	1⅜ x 3	2D x 3½	1½D x 2	2½D x 3½	2½D x 3 11/16	8 x 5
Mounting Style*	threaded base	threaded base	threaded base	flange base	threaded base	threaded base	threaded base	mounting bracket
Approximate unit price (1-9 pcs)	$105	$110	$128	$128	$135	$135	$150	$110

*Other styles available **H-21, same spec as H-20, except H-21 is SPST, N.O.

HYVAC, specialists in vacuum electronic components, manufactures a complete line of high voltage vacuum relays in glass or ceramic for prompt, and in many cases, immediate off-the-shelf delivery. These relays are widely used in ECM, communications, sonar, radar, pulse-forming networks, medical electronics, and other high voltage equipment. Many HYVAC models are completely interchangeable with other manufacturers types.


HYVAC's broad line and "Quick Reaction Time" is geared to your most critical delivery schedule. We have the high vacuum experience, design and production capability to provide special modifications of our standard off-the-shelf designs in unbelievably short order. HYVAC, a company small enough to be responsive, large enough to be responsible.

For complete technical information call your nearest HYVAC sales-engineering representative or write directly to us.


HYVAC

HIGH VACUUM ELECTRONICS, INC., 538 MISSION STREET, SOUTH PASADENA, CALIFORNIA • (213) 682-2149 • TWX 213-449-2552


ON READER-SERVICE CARD CIRCLE 144

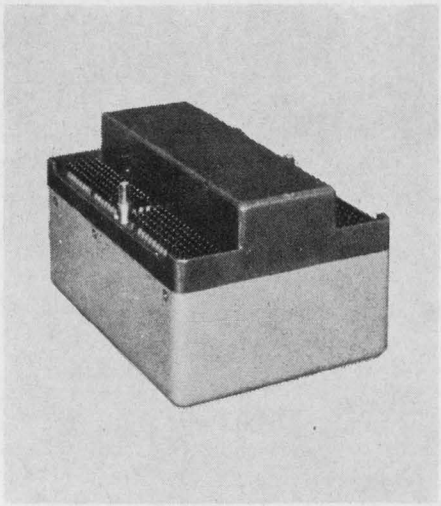


Customer: Control Data Corporation
128 x 64 x 12 capacity, temperature controlled stack for Polaris program

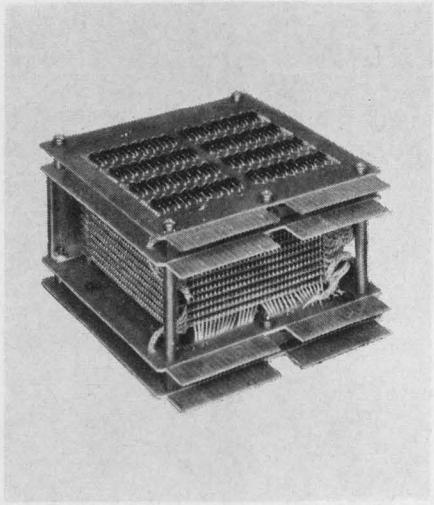


Customer: Honeywell
64 x 64 x 9 stack for H-200 computer

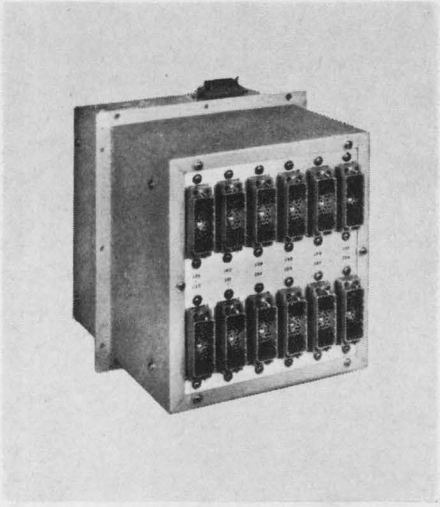


Customer: Scientific Data Systems
16,384 x 25 stack for 930 computer

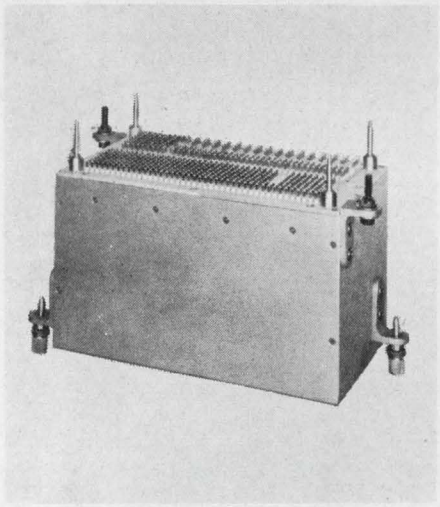

Customer: Bunker-Ramo Corporation
16,384 x 16 stack for BR 133 computer

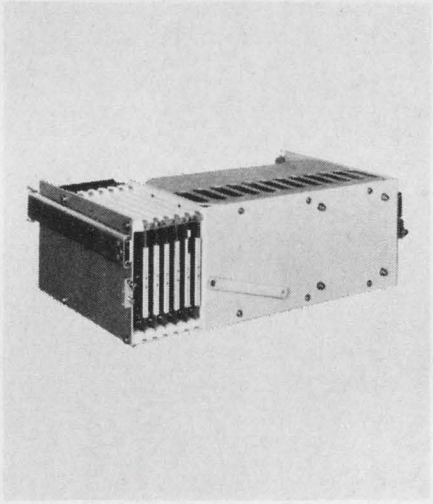

Customer: Dynatronics
2048 x 19 stack for simulator system

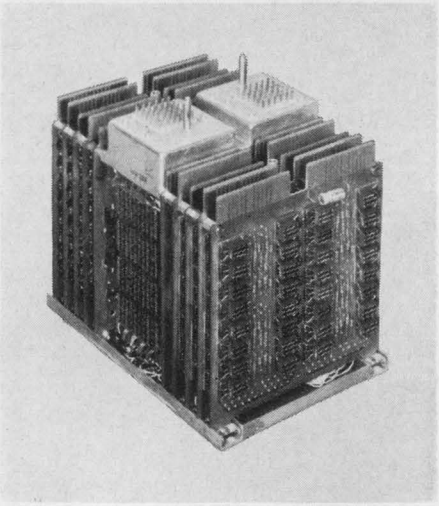

Customer: Honeywell
128 x 128 x 9 stack for H-2200 computer

Whatever you need in a core memory stack... FABRI-TEK can build it!

These stacks are typical of the diverse requirements our customers ask us to meet. Their problems range from speed to packaging, from temperature to size.

The solution to a stack problem can take many forms. We work with all core sizes and types to suit your system needs. We'll give you any word selection scheme, any type termination, any capacity. Packaging can include heaters, ground planes, ruggedized circuitry or your own hardware, if you desire.

Your stack design may not look like any of these, but it's a good bet we've built its cousin.

Put Fabri-Tek memory technology to work on your stack problems. Write Fabri-Tek Incorporated, Amery, Wisconsin.

Phone: 715-268-7155. TWX: 510-376-1710.

FABRI-TEK LEADS IN MEMORY TECHNOLOGY

Check with Fabri-Tek for rewarding engineering opportunities!

ON READER-SERVICE CARD CIRCLE 145

EIMAC

25 kW magnetron is now at work putting the crackle in potato chips for Cryodry Corporation


Microwave heating has recently emerged from the laboratory and is now finding its place in the food processing and other industries. Because it is fast, efficient, and highly controllable, microwave heating is particularly suitable for on-stream operations.

For example: Revolutionary new potato chip processing machinery manufactured by the Cryodry Corporation, a subsidiary of the Armour Company, uses the EIMAC EM15LS magnetron in a conveyorized microwave oven to finish-dry to optimum color potato chips which have been pre-cooked in oil.


M. R. Jeppson, President of Cryodry, says: "We chose Eimac's new magnetron to power our machinery because the tube has an unusually high dc-to-rf conversion ratio—80%—and promises a very competitive life cost per kilowatt hour of only 2¢."

Moisture removal is only one of the tasks which industry can assign to microwave heating. Others include chemical catalysis, distillation, puffing, fermentation, and sterilization. Eimac has built pioneering tubes to supply microwave power for this new technique. As fast as new applications for microwave heating arise, Eimac is developing appropriate power supplies. If you'd like to find out more about what *you* might do with microwave heating, write on your letterhead to *Microwave Marketing, Eimac.*

EIMAC
San Carlos, California 94070
A Division of Varian Associates

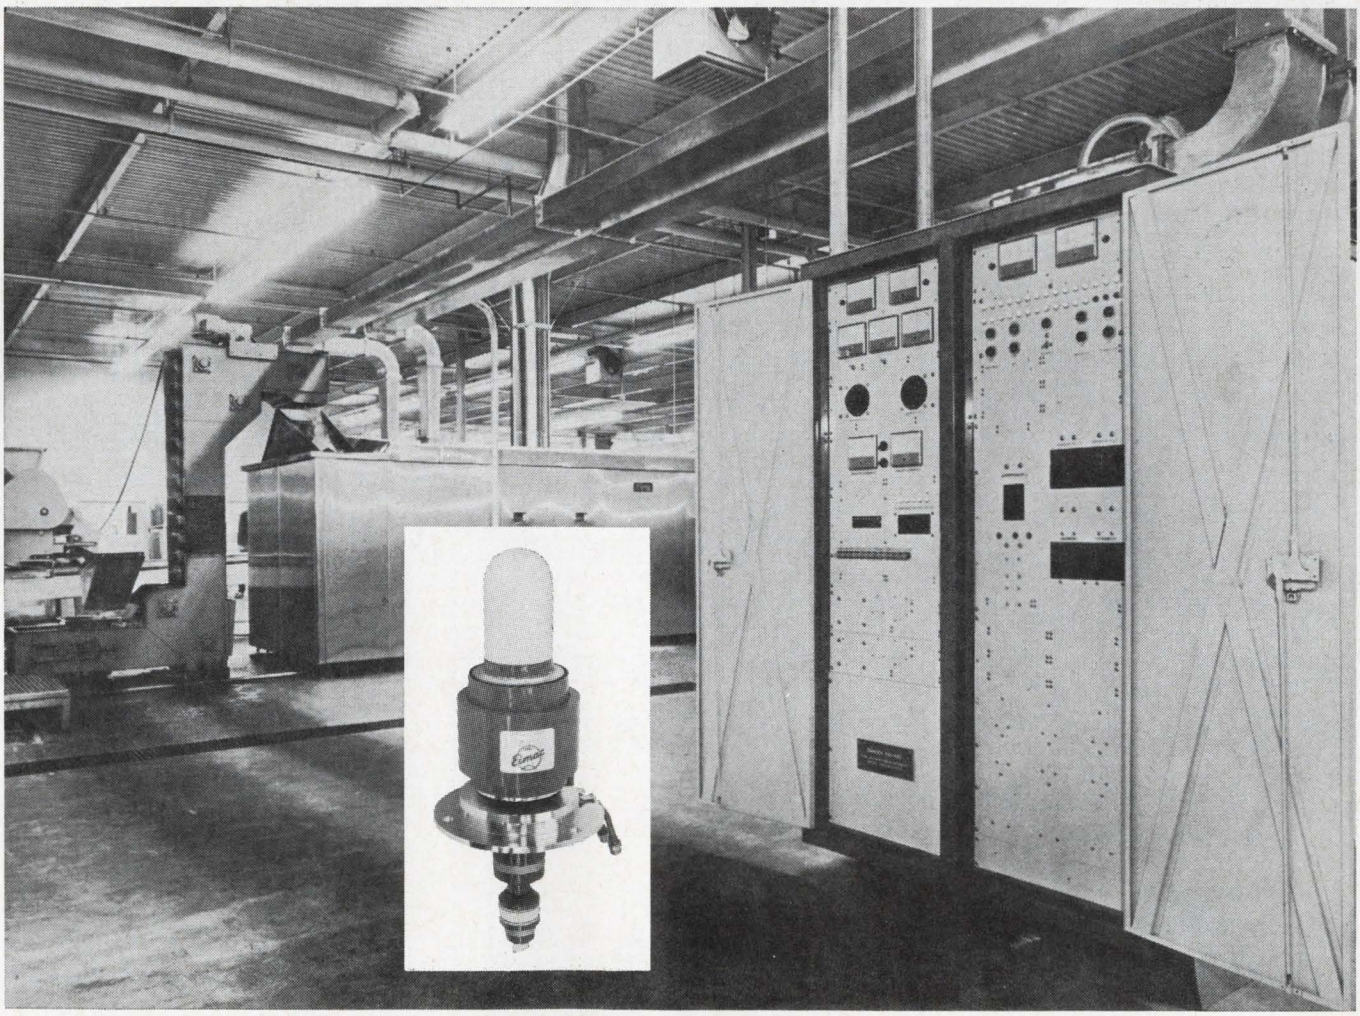

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 146

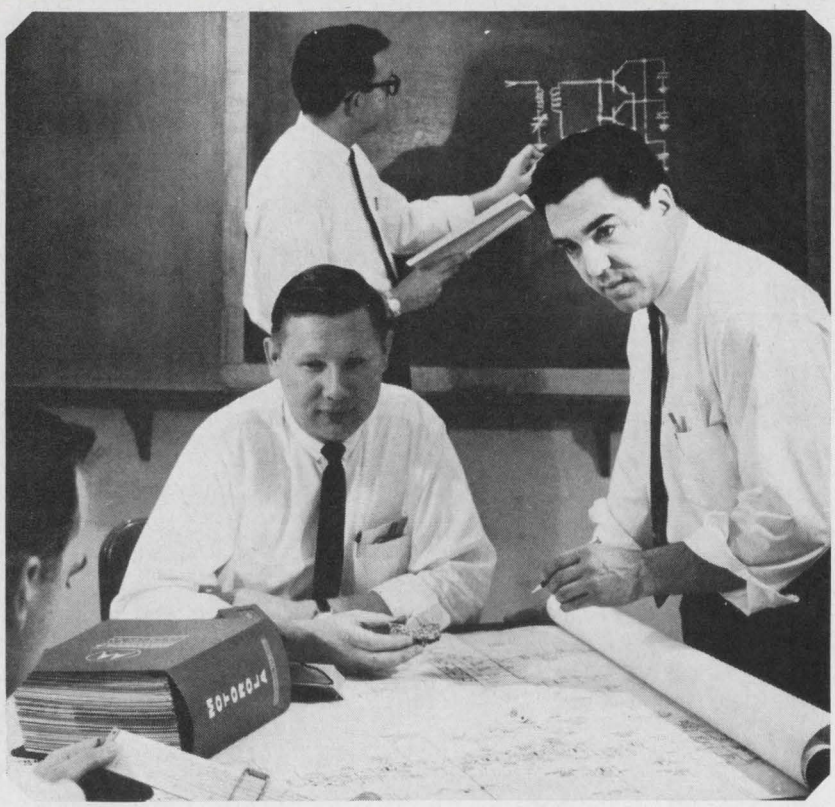

What do they mean by "an engineer's company"?

Some very successful companies are "sales oriented"—others, equally successful, receive their primary impetus from accounting, legal or business-management directions. Probably because of the highly technical nature of its product, Motorola has always been a company wherein engineering has been the moving force. At any management conference at Motorola, you'll find men think like engineers, and talk like engineers, because so many in the management echelon *are* engineers.

At Motorola the engineer achieves full professional status—because he is working in an environment where the state of the art has progressed to the point where only an "engineering oriented" management can direct the flow of achievement.

In this dynamic atmosphere, of course, the challenges are great—but equally rewarding for truly qualified engineers. Would you like to talk to us?

SYSTEMS ENGINEERS advanced R & D in radio communications systems related to Two-way, portable, mobile and radio-telephone equipment.

EQUIPMENT DESIGN high performance solid state receivers, transmitters, and data processing equipment for radar, communications, command and control, tracking and telemetry.

FAMILIARITY WITH STATE-OF-THE-ART statistical communications theory, advanced signal processing techniques, solid state r.f. techniques, ultra-reliability, antenna systems, advanced structural and thermal designs.

SECTION MANAGER direct engineers and support personnel in state-of-the-art communications, including r.f. systems and input-output devices.

CHIEF ENGINEER technical management of R & D group in advanced technology related to solid state r.f. communications.

CIRCUIT DESIGN ENGINEERS advanced R & D in receivers, transmitters, RF, digital, Color TV and automotive electronics.

DEVELOPMENT ENGINEERS advanced communications products in consumer, industrial and military electronics.

Excellent opportunities also available in Phoenix, Ariz.

Mr. W. H. HAUSMANN, Engineering Personnel Mgr., Dept. B, 4545 Augusta Blvd., Chicago 51, Illinois

An equal opportunity employer.

MOTOROLA inc.

ON CAREER INQUIRY FORM CIRCLE 905

Looking for a New Job?

- **Fill out one application . . .**
- **Check off the companies that interest you . . .**
- **We do the rest**

Contacting the job market takes only ter minutes with ELECTRONIC DESIGN's Ca reer Inquiry Service. To put Career Inquiry Service to work for you, fill in the attached resume. Study the employment opportunity ads in this section. Then circle the numbers at the bottom of the form that correspond to the numbers of the ads that interest you.

ELECTRONIC DESIGN will be your secretary, type neat duplicates of your application and send them to any number of companies you select—the same day the resume is received.

Career Inquiry Service is a fast, efficient way to present your job qualifications to companies recruiting engineering personnel—as confidentially and discreetly as you would in person. This service is the first of its kind in the electronic field, and one that engineers have used effectively since its inception in 1959.

We take the following precautions to ensure that your application receives complete, confidential protection:

- All forms are delivered unopened to one reliable specialist at ELECTRONIC DESIGN.
- Your form is kept confidential and is processed only by this specialist.
- The "circle number" portion of the form is detached before the application is sent to an employer, so that no company will know how many numbers you circled.
- All original applications are placed in confidential files at ELECTRONIC DESIGN and after a reasonable lapse of time they are destroyed.

ELECTRONIC DESIGN
March 1, 1966

CAREER INQUIRY SERVICE

USE BEFORE APRIL 26, 1966

After completing, staple, fold and mail career form to ELECTRONIC DESIGN, 850 Third Avenue, New York, N. Y. Our Reader Service Department will forward copies to the companies you select below.

(Please print with a soft pencil or type.)

Name _____ *Telephone* _____

Home Address _____ *City* _____ *Zone* _____ *State* _____

Date of Birth _____ *Place of Birth* _____ *Citizenship* _____

Position Desired _____

Educational History

College	*Dates*	*Degree*	*Major*	*Honors*

Recent Special Training _____

Employment History

Company	*City and State*	*Dates*	*Title*	*Engineering Specialty*

Outstanding Engineering and Administrative Experience _____

Professional Societies _____

Published Articles _____

Minimum Salary Requirements (Optional) _____

Use section below instead of Reader Service Card. Do not write personal data below this line. This section will be detached before processing.

Circle Career Inquiry numbers of companies that interest you

900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924
925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949

Fold here, staple and Mail.

FIRST CLASS
Permit No. 725
New York, N.Y.

BUSINESS REPLY MAIL

No Postage Stamp Necessary if Mailed in the United States

POSTAGE WILL BE PAID BY

ELECTRONIC DESIGN

READER SERVICE
850 THIRD AVENUE
NEW YORK, NEW YORK 10022

LATCH on to the EXCITEMENT in MICROELECTRONICS and SILICON DEVICE DEVELOPMENT at DELCO RADIO

Enthusiasm is running high at General Motor's Delco Radio Division.

Exciting developments in microelectronics and silicon devices have spawned a rapidly expanding research effort. New buildings . . . new equipment . . . and most importantly, new people!

The dynamic pace of accomplishment at Delco is pushing the state of the art clear out of sight. The opportunity is here for those who choose to capitalize on it.

Microelectronics

Circuit oriented EE's—0 to 5 years experience. Here's a chance to get in on the excitement in microelectronics. Research programs in both linear and digital circuitry embrace monolithic . . . thick film . . . thin film . . . and hybrid microcircuits.

Silicon Device Development

Lots of room here for the BS, MS, PhD in Physics, Chemistry, Physical Chemistry, or related fields. Development programs are underway in these areas:

Low power and very high power monolithic and hybrid circuits.

Silicon Transistors—from very high frequency 10 milliampere through 25 ampere, 1000 volts.

Thyristors—from 50 milliampere through 500 ampere, 2000 volts.

Zener Diodes.

Silicon Rectifiers—from milliampere through 250 ampere, 3000 volts.

Continuing R&D efforts already have led to Delco's leadership in high power, high voltage silicon transistors. Delco rectifiers—rated at 250 amps, 2000 volts—are going into alternators designed to handle the full power generated by the latest Diesel-electric locomotives.

Full-size, fully-transistorized TV sets now are in production, thanks to a Delco high powered transistor in the horizontal and vertical deflection circuits.

A tremendous momentum is building at Delco. The time is ripe—now—to join this outstanding research group.

If you'd like more information immediately, pick up the phone and call us collect, Area Code 317/459-2808. Ask for C. D. Longshore. Or, send your resume to Mr. Longshore, Salaried Employment, Dept. 101, Delco Radio Division, General Motors, Kokomo, Indiana.

An equal opportunity employer

ON CAREER-INQUIRY FORM CIRCLE 907

Two Unique Reasons Why Hughes Can Offer You A Truly Rewarding Career In Systems Analysis

1 **Continuing responsibility throughout product development.** The shaping of basic concepts is only the beginning of your contribution as a Hughes systems analysis engineer. It also includes systems and subsystems optimization, and responsibility for technical integrity of the system through prototype design and development, production design and testing, and operational phases. You monitor each stage of the program, evaluating all pertinent technical information and suggestions for refinement or possible modification. Your strong involvement from start to finish, and the responsibility you have for a successful outcome, provide the kind of incentives that inspire a man's best efforts.

2 **"Accent on enlightenment" among technical managers.** From immediate supervision to the policy forming level, Hughes managers are young, vigorous and technically oriented. A high percentage hold advanced degrees in science and engineering — an achievement encouraged and respected at Hughes. Many present technical managers began their careers just a few years ago as Fellows in the Howard Hughes Masters and Doctoral Fellowship programs. The resulting climate of rationality assures that your work and professional growth will be recognized and rewarded.


These policies have contributed measurably to the Hughes position of leadership in the systems industry. The company has grown from 2,000 employees in 1950 to over 8,000 in the Aerospace Engineering Division alone.

Hughes systems analysis is not limited to current programs. Much is directed toward the conception and development of advanced systems requiring such techniques as synthetic array radar, infrared sensors, LASERS and MASERS, ion engines, television sensors, millimeter wave devices, inertial devices, digital computers, displays and controls.

If you are a graduate of an accredited engineering university, are a U.S. citizen, and have acquired some applicable technical experience, we would like to acquaint you with some of our hundreds of openings.

For immediate consideration, please airmail your resume to:

MR. ROBERT A. MARTIN
Head of Employment
Hughes Aerospace Divisions
11940 W. Jefferson Blvd.
Culver City 42, California

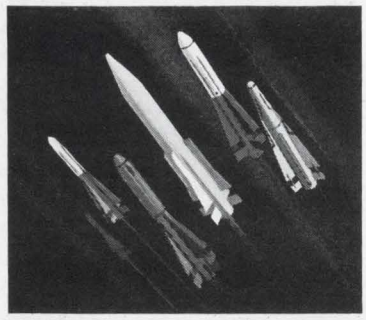

WE PROMISE YOU A REPLY WITHIN ONE WEEK

An equal opportunity employer.

Creating a new world with electronics

HUGHES

HUGHES AIRCRAFT COMPANY
AEROSPACE DIVISIONS

Engineers and Scientists are invited to inquire about the professional openings available immediately with General Electric on the Apollo Program

apollo

apollo

PROGRAM

The Apollo Support Department is working on the frontiers of reliability, integration and checkout for the NASA Apollo mission. Reliability and quality engineers use mission models to pinpoint critical equipments and sequences in the lunar mission, and simulate entire equipments before they're built to make sure they'll work. Extensions in the reliability art are the order of the day.

The acceptance checkout equipment for the Apollo spacecraft is one of the most advanced ever developed in the United States. It will assure our astronauts' spacecraft is in working order before the mission begins. Other challenging checkout tasks include the electrical support equipment for the Saturn launch vehicle, and special equipment to check out the systems, facilities and personnel in the launch area.

Professional openings immediately available with G.E. on the Apollo Program:

POSITION TITLES	DEGREE REQUIREMENTS	LOCATIONS
Computer Engineers/Specialists	BSEE/Aerospace Tech.	Bethpage, L.I., N.Y.
Engineers—Thermal Systems Analysis	BS/MS ME/AE	Houston, Texas
Engineers—Crew Systems Test/Reliability	BSEE/ME	Houston, Texas
Engineers—Reliability End-Item	BSEE/ME	Houston, Texas
Systems Instructors, Training Planners, or Programming Analyst Instructors	BSEE/Physics/Math	Daytona Beach, Fla.
Engineering Programmers	BS Math/Physics/Engr'g.	Daytona Beach, Fla.
Programmers/Programming Analysts	BS Math/EE	Kennedy Space Center, Fla.
Engineers—Telemetry Systems	BSEE/MSEE	Kennedy Space Center, Fla.
Mechanical Engineers—Systems Analysis	BSME	Kennedy Space Center, Fla.
Computer Programmers	BS Math/Statistics/EE/ ME/Bus. Admin.	Kennedy Space Center, Fla.
Engineers—Digital Systems	BSEE/MSEE	Kennedy Space Center, Fla.
Engineers—Logistics Integration	BSEE/ME	Kennedy Space Center, Fla.


Please write, in full confidence, including salary requirements to: Mr. D. M. Hill, Professional Placement, General Electric Co., Apollo Support Dept., Room 1142-L, Box 2500, Daytona Beach, Florida 32015.

APOLLO SUPPORT DEPARTMENT
MISSILE & SPACE DIVISION

GENERAL ELECTRIC

An Equal Opportunity Employer

ON CAREER-INQUIRY FORM CIRCLE 902

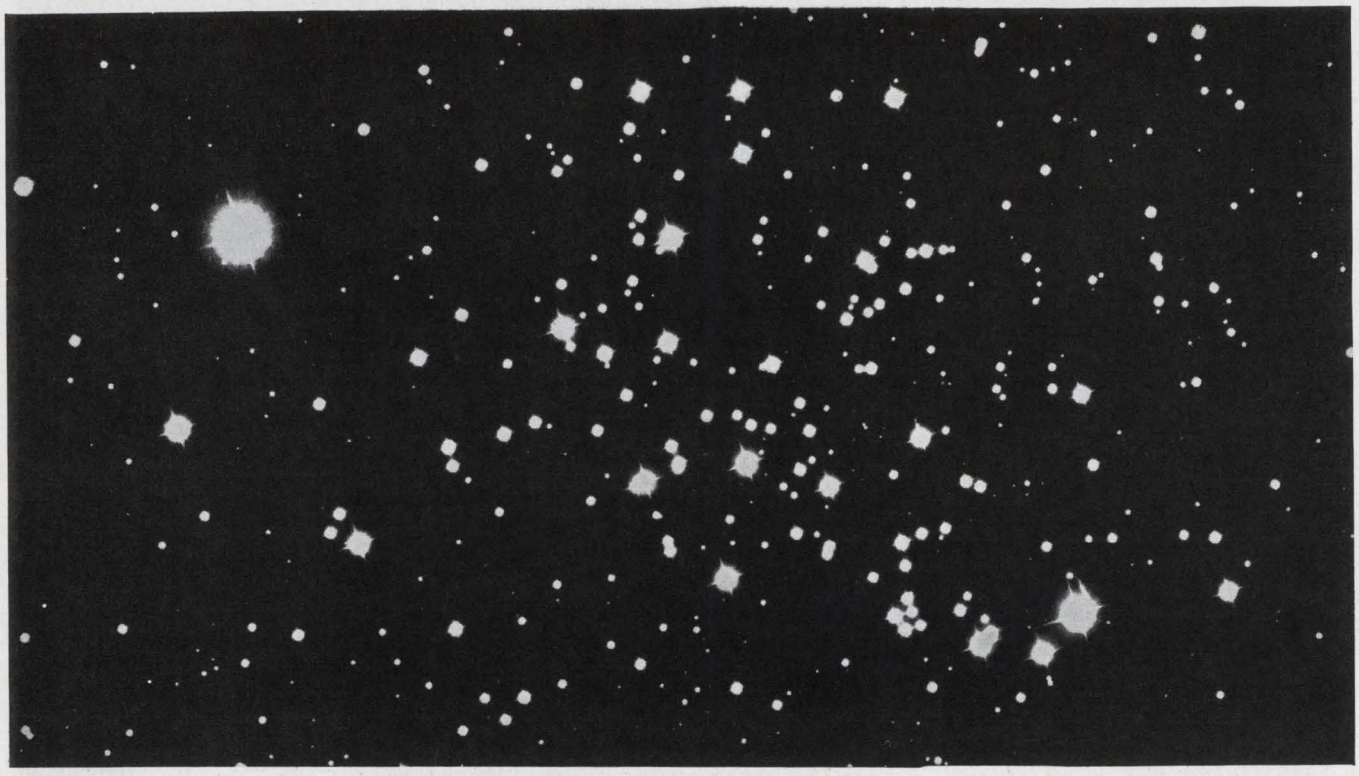

You are standing on the threshold of the future.

Take that giant step.

Step into a world of challenge and excitement. A world of intellectual stimulation. A world of real and meaningful personal rewards.

How? By joining IBM's Federal Systems Center in Bethesda, Maryland.

It's here, near the pulse of our nation's capital, that you'll be asked to contribute to the design and development of:

Tactical switching systems using advanced electronic circuits • Special-purpose oceanographic data processing and control equipment • Systems for data handling requirements during the coming decade • Communications systems utilizing pseudonoise modulation, speech compression, data compaction and error control coding • ASW signal processing equipment.

Sound fascinating? It is. And we need qualified engineers right now who are "turned on" by questions like these. Engineers who are concerned about our country's achievements—and their own. Who want to grow and thrive with a growing company.

There are immediate openings in the disciplines listed below. Take a look and see if your talents and training are needed. Take that giant step. It only takes a minute.

Sonar systems design • Systems engineering • Advanced communications systems design • Digital and analog circuit design • Digital systems logic design • Mechanical packaging design • Electrical systems design • Optical mechanical design.

IBM is an Equal Opportunity Employer.

For complete details on a career position with IBM, direct your inquiries in complete confidence to:

Mr. J. B. Farrington, Dept. 555P2
Federal Systems Center
IBM Federal Systems Division
7220 Wisconsin Ave.
Bethesda, Md.

IBM®

ON CAREER-INQUIRY FORM CIRCLE 903

Electronic Engineers:

Move ahead with Douglas Missile & Space Systems Division

If you are looking for growth potential and the opportunity to work with some of the best professionals in your field, come to Douglas. Challenging opportunities await you in Electronic Engineering if you are:

INSTRUMENTATION ENGINEERS – You will analyze measurement requirements for transducer characteristics, determine selection of transducers and formulation of detailed procurement and testing specifications. Positions require BS/MS EE or Physics degree.

INERTIAL INSTRUMENTS ENGINEERS You will assist in the development, evaluation, and testing of gyroscopes and accelerometers for missile reference and autopilot systems. Mechanical or Electrical Engineer with BS or advanced degree and 3 to 6 years experience in inertial instruments.

CIRCUIT DESIGN ENGINEERS – You will perform detailed circuit design and analysis primarily in the analog circuit design area, including AC and DC amplifiers, regulators, inverters, and demodulators. BS in EE, MS in EE desirable, and minimum of 3 years experience in circuit design.

TELEMETRY SYSTEMS ENGINEERS – Your responsibilities will include system engineering and design of on-board PCM telemetry systems. You will determine requirements on the system to allow sizing and format selection, and determine multiplexing techniques and define interface requirements with other vehicle systems. Requires BS/MS EE or Physics degree.

DIGITAL TIMING SYSTEM DESIGNERS Your responsibilities will include the determination of requirements for the system design of an airborne central timing system and programmer to be used for control of vehicle subsystems. Positions require BS/MS EE or Physics degree.

RECORDING SYSTEMS DESIGNERS – You will determine requirements for system design of airborne recording systems, voice through video, and airborne search and control systems. Analog and digital recording systems experience desired with BS/MS EE or Physics degree.

ELECTRO MAGNETIC COMPATIBILITY ENGINEERS – You must be familiar with EMC specifications, experienced in practical circuit and large system design, and possess mathematical analysis capability in EMC. BSEE degree with 3 to 5 years experience required.

See you at the IEEE Show, March 21-24. We'll be at the City Squire Motor Inn, Broadway between 51st and 52nd. To arrange for an appointment with our engineering managers, complete and return this coupon to D. J. MacDonald, Douglas Missile and Space Systems Division, 2700 Ocean Park Blvd., Santa Monica, California 90406.

NAME _____ HOME PHONE _____

ADDRESS _____

CITY _____ STATE _____

Degree(s) _____

Field(s) _____

Specialty(ies) _____

U.S. Citizen ☐ Yes ☐ No

You gain by going to

DOUGLAS


MISSILE & SPACE SYSTEMS DIVISION

An equal opportunity employer.

ON CAREER-INQUIRY FORM CIRCLE 904

RAYTHEON IS LOOKING FOR:

ENGINEERS WHO CAN THINK "SMALL"... IN A BIG WAY



The professional who can relate state-of-the-art miniaturization techniques to space systems technology stands ten feet tall at

RAYTHEON'S

SPACE and INFORMATION SYSTEMS DIVISION

We're pushing ahead, pacing space technology with growth programs in Advanced Guidance Computer Systems, Radar Systems, Communications Systems, and Re-entry Systems. Our continuing long-term programs have created many new career opportunities for professionals in these fields. We offer positions of stature in such challenging programs as the space-borne guidance computers for the Apollo Command Module and Lunar Excursion Module, the Advanced Polaris A-3, and the Poseidon Fleet Ballistic Missile Programs.

Men who can contribute toward advancing the state-of-the-art are urged to explore the following immediate positions:

COMPUTER MEMORY ENGINEERS — Design magnetic memory systems utilizing non-destructive read-out devices and coincident — current core memories.

COMPUTER LOGIC ENGINEERS — Design and evaluate logic for aerospace computers including arithmetic units, input-output equipment and memories.

DIGITAL CIRCUIT ENGINEERS — Design a variety of digital circuits and subsystems using integrated circuits, field effect devices, thin films and thick films.

ANALOG CIRCUIT ENGINEERS — Circuit/subsystems design with emphasis on microminiaturization for guidance electronic systems ranging from video to DC and micro-amps to amps.

RECEIVER CIRCUIT ENGINEERS — Design and test solid state analog circuits for I. F., high power high frequency applications involving pulse compression techniques, video display and signal processing.

MICROWAVE ENGINEERS — Design and analyze microwave receivers or transmitters, participate in trade-off analyses and predict component behavior in space environment.

COMPONENT FAILURE ANALYSIS ENGINEERS — Perform physical analysis of semiconductor micrologic components, particularly integrated circuits or planar transistors.

Call, write, or come to Sudbury. We're so eager to talk business we're even here evenings and Saturdays.

To arrange an interview, send resume to John C. Jones, Employment Manager, Department S, Space and Information Systems Division, 528 Boston Post Road, Sudbury, Mass. 01776.

RAYTHEON

Excellence in Electronics

An Equal Opportunity Employer M/F

ON READER-SERVICE CARD CIRCLE 908

ON READER-SERVICE CARD CIRCLE 909 ➤

NASA Tech Briefs


Voltage comparator is also sensor

Problem: Detect the highest voltage input among a group of varying voltage inputs without the aid of external circuits.

Solution: A transistorized circuit that can be directly coupled to a binary encoder for readout.

The voltage comparison circuit uses one transistor for each input line. The base-emitter junctions of the transistors are connected as in a standard diode comparator circuit. The collector circuits of the transistors perform the sensing function.

The emitters of all the transistors are tied to one common resistor R_1. Each transistor has a load resistor in its collector

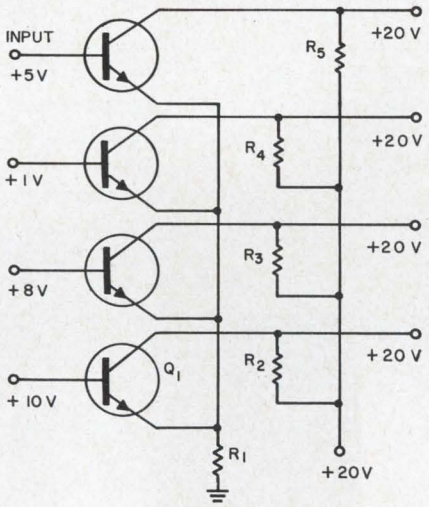

circuit. With the maximum input voltage on the base of Q_1, the base-emitter junction of Q_1 will be the only one forward biased. Voltages on the emitters of all transistors, except Q_1, will be more positive than the voltages on their respective bases and they will be cut off. The output voltages of these transistors will be very high compared to that of Q_1.

For further information, contact: Technology Utilization Officer, Goddard Space Flight Center, Greenbelt, Maryland 20771 (B65-10028).

engineering management opportunities with

U.S. NAVY-BUREAU OF SHIPS in:

ANTI-SUBMARINE WARFARE

The Navy's high-priority anti-submarine warfare program, involving multi-million dollar contracts with industry, needs qualified engineers for program management involving research, development, testing, evaluation, procurement planning, production, installation and maintenance in these fields:

• SURFACE SHIP, VARIABLE DEPTH AND SUBMARINE SONAR SYSTEMS
• UNDERWATER ACOUSTIC COMMUNICATIONS AND IFF SYSTEMS
• OCEANOGRAPHY • DIGITAL SIGNAL PROCESSING

• Transportable Underwater Ocean Area Surveillance Systems
• Acoustic Navigation And Mine Avoidance Equipments
• Inshore Undersea Warfare Equipment
• Mine And Torpedo Detection Sonar
• ASW Target Classification • Transducer Design
• Non-Acoustic Detection of Submerged Submarines
• Display Engineering • Systems Analysis

AND OTHER FIELDS: NAVAL ARCHITECTURE; MARINE, ELECTRICAL, ELECTRONIC, MECHANICAL ENGINEERING IN—SHIPS DESIGN, CONSTRUCTION AND MAINTENANCE; MACHINERY DESIGN; RADAR, COMMUNICATIONS, TEST EQUIPMENT, QUALITY ASSURANCE & RELIABILITY.

These positions, which are in Washington, D.C., involve travel and considerable contact with industrial organizations. Degree in mechanical or electro/electrical engineering and related experience desirable. Starting salaries range from $7,987 to $14,680 depending on experience. Most positions are at $10,619 and $12,510. Relocation expenses paid. These are career Civil Service positions with full benefits, regular salary increases.

Send resume or SF-57 to:

Civilian Personnel Division
Bureau of Ships, Code 263R-08
Department of the Navy, Room 2435
Washington, D.C. 20360

An Equal Opportunity Employer

ON CAREER-INQUIRY FORM CIRCLE 910

FET audio signal mixer exhibits linearity, isolation

Two FETs forming a mixer circuit will produce an output envelope corresponding to the difference between two closely spaced audio transducer signal inputs. The high Z_{in} and large g_m of the FET give the circuit excellent isolation and linearity and also enable it to function as a complex signal simulator.

The mixing action in this circuit (Fig. 1a) is one of pure combination of two differing frequency signals. The basic circuit operation is as follows:

Each input transducer has its respective gain control, represented by potentiometers, for providing numerous amplitude ratios between the input signals. A single drain-load resistor is used to facilitate output coupling to succeeding stages. Degenerative feedback in the common-source lead is provided by an unbypassed resistor.


A 3:1 feedback ratio between source resistors has been found to provide adequate stability and to ensure predictable circuit performance with device interchangeability. The output signal is shifted 180° with respect to the gate input. If "in-phase" operation is desired, a bipolar stage may be added, as shown in the circuit diagram (Fig. 1b). The performance is typified by a frequency response of 10 Hz-5 kHz (flat), with the upper 3 dB cutoff at 25 kHz. The input impedance is 10 MΩ, and the input dynamic range is 0-400 mV before any output distortion is noted. The voltage gain is 3.0 at 1.0 kHz.

The circuit will combine any two frequencies in the audio range. Either of the input frequencies may be recovered at the output, by passing the total output spectrum through an appropriate narrow-band filter network. The circuit functions very well as a complex signal simulator, since a phase shifter may be placed in either or both signal inputs to provide simulated transducer operation over a broad range of amplitude, frequency and phasing ratios.

C. R. Seashore, Senior Research Engineer, Honeywell, Inc., St. Paul, Minn.

VOTE FOR 110

IDEAS FOR DESIGN: Submit your Idea for Design describing a new or important circuit or design technique, the clever use of a new component, or a cost-saving design tip to our Ideas for Design editor. If your idea is published, you will receive $20 and become eligible for an additional $30 (awarded for the Best of Issue Idea) and the grand prize of $1000 for the Idea of the Year.

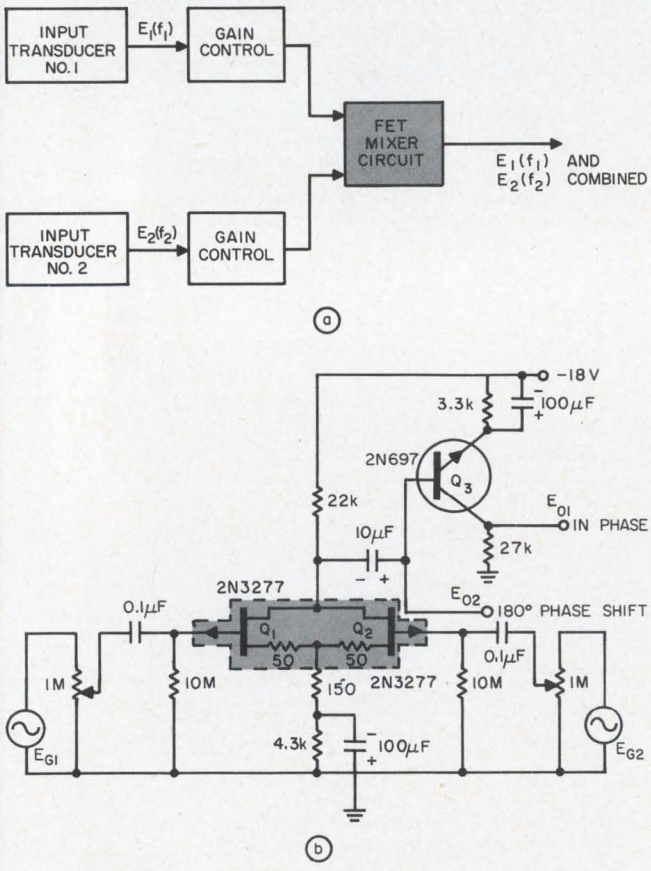

Two closely spaced transducer audio input signals are combined in a FET mixer (a). Complete circuit (b) shows high isolation (Z_{in} = 10 MΩ), good linearity (400 mV dynamic input range) and dual outputs (0° and 180° phase shifts).

SCR plus zener extend one-shot's time delay

Adding an SCR and a zener diode to a one-shot multivibrator results in longer time delays and prevents the rounding of output waveforms caused by long capacitor-charging times. Designed for use in an optical character reader, this circuit will lend itself readily to other pulse applications.

The SCR-zener combination shown in the accompanying figure completely isolates the *RC* timing network from the switching circuit and permits the use of high *R* and low *C* components for long time delays. Operation of the modified multivibrator closely resembles that of conventional types. It is as follows:

Transistor Q_1 is normally ON, holding *C* discharged through CR_3. A positive input pulse turns Q_1 OFF, thereby switching Q_2 ON. This circuit state persists until *C* charges through *R*, R_{L1} and R_{L2} to a voltage sufficient to forward-bias the SCR gate. The SCR then fires, switching the circuit back to the normal state. Capacitor *C* is

ON READER-SERVICE CARD CIRCLE 230 ➤



Mix & match.

From breadboard to prototype to production.


Sub-miniature coax, standard machined or formed strip contacts can be intermixed instantly in the same connector block.

You can begin wiring your breadboard or prototype with standard wire. If noise develops, just switch signal leads to sub-miniature coax without changing the connector block.

Here's a twist. You can also convert standard leads to twisted pair. In case we forgot to mention it, the sub-miniature coax contacts take twisted pairs as well as coax cable.

And the formed contact is a big money saver in initial and installed costs. Throw in the automatic Burndy Hyfematic,™ and crimp up to 3000 contacts per hour. Blocks available for 14 to 152 positions.


Now put it all together. Contact intermixing, economy, universality. Get in touch with Burndy for all the details. Hurry.

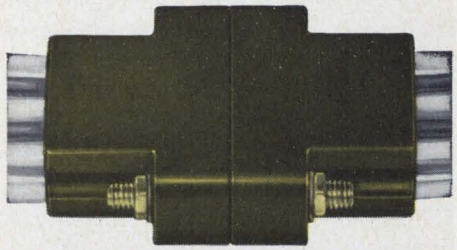

BURNDY

Norwalk Connecticut

See more at IEEE Booths 2B04-8

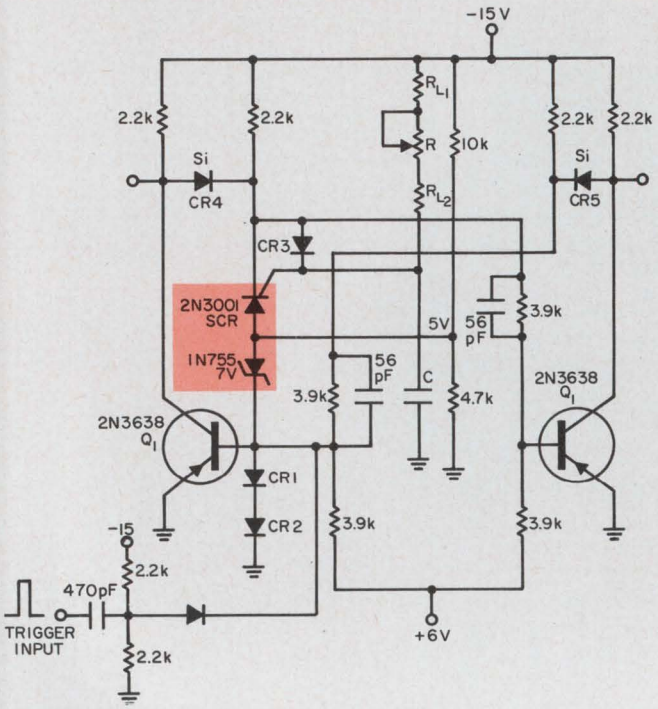

This modified one-shot multivibrator uses an SCR-zener combination for longer time delays and squarer outputs. In effect, these components isolate the timing elements from the switching network.

discharged through CR_3, and the circuit remains "ready" by virtue of the feedback from Q_2, until another trigger appears.

Diodes CR_1 and CR_2 prevent zener firing and SCR triggering on large-input trigger amplitudes. CR_4 and CR_5 isolate the output from the switching circuit, allowing full logic output swings.

D. R. Hobaugh, Project Manager, Recognition Equipment, Inc., Dallas, Tex.

VOTE FOR 111

Dc-coupled flip-flop acts as Schmitt Trigger


By substituting a saturating flip-flop for the conventional Schmitt trigger, a ground-level output capability is achieved. This feature is especially useful in digital applications.

The traditional Schmitt trigger is a bistable multivibrator employing a common-emitter resistor in its feedback loop. The resistor is essential in developing the switching threshold voltages. Because current flows through the resistor at all times, it is difficult for the Schmitt circuit to produce a ground-level output. Since the circuit has many applications in digital circuits, and many of these often use ground as one of the two stable logic levels, several methods have been devised to produce a ground-level output. Typically, these techniques make the circuit more costly and complex.

A less costly, far-less complex alternative appears in the illustration. The circuit is a collector-coupled bistable multivibrator revised to act much like the Schmitt circuit. The change is minor and consists of direct-coupling by means of resistor R_1, instead of the usual capacitive coupling at the input. When Q_2 is cut off, current is supplied by R_1 and by the base of Q_1 to R_2 and R_3. When E_1 becomes large enough to cause all the current to be supplied by R_1, (that is, when the voltage at the base reverse-biases the base-emitter junction of Q_1), the multivibrator will regenerate. This first threshold is of opposite polarity to V_{BB} and is defined by the ratio of R_1 to $R_2 + R_3$ as:

$$E_1 - V_{BE} = \frac{(V_{BB} - V_{BEQ_1})\,R_1}{R_2 + R_3} \qquad (1)$$

Note that all values of voltage must be of the same sign as their polarity with respect to ground. R_2 is now brought to ground through the saturated Q_2. The circuit will remain in this state until the base voltage is sufficient to forward-bias the base-emitter junction and until sufficient current to

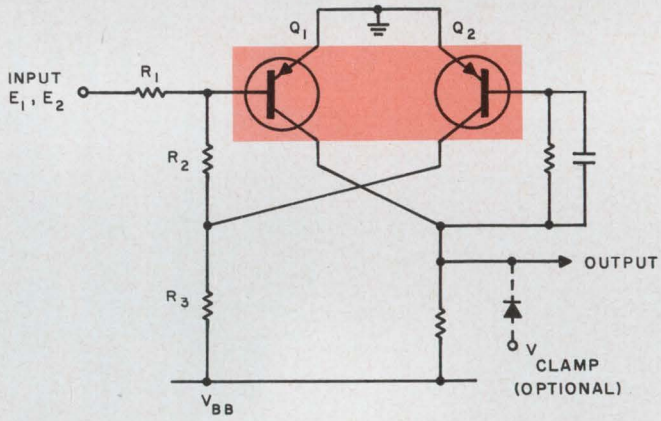

Dc-coupled flip-flop acts like a Schmitt trigger, but provides a ground-level output capability. Q_1 and Q_2 are saturating transistors with small V_{CE} and large V_{BE} ratings.

cause regeneration is supplied to the base. This second threshold is of the same polarity as V_{BB} and is defined by the ratio of R_1 to R_2 as:

$$\frac{-E_2 + V_{BEQ_1}}{R_1} = \frac{V_{CEQ_2} - V_{BEQ_1}}{R_2} - \frac{V_{BB}}{\beta R_L} \qquad (2)$$

If we assume that $I_{BQ1} << I_{R1}, I_{2R}$, this formula can be simplified to:

$$\frac{(V_{CESAT} - V_{BE})\,R_1}{R_2} = V_{BE} - E_2 \qquad (3)$$

Since the difference between V_{BE} and V_{CESAT} is of considerable importance to proper circuit function, transistors with a small V_{CESAT} and a large V_{BE} should be chosen.

Note that this circuit is unusual, in that it may be unconditionally set to respond to the E_1 threshold by pulsing the base of Q_2 with a positive pulse. This positive pulse can be applied at any time. In other words, while normal Schmitt action requires that the input pass both thresholds before the circuit will regenerate, this configuration can regenerate at any time and may be set to a specific threshold. Thus, to set to respond to E_1, we may

ON READER-SERVICE CARD CIRCLE 233 ➤

Revolution in Resolution: 0.032% in a TRIMPOT® Package!

Seven inches of wirewound resistance element in a package just 5/16" square and one inch long—that's our new Model 3070! With resolution seven to ten times better than you normally get from wirewound units this small, Model 3070 TRIMPOT potentiometer gives you premium adjustability at no premium in space, weight, or temperature coefficient. Settings you make with this unit stay set, too; the exclusive rotor/wiper design, based on that of our precision potentiometers, is outstandingly stable under shock and vibration.


Model 3070 also offers slip-clutch action, the indestructible SILVERWELD® termination, and resistance wire with twice the normal cross-section area. Units are available immediately in a broad choice of terminal types and mounting styles, including two panel-mount versions.


Write today for free technical data.

Resolution:	0.032% to 0.15%
Standard resistances:	75 Ω to 50K
Power rating at 70°C:	1.5W
Max. operating temp.:	175°C
Temp. Coeff. (entire unit)	70ppm/°C
Humidity:	Meets MIL-STD-202B, Method 106 (Cycling)
Size:	5/16"x 5/16"x 1 1/16"

If it's TRIMPOT®, it's BOURNS

TRIMPOT is a registered trademark of Bourns, Inc.

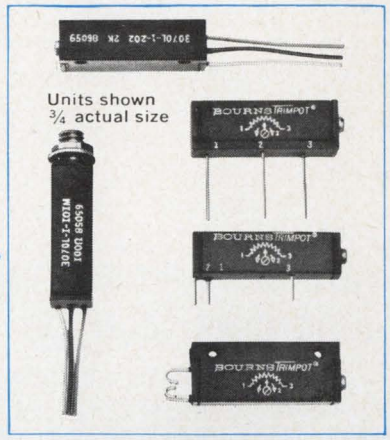

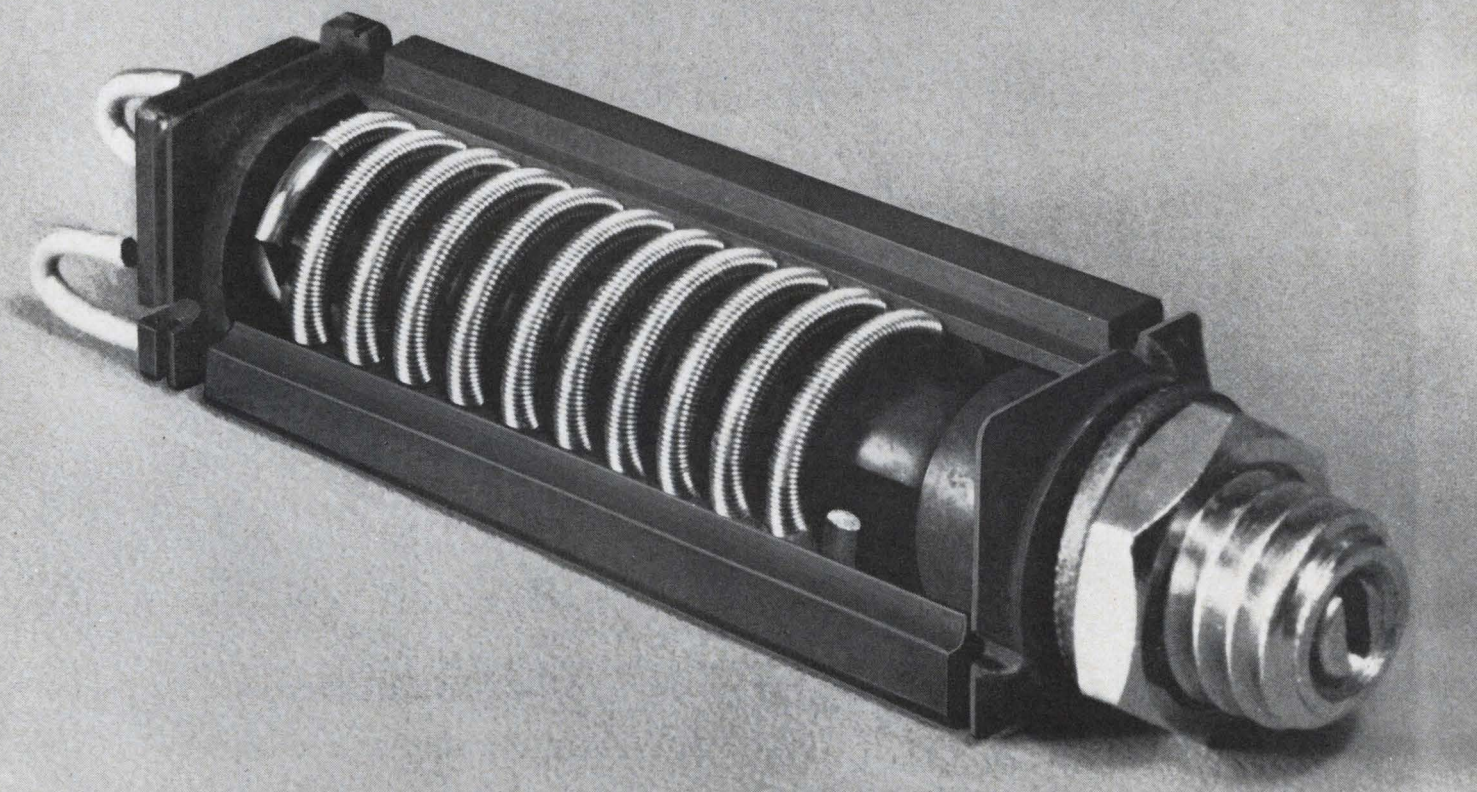

BOURNS

BOURNS, INC., TRIMPOT DIVISION
1200 COLUMBIA AVE., RIVERSIDE, CALIF.
PHONE 684-1700 · TWX: 714-682 9582
CABLE: BOURNSINC.

MANUFACTURER: TRIMPOT® & PRECISION POTENTIOMETERS, RELAYS; TRANSDUCERS FOR PRESSURE, POSITION, ACCELERATION. PLANTS: RIVERSIDE, CALIFORNIA; AMES, IOWA; TORONTO, CANADA

pulse the Q_2 base with a positive pulse. Or to set to respond to E_2, we can draw the output to ground with an external inverter.


Ray Schwegler, Staff Member, Digital Equipment Corp., Maynard, Mass.

VOTE FOR 112

Variable-speed photochopper generates teletype signals

In testing teletype equipment, such as distortion analyzers, it is desirable to have available any letter of the teletype code with any degree of distortion (misplaced pulses). It is also desirable to provide for a variable-speed range, so as to simulate overspeed and underspeed conditions. These requirements are neatly filled by a photochopping system.

The circuit and equipment for generating and viewing teletype signals appear in the accompanying illustration. Wheel A, composed of one or more discs of stiff opaque paper, chops the light beam into a teletype letter. Six discs (one for the stop pulse and five for character pulses) suffice for all perfect teletype characters. Additional discs can be cut for any type or degree of distortion. Accurate measurements of the pulse lengths may be made with an electronic time-interval meter by installing one disc at a time.

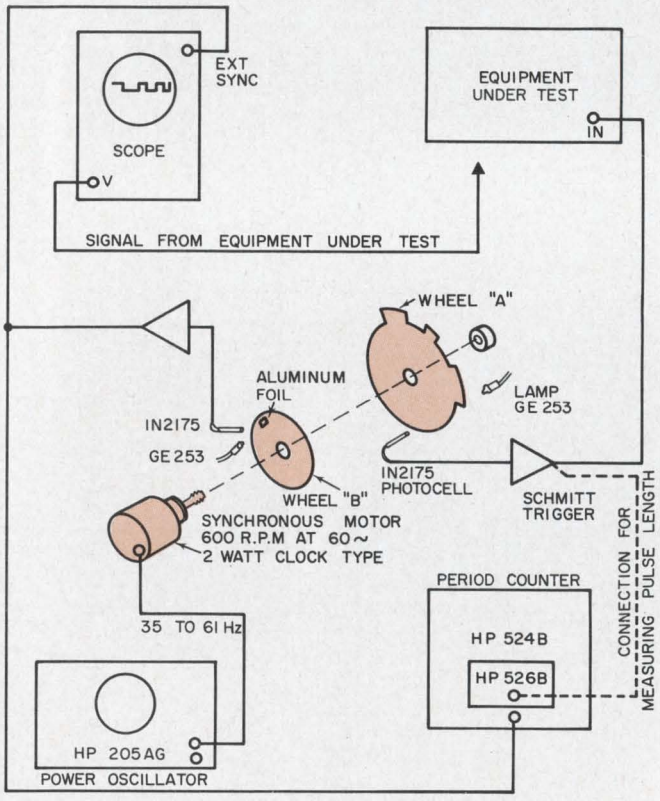

Teletype signals are generated by this variable-speed photochopping system. Wheels A and B produce the various facsimile and timing pulses. The system is also capable of viewing teletype signals.

Wheel B is a smaller-diameter black paper disc with a dot of aluminum foil glued near the rim. This provides a pulse to synchronize a scope positively, regardless of the character being transmitted or the condition of the equipment under test. This same pulse can be put into an electronic period-counter to monitor the speed with a high degree of accuracy.

By setting the HP 205AG oscillator to any frequency between 35 and 61 Hz, we get a speed range capability of 60 to 100 words a minute.

Marriott Dickey, Design Engineer, Orinda, Calif.

VOTE FOR 113

UJT pulse generator makes bistable multi more versatile

The simple addition of a unijunction transistor trigger, a potentiometer and four diodes turns the standard bistable multivibrator into a versatile circuit capable of pulse generation, encoding, or decoding. Moreover variations in symmetry, pulse width and repetition rate are made independent of one another.

For example, output symmetry can be varied while repetition rate is kept constant, or vice versa. In another variation, pulse width can be changed while constant repetition rate is maintained. Finally repetition rate can be varied with no interaction between pulse rate and pulse width.

Referring to the circuit schematic, we see that Q_1 and Q_2 make up the basic multivibrator and that Q_3 is a UJT used to generate positive trigger pulses. Gating diodes D_3 and D_4 steer the trigger pulses to the proper side of the multivibrator. D_1 and D_2 are diode switches used for both isolation and to select the proper side of resistor R_T for timing the pulse generator.

With Q_1 conducting, D_1 conducts and places the left side of R_T in as the timing resistor for C_T. Note that D_2 is reverse-biased, thereby isolating the right side of R_T. D_3 is also reverse-biased, isolating any triggers from the left side of the multivibrator. D_4 conducts coupling triggers to the right side of the multivibrator.

When the UJT fires, the positive-going trigger pulse is coupled to the right side of the multivibrator, placing it in its other state (Q_2 conducting, Q_1 OFF). This action also switches the diodes. Since D_2 is now conducting, the right side of R_T is timing the charge of C_T. D_3 also conducts, coupling the next trigger to the left side of the multivibrator.

The next trigger from the pulse generator switches the multivibrator back to its original state. Therefore the conduction time is controlled by the wiper position on R_T. This potentiometer



new 260® SERIES 5 VOM

We're at it again . . . making the 260® a better buy than ever. This latest improvement is built-in *meter* protection . . . standard on *regular** 260 volt-ohm milliammeters—Series 5 and 5M.

It prevents mechanical damage to the moving element in the movement from instantaneous overloads up to 1,000,000%, or steady state overloads up to 500,000%. It also stops overheating or burnout of the armature coil, damage to hair springs, and calibration change due to high overloads. Otherwise the famous 260 remains unchanged.

If you now have a Series 1, 2, 3, or 4, 260 VOM, you can install your own meter protection. Ask your electronics distributor for a Simpson meter "safe/guard®." It takes only minutes to install.

260-5 with new meter protection..... $52.95

260-5M (mirror scale) with meter protection..... $54.95

RANGES (20,000 o/v DC; 5000 o/v AC)

DC VOLTS: 0-0.25; 0-2.5; 0-10; 0-50; 0-250; 0-1000; 0-5000

AC VOLTS: 0-2.5; 0-10; 0-50; 0-250; 0-1000; 0-5000

DC MICROAMPERES: 0-50 (250 MV Drop)

DC MILLIAMPERES: 0-1; 0-10; 0-100; 0-500

DC AMPERES: 0-10 (250 MV Drop)

RESISTANCE RANGES: RX1 0-2000 ohms (12 ohms center) RX100 0-200K ohms (1200 ohms center) RX10K 0-20 megohms (120K ohms center)

ACCURACY: DC, ±2% F.S.; AC, ±3% F.S.

Write for Bulletin 2072 showing the entire line of Simpson VOM's

*260-5P has both meter and circuit protection except on the 1000V and 5000V DC and AC ranges, and the 10-amp DC range. Price **$79.95**

Simpson
INSTRUMENTS THAT STAY ACCURATE

SIMPSON ELECTRIC COMPANY
5202 W. Kinzie Street, Chicago, Ill. 60644 • Phone: (312) EStebrook 9-1121
Representatives in Principal Cities . . . See Telephone Yellow Pages
Export Dept: 400 W. Madison St., Chicago, Ill. 60606 Cable, Amergaco
In Canada: Bach-Simpson Ltd., London, Ontario
In India: Ruttonsha-Simpson Private Ltd., Vikhroli, Bombay

WORLD'S LARGEST MANUFACTURER OF ELECTRONIC TEST EQUIPMENT

ON READER-SERVICE CARD CIRCLE 147

G-V

RED/LINE THERMAL TIMERS

for

Instant Reset
Normal Reset
Cyclic Timing

"Best on the market" . . . "Reasonably priced" . . . "Thoroughly dependable". These are some of the reasons why more and more manufacturers buy more and more thousands of Red/Line Relays each year . . . for copy machines, telephone switchboards, computers, machine tool controls, air conditioning and heating equipment, battery charging controls, automatic live stock feeders and countless other uses. New applications are being introduced almost daily. How many ways can Red/Line Relays serve **you?**

Series DM Instant Reset Element Red/Line



Quiet, positive operation; long life; light weight; operation in any plane; wide range of temperature compensation. Timing cycle starts again when energizing power is interrupted, even momentarily.

Ask for Pub PD 1011

Series DT Regular Red/Line



Delays of 2 seconds to 3 minutes; energizing voltages of 6.3 to 230 AC or DC; rugged stainless steel mechanism; tamperproof; shatterproof (no glass); dust-tight enclosure; steel encased heaters; directly interchangeable.

Ask for Pub 131

Series DF Cyclic Timer Red/Line




Accurate, reliable thermal cyclic timer at moderate cost; operation essentially unaffected by temperature variation; heat and load circuit independently controlled; maximum stability; greater accuracy in flashing rate than anything in its price range.

Ask for Pub PD 1018

For specific information and engineering assistance on any Red/Line application, write or telephone today.

G-V **G-V CONTROLS INC.**
Okner Parkway • Livingston, New Jersey
(201) 992-6200

ON READER-SERVICE CARD CIRCLE 148

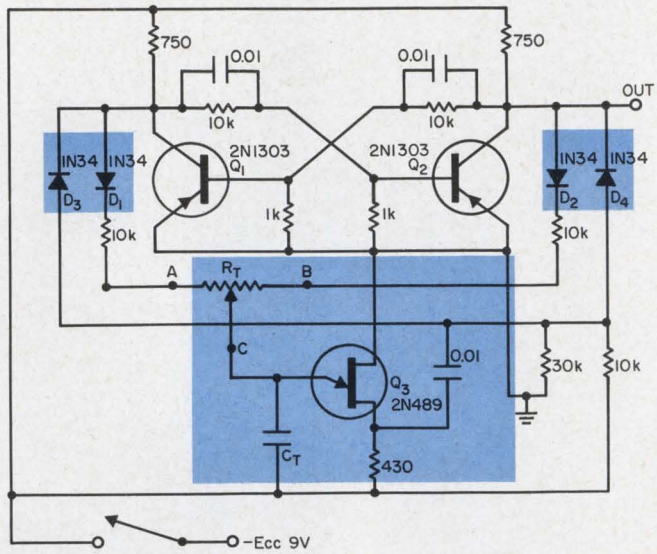

UJT, steering diodes and potentiometer add to versatility of bistable multivibrator. Q_3, $D_1 - D_4$ and R_T enable symmetry, pulse width and repetition rate to be independently controlled.

(the over-all resistance) also controls the symmetry of the square wave while maintaining a constant frequency.

For the component values shown, the turn-off time of Q_1 and Q_2 is 30 ns, and the frequency changes less than 1% with symmetry variations. The output pulse level varies between zero and $-E_{cc}$. The circuit was used as a digital encoder for a closed-loop servo system, and it offers promise in a number of other encoding and decoding applications.

Cyril B. Smith 2d, Research Technician, Federal Aviation Agency, Oklahoma City, Okla.

VOTE FOR 114

Analog-to-frequency converter has improved linearity, range

The simple addition of a one-shot and a feedback resistor improves the linearity and increases the frequency range of the basic analog-to-frequency converter. This modification overcomes the error introduced by the converter's integrator reset time.

Many requirements exist for precision voltage-to-frequency conversion in such applications as analog to digital converters, digital integrators and precision servo systems. The conventional analog-to-frequency converter (Fig. 1a) can be used for converting analog voltages to a pulse rate when low pulse rates are desired. However, at high pulse rates the linearity error becomes significant because of the integrator reset time.

We can use the circuit in Fig. 1a to demonstrate the deviation from linearity. If we assume that the gain of the amplifier is infinite (that is, that the



New EI-85 Digital Multimeter* in one encoding makes ± .005% measurements in 10 ms!


and it stays there!

Accurate, full 5 digit measurements are now possible in 10 msec with the EI-85's successive approximation logic.

Why the "one encoding"? Because unlike other high speed instruments which are allowed to encode before their input circuitry settles to full accuracy, the EI-85 contains a sensing circuit which acknowledges settling of its high impedance input section to ±.001% of final value before allowing its logic circuitry to encode. All *within* 10 msec! Repeat encodings are not necessary to obtain that "last digit of accuracy" with this high speed DVM. This assures you consistent repetitive readings.

Noise Rejection—Not forgetting the effect of noise, the EI-85's guarded differential input and active Bessel filter provides 160 db of CMR and 60 db NMR at 60 Hz while maintaining a *constant* high input impedance of greater than 10,000 megohms to 10 volts F.S. This means, of course, no loss of accuracy due to noise or source loading during encoding!

Whether your need is for accurate high speed measurements of dynamic fast changing signals, high speed system operation (100 readings/second) or a versatile accurate multimeter for general purpose use, the EI-85 fills the bill!



*DC, Ratio, AC, Resistance, Pre-Amplifier

Other Features—Complete multimeter capability utilizing plug-in card accessories • DC and Ratio comprise the basic instrument • 10 μvolts basic resolution without preamplifier (1 volt F.S.) • Differential guarded input on *all* modes of operation • Autorange and polarity in *all* modes • Storage in readout prevents "blinking" • Storage in electrical outputs allows time sharing operation • Isolated BCD and 10-line decimal outputs and remote control are standard • AC converter—5 digit, 10 μvolt resolution, 10 Hz to 100 KHz • Resistance converter—.01 ohms to 10 megohms • Preamplifier—for 1 microvolt resolution • Priced from $5000.00.

Complete EI-85 High Speed System—A complete line of EI system modules can be added to your EI-85. Signal conditioning, scanning, comparison, timing, automatic programming and peripheral outputs such as computer compatible paper or magnetic tape are typical capabilities. Write for our complete systems brochure.



Electro Instruments, Inc.

8611 Balboa Avenue, San Diego, California 92112 41 Emmastraat, Veldhoven, Holland

ON READER-SERVICE CARD CIRCLE 149



MODEL	6 db BANDWIDTH
TL-2D5A	2 kc
TL-4D8A	4 kc
TL-6D11A	6 kc
TL-8D14A	8 kc
TL-10D16A	10 kc
TL-16D25A	16 kc
TL-20D32A	20 kc
TL-30D45A	30 kc
TL-40D55A	40 kc
TL-45D65A	45 kc
TL-32E48C	32 kc
TL-50D75C	50 kc

Clevite Ceramic Ladder Filters 80 db rejection in 0.1 cu. in.

- **50% lower insertion loss**
- **Increased skirt selectivity**
- **Less insertion loss change with temperature**

Clevite ceramic ladder filters provide more selectivity for their size than any conventional i-f filter. They are fixed tuned and need no alignment—are non-magnetic and non-microphonic. Leading manufacturers now specify Clevite ladder filters for their modern communications equipment. Improve your newest design with these unique filters. Write now for complete specifications—Bulletin 94017 or request selectivity curves for each stock model. ■ Dimensions: 5-1/6″ diameter x 1-1/2″ long ■ Selectivity: 60 db/6db shape factor from 1.4:1 to 2.5:1 ■ Center Frequency Stability: within 0.2% for 5 years, and within 0.2% from −40°C to +85°C ■ Impedance: 1200-2500 ohms ■ Designed for military and space environment. ■ Clevite Corp., Piezoelectric Division, 232 Forbes Road, Bedford, Ohio 44014.

CLEVITE

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 150

output of the integrator has a perfect slope), the operational time interval is:

$$t = \frac{E_c}{e_i} R_i C_F + T_R, \qquad (1)$$


where $1/t$ = pulse rate; E_c = comparator reference voltage and T_R = time required to reset integrator.

A plot of e_i vs pulse rate and e_i vs percentage deviation from linearity is shown in Fig. 1b. The circuit parameters are such that E_c is 10 V, e_i is 0 to 10 V, T_R is 3.0 μs and the output pulse rate is 0 to 10 Kpps. We conclude from these graphical data that by adding a voltage, Ke_1, to the output of the integrator, the error introduced by T_R can be corrected.

The circuit configuration in Fig. 2 performs this correction. The output of the integrator then becomes:

$$e_o = Ke_i + \frac{t'}{t_c} e_i, \qquad (2)$$

where $K = R_f/R_i$ and $t_c = R_i C_F$. The integrator will reset when e_o is equal to the reference voltage

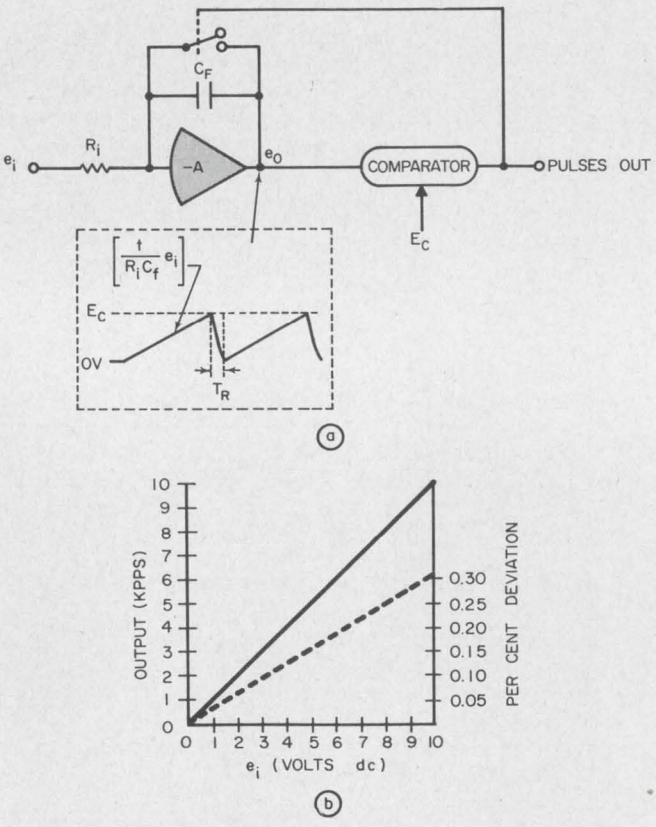

1. **Conventional analog-to-frequency converter** (a) operates with an output of 0-10 Kpps and has linearity of 0.5%. Integrator's reset time (T_R) limits linearity of the response, especially at high pulse rates. Curve shows the relationship between input voltage, output pulse rate and deviation from linear response (b). Note error due to T_R.

Mincom recorders and the Apollo Program



Instrumentation recorders used for telemetry tracking in the Apollo program will be supplied by Revere-Mincom, under a series of contracts awarded in 1965.

Fifty wideband and thirteen intermediate-range recorders to NASA-Goddard SFC for a global network of ground-based and shipboard tracking stations. Seventeen Mincom recorders to The Bendix Corporation for airborne telemetry in ARIA (Apollo Range Instrumentation Aircraft).


With existing installations, these contracts make Revere-Mincom one of NASA's largest suppliers of instrumentation tape recorders.

Revere-Mincom Division 3M COMPANY

300 South Lewis Road, Camarillo, California 93010

ON READER-SERVICE CARD CIRCLE 151

Where pennies are important
ECC
saves you dimes and quarters

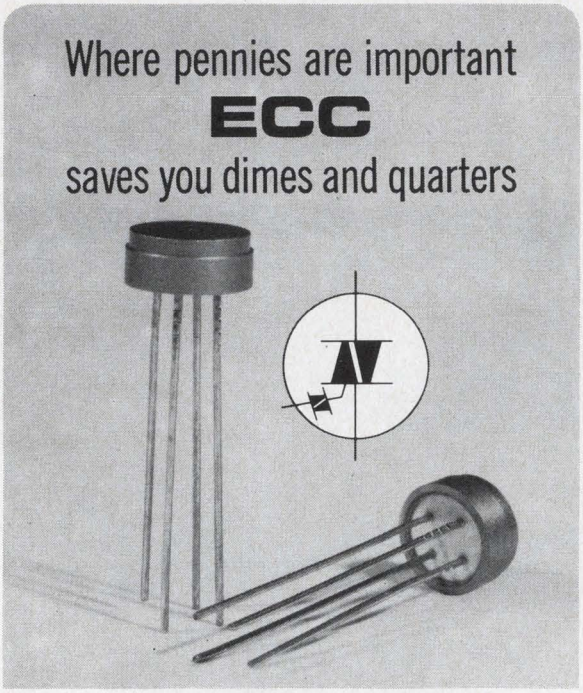

QUADRAC®
Integrated AC semiconductor with built-in triggering diode

QUADRAC does the work of two SCR's connected in inverse parallel — **plus**, QUADRAC contains its own built-in triggering diode (optional). This reduces the number of components needed in most AC circuits and substantially lowers component and circuit assembly costs while increasing circuit reliability.

QUADRAC, with built-in triggering diode, even costs up to 47¢ less than comparable bi-directional triode semiconductors **without the trigger.**

Further, QUADRAC is passivated and completely protected against high voltage transients, assuring long life and circuit reliability. QUADRAC's case is electrically isolated, eliminating the need to isolate when mounting. Think of the savings!

Many manufacturers are already using QUADRAC in AC applications such as motor speed controls, lighting controls, blower and fan speed controls, solid-state switches, static relays and temperature modulation controls. Other applications are virtually unlimited — ranging from air conditioning and heating equipment to business machines, large and small household appliances, and industrial control equipment. Wherever AC current is being switched, modulated or controlled, QUADRAC can substantially reduce package size, lower component and assembly costs and, at the same time, increase circuit reliability.

NOW AVAILABLE FROM STOCK: The complete line of QUADRAC's rated up to ±400 volts V_{bo} — 3 to 15 amps.


®QUADRAC is a registered trademark of Electronic Control Corporation

For complete details, write or call:

ecc

Electronic Control Corporation
P. O. Box J • Euless, Texas • 214 — AN 4-2429

ON READER-SERVICE CARD CIRCLE 152

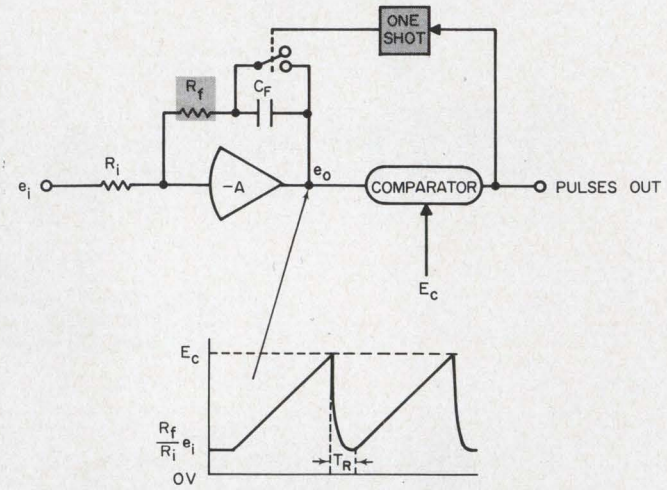

2. **The simple addition of a feedback resistor** and a one-shot to the circuit of Fig. 1a produces an A-to-F converter that operates up to 250 Kpps with a 0.01% linearity figure.

E_c on the comparator. Then

$$E_c = Ke_i + \frac{t'}{t_c} e_i. \tag{3}$$

Solving Eq. 3 for t' (the operational time of the circuit), we get:

$$t' = \left[\frac{E_c}{e_i} - K\right] t_c. \tag{4}$$

The one-shot is used to insure a constant reset time, T_R. Note that T_R can be regarded as system deadtime. Thus the operational time of the system is

$$t = \left[\frac{E_c}{e_i} - K\right] t_c + T_R. \tag{5}$$

To select the proper value for the constants in Eq. 5, let E_c = maximum e_i, $t_c = R_i C_F$ = minimum t (t_m) or maximum pulse rate and $K = R_f/R_i = T_R/t_m$.

The advantage of the modified circuit becomes obvious when plotting e_i vs t (as given by Eq. 5). We see that the K term cancels the effect of T_R and that there is no error due to reset time.


This circuit has been used as an analog-to-frequency converter with the following specifications: $e_i = 0$ to $\pm$ 10 V, output = 0 to 25 Kpps, $T_R = 2$ μsec and linearity = 0.01% over full range. *Robert B. Jones, Project Engineer, Continental Device Corp., Hawthorne, Calif.*

VOTE FOR 115

Curve-tracer test jig matches diodes quickly

A small test device, easily built, can be used in conjunction with a Tektronix 575 Transistor

Dial "X" for convenience

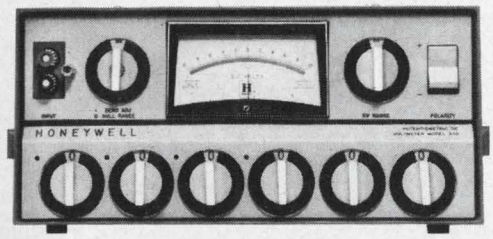

Get 7-dial resolution in this 6-dial, solid-state Honeywell 852 Guarded Potentiometric Voltmeter

By simply dialing "X" on the 852's last dial and reading it as 10.00000, the instrument advances from 9.99999 to 10 volts. Just like that.

You get the same convenience on all 6 dials, and at 1, 100, and 1000 volts, too. All told, the Honeywell 852 permits *infinite impedance* measurements from 0 through 1,111.110 volts in four overlapping ranges, with one ppm resolution.

Completely solid-state, the 852 features an ultra-stable 1,111.110 volt DC reference, a sensitive, high-impedance null detector, and a precision 6-dial Kelvin-Varley divider. And, you get the handsome, functional styling that's so evident in our illustration. Best of all, the 852 is competitively priced. Shouldn't one be in *your* lab?


1K100 Primary DC Reference Standard

This versatile Honeywell instrument is used for precision calibrations of digital, differential, and potentiometric voltmeters, shunts and current measuring devices, volt boxes, potentiometers, and voltage dividers.

Also featuring the convenience of 7-dial resolution, the 6-dial 1K100 provides voltages from one microvolt to 1,111.110 volts DC in four overlapping ranges, with one ppm resolution.

With its high current output, 100 ma with variable current limiting, the 1K100 permits calibrations once impossible or impractical. Accuracy: ± 0.01%; twice the stability of any other reference: 0.001% per day, non-cumulative; 0.01% for 1000 hours of operation. The price? Competitive!

For more information on the 1K100 or the 852, contact your Honeywell representative or mail the coupon below for comprehensive literature.

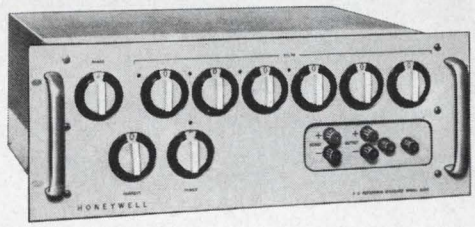

The highly versatile 1K100 Reference Standard

Carl Boyer
Honeywell, Denver Division
Mail Station 414
Denver, Colorado 80217

Please send 852 and 1K100 literature to:

Name_____

Company_____

Address_____

City_____ State_____ Zip_____

DATA HANDLING SYSTEMS
Honeywell

HONEYWELL IS WORLDWIDE • Sales and service offices in all principal cities of the world. Manufacturing in Brazil, Canada, France, Germany, Japan, Mexico, Netherlands, United Kingdom, United States.

ON READER-SERVICE CARD CIRCLE 153



Haven't you enough to worry about... without this?


Insulation tubing shouldn't be a design engineer's worry anyhow. But it's vital to your product's performance . . . so you worry! Why not unload this worry on us? Just give us the facts about your insulation need and we'll come up with the right tubing to do the job. This way, you'll have one less worry! You can take our word for it . . . because we've been insulation specialists for 44 years.

THERE'S FLEXITE® TUBING TO MEET YOUR SPECIFICATIONS

Markel FLEXITE extruded tubings are manufactured of Teflon, silicone rubber, vinyls, polyethylene, Nylon and other plastics. Special formulations provide properties to meet the widest range of applications and operating conditions . . . at continuous temperatures as low as −70°C and as high as 250°C. Every type and grade meets the highest standards of dielectric and mechanical reliability. Included in the FLEXITE line are Shrinkdown Heat Shrinkable Tubings and TGL Triangular Guide Line Wrapping Tape. We'll gladly send you specifications and Sample File on the full FLEXITE line . . . just write.

L. FRANK MARKEL & SONS
SINCE 1922
Norristown, Pa. 215-272-8960
INSULATING TUBINGS & SLEEVINGS • HIGH TEMPERATURE WIRE & CABLE

ON READER-SERVICE CARD CIRCLE 154

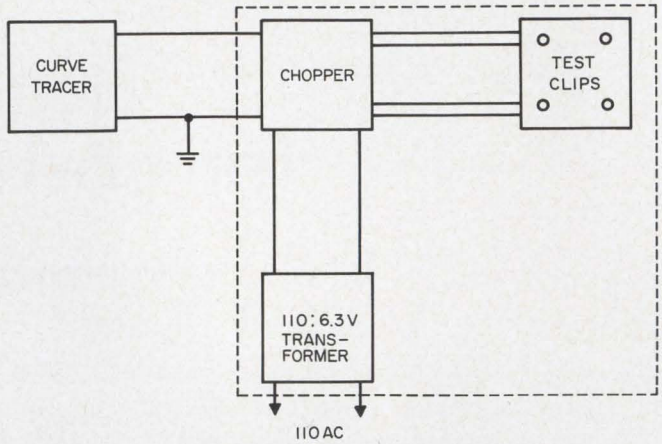

Diodes are quickly and simply matched when this test jig is used in conjunction with a curve-tracer. The chopper is employed for viewing the low-voltage portions of the **E/I** curves. For higher level portions, a reed relay should be substituted for the chopper.

Curve Tracer to match diodes rapidly.

The test jig consists of a chopper, a 6.3-volt step-down transformer and four standard test clips. All elements are mounted on a small chassis. The circuit permits two diodes to be matched by displaying both E/I curves simultaneously.

When interested in the low-voltage portion of the E/I curve, the user employs a chopper (as shown). If high-voltage or high-current portions are required for display, a mercury-wetted contact or reed relay may be substituted for the chopper.

This system may be used for matching transistors, but provision must be made to intensify one of the displays, so they can be easily separated and thus distinguished. Note here that the transistor may oscillate if the leads from the device to the curve-tracer are too long.

Ancil S. Zeitak, Senior Technician, Radio Astronomy Observatory of the University of Michigan, Ann Arbor.

VOTE FOR 116

IFD Winner for Nov. 22, 1965

Harold T. McAleer, Engineer, General Radio Corp., West Concord, Mass.

His idea, "Diode improves voltmeter's linearity and stability", has been voted the $50.00 Most Valuable of Issue Award.


IFD Winner for Dec. 6, 1965

Roy Foerster, staff engineer, The Bunker-Ramo Corp., Canoga Park, Calif.


His idea, "Locking monostable circuit immune to false triggering", has been voted the $50.00 Most Valuable of Issue Award.

Cast Your Vote for the Best Idea in this Issue.

Before specifying these components...

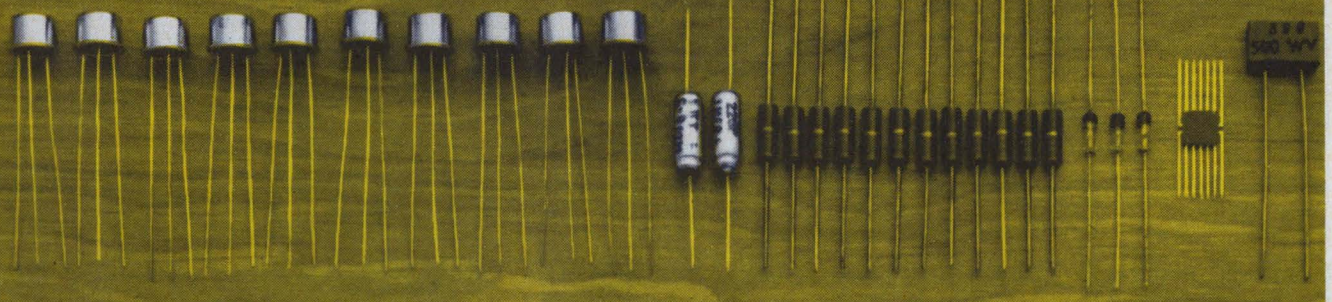

in your circuit, consider...

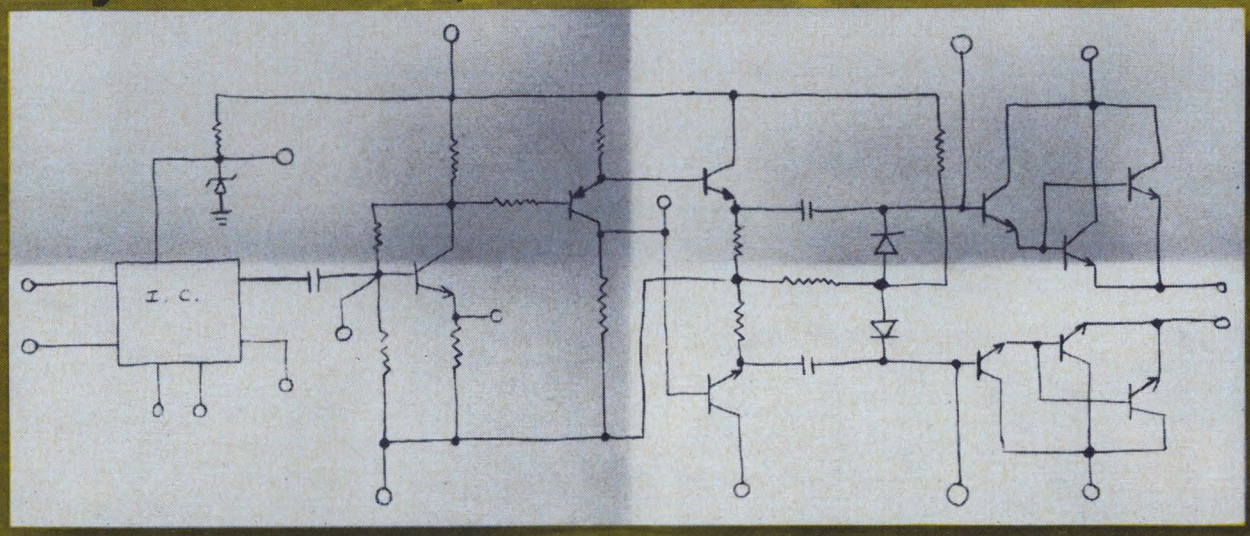

Hamilton Standard could give you the function...

...in this microelectronic package.



The Hamilton Standard advanced microelectronic packaging technology permits interconnecting and intermixing monolithic integrated circuits, transistors, diodes, thin film, thick film and discrete components.

It facilitates the use of matched transistors and often solves tight TCR tracking requirements.

• **Reliability is enhanced** through the use of welded interconnections and a welded hermetically sealed package.

• **Weight and volume of circuit are reduced.**

• **Design, component testing, and system assembly are simplified** through use of this functional package. It has axial leads for soldering, welding, or plug-in to a connector.

Whether your circuit is analog or digital, integrated or hybrid, you can probably benefit and profit from the use of this advanced packaging technology.

Talk it over with our experienced design team by contacting our Marketing Manager at the Electronics Department, Hamilton Standard, Broad Brook, Connecticut 06016, or call 203/623-1621, Ext. 6106.

On display at IEEE, N.Y. Coliseum, March 21-24, Booths 2C43-2C50

Hamilton Standard DIVISION OF UNITED AIRCRAFT CORPORATION

ELECTRONICS • ATTITUDE CONTROLS • STABILIZATION SYSTEMS • ENVIRONMENTAL CONTROLS • FUEL AND AIR INDUCTION CONTROLS
ELECTRON BEAM MACHINES • PROPELLERS • STARTERS • TURBOMACHINERY • GROUND SUPPORT EQUIPMENT • OVERHAUL AND REPAIR

ON READER-SERVICE CARD CIRCLE 155



SERENDIPITY IS A $985 INTEGRATING DIGITAL VOLTMETER

What makes the VIDAR 500 a rare and worthwhile find is not its price alone. It is the combination of low price and performance features that include:

Five full-scale ranges from ±100 mv to ±1000 volts

Three significant digit display (over-ranging adds a fourth from one to three times full scale)

Accuracy better than ±0.05% of reading ±1 digit

Up to nine readings per second

Variety of plug-in options

Built in voltage-to-frequency converter produces pulses at a rate precisely proportional to the input voltage. A precision electronic counter counts the pulses over a fixed time interval and displays an integral or average value. This technique virtually eliminates errors caused by noise superimposed on the data signal.

Used as a frequency counter, the VIDAR 500 ranges from 10 cps to 200 kc with a four digit display and selectable gate times of 0.1 and 1.0 seconds.


You can own a VIDAR 500 Integrating Digital Voltmeter for $985! Send today for the complete performance data. Your copy awaits you at: 77 Ortega Ave., Mountain View, Calif.

VIDAR CORPORATION


ON READER-SERVICE CARD CIRCLE 231

E|D Products


Integrating gyro eliminates hysteresis PAGE 264
Schottky–barrier diode for RF mixers PAGE 266
Flat-bonded ribbon cable PAGE 271
IC Commutator uses MOSFETS PAGE 272

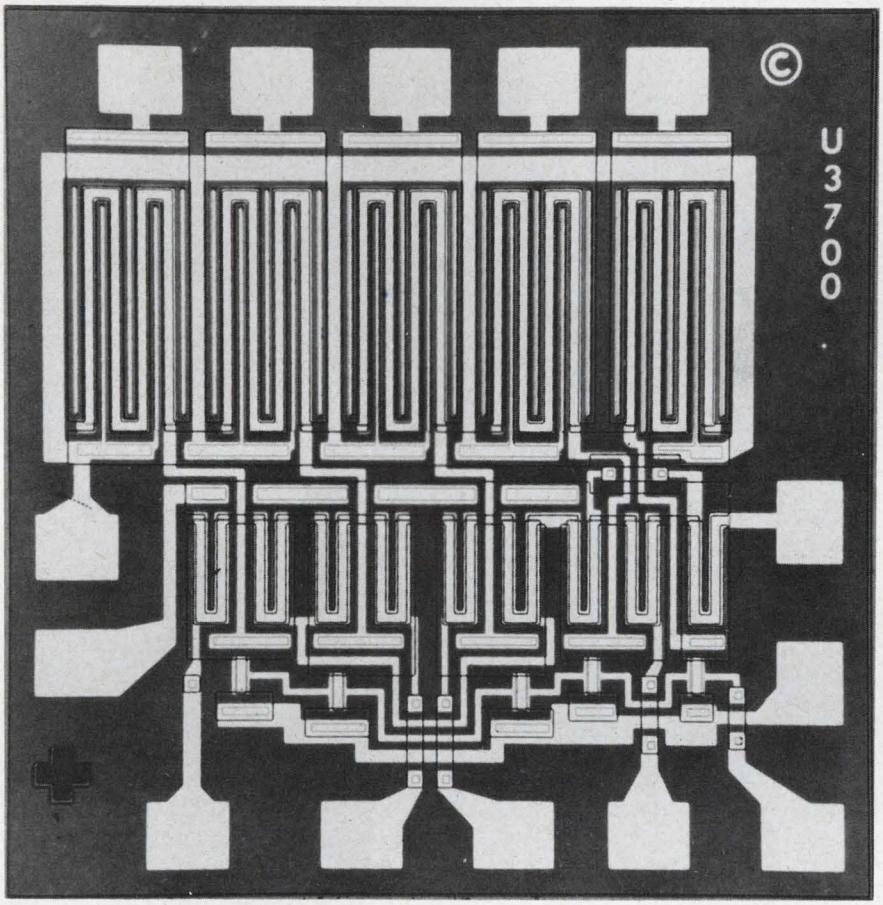


Multi-channel IC commutator has low on-resistance.

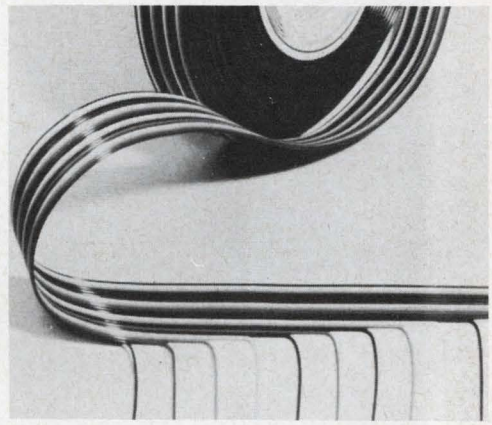

Ribbon cable has many uses. 271

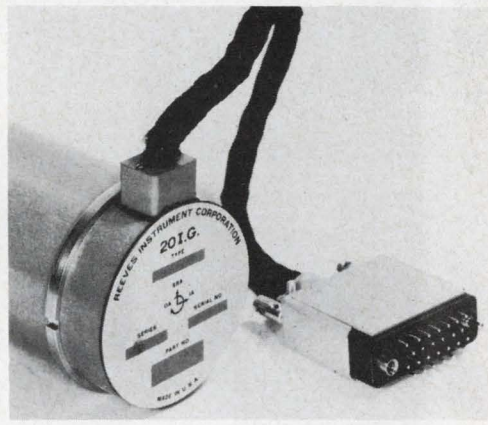


Integrating gyro has 0.1% linearity. 264

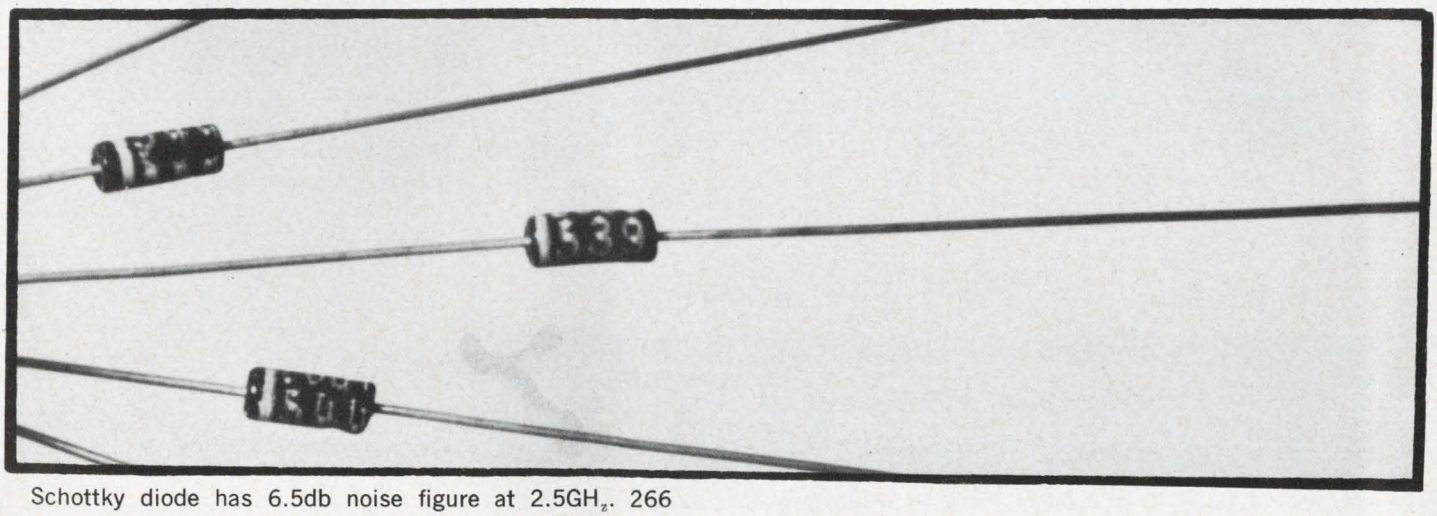

Schottky diode has 6.5db noise figure at 2.5GH$_z$. 266

4PDT 1/6 SIZE RELAY

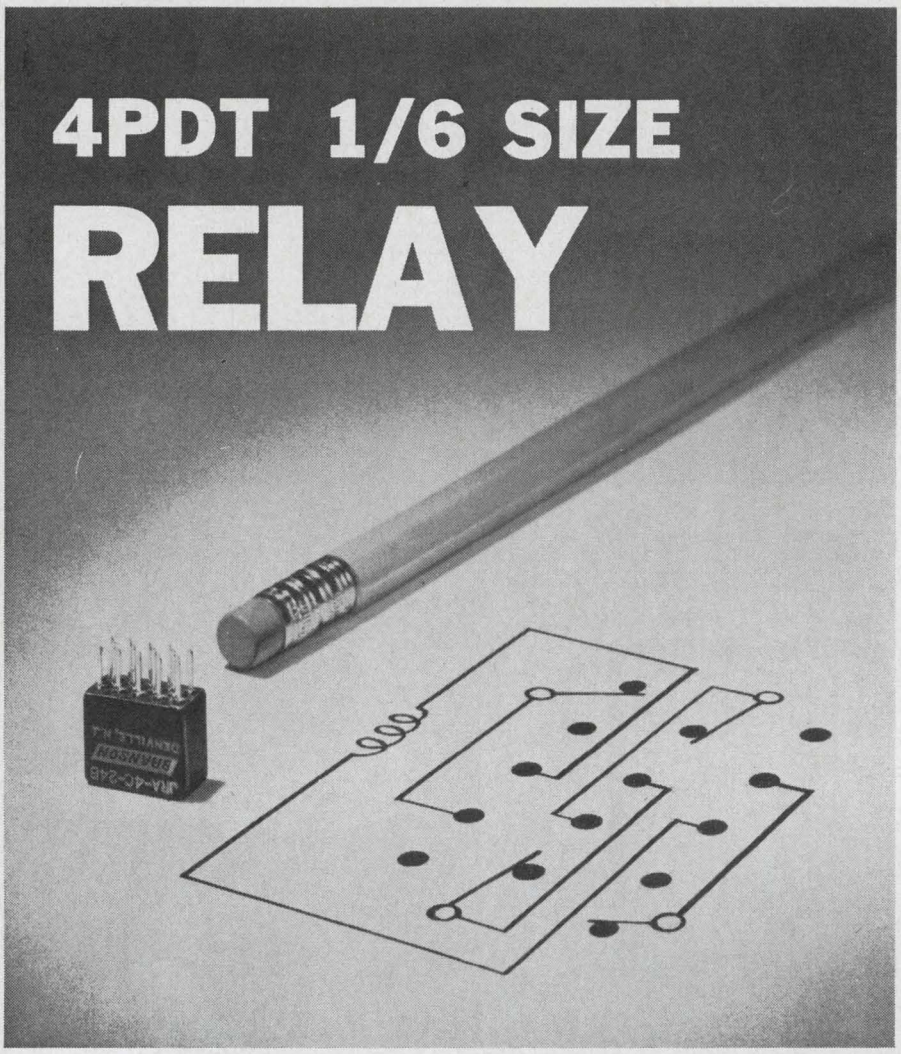

Another Breakthrough from BRANSON


The art of relay miniaturization is advanced still further with the introduction of the 4PDT type JR relay in the 1/6 crystal can size package. It occupies only .04 cubic inches, provides a contact rating of 0.5 ampere at 28 volts DC resistive load, and is virtually unaffected by vibration and G levels many times those required by Military Specifications.

Send for data sheet which provides complete technical details.


OTHER BRANSON PRODUCTS...




6 Pole DT Crystal Can Relay



Time Delay Relays



4PDT ½ Crystal Can Relay




Micro-Miniature Relay Sockets

Relays...Our Only Business

BRANSON CORP.

VANDERHOOF AVENUE • DENVILLE, NEW JERSEY • 201-625-0600

ON READER-SERVICE CARD CIRCLE 156

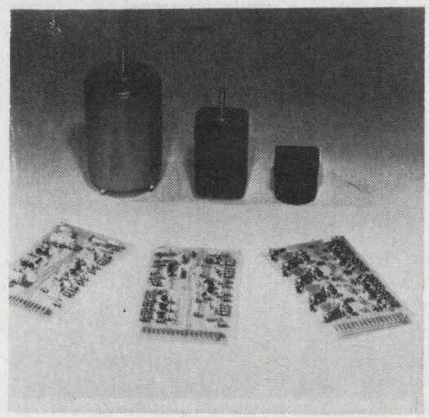

Stepping motor controls

A line of modular controls for stepping motor positioning systems includes logic and pulse circuits.

Motor driver logic, pulse generators, decade counters, general-purpose logic, power supplies and hardware are compatible with most digital systems. Applications include automatic printers, tape transports, X-Y plotters and other multi-axis purposes.

Icon Corp., 107 Binney St., Cambridge, Mass. Phone: (617) 868-5400. *Circle No. 510*

Oscilloscope recording

The PAR-RC-70 is an instrumentation camera for recording oscilloscope patterns, thus effectively simulating an oscillograph.

It records on 70 mm photorecording paper. Resolution of up to 75 μs is provided, and time-base and amplitude coordinates are recorded simultaneously with the trace. Three paper transport speed ranges are available: 0-12, 0-60, and 0-100 inches per second.

Traid Corp., P. O. Box 1839, Glendale, Calif. (213) 245-9393. *Circle No. 511*

Guidance FM decoders


Three new FM command guidance receiver decoders operate in the 406 to 550 MHz band in one, five and ten-channel configurations. The units are designated 34-23-00860, -00770, and -00800 respectively.

Applications are primarily in the area of command guidance and destruct. Selectivity is determined by a passive, 6-pole LC filter followed by a five-stage IF amp.

Electronic Specialty Co., 4561 Colorado Blvd., Los Angeles, Calif. Phone: (213) 246-6767. *Circle No. 512*

ON READER SERVICE-CARD CIRCLE 157 ➤

Heat Dissipation Bonus of Beryllia Worth An Extra Two Cents?

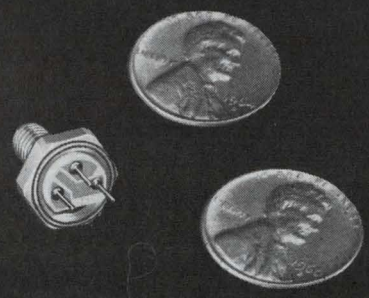


consider Coors metallized ceramics

Coors Beryllium Oxide Ceramic offers you the bonus of 10 times the thermal conductivity of aluminum oxide ceramic—approximately the heat transfer qualities of aluminum metal. Ordinarily, beryllia is thought to be too expensive, except for designs where maximum heat dissipation is an essential. However, we find the additional cost of using beryllia in small metallized assemblies adds only a few cents to the total cost of the completed part. For an "extra two-cents worth" Coors offers a beryllia-to-metal assembly that allows you to use more power . . . or allows you even further miniaturization than with alumina . . . or gives you longer component life—or a combination of all three. When you design micro-substrate assemblies—Consider Coors Metallized Ceramics—and get the bonus of beryllia's thermal conductivity. Write for Coors Metallizing Data Sheet 9502, or call the Coors "hot line"—303/279-4533, Ext. 351.



THIS COORS METALLIZED BERYLLIA MICRO-COMPONENT DISSIPATES THE SAME QUANTITIES OF HEAT

AS THIS COORS METALLIZED ALUMINA MICRO-COMPONENT




Coors

CERAMICS

ALUMINAS • BERYLLIAS • MAGNESIAS • SPECIAL OXIDES

Coors Porcelain Co., Golden, Colo.

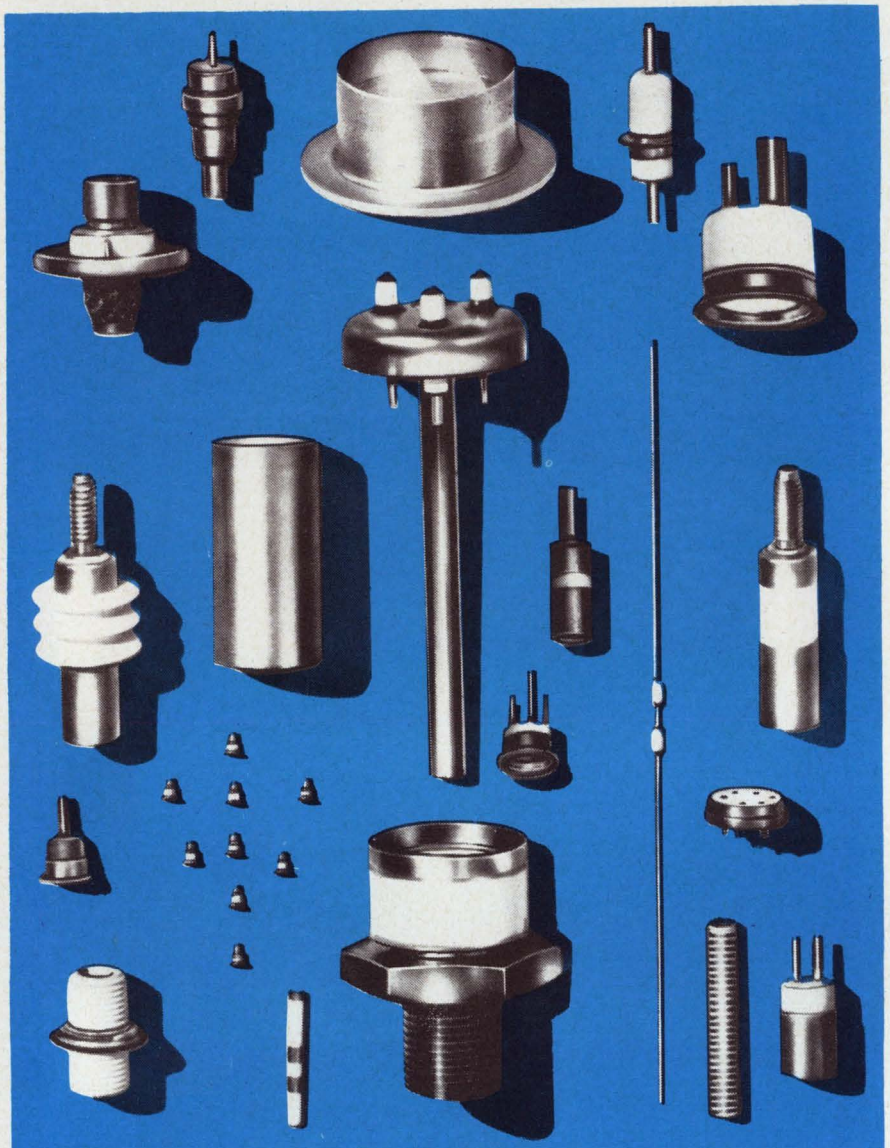

If you can't use any of these products, we'll make one you can use!

HIGH TEMPERATURE CERAMIC-TO-METAL SEALS AND SAPPHIRE WINDOWS, MADE TO YOUR SPECIFICATIONS.

This small sampling of the widely varied products we make does not show the full extent of our capabilities in the High Temperature ceramic-to-metal and sapphire window markets. However, it does indicate the breadth of experience we can bring to your problems.

We have the know-how, staff and production capability to handle your job from prototype through production, and are prepared to render design assistance. Our guide, WHAT YOU SHOULD KNOW BEFORE YOU SPECIFY HIGH TEMPERATURE CERAMIC-TO-METAL SEALS, may be of particular interest.

Write for your copy today.




CERAMICS INTERNATIONAL CORP
MAHWAH, NEW JERSEY

ON READER-SERVICE CARD CIRCLE 158

SYSTEMS

Spectrum analyzer

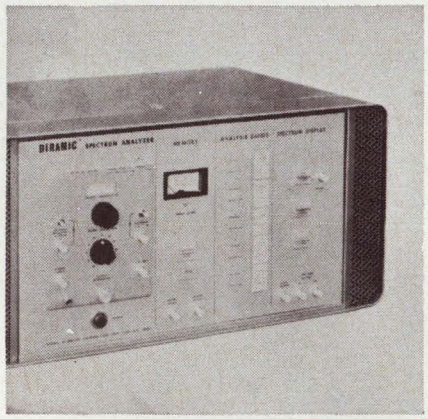


The Diramic Ubiquitous spectrum analyzer covers all frequencies simultaneously in real time within an analysis band up to 10 kHz. The standard model has a 48-dB dynamic range and 60 dB and 72 dB options are available. An internal memory can be used to capture transients and replace tape loops and storage scopes.

Federal Scientific Corp., 615 W. 131st St., New York, N. Y. Phone: (212) 286-4400.

Circle No. 523

Filter/comparator

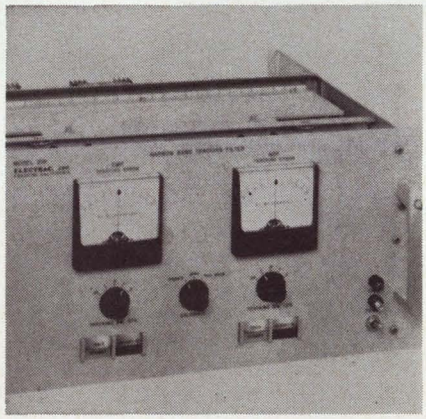

The Model 219A phase-lock tracking filter and phase comparator provides two identical 100 ±3 Hz channels and selectable noise bandwidth from 0.03 to 3 Hz. Phase slope is only 0.7 degrees/Hz. The system is entirely solid-state. Pulse outputs are furnished for use with an external digital phase meter. Applications are in the area of radio interferometry and other angle measuring systems.

Electrac Inc., 1614 Orangethorpe Way, Anaheim, Calif. Phone: (714) 879-6021.

Circle No. 524




DICKSON RELIABILITY PAYS OFF ..... * HERE

...and is incorporated in Dickson's broad line of standard and custom HIGH-VOLTAGE SILICON RECTIFIERS

All Dickson products are produced with the same care and engineering excellence demanded by critical military and space projects. For example, each standard Dickson high-voltage rectifier is engineered to exceed *maximum specified characteristics*, so it will operate reliably under those maximum conditions.

When producing custom high-voltage rectifiers, Dickson's unique cell construction not only assures exceptional reliability but provides unlimited flexibility in package configuration. Each cell contains carefully selected P-N junctions soldered in series and terminated with pure silver leads. To insure long-term stability under extreme environmental and electrical stresses, all junction surfaces are treated before encapsulation.

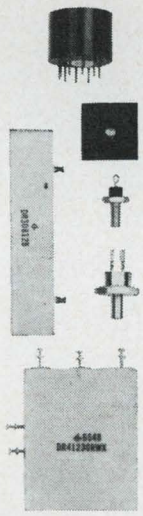

Dickson is currently supplying high-voltage rectifiers up to 135 KV for a wide variety of applications including: aerospace boosters, space vehicles, medical equipment, and military weapons systems.

DICKSON HIGH-VOLTAGE RECTIFIERS
JEDEC TYPES

1N1133	1N1148	1N1754	1N2381	1N3880
1N1134	1N1149	1N1755	1N2382	1N3881
1N1135	1N1730	1N1756	1N2383	1N3882
1N1136	1N1731	1N1757	1N2384	1N3883
1N1137	1N1732	1N1758	1N2385	1N3889
1N1138	1N1733	1N1759	1N3052	1N3890
1N1139	1N1734	1N1760	1N3053	1N3891
1N1140	1N1745	1N1761	1N3054	1N3892
1N1141	1N1746	1N1762	1N3055	1N3893
1N1142	1N1747	1N2374	1N3056	1N4933
1N1143	1N1748	1N2375	1N3057	1N4934
1N1143A	1N1749	1N2376	1N3058	1N4935
1N1144	1N1750	1N2377	1N3059	1N4936
1N1145	1N1751	1N2378	1N3060	1N4937
1N1146	1N1752	1N2379	1N3061	
1N1147	1N1753	1N2380	1N3879	


FOR COMPLETE TECHNICAL INFORMATION
use this publications reader service card
or write, wire or phone Dickson
VISIT IEEE BOOTH #2H34

DICKSON
ELECTRONICS CORPORATION

PHONE (602) 947-5751 TWX (602) • 949-0146 TELEX 66706
P.O. BOX 1387, SCOTTSDALE, ARIZONA 85252

Manufacturers of quality zener diodes, rectifiers, tantalum capacitors, solid state circuit breakers, field effect transistors.


ON READER-SERVICE CARD CIRCLE 159

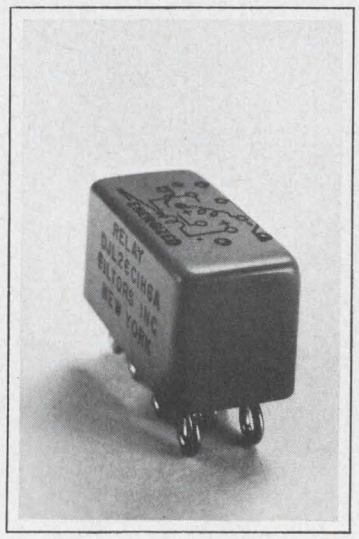

Not all 2pdt relays latch in just 4 msec!

Filtors DJL Series does this and more. DJL, a fast-acting, half-size relay, performs like a full-size crystal-can relay, yet requires 20% less power. With full 2-amp contacts, DJL is a product of Filtors exclusive Total Contamination Control Program which assures reliability. Sealed by flux-free, electron-beam welding... subjected to residual gas analysis ... DJL combines the exacting engineering, production controls and extensive testing that results in Filtors unsurpassed reliability. For complete information on DJL and other extraordinary relays, write:

FILTORS INC.
E. Northport N Y 11731
(516) ANDREW 6-1600



A DIVISION OF THE DEUTSCH COMPANY—ECD

Look for us at Booth 2D13, IEEE.

ON READER-SERVICE CARD CIRCLE 160




Flux remover

A solder flux remover in aerosol form is said to provide a convenient means of completely removing flux residues from electronic circuitry. The solvent used is DuPont's Freon TMC. Offered in 16-oz. aerosol cans, the solvent can be applied to soldered joints as a heavy, flushing spray. A heavy-duty formulation, MS-190Hd is also available in this form. Extension nozzels are available with both types.

Miller-Stephenson Chemical Co., Rte. 7, Danbury, Conn. Phone: (203) 743-4447.

Circle No. 521

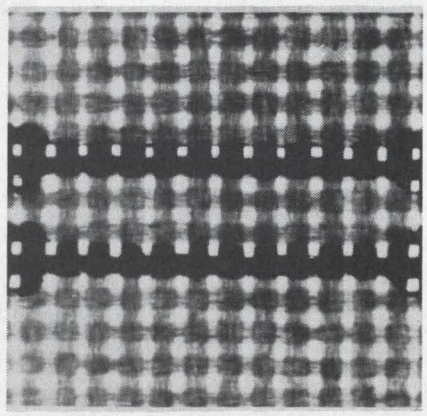

Multilayer PC boards

Materials for a new process for making multilayer printed-circuit boards are available for a wide variety of applications. Called the Friedman Process, the result is discrete layers of circuitry that are easily joined by several methods. The copper lines are handled without disturbing spatial inter-relationships and such layers are easily joined to insulation where required.

The Leal Co., 1716 S. 6th St., Camden, N. J Phone: (609) 365-0098.

Circle No. 522



JUST TILT

AND STRIP!

Our new Mallinckrodt photoresist stripper needs no added chemicals, and it works hot or cool.


Here's the organic stripper that eliminates the mess of mixing and, in many cases, the need for heating. New Photostrip 66 TransistAR®. You just pour it out and put it to work at room temperature. Or heat it up where the application requires.

Photostrip 66 is non-flammable and non-alkaline. It softens and removes resist quickly, *without attacking aluminum deposits on your silicon.*

Give our new Photostrip 66 a whirl. It works beautifully and it's a step faster than anything you've ever used before. For product data, write Electronic Chemicals, Mallinckrodt Chemical Works, St. Louis, Mo. 63160.

Mallinckrodt® **MALLINCKRODT CHEMICAL WORKS / Electronic Chemicals**
St. Louis • New York • Los Angeles

ON READER-SERVICE CARD CIRCLE 161

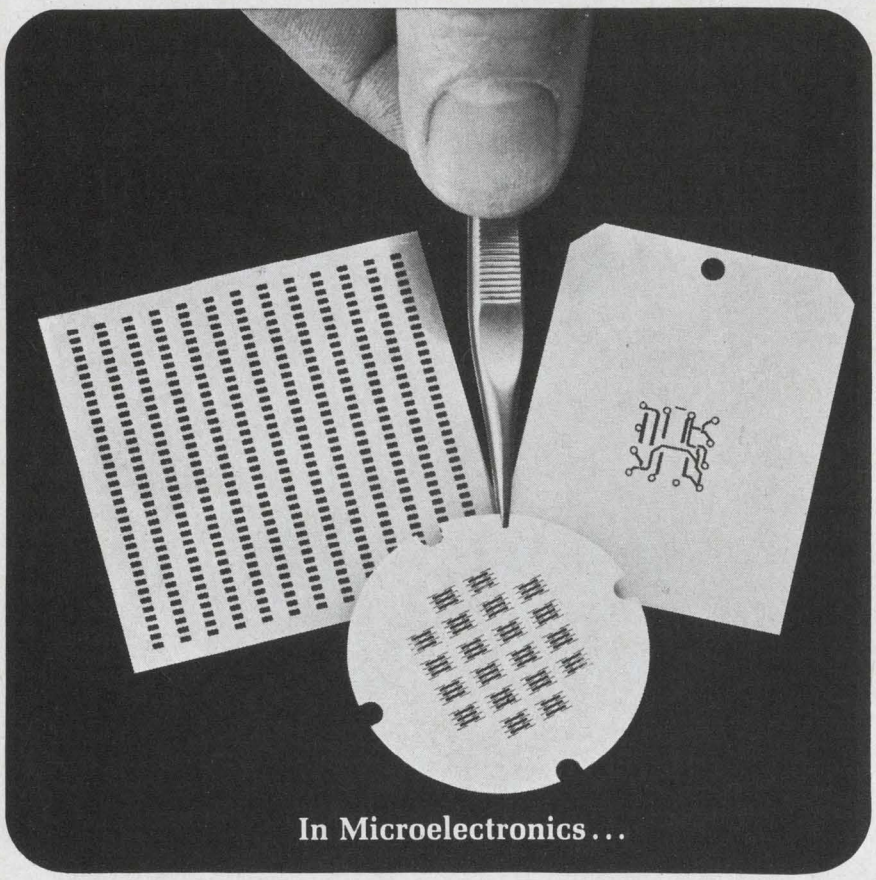

If the mask is Moly, the circuit is quality.


Shown actual size, these evaporation masks are used in vacuum deposition of microelectronic circuits. Molybdenum from General Electric, superior to any other masking material, delivers distinct advantages to producers of integrated microelectronic circuits.

Molybdenum's purity (99.9+ percent) and uniform, fine grain structure enable masks to be photoetched with outstanding precision and definition. Molybdenum's low coefficient of thermal expansion makes possible the reproduction of circuits on glass substrates with extremely close registry. Parallax problems are virtually eliminated because thinner foils can be used, since molybdenum is stiffer than any other available masking material. General Electric supplies molybdenum foil as thin as .0003 in. in widths up to 12 in.

General Electric molybdenum foil has uniform thickness and scratch-free, bright surface finish (2 RMS is typical).

Control of ripple and flatness minimizes resolution problems.

Write or call for more information or application assistance regarding any application of General Electric refractory metals in microelectronics: masks, substrate material, or evaporation boats and coils. General Electric Company, Lamp Metals & Components Department, 21800 Tungsten Road, Cleveland, Ohio 44117. Telephone: (216) 266-3490.




GENERAL ELECTRIC

ON READER-SERVICE CARD CIRCLE 162

SYSTEMS

Integrating gyro

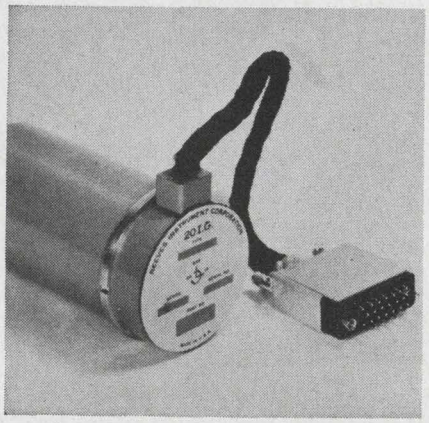


Containing a D'arsonaval torquer, the 20IG type C40D permanent magnet torquer rate integrating gyro is said to eliminate magnetic restraints, hysteresis, saturation non-linearities and power drain from a reference field. The 0.1% torquer linearity holds for 300,000 degree/hours torquer rate and the company guarantees 5000 hours as the dynamic wearout wheel bearing life.

Reeves Instrument Co., Garden City, N. Y. Phone: (516) 746-8100.

Circle No. 513

Telemetry amplifier

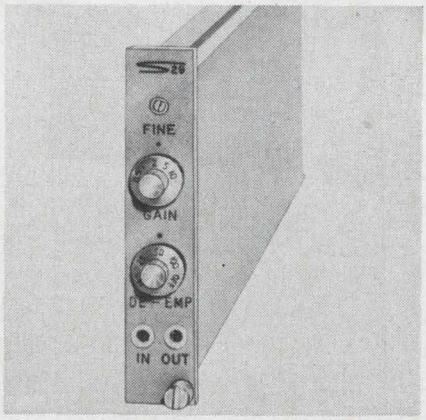

Features of the Model S-29 telemetry amplifier include a switchable de-emphasis circuit and a frequency response of 300 Hz to 2 MHz at a gain of 5 or less. In addition, dual inputs provide a low impedance for summing the outputs of the manufacturer's line of VCOs containing built-in mixing resistors. Output voltage is 20 V and current is 100 mA.

Sonex, 20 E. Herman St., Philadelphia, Pa. Phone: (215) 843-6400.

Circle No. 514

ENGINEERS . . . DESIGNERS . . . RESEARCHERS

WIN A COLOR TV

other outstanding prizes . . . in the

FENWAL ELECTRONICS

"MR. THERMISTOR" CONTEST

ATTENTION . . . THERMISTOR USERS

If you have ever employed *thermistors* for temperature measurement, temperature compensation, industrial control, or any one of the dozens of other applications for which they are ideally suited, here is a chance to cash in on your experience. All you have to do is describe the applications briefly, in accordance with the contest rules below, and send it to Fenwal Electronics, Inc. before April 30, 1966. Just for entering, you will receive an F. E. I. Experimenters Thermistor Kit (valued at $9.95). And you will be eligible to win one of the three valuable grand prizes described below.

1ST PRIZE



23" COLOR TV . . . A handsome 23" Motorola table-model color set (valued at $500) goes to "Mr. Thermistor". This prize, guaranteed to please the whole family, will be delivered to the winner's home, installed, with a full ninety-day warranty.

2ND PRIZE



ACCUTRON® TIMEPIECE . . .

The winner of the second "Mr. Thermistor" prize will receive this striking timepiece . . . said to be the world's most accurate. Electronically-driven by pulses from a tuned oscillator, it is a real engineer's watch, guaranteed to make you the envy of the whole department. Retail value $125.

3RD PRIZE




SPANISH TREASURE PEN

This unique Parker 75 pen (which lists for $75) is a conversation piece you will treasure for years. The beautifully-wrought barrel is genuine antique silver, recently salvaged from the remains of a Spanish plate fleet which foundered in a hurricane off the East coast of Florida in 1715. With the pen you get documentary proof of its authentic origin. It is also a fine writing instrument.

EVERYBODY WINS

Everyone who submits an entry in the April Fenwal Electronics "Mr. Thermistor" Contest will receive one of F.E.I.'s large G-701 Experimenter's Thermistor Kits (which sell for $9.95) containing 10 assorted precision thermistors with complete specifications and application data.



Fenwal Electronics

63 Fountain Street
Framingham, Mass.

"MISTER THERMISTOR" CONTEST RULES

1. F.E.I.'s "Mr. Thermistor" Contest is open to all qualified engineers and researchers residing within the United States, with the exception of employees of Fenwal Electronics, Inc., Fenwal, Inc., and their advertising agencies.

2. Each entry should describe in as many words as necessary:

a. The product, system or application in which the thermistor was used.

b. The specific function of the thermistor, (or thermistors), operating parameters, and the type used.

c. Why a thermistor was used, instead of some alternative approach, and how well the application achieved objectives.

A sketch or schematic (pencil is OK) must be included to illustrate the application.

3. More than one entry may be submitted by a contestant.

4. Entries should be typed, or written clearly, on 8½ x 11 paper. Sender's name, title, company affiliation, and home or company address should be clearly indicated. Each entry must be signed in ink. More than one individual may sign, but only one prize will be awarded per entry.

5. Entries will be judged on: ingenuity of thermistor utilization, sophistication of probe design or thermistor circuitry, and/or effectiveness of the thermistor approach in solving a specific design problem.

6. Decision of the judges will be final. All entries become the property of Fenwal Electronics, Inc.


7. Entries for this "Mr. Thermistor" Contest must be postmarked no later than midnight, April 30. Winners will be advised directly.

8. **First Prize** winner (1) will receive a 23" Motorola Color Television Set. **Second Prize** winner will receive an ACCUTRON® Timepiece. **Third Prize** winner will receive a Parker 75 Treasure Pen.
Every contestant will receive a G-701 Thermistor Kit.


9. Entries should be addressed to:
Thermistor Contest
Fenwal Electronics, Inc.
63 Fountain Street
Framingham, Massachusetts

GET YOUR ENTRY IN *NOW* BEFORE THE APRIL 30, DEADLINE

ON READER-SERVICE CARD CIRCLE 163

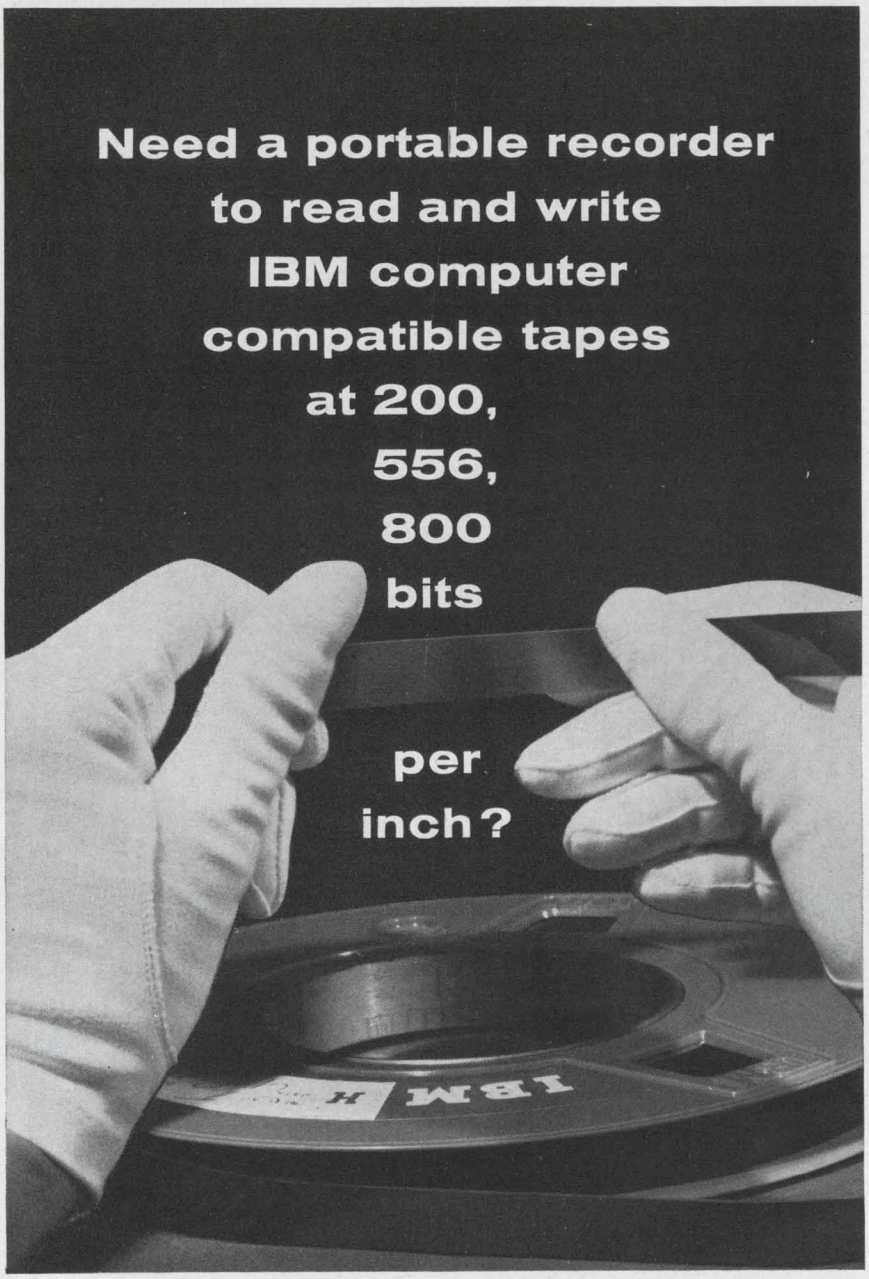

Maybe the Parsons DR 1200 is what you've been looking for. This new digital recorder is compact, weighs only 45 pounds, operates with only 100 watts of power and reads and writes IBM computer compatible tapes with tape speeds up to 120 inches per second. Recording format is 7 or 9 track data on IBM reels. Overall dimensions: 19 in. x 14 in. x 7.5 in.



Its rugged construction, precision performance and fail-safe features make the DR 1200 an ideal instrument for field or fixed installations in virtually any kind of environment. Best of all, it is priced considerably lower than you would expect to pay for a comparable unit. It is now in production and deliveries can be made within six weeks.

Dial 213-681-0461 (or drop us a line) and tell us what you need. Chances are the DR 1200 can be adapted to meet your optional requirements at a price you are ready to pay. For the white glove treatment, contact Jim Vallely, Sales Manager, at

PARSONS

THE RALPH M. PARSONS ELECTRONICS COMPANY


151 S. DE LACEY AVE., PASADENA, CALIF.

A subsidiary of The Ralph M. Parsons Company

LOS ANGELES
NEW YORK
WASHINGTON

OFFICES IN OTHER PRINCIPAL CITIES THROUGHOUT THE WORLD

ON READER-SERVICE CARD CIRCLE 165

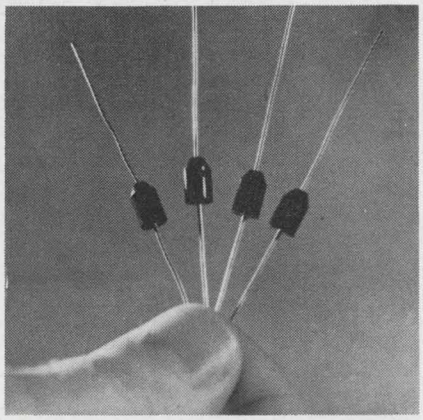


Silicon rectifiers

A group of moisture-proof epoxied silicon rectifiers has 1.5 A rating at 40°C case temperature. Surge rating is 50 A (peak half-cycle current at 60 Hz under full-load).

Designated 1N4816-4822 and 359 P, S, and Z, these units have peak reverse voltage ratings from 50-1000 V. JEDEC registered devices (1N numbers) carry lifetime guarantees.

Price: $.28 each 50-V to $1.15-1000-V. Westinghouse Semiconductor, Youngwood, Pa. Phone: (412) 925-7272.

Circle No. 515

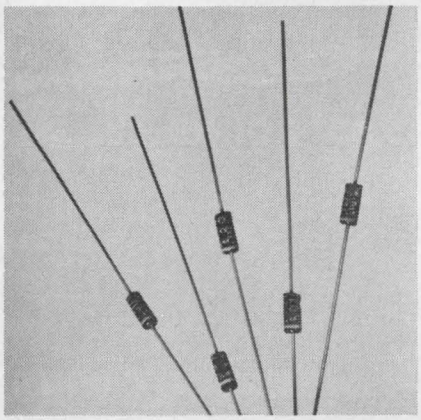


MW hot-carrier diode

An improved hot-carrier microwave mixer diode is called the hpa-2350. This metal-silicon Schottky-barrier diode has applications as an RF mixer through 2.5 GHz.

Noise figure at 2 GHz is typically 6.5 dB, IF impedance is 175 ohms typical, vswr is 1.3 typical, total capacitance is 1 pF max, power dissipation is 125 mW at 25°C, and peak pulse power rating is 5 ergs.

P&A: $22; stock. hp associates, 620 Page Mill Rd., Palo Alto, Calif. Phone: (415) 321-8510.

Circle No. 516

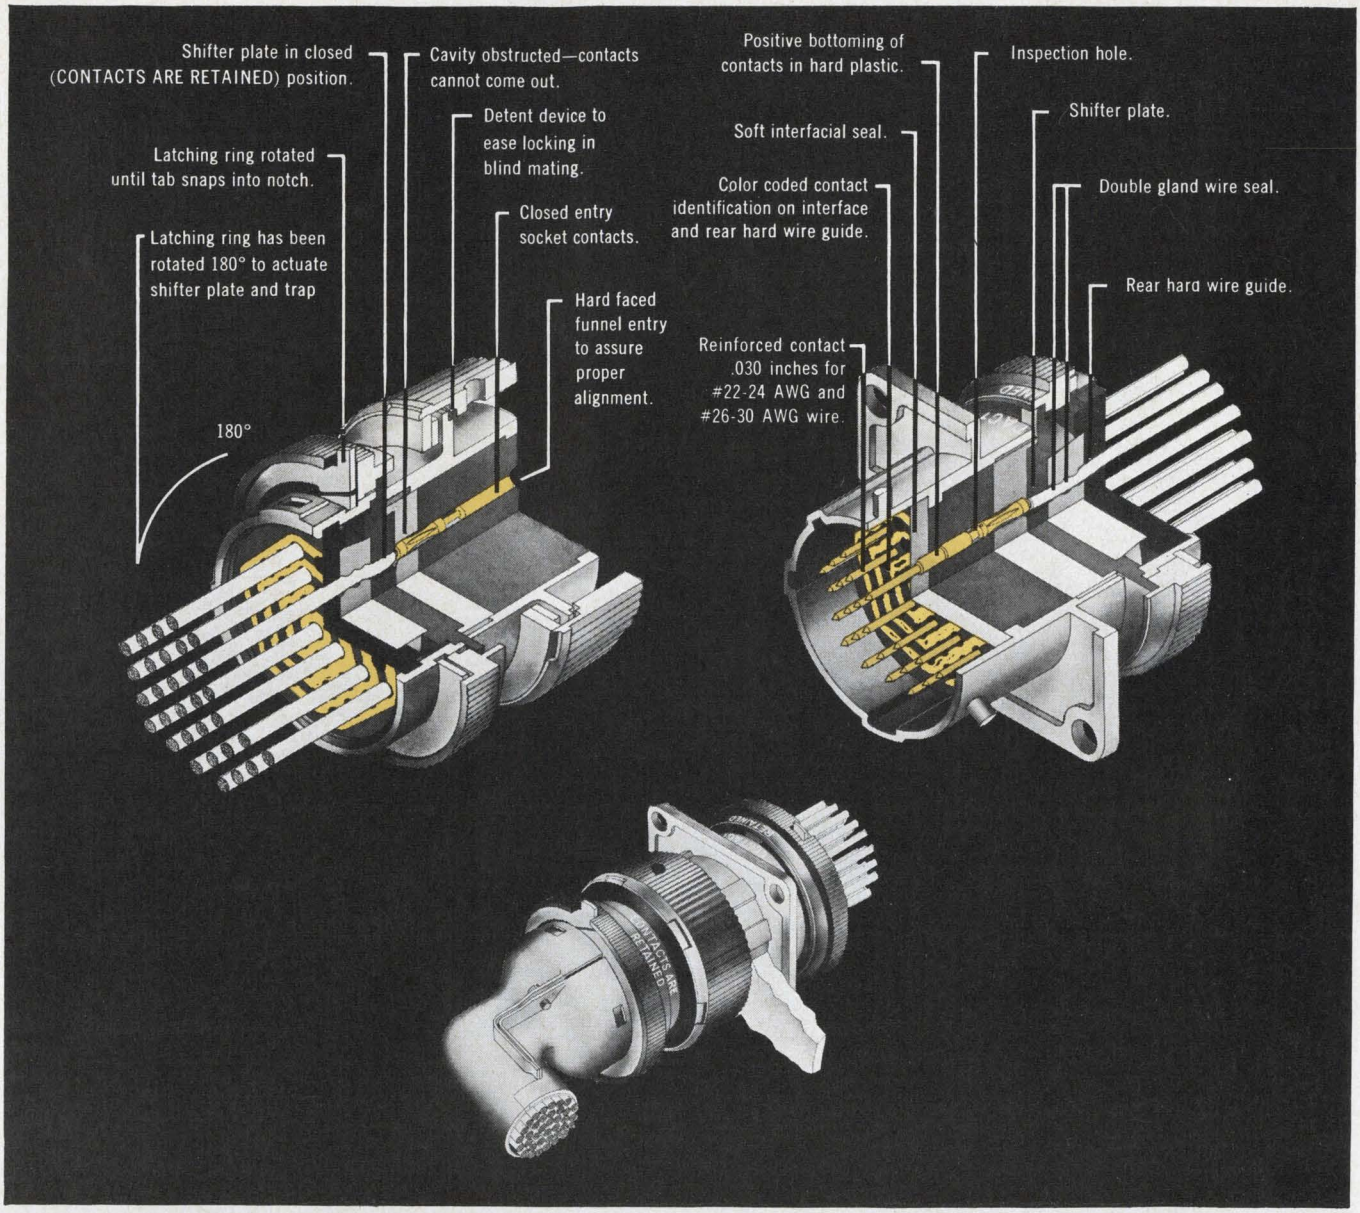

This connector begins where others leave off

Take the best subminiature pin and socket connector on the market. Eliminate its inherent failure modes. Give it twice the contact density of other connectors. Then add the very latest innovations in design and materials. This was our objective in developing the new CH-AMP★ Subminiature Circular Connector.

The result shown here is in many ways even more spectacular than the objective. Here is a bayonet-coupled connector with a unique twist-to-lock contact retention mechanism that eliminates the need for retention clips and *extraction tools*—an environmentally sealed connector designed in a stainless steel housing that provides continous grounding from mounting flange to cable clamp.

The contacts are a special reinforced spring design with closed entry for probe protection and a four-indent crimp for maximum electrical conductivity. A resilient wafer grips them in the proper position prior to locking. Color-coded interfaces and positive visual checks top off the many precision engineered features that give the CH-AMP Connector a positive GO for all high grade military and industrial applications.

- Meets or exceeds the requirements of MIL-C-26500 and MIL-C-26482
- Available in 85, 58, 37, 26, and 14 contact configurations
- Contact retention force: 2 lbs. unlocked, 10 lbs. locked
- Positive depth-controlled contact insertion
- Moisture-proof, double gland wire seal
- 90° or 180° cable clamp can be applied *after* connector is wired

Available in five shell configurations for wire sizes AWG 22-30. For full details, write today for the new A-MP★ Subminiature Circular Connector brochure.

★Trademark of AMP Incorporated

AMP INCORPORATED
Harrisburg, Pennsylvania


INDUSTRIAL SALES DIVISION

A-MP★ products and engineering assistance are available through subsidiary companies in: Australia · Canada · England · France · Holland · Italy · Japan · Mexico · Spain · West Germany

Visit us at the IEEE Show, Booths 2E45-2E49, March 21-24, 1966

Speed Inquiry to Advertiser via Collect Night Letter

ON READER-SERVICE CARD CIRCLE 164

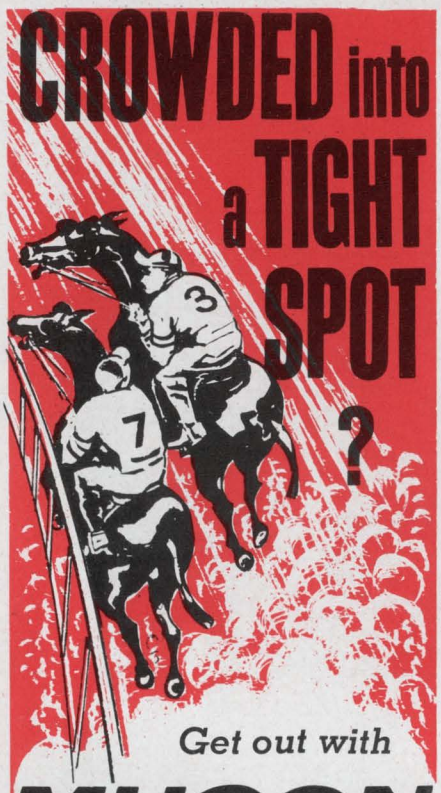

26 STOCK VALUES

Part No.	Capac. mmf.	Tol.	Max. Body Length
SC-1	1.0	±25%	.100"
SC-2.5	2.5	±25%	.100"
SC-5	5.0	±25%	.100"
SC-7.5	7.5	±25%	.100"
SC-10	10	±25%	.100"
SC-15	15	±25%	.100"
SC-22	22	±25%	.100"
SC-33	33	±25%	.100"
SC-47	47	±25%	.100"
SC-68	68	±25%	.100"
SC-82	82	±25%	.100"
SC-100	100	±25%	.100"
SC-150	150	±25%	.100"
SC-220	220	±25%	.200"
SC-330	330	±25%	.200"
SC-470	470	±25%	.200"
SC-680	680	±25%	.200"
SC-820	820	±25%	.200"
SC-1000	1000	±25%	.200"
SC-1500	1500	±25%	.200"
SC-2500	2500	±25%	.250"
SC-3300	3300	±25%	.250"
SC-4000	4000	±25%	.250"
SC-5000	5000	±25%	.250"
SC-7500	7500	±25%	.250"
SC-01	10000	±25%	.250"


Republic Electronics makes a broad line of Mucon Subminiature Ceramic Capacitors to meet any requirement.
Write for Catalog

REPUBLIC ELECTRONICS CORP.
176 E. 7th ST., PATERSON, N. J. 07524
201-279-0300

ON READER-SERVICE CARD CIRCLE 166

POWER EQUIPMENT

IC power source

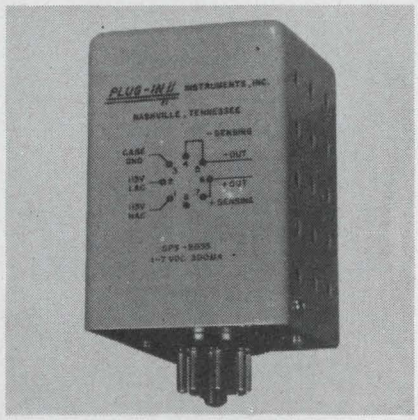


The regulated supplies SPS-2055 and 2062 are designed especially to provide dc power to integrated circuits. The model shown, SPS-2055, has a voltage adjustment range from 1 to 6.5 V and can continuously deliver 0 to 300 mA. Line and load regulation is better than 3 mV dc and ripple is typically 1 mV. Both use silicon transistors and include overload protection.

Plug-In Instruments, Inc., 1416 Lebanon Rd., Nashville, Tenn. Phone: (615) 244-1330.

Circle No. 517

Plug-in supply

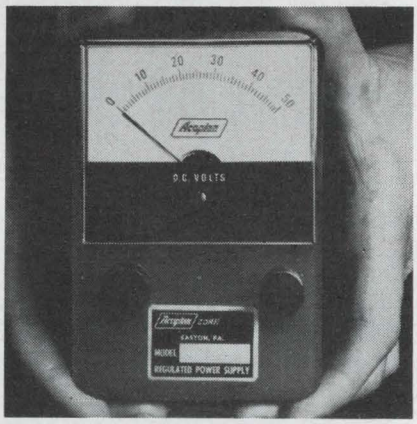


The Pow-A-Meter is an adjustable power supply with an integral voltmeter. The supply can be plugged into a breadboard, instrument or other equipment, eliminating the need for external power supplies, voltmeters and leads. Four models are available with nominal output voltages from 6 to 50 V and current out from 200 to 500 mA.

Price: $95-$115. Acopian Corp., 927 Spruce St., Easton, Pa. Phone: (215) 258-6149.

Circle No. 518

Magnet power supply

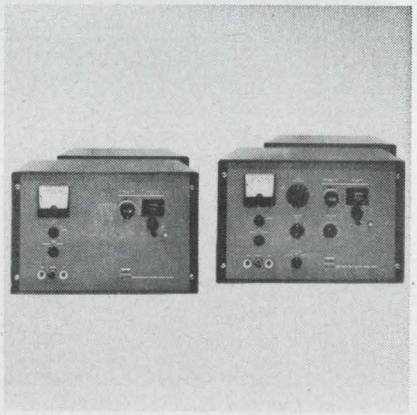


A dial on the V-FR2000 series 2-kW dc power supplies permits resetting the field intensity of a laboratory electromagnet to any desired value within the magnet's range, independent of hysteresis effects.

Accuracy of 0.2% up to 10 kilogauss is specified, field repeatability is of an even higher order. The field-sweep instrumented V-FR2903 is otherwise similar to the basic V-FR2902.

Varian Assoc., 611 Hansen Way, Palo Alto, Calif. Phone: (415) 326-4000.

Circle No. 519

Variable-slope supply

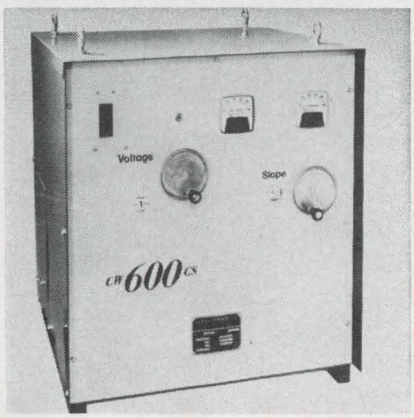

A new rectifier type power supply features continuously adjustable voltage and slope. With a 100% duty-cycle rating of 600 amps (750 at 60% duty-cycle), it has an 85% or better efficiency rating, and a 0.9 or better power factor. Rectifiers are surge-rated at 8000 amps.

The unit is called CW600CS, measures 27- x 32- x 32-in., and weighs 700 pounds.

Glenn-Pacific Div. of Teledyne, Inc., 703-37th Ave., Oakland, Calif. Phone: (415) 532-7404.

Circle No. 520

Low Cost Test Signals

10 MHz to 1000 MHz



—with the 3200B VHF OSCILLATOR

Using the new Frequency Doubler Probe 13515A

The VHF Oscillator Model 3200B is designed for general purpose laboratory use including receiver and amplifier testing, driving bridges, slotted lines, antenna and filter networks, and as a local oscillator for heterodyne detector systems in the frequency range from 10 to 500 mc.

The push-pull oscillator is housed in a rugged aluminum casting for maximum stability and extremely low leakage; six frequency ranges are provided for adequate bandspread on the slide-rule dial. Internal CW operation is provided; AM and pulse modulation may be obtained through the use of a suitable external source. The RF output is coupled through a waveguide-below-cutoff variable attenuator; in addition, an electrical RF level vernier is included as a front panel control.

An optional accessory Frequency Doubler Probe, Model 13515A incorporates a solid-state doubler circuit and provides additional frequency coverage from 500 to 1000 mc.

Features:

- ±0.002% Frequency Stability
- External AM and Pulse Modulation
- Waveguide-Below-Cutoff Output Attenuator
- Solid-State Power Supply

Data subject to change without notice.

SPECIFICATIONS 3200B

Frequency range: 10 to 500 Mc (MHz) in six bands: 10 to 18.8 Mc; 18.5 to 35 Mc; 35 to 68 Mc; 68 to 130 Mc; 130 to 260 Mc; 260 to 500 Mc.

Frequency accuracy: within ±2% after ½ hour warmup (under 0.2 mw load).

Frequency calibration: increments of less than 4%.

Frequency stability (after 4-hour warmup under 0.2 mw load): short term (5 minutes) ±0.002%; long term (1 hour) ±0.02%; line voltage (5-volt change) ±0.001%.

RF output:
Maximum power (across 50-ohm external load):
>200 mw (10 to 130 Mc);
>150 mw (130 to 260 Mc);
>25 mw (260 to 500 Mc).
Range: 0 to >120 db attenuation from maximum output.
Load impedance: 50 ohms nominal.

RF leakage: sufficiently low to permit measurements at 1μv.

Amplitude modulation: externally modulated.
Range: 0 to 30%.
Distortion: <1% at 30% AM.
External requirements: approximately 15 volts rms into 600 ohms for 30% AM, 200 cps to 100 Kc.

Pulse modulation: externally modulated.
External requirements: 1 volt peak pulse into 2000 ohms. 5-volt rms sine wave will provide useable square-wave modulation.

Power: 105 to 125 v or 210 to 250 v, 50 or 60 cps, 30 w.

Dimensions: $7\frac{25}{32}$" wide, $6\frac{1}{2}$" high, $12\frac{17}{32}$" deep (198 x 165 x 318 mm.)

Weight: net 15 lbs. (6, 8 kg), shipping 19 lbs. (8, 6 kg).

Accessories available: 13515A Frequency Doubler Probe; 501B, 514B, 517B Output Cables; 502B, 506B Patching Cables.

Price: Model 3200B, $475. F.o.b. factory.

13515A FREQUENCY DOUBLER PROBE

Frequency range: 500 to 1000 Mc (MHz) with the 3200A/B operating at 250 to 500 Mc.

Harmonic suppression: (at 4 mw output): fundamental: >16 db down; higher order: >16 db down (500 to 800 Mc); >14 db down (800 to 1000 Mc).

RF output: more than 4 mw across external 50-ohm load, controlled by probe depth.

Weight: net 4 oz. (110 gms), shipping 8 oz. (220 gms).

Price: Model 13515A, $95. F.o.b. factory.

For more information contact your local Hewlett-Packard field engineer or write Hewlett-Packard, Green Pond Road, Rockaway, N. J. 07866; Europe: 54 Route des Acacias, Geneva.

See us at the I.E.E.E. Show
BOOTHS 3E01 - 3E18

HEWLETT hp PACKARD
An extra measure of quality

ON READER-SERVICE CARD CIRCLE 168

Automatic synchronizer




Model 8708A signal-generator synchronizer uses phase-lock techniques to give test signals stable within 2 parts in 10^7 over 10 minutes. Automatic synchronization is achieved within the range of the 606B (50 kHz to 65 MHz) or 608F (10 MHz to 455 MHz sig gens.

P&A: $1800; stock. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.

Circle No. 525

Transistor tester

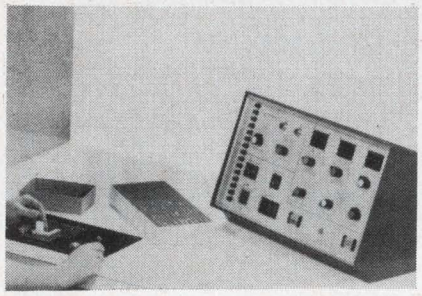

A high-speed go/no-go diode and transistor tester has 10-second program changing.

Both dc and pulse testing are provided by the model 665, as are 15 device-sorting outputs and built-in failsafe circuitry.

P&A: about $25,000; 60 days. Test Eqpt. Dept., Industrial Prod. Group, Texas Instruments Inc., 3609 Buffalo Speedway, Houston, Tex. Phone: (713) 526-1411.

SEE AT BOOTH 1D13-25

Circle No. 526

Speed and torque meter

The TM9 measures speed, torque and horsepower, presenting all three measurements as direct dial readouts, or signals for remote application. Used with a strain-gauge torque transducer, several ranges are possible within the full-scale range of 3 lb-ft. to 40,000 lb-ft., 250 to 6,000 rpm, and 0.5 to 5,000 hp. Accuracy of ±1% is attained on full-scale readouts, and greater accuracy is possible using the calibration charts provided. The unit is suitable for direct plotting of torque/speed and horsepower/speed curves of short rated motors in conjunction with an X-Y plotter.

Price: meter, $1,048; transducers, $532 to $1420. Westland Aircraft Ltd., Saunders Rowe Div., East Cowes, Isle of Wight, England.

Circle No. 527



Machinable ceramic




Machining of this material, CERAMSOFT, can be done with conventional tools such as Lathe, drill press and milling machine. Firing produces a hard, dense, high-temperature (1177°C) ceramic.

The material can be used for induction heating devices, and precision components of all types.

Availability: Stock. Metal CERAM 17 N. West St., Mt. Vernon, N. Y. Phone: (914) 664-2800.

Circle No. 528

Flat ribbon cable

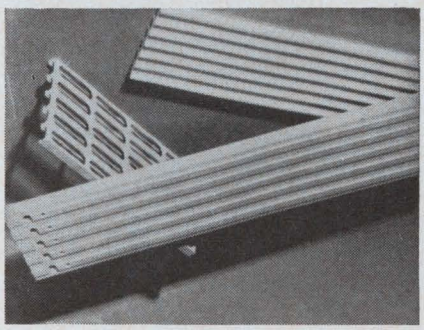

Spectra-Strip is a flat-bonded ribbon cable that is available in a wide variety of configurations for virtually any application.

Options in the line include your choice of conductor size, color coding and length of the conductors. Many types are offered.

Spectra-Strip Wire and Cable Corp., P. O. Box 415, Garden Grove, Calif. Phone: (714) 537-4530. TWX: (714) 530-0313

Circle No. 529

Powdered epoxy resins


Two new powdered epoxy resins are designed for insulation and protection of electronic parts. Called Scotchcast types XR-5106 and 5115, both are one-part systems that can be spray-coated or dipped. XR-5106 is semi-flexible and unfilled for applications requiring high impact resistance, such as coating capacitors and resistors. Type XR-5115 is a filled system with particularly high impact resistance recommended for insulation and protection.

Cure times for both systems range from 3 minutes at 400°F to 30 seconds at 400°F. Impact resistance of the system by the Gardner tester is rated 160 inch pounds for XR-5106 and 140 for XR-5115. Both are self-extinguishing and highly resistant to moisture.

3M company, 2501 Hudson Rd., St. Paul, Minn. Phone: (612) 733-4033.

Circle No. 530

SINGER
INSTRUMENTATION

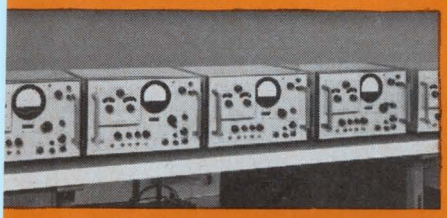

The elegant engineering solution to 20-15,000 Hz electromagnetic interference measurement problems:

Solid-State NF-315
Noise and Field Intensity Meter

Here in one light, compact package is everything you need to perform rapid EMI measurements with confidence: □ Solid-state dependability □ Internal frequency and amplitude calibrators for on-the-spot checking □ 0.005 microvolt sensitivity □ Greater than 70 db spurious response rejection □ Signal range 180 db □ 8 hours continuous portable operation with built-in rechargeable battery □ Highly-stabilized circuits to eliminate recalibrations when tuning to new frequencies. All-in-all, the sophisticated simplicity which adds up to engineering elegance.

The EMPIRE NF-315 is a fast, precise, sensitive instrument with all the characteristics you need, backed by a company with an unparalleled dependability record. Military and civilian government agencies, major aerospace contractors insist on the NF-315. You should, too!

On Display IEEE, Booths 3H01-3H06

EMPIRE*
*A Trademark of THE SINGER COMPANY

THE SINGER COMPANY
METRICS DIVISION
915 PEMBROKE ST., BRIDGEPORT, CONNECTICUT
PHONE (203) 366-3201 • TWX 710-453-3483

Design and production of PANORAMIC • SENSITIVE RESEARCH • EMPIRE • GERTSCH Instruments for measurements

E-66-12

BIRD®

CURVES DESIGNED TO PLEASE

COAXIAL RF FILTERS



CUSTOM ENGINEERED OR FIELD-PROVEN DESIGNS BIRD engineers have extensive experience in designing filters where specifications are demanding and the tolerances are tight. Competent engineering, complete manufacturing and comprehensive testing facilities assure deliveries to meet your schedules. Filters available with Low-pass cut-off from 30 to 2700 mc (nearly fifty designs at 400 mc), Hi-pass cut-off frequencies from 30 to 1000 mc, Band-pass as narrow as 5% of center frequency. Sizes from ¾ cubic inches, with sub-miniature connectors, to 3⅛" line.


A summary of representative filters already manufactured by BIRD is available upon request. Ask for Bulletin CF-65. You may find that some of the listed designs will satisfy your requirements at a trimming of time and a saving in cost.

BIRD ELECTRONIC CORPORATION
CLEVELAND (SOLON) OHIO 44139
30303 AURORA RD. Phone 216-248-1200
TWX 216-248-6458 • Telex 098-5298 • Cable BIRDELEC

Palo Alto, Cal: O. H. Brown, Box 128. Phone: 415-321-8867 • Los Angeles, Cal: Allgood Asso., 3388 W. 8 St. Ph: 213-383-4443 • Waltham, Mass: Bird Electronic, 235 Bear Hill Rd. Phone: 617-899-4162

SEE US AT BOOTH 3B11-12 IEEE SHOW

ON READER-SERVICE CARD CIRCLE 181

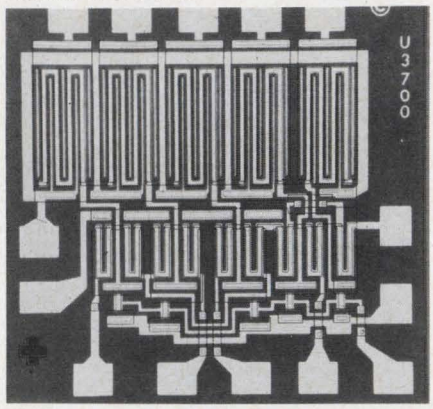


Commutator

A monolithic multi-channel commutator is intended for use in multiplexing and telemetry systems where low on-resistance and low channel leakage is required. The uM 3700 offers on resistance less than 200 ohms and leakage less than 1nA per channel. Using MOSFETs as active resistors, the device has all channel blanking for four channel operation. Each gate diode; protected.

Availability: April. Fairchild Semi., 333 Fairchild Dr., Mountain View, Calif. Phone: (415) 962-2530.

SEE AT BOOTH 2GO3-2G13

Circle No. 580

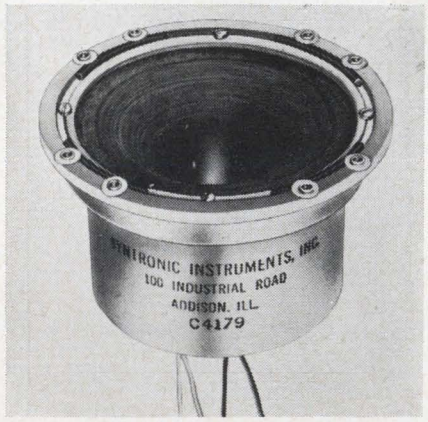

90° deflection yoke

Type C4179 encapsulated 90° deflection yoke has 1" ID, permitting proper fit on CRTs with neck sizes from 7/8-1 in. Neck shadow is eliminated by the flare which allows the yoke to nestle against the CRT.

Resonant operation is achieved by a high Q ferrite core. A variety of impedances are available.

P&A: $100; 6 wks. Syntronic Instruments, 100 Industrial, Addison, Ill. Phone: (312) 543-6444.


SEE AT BOOTH 2G15

Circle No. 581

volt-pac®

AUTOMATIC VOLTAGE REGULATOR

VOLTAGE PROBLEM SOLVERS

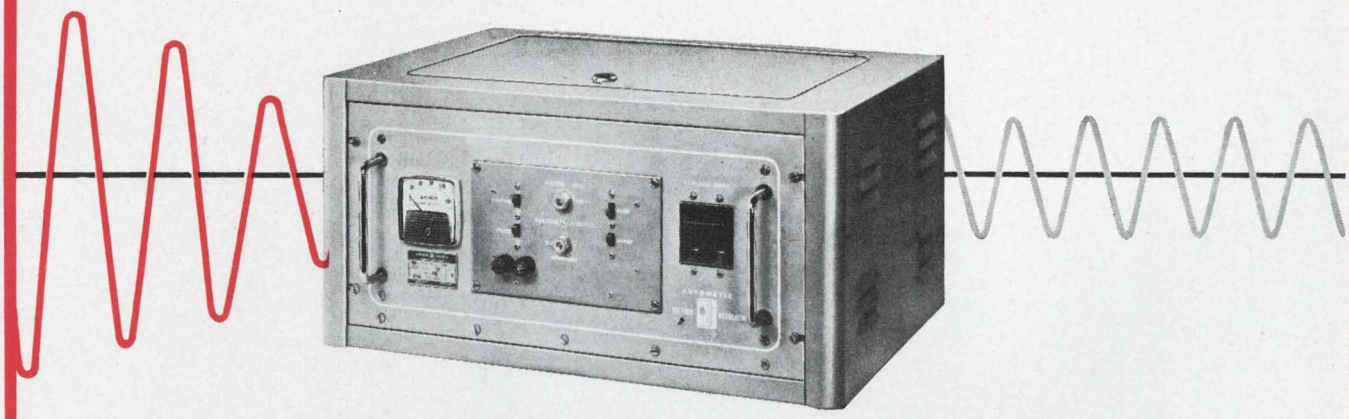

Automatically smooths input fluctuations

G-E Automatic Volt-Pacs maintain pre-selected output voltage levels within ±1 percent despite variations in both line and load conditions. Use automatic Volt-Pacs as an integral component or for separate indoor mounting to supply a constant voltage to circuits which are sensitive to voltage variations. Typical specifications for G-E Automatic Volt-Pacs:

Regulation accuracy	±1%
Speed of correction	10.4 v/sec
Output voltage	Adjustable from 110-120v
Input voltage	95v-135v, single-phase
Frequency	60 cycles
Load range	0 to full load
Efficiency	Up to 99%
Power factor range	0 to 100%
Wave form distortion	None
Ambient temperature operating range	−20 to +40C

In addition to its full line of automatic Volt-Pac voltage regulators, G.E. offers conventional static-magnetic and Stabiltron a-c voltage stabilizers, and manual and motor-operated Volt-Pac variable transformers.


Contact your G-E Sales Engineer for application assistance. Or, for free Volt-Pac literature, write for publications GEA-8068 (automatic) or GEA-8110 (manual and motor-operated) to General Electric, Section 413-31, Schenectady, N. Y. 12305.


Specify General Electric for all your voltage regulation and control needs

Stabiltron

A-C VOLTAGE STABILIZERS

Maintain precise voltage output despite wide fluctuations of line voltage, frequency, load, load power factor and ambient temperature. Stabiltron is available in 0.5, 1, 2, 5, and 10 KVA ratings. Write for publication GEA-7358.






POWER SUPPLIES

Keep d-c output voltage constant for computers, process control, electronic measuring devices despite fluctuating line voltage with G.E.'s d-c power supply. Get output up to 2 KVA, 50- or 60-cycles. Write for publication GEA-7353.

Progress Is Our Most Important Product

GENERAL ELECTRIC

ON READER-SERVICE CARD CIRCLE 182

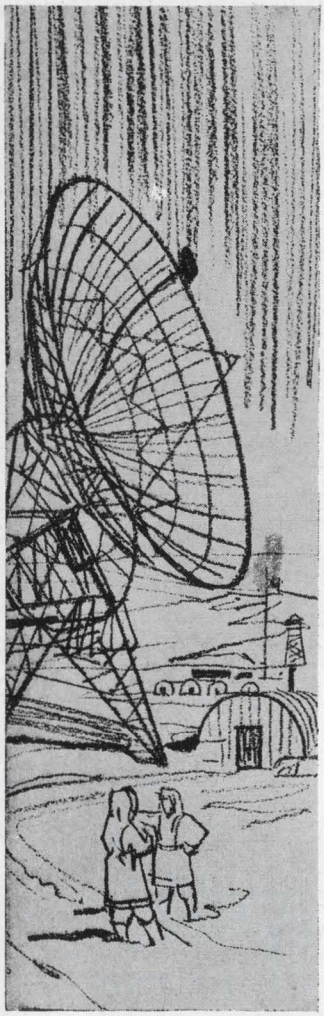


KLIXON®
PRECISION CONTROLS





ACTUAL SIZE



For superior thermal stability of semiconductor components in ambients from –55°C to 100°C . . .

RELY ON TI FOR TEMPERATURE CONTROL

NEW KLIXON Component Ovens provide for the first time accurate temperature control for DO-7 and TO-5 type semiconductor components without the use of conventional heaters, thermostats or controllers. Result? Improved performance with substantial cost reductions.


A breakthrough in semiconductor technology! These miniature ovens utilize the self-regulating characteristics of a polycrystalline semiconductor material to assure uniform component temperature over a wide range of ambient temperatures.

Two ovens now . . . more later! The 3ST oven reduces the temperature coefficient of voltage regulator diodes (DO-7). The 4ST oven stabilizes the temperature of transistors (TO-5) in dc and differential amplifiers, unijunction and voltage controlled oscillators, pulse-counting discriminators, infrared sensing equipment and high frequency crystals. Power requirements are 24v-ac or v-dc, 3.4 watts max (3ST), 6.5 watts max (4ST). Control temperature is 115°C. Warm-up time from —55°C is less than 2.5 minutes. Ovens for other component configurations and temperatures are being developed.

Bulletin PRET-15 gives you all the data on these exclusive TI developments. Write for your copy today.

KLIXON
CONTROL PLANTS IN
Attleboro, Mass • Versailles, Ky.
Central Lake, Mich • Richmond Hill,
Ontario • Holland • Italy • Australia
Argentina • Brazil • Mexico

METALS & CONTROLS INC.
FOREST ST., ATTLEBORO, MASS.
A CORPORATE DIVISION OF
TEXAS INSTRUMENTS
INCORPORATED

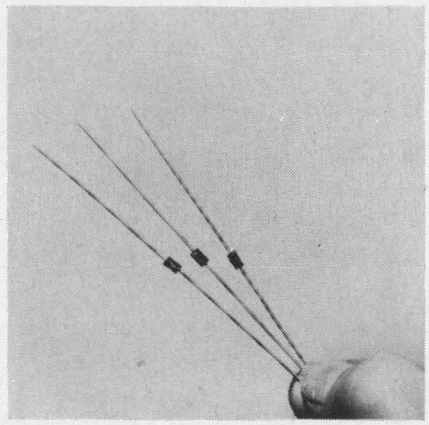


Micromin capacitors

A line of microminiature tubular capacitors is a 0.17 x 0.10-in. ceralam monolithic ceramic element in an epoxy jacket. The units, designated ML-10, have normal temperature coefficients of ±15%, with −1-1/2 ±5%, and ±5% optionally available. Ratings are 25 Vdc with up to 12,000 pF, 50 Vdc with up to 6,000 pF, and 100 Vdc with up to 2,000 pF.

Hi-Q Div., Aerovox, Olean, N. Y. Phone: (716) 372-6611.

SEE AT BOOTH NO. 2A36

Circle No. 582

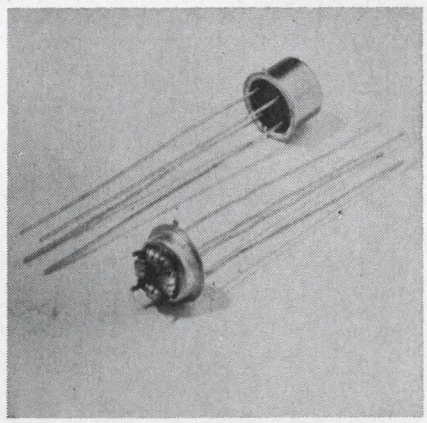


Rectifiers/drivers

Packaged in a modified TO-5 package, the HBR-5/40 rectifiers operate from 50-400 v. Average output current is 500 uA at 25°C, with diodes matched to within 25 mV at 0-75°C. The HCD-3 and HCD-4 Core Driver Diodes are hermetically sealed glass, axial-leaded types. Switching time is as low as 6 nsec, with 2 pf capacity.

P&A: $1.60-$5.20 (1-99); stock. Hoffman, 4323 N. Arden, El Monte, Calif. Phone: (213) 686-0123.

SEE AT BOOTHS 1C09-1C11.

Circle No. 583

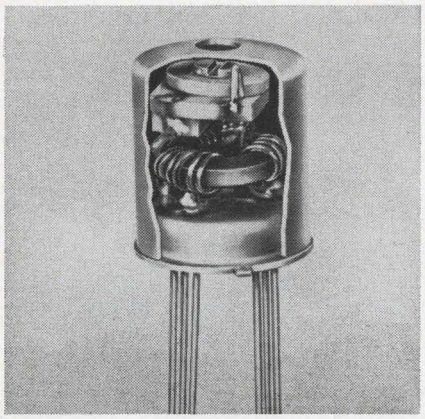


Tunable LC Networks

Series MTLC units are housed in a TO-5 enclosure. Center frequencies range from 3-250 MHz, tuning ranges from 2-8-325 MHz. Bandwidths (3 dB down) range from 0.04-4 MHz, and minimum unloaded Q (3 dB down) from 60-95. Operating temperature range is from −55° to 90°C.

Availability: 2 weeks. JFD Electronics Corp., Components Div., 1462 62 St., Brooklyn, N. Y. Phone: (212) 331-1000.

SEE AT BOOTH 1E12.

Circle No. 584

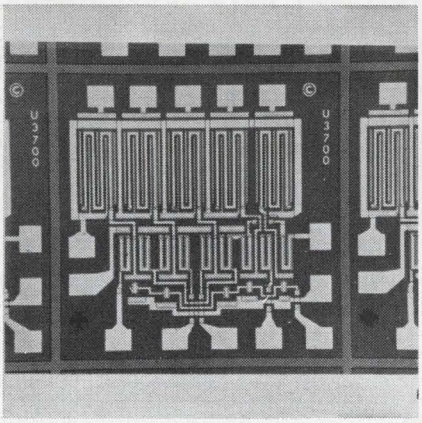


Multi-channel commutator

A monolithic multi-channel commutator has low on-resistance and low channel leakage. The μM3700 offers on-resistance below 200 ohms and leakage under 1 nA per channel. Using MOSFETs as active resistors, the device has blanking for four channel operation. Each gate is diode protected.

Available: April. Fairchild Semiconductor, 313 Fairchild, Mountain View, Calif. Phone: (415) 962-2530.

SEE AT BOOTHS 2G03-2G13

Circle No. 585

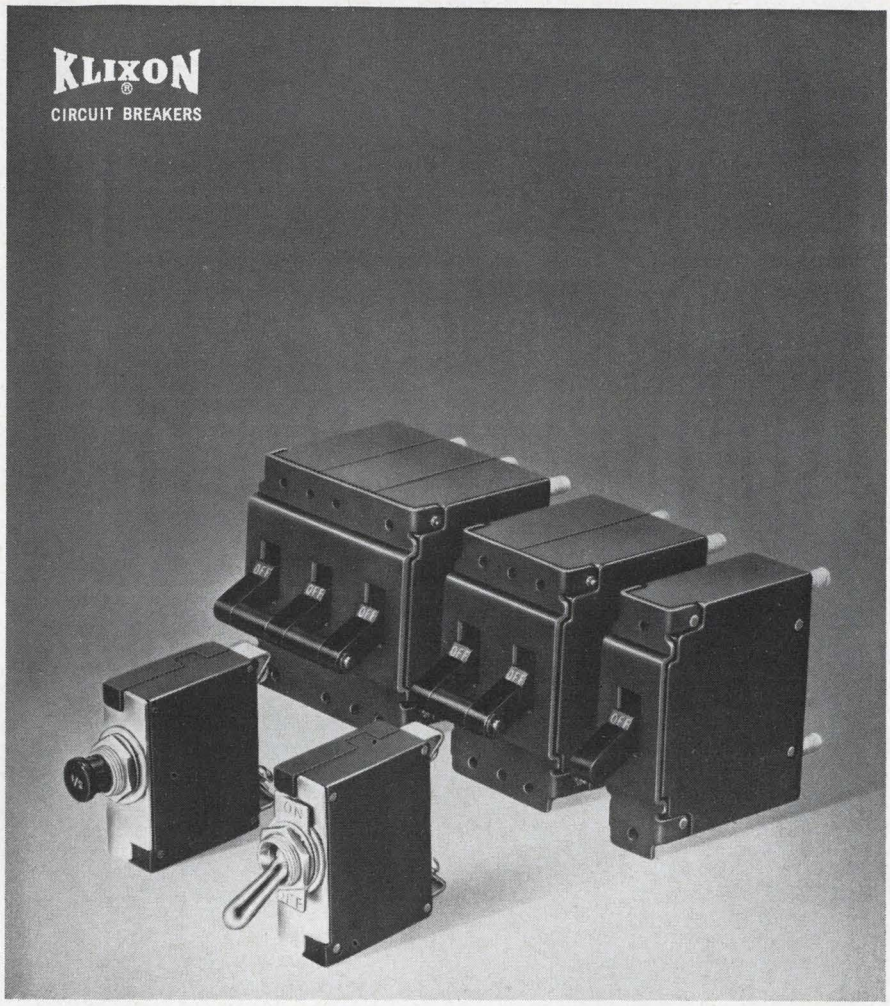

When magnetic circuit breakers are needed for high-reliability protection

...TI DELIVERS!

KLIXON® Magnetic Circuit Breakers combine more performance advantages and design options than any other line. Lower voltage drop—up to 56% less in some ratings. Higher interrupting capacity —5000 amp at 32 v-dc. Ampere ratings—0.020 to 50 amp. Voltage ratings—up to 60 v-dc, 250 v-ac. Calibrated for dc or 50, 60 or 400 cycle ac. Series, shunt, or relay trip. Auxiliary circuits. Toggle or push button actuation. Single or multi-pole. Instantaneous or wide choice of time delays. U-L recognized in most ratings. Many ratings are stocked by distributors.


New Fact File contains complete data on TI magnetic circuit breakers. Write for your free copy today.

METALS & CONTROLS INC.
5103 FOREST ST., ATTLEBORO, MASS.
A CORPORATE DIVISION OF
TEXAS INSTRUMENTS
INCORPORATED

Speed Inquiry to Advertiser via Collect Night Letter

Tenney couldn't let well enough alone.

When the Junior environmental chambers were first introduced, they were well in advance of the state-of-the-art. Yet our design engineers still wanted wider parameters, more precision, more economy of operation. The results of their labors are shown below:



Tenney Jr. Bench Model
High-Low Temperature Test Chamber
New Temperature Range From —120° F to +350° F!

New mechanically-refrigerated Tenney Jr. features wider temperature range with ±½° F control throughout with indicator. Full 1,400 cu. in. test area. New, faster pull down, greater load dissipation. New fan guard. 2¢ per hour average operating cost! Hermetically sealed inside and out. Weighs only 200 lbs. Simple plug-in operation.

Still only **$990,** complete and available for immediate delivery.



Space Jr.
Bench Model Thermal Vacuum Simulator
Heat, Cold & Vacuum for the Price of Vacuum Alone!

New improved mechanically-refrigerated Space Jr. for testing under deep space conditions. Temperature range from —100° F* to +350° F with ±1° F control throughout. Standard altitude of 1,100,000 ft. with an LN_2 cold trap (approx. 7.5×10^{-8} torr). 1,728 cu. in. test area. High vacuum construction throughout. Self-contained, air cooled, plug-in design. Temperature surfaces are blackened for high emissivity.


Available for immediate delivery.

*LN_2 shroud for lower temperature and other optional accessories

To order, or for more information, write to

Tenney ENGINEERING, INC.
1090 Springfield Road • Union, New Jersey
Western Division: 15700 S. Garfield Ave., Paramount, Calif. 90723
Oldest and Largest Manufacturer of Aerospace and Environmental Equipment

211

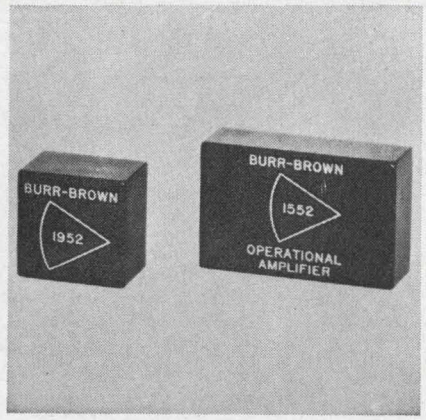

FET op-amps

Models 1552 and 1952 are all-silicon, epoxy encapsulated operational amplifiers with very high impedance.


They feature 10^{10} ohms input impedance and 100 kHz bandwidth at their rated ±10 V, 20 mA output. Gain of both is 106 dB, and small-signal bandwidth is 1.5 MHz.

Measurements are 1 x 1 x 0.7-in., 1952; 1.2 x 1.8 x 0.6-in., 1552.

Prices: 1552-$145, 1952-$165. Burr-Brown, Box 11400, Tuscon, Ariz. Phone: (602) 294-1431. TWX: (910) 952-1111.

SEE AT BOOTH 3A26-27

Circle No. 571

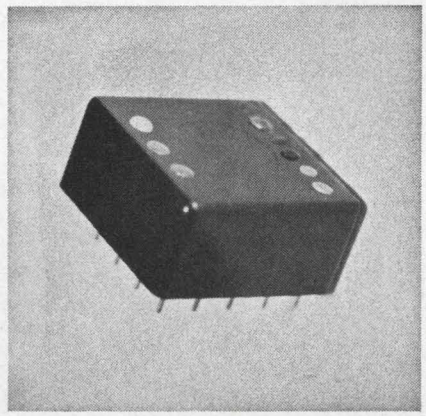


High frequency op amp

The model 976, high frequency operational amplifier has a unity gain frequency of 300 MHz. Slewing rate is 250 V/μs, output voltage is ±10 V max, and open-loop output Z is 1,000 ohms.

Open-loop gain is 300 min with a differential input Z of 3,000 ohms min. Operating temperature is 0-50°C, and the equivalent input-voltage drift is 50 μV/°C. Measurements are 1.0 x 1.0 x 0.5-in.

Price: $47.00; stock. Optical Electronics, Box 11140, Tucson.

Circle No. 572

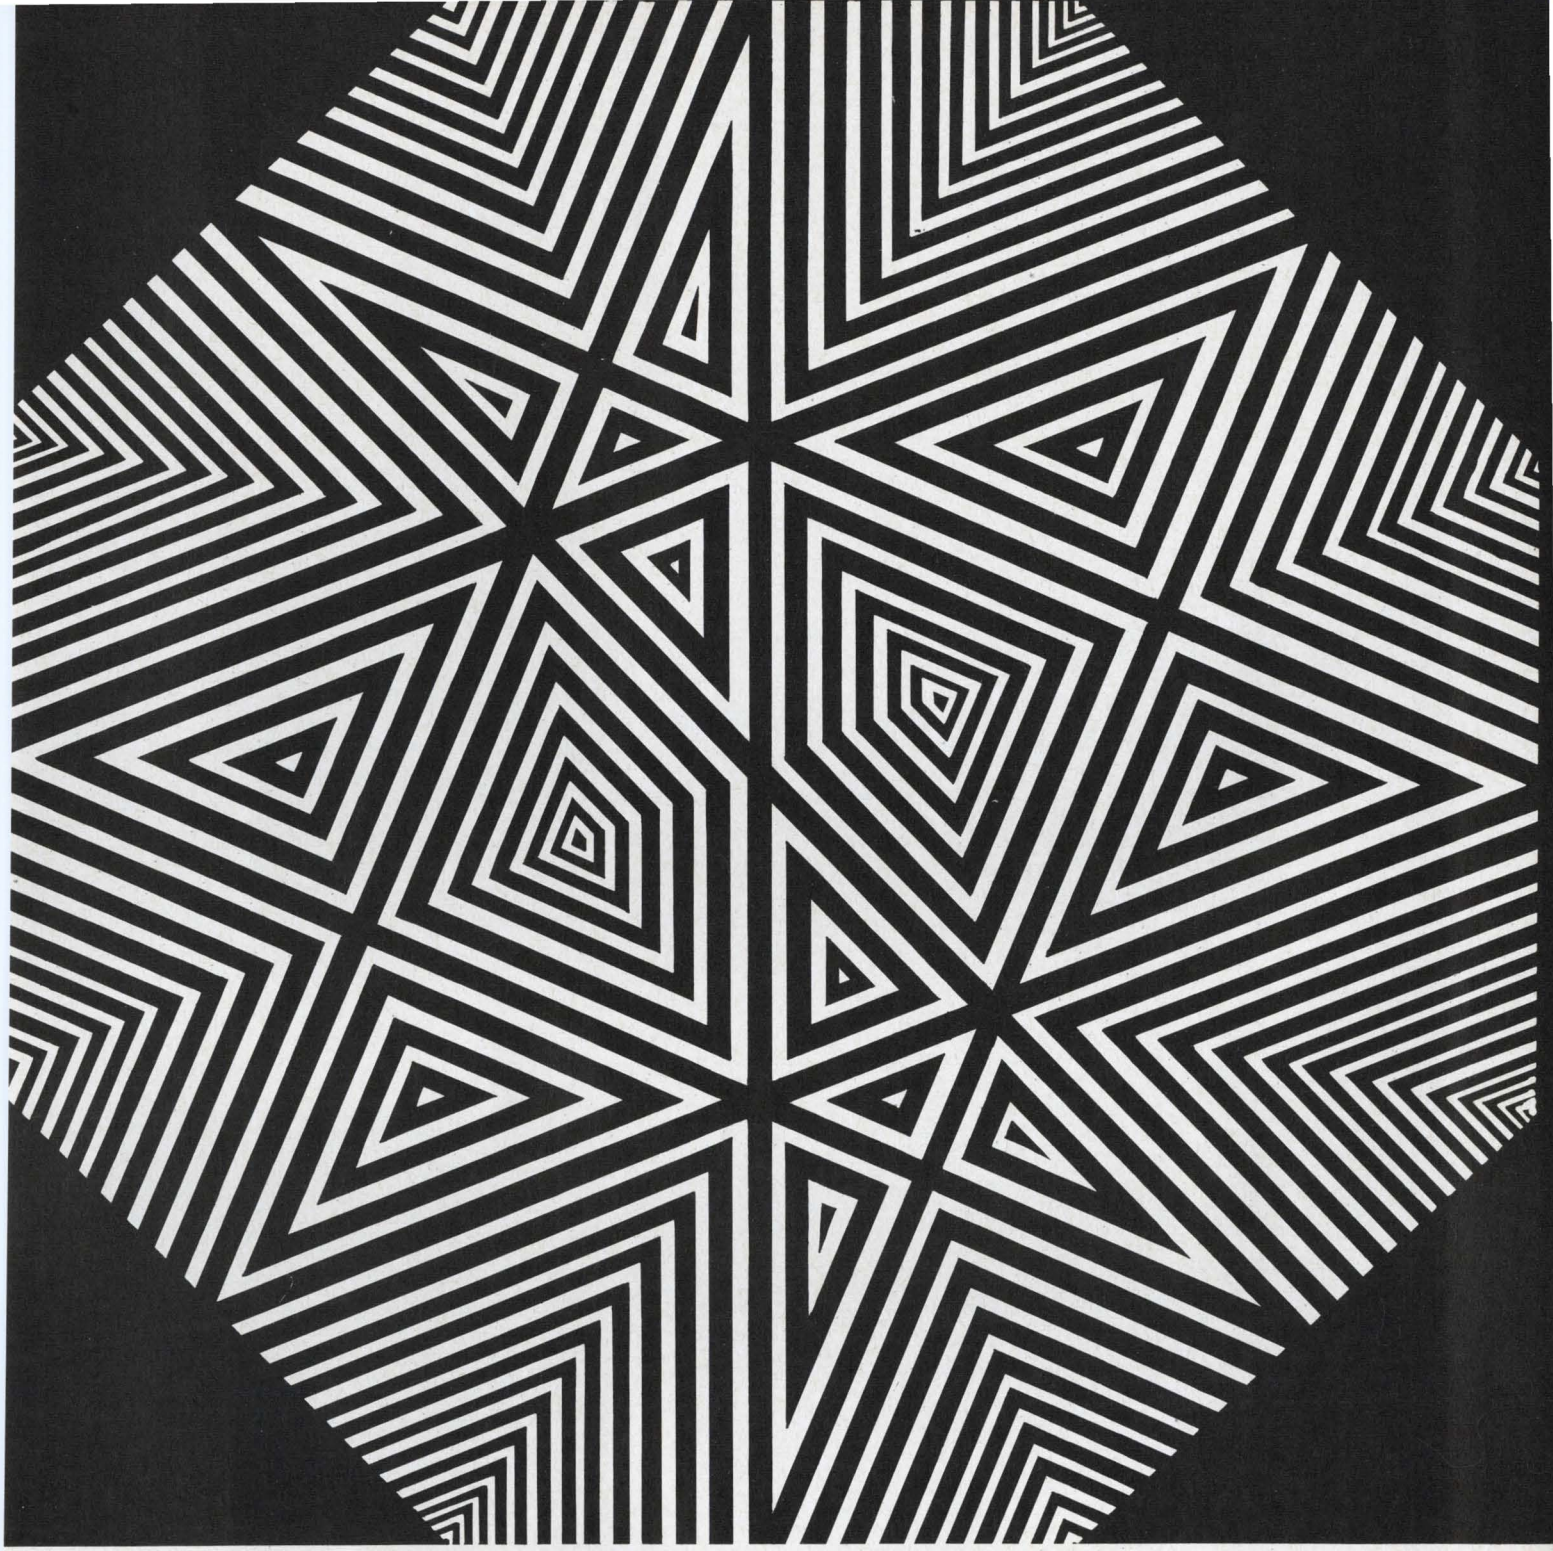

optimizing the art... in delay lines


Typical problems we've made look easy: 32-module isothermal multidelay package (0.01°C temperature stability) — 150 microsecond digital delays with 20-80 db attenuation. We can do even better to meet your special needs — 60 modules? 100? 0.001°C thermal stability? 300-microsecond Zero T. C. (Temperature Coefficient) Memory System? So come to us for unusual requirements in glass, quartz, electromagnetic and magnetostrictive delay lines, or in associated electronics — transformers, amplifiers, temperature controllers, serial ultrasonic memories, and other advanced components.

In the microwave field, we've done tricky things in phase-locked and other oscillators, frequency and pulse stability testers, noise measurements, and other advanced instrumentation. Oh, yes, since LFE "wrote the book" on delay lines, we'll be happy to send you copies of our brochures defining common terms and basic measurement techniques. To OPtimize your design, OPT LFE.

LFE | *LFE ELECTRONICS*

A DIVISION OF LABORATORY FOR ELECTRONICS, INC.
WALTHAM, MASSACHUSETTS 02154

Delay Lines • Filters • Transformers • Amplifiers, and Associated Electronics
Microwave Measurement & Signal Generation Equipment

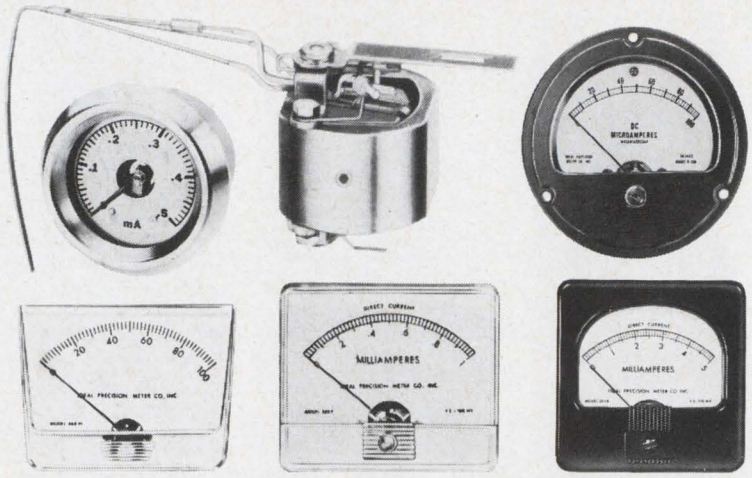

You name the shape, we have it—or we'll make it for you:

For everything in meters you can count on Ideal.

BRAND

Ideal is a specialist's specialist—a complete facility with 100% concentration on meter development and design exclusively. Ideal meters are used by every branch of the Military and by leaders in defense and industry. Whatever you need in meters—ruggedized or commercial, custom and stock, ½" to 7"—call Ideal, the proven leader.


Write for free 52-pg. handbook and catalog. Ideal Precision Meter Co., Inc., 218 Franklin St., Brooklyn, N.Y. 11222. (212) EVergreen 3-6904.

IDEAL

SEE US AT IEEE BOOTH 3K47
ON READER-SERVICE CARD CIRCLE 186

YOKE SPECIALISTS


FOR INFORMATION DISPLAYS

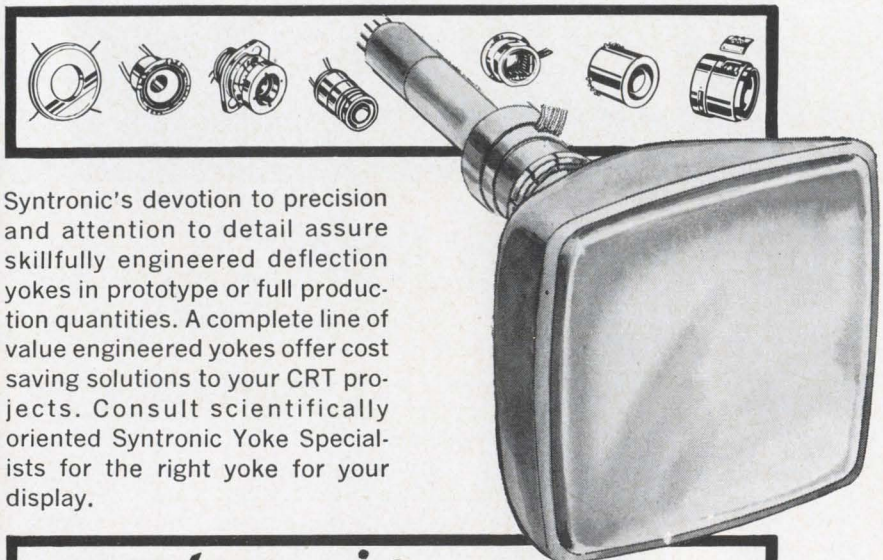

Syntronic's devotion to precision and attention to detail assure skillfully engineered deflection yokes in prototype or full production quantities. A complete line of value engineered yokes offer cost saving solutions to your CRT projects. Consult scientifically oriented Syntronic Yoke Specialists for the right yoke for your display.

syntronic INSTRUMENTS, INC.
100 Industrial Road, Addison, Ill.
Phone: Area 312, 543-6444

ON READER-SERVICE CARD CIRCLE 187

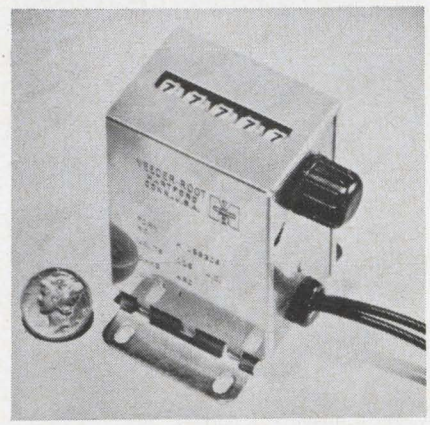

Reset counter

The Series 1983 is a reset version of the company's non-reset Econocounter. The 5-digit 1983 is furnished with either base or rack mounting. Both ac and dc operating units are offered. Nominal power consumption is 6 W ac and 5 W dc. Designed for UL listing, the manual reset mechanism uses a bouncing pinion.

Veeder-Root Inc., 70 Sargeant, Hartford, Conn. Phone: (203) 527-7201.

SEE AT BOOTH 3G07.

Circle No. 569



Electric counters

The Series 1981 is a line of 6-figure general purpose counters. Reset or non-reset, base or panel mount models for either ac or dc operation are available. Nominal power consumption is 8 W. Typical uses are on communications and production equipment, business machines, fuel meters and other counting operations.

Veeder-Root Inc., 70 Sargeant, Hartford, Conn. Phone: (203) 527-7201.

SEE AT BOOTH 3G07.

Circle No. 570

REMI*


(REmovable, REentrancy, MIniature) sleeve-fitted closed-entry crimp-type contact connectors.



U.S.C. REMI sleeve-fitted closed entry crimp-type contact connectors snap in—snap out quickly, simply and surely. Contacts do **not** ride in bare plastic of the connector body. Both male and female spring phosphor bronze contacts snap into and out of heat-treated beryllium copper sleeves for positive solid connection. Mechanical stresses are confined between **metallic** elements. ■ **No. of Contacts:** 7, 14, 18, 20, 21, 26, 34, 41, 42, 50, 75, 104, 123, 150, 225. ■ **Wire Sizes Accommodated:** AWG #14 to #30 and MIL-W-16878A #16 to #32. REMI contacts are ordered separately. Crimping by MIL-T-22520A (WEP) ■ Class I or II tools ■ **Military Specifications:** (Contacts) MIL-C-23216, MIL-C-26636, MS3190. (Connectors) MIL-C-8384, and MIL-C-25955. . [Latest Revisions] U.S. Patent Nos. 2,761,108; 2,979,689 & Five International Patents ■ Write for REMI catalog.

Golden RUMI

(Removable Ultra-MIniature) Crimp-Contact Series



Adds **removable** crimp-contact connector versatility to any micro-miniature system—now. Can be incorporated immediately into any established or advanced system. Interchanges with any other Ultra-MIniature connectors—positively and economically. Contacts are machined of top quality spring temper phosphor bronze per Federal specification QQ-B-750. RUMI contacts are ordered separately. U.S. Pat. No. 2,761,108. ■ Write for RUMI catalog. ■ **No. of Contacts:** 7, 11, 14, 20, 26, 29, 34, 44 and 50. **Wire Sizes Accommodated:** AWG #24, 26 and 28 ■ **Current Rating:** 5 amps


Take Your Choice of These

REMOVABLE CRIMP-CONTACT CONNECTOR SERIES

from U.S.C.

Here, from **one** source is a **complete** family of performance-proved removable crimp-contact connectors. Whether you select the REMI®, RUMI, URC or REPC series you get **extra** reliability plus the highest possible performance-to-size ratio.


URC Series



Developed especially for oompact marine, aircraft, missile and computer electronic packages. Saves replacement and installation time. Removable contacts facilitate replacement of defective contacts and circuit changes without disruption. Contacts can be replaced with standard hand crimping tool or automatic type in seconds. (URC contacts are ordered separately.) U.S. Pat. No. 2,761,108 ■ Write for URC catalog. **No. of Contacts:** 14, 20, 34, 42, 50, 66, 75 and 104. **Wire Sizes Accommodated:** AWG #14 thru #30. ■ **Current Rating:** 13 amps. ■ **Military Specifications:** MIL-C-22857C & related drawings. ■ **Also Available:** Four other pairs of size 16 contacts, from AWG #14 through #28. Also, complete series of 6 pairs of size 20 contacts from AWG #16 through #30.

REPC

(REmovable, REentrancy, Printed Circuit) removable crimp-contact connectors.

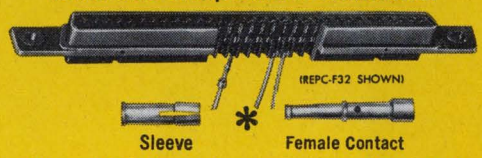

Another first from U.S.C. Meet tri-service specs MIL-C-23353/9 and MIL-C-23353/10 ■ Uses the unique REMI concept that confines mechanical stresses between **metallic** elements only. REMI sleeves are now specified as MS18135 (per MIL-C-23216) with U.S.C. Part No. 1242-9 (female crimp-barrel socket contact MS18134 per MIL-C-23216), on both new military specifications sheets. ■ U.S. Pat. 2,979,689 & five international patents. ■ Write for UPCC-REPC catalog. ■ **REPC-F SERIES** ■ **No. of Contacts:** 7, 11, 15, 19, 23, and 32 ■ **Wire Sizes Accommodated:** AWG #14 to #30. **Current Rating:** 7.5 amps ■ **Military Specifications:** MIL-C-23353/9 ■ **REPC-SGF SERIES** ■ **No. of Contacts:** 11, 17, 23, 29, 35 ■ **Wire Sizes Accommodated:** # 14 to #30 ■ **Current Rating:** 7.5 amps ■ **Military Specifications:** Connector—MIL-C-23353/10 ■ Contacts per MIL-C-23216 ■ REPC contacts are ordered separately.


TODAY—JOIN AMERICA'S LEADING COMPANIES WHO RELY ON U.S.C. FOR CO-RELIABILITY!

U.S. COMPONENTS, INC.

1320 ZEREGA AVENUE, BRONX, N. Y. 10462
TEL. 212 TA 4-1600
Cable Address: COMPONENTS NYK.
TELEX: 1-2411 .....TWX—212-824-6990

SEE WHAT'S NEW AT U. S. COMPONENTS IEEE BOOTH # 2H07

ON READER-SERVICE CARD CIRCLE 188

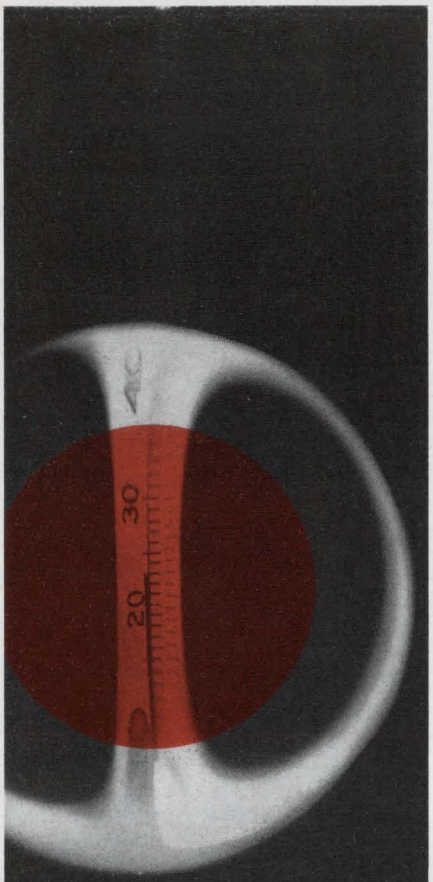

design flexibility for precise control of temperature

Whatever your temperature control requirements...AC or DC, aerospace or industry... some combination of our family of components will solve it. UCC systems provide any of the following features to match your needs:

- On/off Control
- Proportional Control
- Adjustable Differential
- Power Ramp Warmup
- Exact Set-point Control
- Set-point Stability
- Fail/safe Performance
- Solid State Control

"Control" is our middle name. Call or write for details on UCC capability.

UNITED CONTROL CORPORATION

Overlake Industrial Park, Redmond, Wash. 98052
Phone 206-885-3711 or TWX 206-999-1874

ON READER-SERVICE CARD CIRCLE 189

Low-level choppers




These solidly encapsulated units can alternately connect and disconnect a load from a signal source.

An adjustable frequency vibrator drives a chopper. Models 80 and 90 are spdt make-before-break devices, 81 and 90 are dpdt versions for synchronous modulator-demodulator applications. Frequency ranges are 1.5-6.5 kHz for the 80 and 81, 1.8-4.4 kHz for the 90 and 91.

P&A: $155; stock. Solid State Electronics, 15321 Rayen, Sepulveda, Calif. Phone: (213) 894-2271.

Circle No. 565

Modular counter

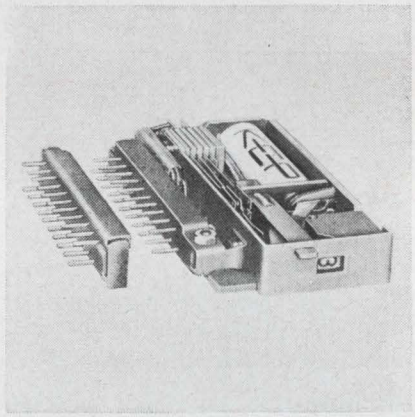


A single-digit count module displays its count visually as it indicates it electrically. These units may be mounted side-by-side to form a multi-digit counter for electrical control functions.

Each module is equipped with separate reset and transfer switches. Adding and substracting models operate from 24 Vdc, or can be specially ordered with other voltages.

Available from stock. Kessler-Ellis, 46 Center Ave., Atlantic Highlands, N. J. Phone: (201) 291-0500.

Circle No. 566

Protector/relay

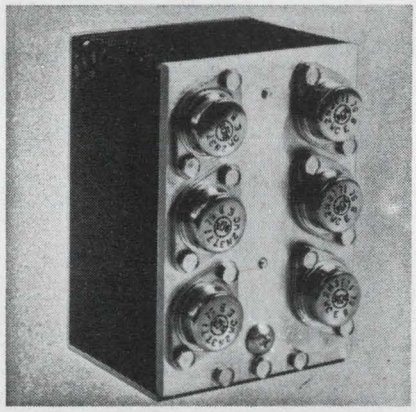


The Voltrac is an over-or-under voltage protector capable of protecting circuitry by shutting down a power source delivering up to 100 Amperes. It may be specified to operate at any differential voltage from supply nominal, and can be wired to track the output of an adjustable supply while still providing protection. An integral contactor is included.

Price: From $25. Chalco Engineering, 15126 S. Broadway, Gardena, Calif. Phone: (213) 321-0121.

Circle No. 567

High voltage converter

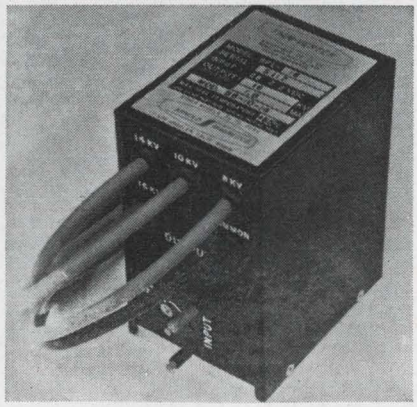


Model SFU High Voltage Converter outputs are from 6 to 20 kVdc tapped in 2 kV steps, up to four common-ground taps.

Input is 26-30 Vdc with line regulation of 0.4% and load regulation of 5.0%. Temperature range is −10° to +65°C. The 59 ounce unit measures 4-3/4 x 3-1/2 x 2-3/4-ins.

P&A: $259 plus $35/tap; 10-12 weeks. Arnold Magnetics Corp., 6050 W. Jefferson Blvd., Los Angeles, Calif. Phone: (213) 870-7014. TWX: (213) 836-0430.

Circle No. 568

INKLESS

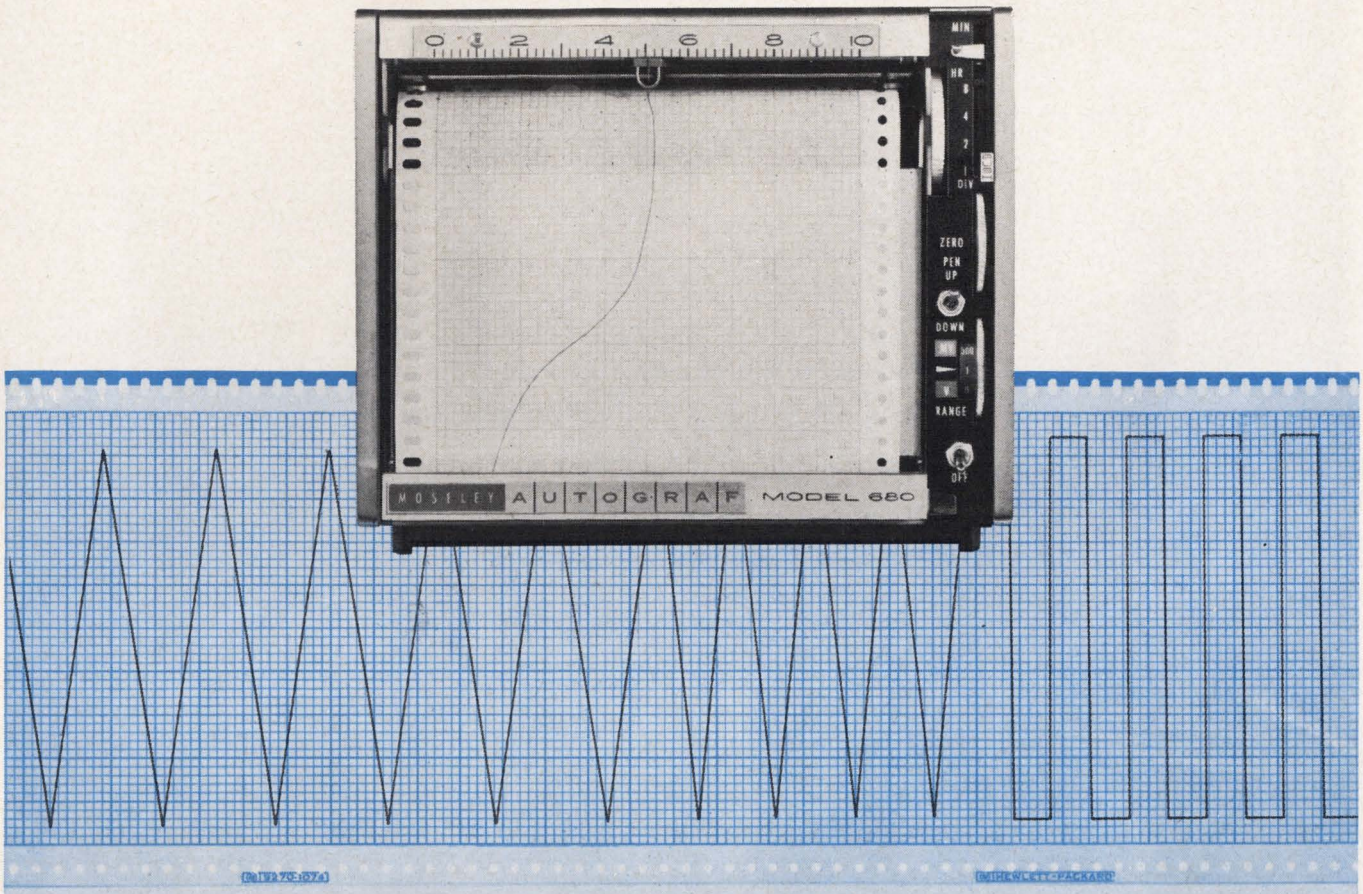

NEW STRIP-CHART WRITING TECHNIQUE:

Ends pen clogging, ink drying
Gives clear, clean traces
Provides new economy

New Hewlett-Packard electrosensitive paper, available as a standard option on Moseley 680 and 7100 Series Strip-Chart Recorders, ends the problems associated with pen-and-ink writing techniques... at an economical price and without the disadvantages inherent in other available electric writing methods.

The Hewlett-Packard electrosensitive paper is a special electro-chemical coated chart paper. The coating is current sensitive, changing to a dark brown trace with application of voltage from the recorder stylus. The new technique eliminates the familiar arc method of electric writing on carbon-backed paper.

With Hewlett-Packard electric writing, you can use your strip-chart recorders for long-term, unattended monitoring, with increased performance at slow writing speeds, as well as at high writing speed. It is non-pressure sensitive, so that you can't damage or obscure your recordings.


Here's another advance in recording capability from Hewlett-Packard. Call your Hewlett-Packard field engineer for information on converting your strip-chart recorder to maintenance-free electric writing. Or write for information: Hewlett-Packard, Palo Alto, California 94304, Tel. (415) 326-7000; Europe: 54 Route des Acacias, Geneva.

Data subject to change without notice.

HEWLETT PACKARD hp MOSELEY DIVISION

1189

Visit the Moseley Division of Hewlett-Packard at IEEE
3rd floor New York Coliseum, March 21-24
ON READER-SERVICE CARD CIRCLE 190

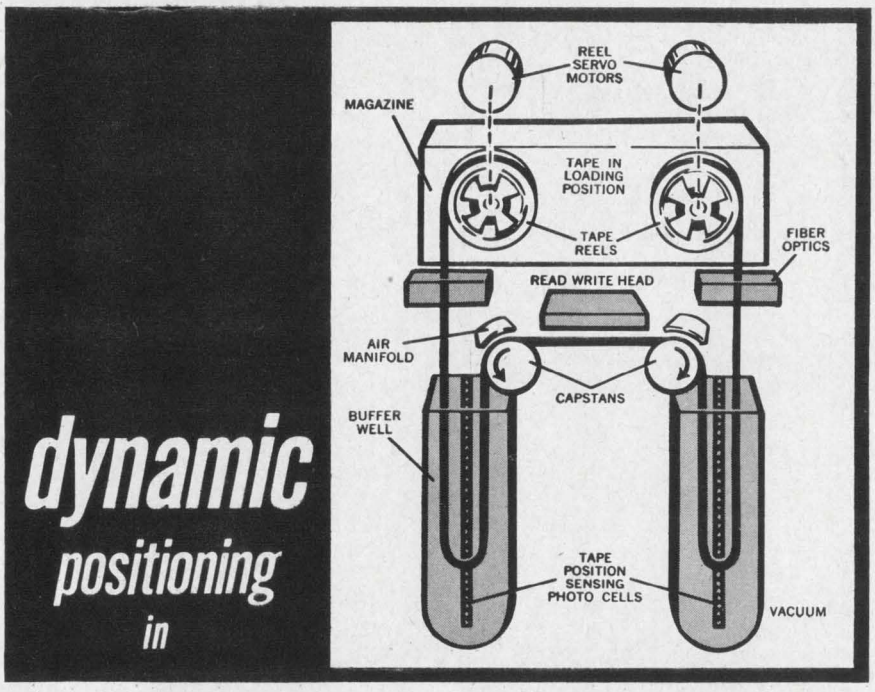


dynamic positioning in

DIGITAL TAPE TRANSPORTS

Inland's Standard DC Direct-drive Torque Motors Solve MOBIDIC Tape Transport Problems

Faced with meeting the rugged requirements of military operation, Sylvania's Electronic Systems Division of General Telephone & Electronics Corp.

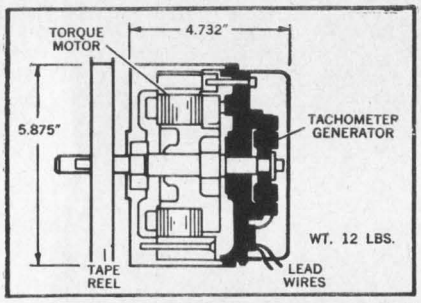

turned from conventional tape transport designs and developed a unique militarized system capable of optimum tape handling without damage or distortion. This modern, miniaturized design provides rapid reversal (less than 6 milliseconds) so programming is not restricted, high controlled acceleration and deceleration, (empty reel: 570 rad/sec², full reel: 270 rad/sec²), wide dynamic speed ranges (1000/1).

Sound impossible? Not to Inland Motor, Inland's standard Model TT-4005, tachometer generator-torque motor combination surpasses these performance requirements. Featuring a peak torque output of 3.5 lb.-ft., the DC direct-drive torque motor, with damping enhanced by a DC directly-driven tachometer generator, furnished the linear speed/torque characteristics required over these ranges. Easily controlled by current limiting, it also provided the desired acceleration. Dynamic braking assisted the quick reversal. Since it was direct-drive, the operation was smooth and back-lash free.

Whatever your servo application may be, you can rely on INLAND to meet your most demanding requirements.



TORQY SAYS:

If you'd like complete details on this unusual application and other interesting facts on Inland direct-drive servo components, write today.

INLAND MOTOR
CORPORATION
RADFORD, VIRGINIA
703-639-3973
SUBSIDIARY OF **KOLLMORGEN**
IEEE Show Booths 2A05 and 2A07
ON READER-SERVICE CARD CIRCLE 191


28V T-1 lamp

A micro-miniature 28 V lamp features an extended life expectancy. Size T-1 (1/8-in. by 1/4-in. long) lamps, with 99.9% tungsten filaments and nickel-iron alloy wires with a life expectancy of 5,000 hours, are hand-made, aged at rated voltage for 16 hours, and final-tested. They are available either based or unbased, #128 and #129, respectively.

Precision Lamp Engineers, 809 San Antonio Rd., Palo Alto, Calif. Phone: (415) 321-0905.

Circle No. 562

Class "K" connector

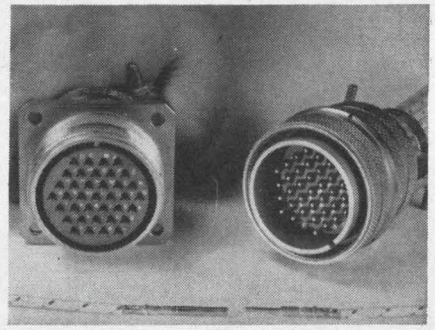

This class "K" series 238 connector is capable of withstanding MIL-C-26500 environments, in addition to meeting flame requirements of MIL-C-5015.

They provide complete interchangeability with existing MIL-C-5015D connectors and servicable crimp poke-home contacts in accordance with MIL-T-22520.

Amphenol, 1830 S. 54th Ave., Chicago, Ill. Phone: (312) 242-1000.
SEE AT BOOTH 1E13-25

Circle No. 563


Ultra-pure zinc crystals

Zinc single crystals of 99.9999% purity are available in rods from 1/4 to 2-1/2-in. diameter at lengths of 1, 2, 4 and 6 inches.

These crucible-grown crystals are normally supplied with random orientation; however, specific orientations within 3° of major axes 100, 110, and 111 are available at higher cost.

Price: 1-in. x 1/4-in. diameter, $146.25; 2-1/2-in. diameter x 6-in length, $1014.25. Aremco Products, Inc., P. O. Box 145, Briarcliff Manor, N. Y. Phone: (914) 762-0685.

Circle No. 564

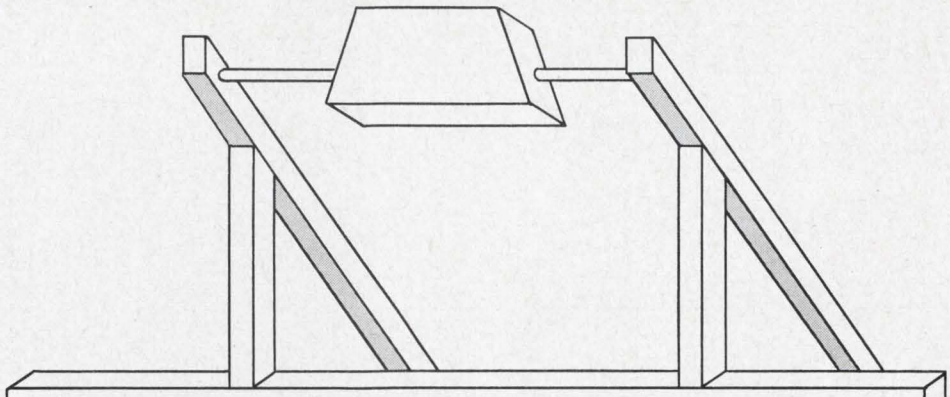

VARIAN CENTER

electron tube and device group

IEEE 2nd Floor

BOMAC division
EIMAC division
LEL division
Palo Alto Tube division
S·F·D Laboratories, Inc.
Varian of Canada, Ltd.

over 100 NEW microwave products

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 192

who said you can't design a plugboard programming system to withstand severe shock?

MAC Panel has done it!



NEW SERIES 140

MAC Panel's Series 140 Plugboard Programming Systems are available in a wide range of sizes . . . each designed and engineered to withstand the severest shock and vibration under operating conditions. Tested to 50G without self-generated contact noise. And life tested to 10,000 cycles with only random variation in contact voltage drop.

Not enough facts? Here are more: You can only insert plugboards one way. Receptacles are available for standard taper pins or series 53 pins. Contacts are spaced on ¼" x ¼" grid to allow more positions in a minimum of space.

How about plugwires? The new Series 140 Plugwires are interchangeable with most existing systems. Ball-D-Tent design prevents accidental dislodging, won't mar the surface.


Want more facts? Write today . . . outline your specific needs and let MAC engineers come up with the answers. They usually do.

MAC

O.E.M. DIVISION

MAC PANEL CO. High Point, N.C.

ON READER-SERVICE CARD CIRCLE 193

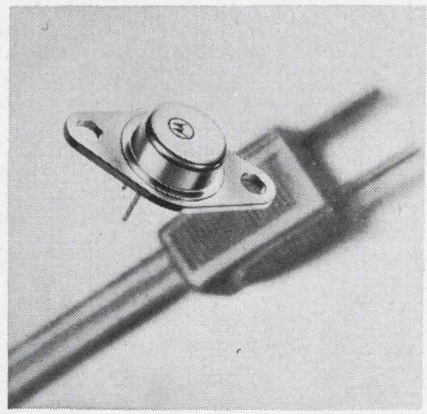

HV power transistors

Two high-voltage npn silicon power transistors, designed to operate directly from ac line voltages, are available. The 2N3738 and 2N3739 are intended audio amplifiers in line-operated sets. Power outputs of these units are one to three watts in class A, and between five and twenty watts in class B operation.

Packaged in the TO-66 case, they feature a maximum collector-emitter voltage rating of 225 V for the 2N-3738 and 300 V for the 2N3739. The min-max current-gain limits are 40 and 200 when operating at a collector current of 100 mA and a collector-emitter voltage of 10 V. The devices can be used over a broad collector-current range of 10 to 250 mA, and have a minimum current-gain-bandwidth product of 15 MHz.

Price: 2N3738-$2.25, 2N3739-$2.45. Motorola Semiconductor Products Inc., P. O. Box 955, Phoenix, Ariz. Phone: (602) 273-6900. **SEE AT BOOTH 1A18-1A24**

Circle No. 586


Voltage regulators

A 50 μs response time and a 1% load and line regulation are featured in the R-3200 series voltage regulators. The units operate over a 47-63 Hz frequency range, and accommodate a wide range of load power factors. The miniature all silicon, units in the line include 15, 30, 60, 120 and 250 VA capacities.


Wanlass Electric, 2189 South Grand, Santa Ana, Calif. Phone: **SEE AT BOOTH 4M09**

Circle No. 587

Do YOU demand THIS accuracy in a Multi-Turn?

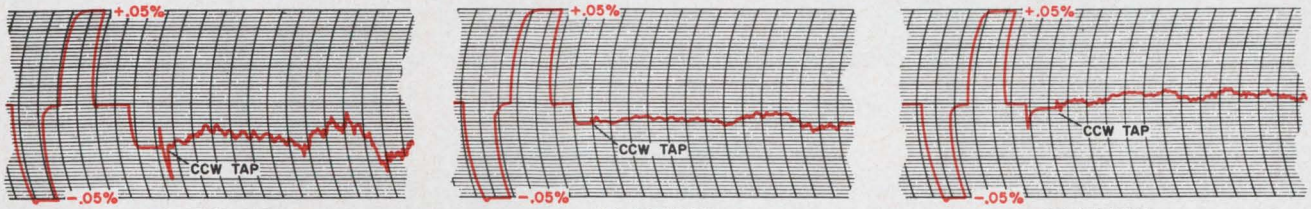

You GET it from TICOC . . . in a small package at a small price!

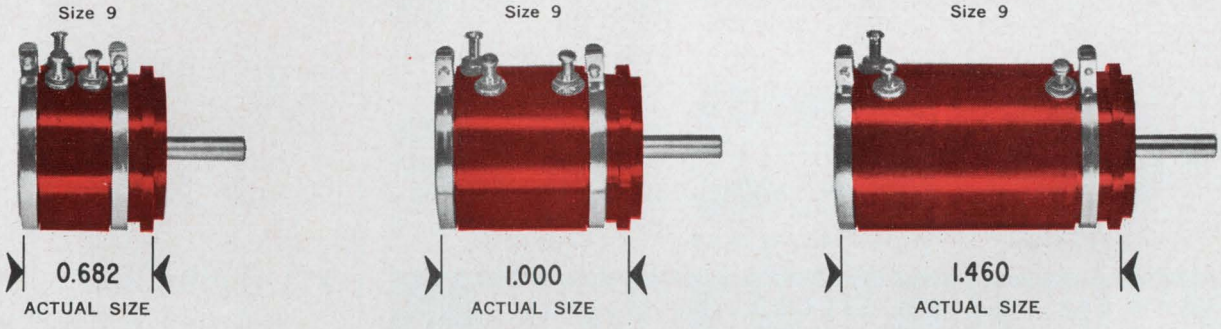

©1966


TIC of California®

TECHNOLOGY INSTRUMENT CORPORATION OF CALIFORNIA
850 LAWRENCE DRIVE • NEWBURY PARK, CALIFORNIA
A Subsidiary Of Bowmar Instrument Corporation



ON READER-SERVICE CARD CIRCLE 194

Cut costs with world's smallest, uniquely produced Silvered Mica Capacitors

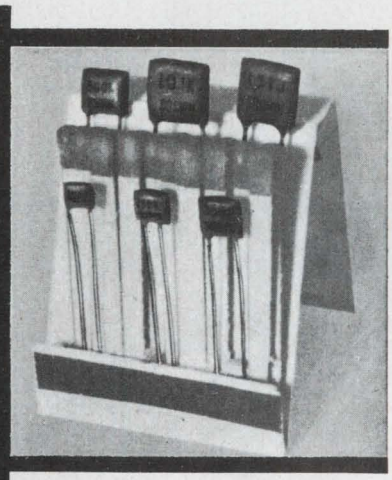

SOSHIN

SOSHIN ELECTRIC CO., LTD.

18-18, Naka-magome 1-chome,
Ohta-ku, Tokyo, Japan. Cables: SOSHINCAPACITOR TOYKO

SOSHIN FMCON

- Smaller than and comparable in price to ceramic capacitors
- Excellent capacitance temperature characteristics

FMCON (500 WV) Temperature range: −30°C~+85°

Type	Size (mm) Area	Thickness (Max.)	Lead ϕ	Maximum Capacitance (PF)	T.C.
FM05	5× 5	5.0	0.3	10	D
FM06	6× 6	5.0	0.4	25	D
FM07	7× 7	5.0	0.4	43	D
FM08	8× 8	5.0	0.4	75	E
FM09	9× 9	5.0	0.5	110	F
FM10	10×10	5.0	0.5	150	F

Various other types are also available.


ON READER-SERVICE CARD CIRCLE 195

• YOUR •
FREE PASS
to instant information on the most complete line of Semiconductor Heat Sinks.

ADMIT ONE

WAKEFIELD DISTRIBUTOR PRODUCTS CATALOG available at:

• Booth #2A25, IEEE SHOW



- Or from an authorized Electronic Distributor who stocks: milliwatt to high power coolers, extrusions, thermal joint compound, thermally conductive adhesive.
- **Or, write to . . .**

WAKEFIELD ENGINEERING, INC.
DELTA T DIVISION
139 FOUNDRY ST. / WAKEFIELD, MASS. (617) 245-5900 • TWX 617-245-9213


ON READER-SERVICE CARD CIRCLE 196

MAGNETIC SHIELDS TO YOUR SPECS


About 80% of all magnetic shield designs now in use originated here.

Maybe it's because our designs work. Maybe our designs work because we've had the most experience. All are good reasons to contact us.

Netic and Co-Netic magnetic shields are the recognized standard all over the world for military, laboratory, industrial and commercial applications. They are insensitive to ordinary shock, do not require periodic annealing, and have minimal retentivity. A few typical applications are illustrated. Our design department is yours.



Magnetically Shielded Room




CRT Shield Complex



Scan Converter Shield



Sectionalized P.M. Shield



Nesting Cans

MAGNETIC SHIELD DIVISION

Perfection Mica Company

1322 N. ELSTON AVENUE, CHICAGO, ILLINOIS 60622

ORIGINATORS OF PERMANENTLY EFFECTIVE NETIC CO-NETIC MAGNETIC SHIELDING

ON READER-SERVICE CARD CIRCLE 197

INNOVATION
INNOVATION
INNOVATION
INNOVATION

In Electrical Electronics Engineering

- 80 Technical sessions, 300 papers — all at the New York Hilton
- 4 floors of exhibits — all at the New York Coliseum. Four days only — Monday - Thursday
- Gala IEEE Banquet—Wednesday, 7:15 p.m., New York Hilton Grand Ballroom — $15.00
- Free shuttle busses between the Hilton and the Coliseum — every few minutes
- Registration — Members $2.00 — Non-members $5.00. Ladies $1.00. Good for all days — Technical Sessions and Exhibits. In and out privileges.

EXHIBITS (4 days only)
Monday through Thursday
11:30 a.m. - 9:30 p.m.
NEW YORK COLISEUM

•

TECHNICAL SESSIONS
Monday through Friday
NEW YORK HILTON

•

MARCH 21-25, 1966

Students (over 14) accompanied by adult will be admitted to Exhibits Thursday only. $2.00. (Not more than 3 per adult)

IEEE EXHIBITION

ON READER-SERVICE CARD CIRCLE 198

RF detector

The model CD-75 detectors are designed for video, vhf, and uhf operation at 75 ohms impedance.

Detection is provided between 100 kHz and 1 GHz with a vswr of better than 1:2:1 at 1 GHz. Frequency response is flat within ±0.15 dB over any 100 MHz segment and ±0.8 dB over the full 1 GHz. Either positive or negative dc can be supplied with any combination of male and female BNC or TNC connectors.

Texscan, 51 S. Koweba Lane, Indianapolis, Indiana. Phone: (317) 632-7351.

SEE AT BOOTHS M-8, 9

Circle No. 588

TTL digital ICs

Six different gate configurations are included in the SE800 series, including a gate expander and a J-K flip-flop. The circuit elements are packaged in a glass-Kovar 14-lead flat-pack EIA designated TO-88. They are said to be interchangeable in both function and pin layout with the Texas Instruments series 54 elements.

Price: $17.60 (gate), $22.80 J-K (flip-flop). Signetics Corp., 811 E. Arques Ave., Sunnyvale, Calif. Phone: (408) 739-7700. TWX: (408) 737-9965.

SEE AT BOOTHS 2J40-42

Circle No. 589

Integrated circuits

Two groups of TTL integrated circuits (SUNL I and II) are for high speed and ultra-high speed applications. Each group includes four series. They include 28 circuits categorized by temperature and fan-out or two military and two industrial ranges.


Fan-out capability is 6-30, average power dissipation per stage is 15 milliwatts. Noise immunity is 1 V (25°C).

Availability: stock. Sylvania Electric Products, Johnson St., Seneca Falls, N. Y. Phone: (315) 568-5881.

SEE AT BOOTHS 2C25-36

Circle No. 590

ON READER-SERVICE CARD CIRCLE 235 ➤

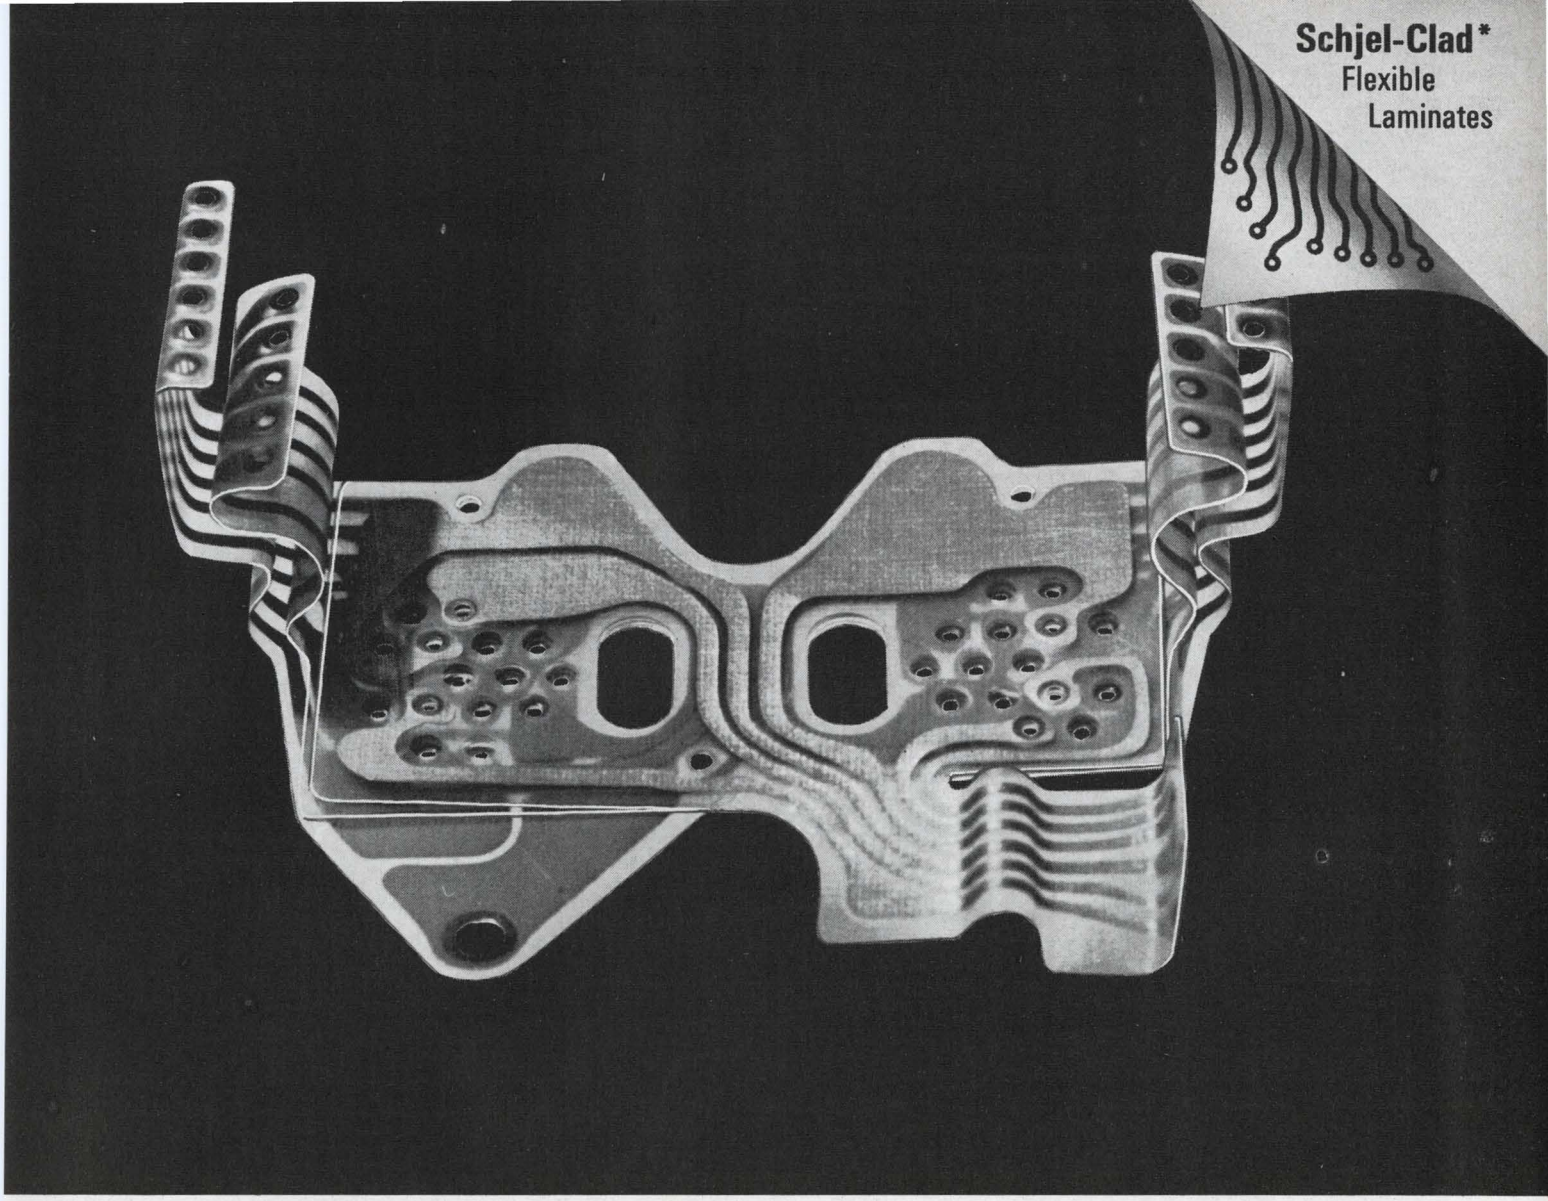

Low-cost GT-5500 makes high-class circuits

GT-5500 Schjel-Clad* is our copper-polyester film laminate for precision-etched *flexible printed circuits*. Many economy-minded engineers are specifying it now. That's because when they tally total system wiring costs, they find Schjel-Clad offers significant savings in many applications.

First, there are the obvious savings of flexible printed circuitry: continuous roll production and virtually reject-free wiring. Second, among materials for flexible printed circuits, GT-5500 is one of the least costly.

Yet even at its relatively low cost, GT-5500 exhibits excellent physical and electrical characteristics. Its polyester base resists most chemicals and has a tensile strength of 22,000 pounds. Its dielectric strength is 7,000 volts/mil. GT-5500 is suitable for use in systems with ambient temperatures ranging from —60°C to 110°C. These characteristics suit GT-5500 to application in all but the most unusually severe environmental conditions. A special characteristic is the base film memory which permits production of formed circuits (as shown above).

But GT-5500 is unlike most other polyester-base laminates in some important ways. Conductor spacing from layout to finished circuit can remain as accurate as ± 0.1% with Schjel-Clad. This accuracy is a product of the proprietary adhesive system Schjeldahl uses in laminating. It doesn't permit conductor shifting to the extent common in fusion-bonded materials.

Schjeldahl stocks GT-5500 in base film thicknesses from 1-mil to 5-mil. Standard types include treated and untreated electrodeposited copper and hard and soft rolled copper in several thicknesses, laminated to one or both sides of the flexible film. The material for your circuits can probably be shipped from stock —at stock item prices.


Naturally, we make other materials for flexible circuits. But check on GT-5500—its price and characteristics are right for most jobs. If you're interested in flexible circuits but don't want to make them, call us anyway. We'll make them for you. Write or call for information. Don't let pronunciation stop you. Say "Shell-Doll."

*Trademark, G. T. Scheldahl Company

See Schjel-Clad at Booths 4K12-4K16 at the IEEE Show.


GT Schjeldahl / ELECTRICAL PRODUCTS DIVISION

G. T. SCHJELDAHL COMPANY • NORTHFIELD, MINNESOTA 55057 • PHONE 507-645-5633

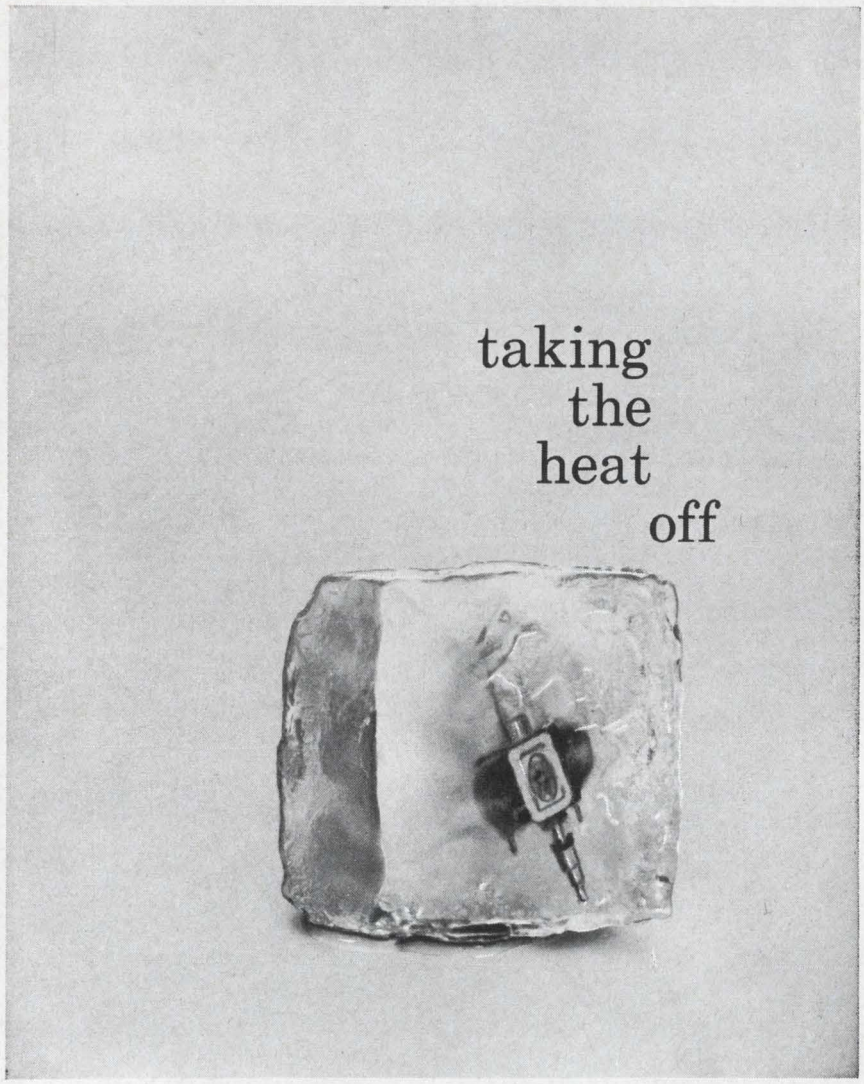

Keeping the temperature of sensitive electronic circuits constant while the ambient temperature wanders all over the lot, helps take the heat off design engineers. And that's the job Eastern refrigeration-type cooling systems do best.

These refrigeration units are the vapor-cycle, closed-system type. Years of tough testing in actual operation prove they sail through government military "specs" with flying colors. The rugged heart of these systems is a semi-hermetically sealed compressor, piston type — powered by a 400 cycle motor.




Send for
Series C Bulletin.

LFE

EASTERN INDUSTRIES

A DIVISION OF LABORATORY FOR ELECTRONICS, INC.
100 SKIFF STREET • HAMDEN 14, CONNECTICUT
BRANCH OFFICES: Topsfield, **Mass.**, Lyndhurst, **N. J.**, Wilmington, **Del.**, Chicago, **Ill.**, Torrance, **Calif.** **IN CANADA:** ENTERPRISE AGENCIES, INC., Montreal, **Quebec**

ON READER-SERVICE CARD CIRCLE 199

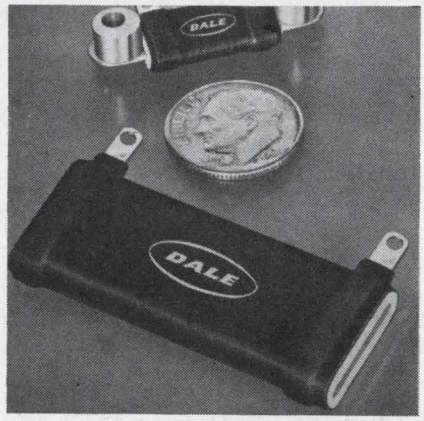

Flat wirewound resistors

The HLM series of flat, wirewound resistors can be used as direct replacement for vitreous enamel types. They combine a precision wirewound element with a multi-layer silicone coating for greater stability and long-term performance than most vitreous types. Tolerance of 5% on values above 1 ohm, and a temperature coefficient of ± 30 ppm/°C are features.

Three models are available: HLM-10 (10 watts, over-all length 1.312-in.), HLM-15 (15 watts, over-all length 1.562-in.), and HLM-20 (20 watts, over-all length 2.625-in.) All are self-stacking, and can be mounted horizontally or vertically. Special brackets offer vibration resistance and heat dissipation.

P&A: about $.30 for HLM-10 (depending on value and quantity); 3-4 weeks. Dale Electronics, P. O. Box 488, Columbus, Nebr. Phone: (402) 564-3131.

Circle No. 591

Reflex klystrons

Suited for use as pump tubes for masers and parametric amplifiers, the VA-254 series reflex Klystron delivers 150 mW into a matched load over its entire 1 GHz tuning range. Tubes are available for any specified center frequency plifiers, the VA-254 series reflex between 18 and 26.5 GHz. Tuning is mechanical. The sealed unit is suited for airborne use.

Varian Associates, Tube Div., 611 Hansen Way, Palo Alto, Calif. Phone: (415) 326-4000.

SEE AT VARIAN, 2nd Floor.

Circle No. 592

ON READER-SERVICE CARD CIRCLE 249 ➤

Honeywell's NEW Auto-Torque METERS

Now available in many styles!

This revolutionary new meter comes in conventional Bakelite models in 2½, 3½, and 4½-inch sizes — a modern, dull black model "45" with a picture frame window — brand new clear plastic 4½-inch square meter priced for the volume user — the distinctive Medalist series and the contemporary "MS" series, each in 3 standard sizes. Auto-Torque meters give you the widest selection of band-type meters available today.

More Reliable!

Auto-Torque's simplified design has 50% fewer parts. And since Auto-Torque meters are machine made, they give you uniform quality and precision never before possible in conventional meters. You can just about say good-bye to service problems!

Revolutionary and fast selling




You save money! Quantity-order prices for volume buyers are below comparable pivot and jewel meters!

Outlasts conventional meters! Auto-Torque's moving system is suspended on metal bands under tension. As a result, there's no friction and wear.

Self-shielded mechanism
Auto-Torque meters can be mounted on any panel without special calibration; accuracy is unaffected by external fields!

For more information on the revolutionary Auto-Torque meters, write Honeywell Precision Meter Division, Manchester, N. H. 03105.

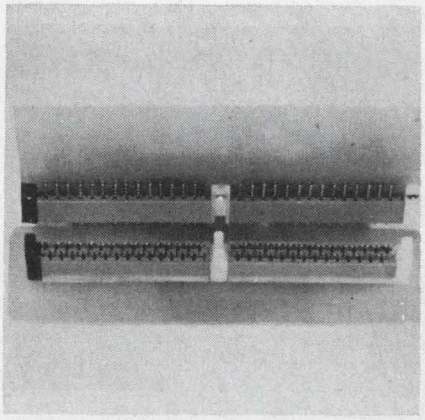

Printed-circuit connector


Series 8218 has up to 76 contacts in a diallyl phthalate insulator. The terminations are in two offset rows on 0.10-in. spacing giving a 0.05-in. grid—or in one row on 0.05-in. spacing.

Multiple units may be coupled by nylon sections. Ratings are 5 A, .006 ohm max contact R.

P&A: $.06 per pos. ELCO, Maryland and Computer, Willow Grove, Pa. Phone: (215) 659-7000.

SEE AT BOOTHS 1D22-23

Circle No. 593

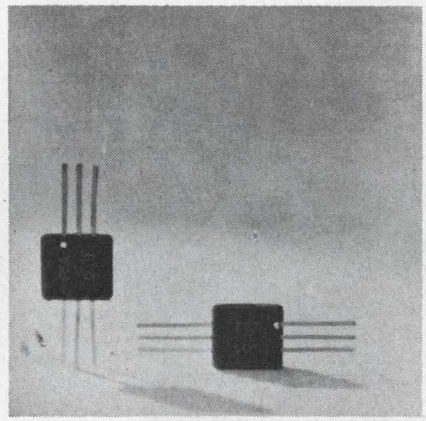

Diode arrays

A family of eight ultra-fast silicon Planar epitaxial diode arrays is for high speed core driver applications. The arrays are sealed for operation to 400 mW.

They include 16-diode and 8-diode TO-5 and ceramic packages, with common-anode and common-cathode models. Forward V is 1.50 V max with forward current of 500 mA.

Price: $15-45. Fairchild Semiconductor, 313 Fairchild Dr., Mountain View, Calif. Phone: (415) 962-2530.

SEE AT BOOTH 2G03-2G13

Circle No. 594

General Electric's newest little lamp is fast on its feet





G-E's Sub-Miniature Bi-Pin lamps will set new speed records for replacement in printed circuit, indicator and switching applications because they plug in from the front and stay there!

These tough little incandescents can perform the same functions as a midget flanged base, screw base, grooved base or wire terminal lamp. They'll save you money in manufacturing and assembly, too, by eliminating more expensive sockets. Bi-Pins in printed circuits, for example, can plug directly into a board. Their rugged plastic base adds long-life insurance by protecting the glass seal.

Five lamp types in the T 1¾ size (approx. 7/32" diam.) are now available (smaller illustration above is actual size). Variations in design volts, amps, candlepower and design life give you the choice of more than 30 lamps in the T 1¾ size.


We'll send you complete specifications and drawings if you'll ask for Bulletin #3-5593. General Electric Co., Miniature Lamp Dept. M6-1, Nela Park, Cleveland, Ohio 44112.


Progress Is Our Most Important Product

GENERAL ELECTRIC


ON READER-SERVICE CARD CIRCLE 781

PROVEN RELIABILITY—
SOLID-STATE POWER INVERTERS,
over 260,000 logged operational hours—
voltage-regulated, frequency-controlled,
for missile, telemeter, ground support,
135°C all-silicon units available now—

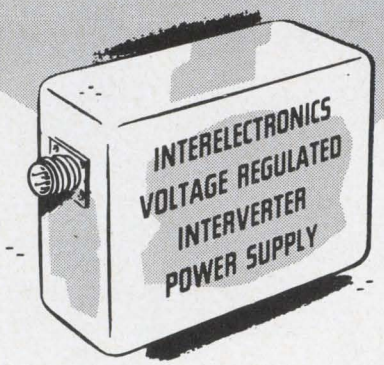





Interelectronics all-silicon thyratron-like gating elements and cubic-grain toroidal magnetic components convert DC to any desired number of AC or DC outputs from 1 to 10,000 watts.




Ultra-reliable in operation (over 260,000 logged hours), no moving parts, unharmed by shorting output or reversing input polarity. High conversion efficiency (to 92%, including voltage regulation by Interelectronics patented reflex high-efficiency magnetic amplifier circuitry.)




Light weight (to 6 watts/oz.), compact (to 8 watts/cu. in.), low ripple (to 0.01 mv. p-p), excellent voltage regulation (to 0.1%), precise frequency control (to 0.2% with Interelectronics extreme environment magnetostrictive standards or to 0.0001% with fork or piezoelectric standards.)




Complies with MIL specs. for shock (100G 11 mlsc.), acceleration (100G 15 min.), vibration (100G 5 to 5,000 cps.), temperature (to 150 degrees C), RF noise (I-26600).



AC single and polyphase units supply sine waveform output (to 2% harmonics), will deliver up to ten times rated line current into a short circuit or actuate MIL type magnetic circuit breakers or fuses, will start gyros and motors with starting current surges up to ten times normal operating line current.




Now in use in major missiles, powering telemeter transmitters, radar beacons, electronic equipment. Single and polyphase units now power airborne and marine missile gyros, synchros, servos, magnetic amplifiers.



Interelectronics—first and most experienced in the solid-state power supply field produces its own all-silicon solid-state gating elements, all high flux density magnetic components, high temperature ultra-reliable film capacitors and components, has complete facilities and know how—has designed and delivered more working KVA than any other firm!

INTERELECTRONICS CORPORATION
550 U. S. Route 303, Congers, N. Y.
Telephone: 914 ELmwood 8-8000

ON READER-SERVICE CARD CIRCLE 782

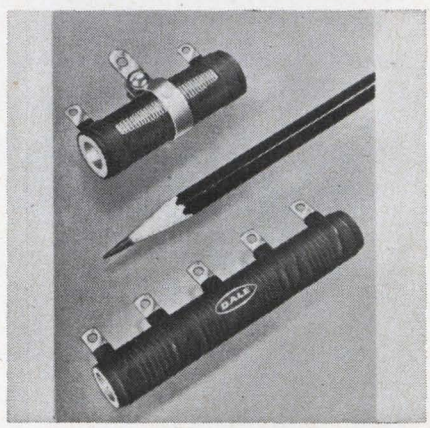

Power wirewounds

Adjustable and tapped power wirewound resistors are designated HLA (adjustable) and HLT (tapped) series. Made to MIL-R-19365C, the 12 model HLA is 12 to 225 W, 1 to 100 k ohms ±5%.

The HLT has 13 models from 11 to 225 W, 1 ohm to 1.1 Meg. ±10%. They can be tapped into sections, resistance and power to order.

P&A: HLA-$.39, HLT-$.27; 3-4 wks. Dale Electronics, P. O. Box 488, Columbus, Neb. Phone: (402) 564-3131.

SEE AT BOOTH 2H33-35

Circle No. 595



High-resolution CRT


A high resolution 1-in. screen CAT is available with or without fiber optic face-plate. The fiber optics version offers full screen fiber area for contact recording of phenomena.

The M-1236 features 1000 lines/in. resolution. It is μ-metal shielded against external magnetic fields. The unit is suited for fine detailed phenomena.

Price: $850; 12-14 wks. General Atronics, 1200 E. Mermaid, Phila., Pa. Phone: (215) 248-3700.

SEE AT BOOTH 2G25

Circle No. 596

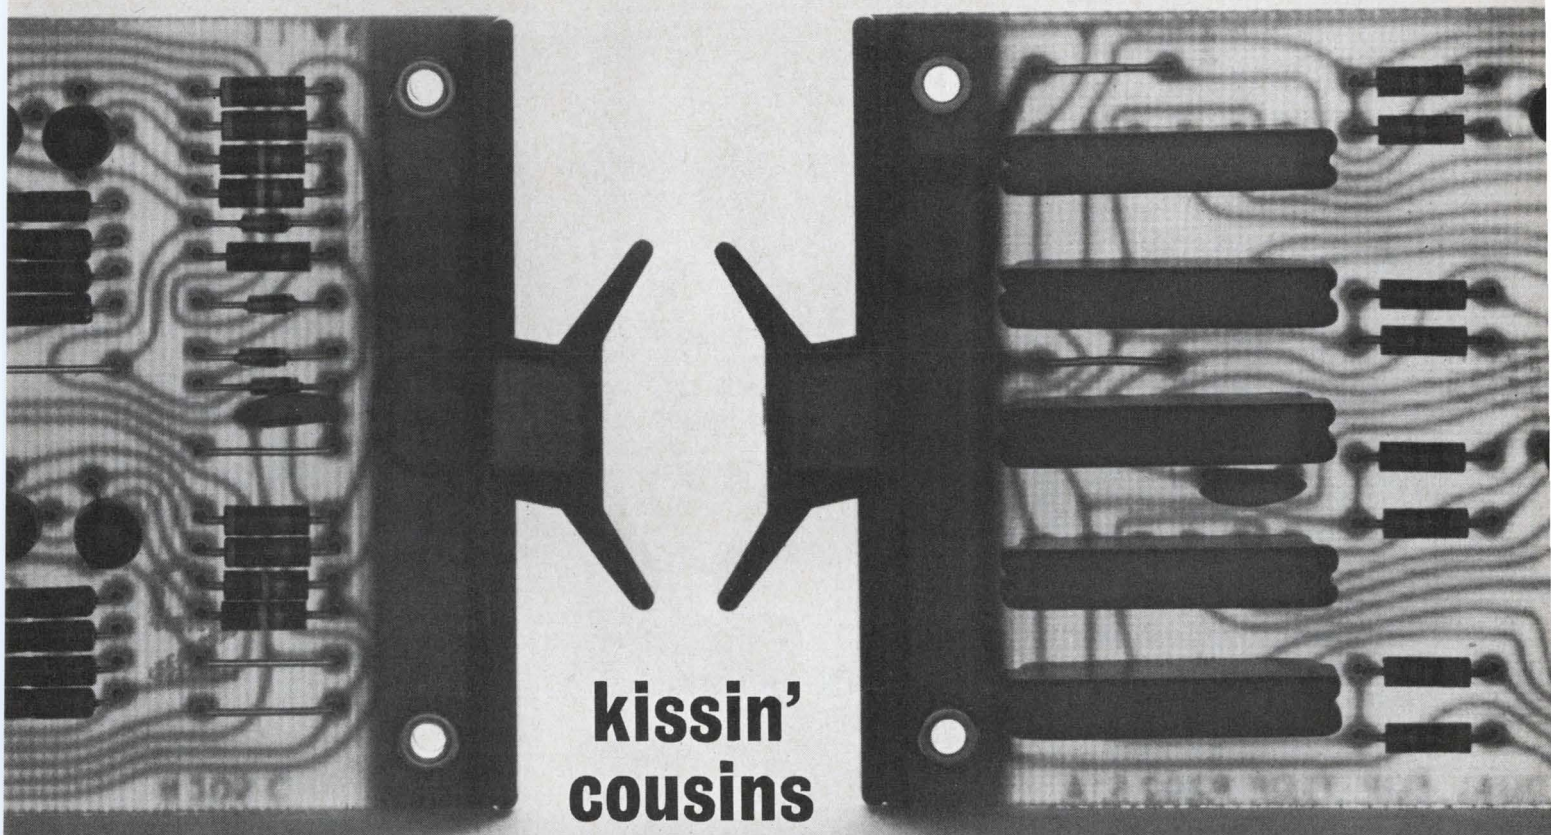

kissin' cousins

These two digital modules are directly related to 99 other standard Flip Chip™ modules. They are related electrically, physically, and logically, and they all carry the same 10-year guarantee.

Together with their kinfolk, they can be arranged to make an up counter, a down counter, a shift register, a jam transfer buffer, a high speed parallel adder, an analog to digital converter, or a vice versa.

Or a signal multiplexer, a typewriter driver, a Gray to binary converter, a vice versa, a paper tape punch control, a reader control, a pseudo random sequence generator, a data acquisition system, or an interface between peripherals and a real time computer.

Sometimes it pays to have a big family.

Write for a catalog.

DIGITAL

MODULES • COMPUTERS

DIGITAL EQUIPMENT CORPORATION, Maynard, Massachusetts 01754. Telephone: (617) 897-8821 • Cambridge, Mass. • Washington, D. C. • Parsippany, N. J. • Rochester, N.Y. • Philadelphia • Huntsville • Orlando • Pittsburgh • Chicago • Denver • Ann Arbor • Los Angeles • Palo Alto • Seattle • Carleton Place and Toronto, Ont. • Reading, England • Paris, France • Munich and Cologne, Germany • Sydney and West Perth, Australia • Modules distributed also through Allied Radio

ELGENCO Noise Generators



Model 610A

SOLID STATE NOISE GENERATORS

Model 602A 5 cps to 5 mc, 3 Ranges **$ 290**
Model 603A 5cps to 5 mc, 3 Ranges **$ 495**
Model 610A 5 cps to 5 mc, 8 Ranges **$1,175**


Series 624 **(Fixed frequency)** 5 cps to 500 kc **$245** to **$490.** Write for details on frequency ranges and spectral flatness.



Model 312A

VACUUM TUBE NOISE GENERATORS

Model 301A DC to 40 cps **$1,995**
Model 311A Two outputs DC to 40 cps and 10 cps to 20 kc **$2,395**
Model 312A Two outputs DC to 120 cps and 10 cps to 20 kc **$2,495**
Model 321A DC to 120 cps **$2,095**
Model 331A 10 cps to 20 kc **$1,275**

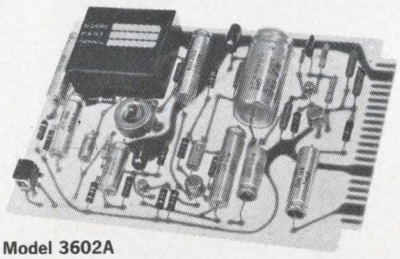

Model 3602A

NOISE GENERATOR CARDS

Series 3602, 3603, and 3606 $144 to $389
Various frequency ranges and output flatness available. Size: 4½"x 6½"x 1". Write for details.


ENCAPSULATED NOISE SOURCE MODULES

Series 1602, 1603, and 1606 . . $95 to $340
Various frequency ranges and output flatness available. Size: 1¾"x 1½"x ¾". Write for details.

ELGENCO INCORPORATED
1550 Euclid Street
Santa Monica, California
Phone: (213) 451-1635
TWX: (213) 879-0091

For a more complete listing, write for our short form catalog.

ON READER-SERVICE CARD CIRCLE 783

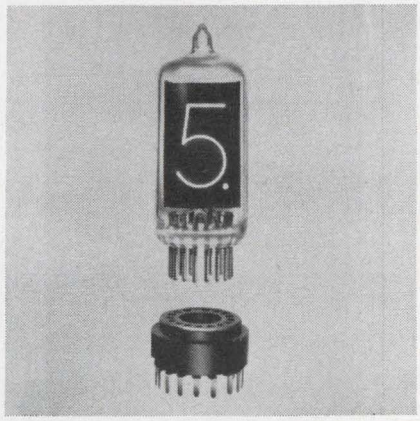

Low-priced nixie

A new entry in the cold-cathode readout line of Nixie tubes is the B-5440. The side-view unit measures 1.8-in. high with a 0.6-in. digit. Sockets, configuration and dimensions are designed to make the device compatible with printed circuitry. Decimal points and plus and minus signs are built in.

P&A: $4.95 in 1000 lots; stock. Burroughs, Electronic Components Div., Plainfield, N. J. Phone: (201) 757-5000. *Circle No. 597*
BOOTH NO. 1B13-1B19.

Feedback elements

Logarithmic modules, LGP-4 and LGN-4 are designed to obtain, when used with Nexus' amplifiers, an output voltage proportional to the log of an independently variable input signal current. The 1.55 x 0.78 x 0.75-in. units are temperature compensated to provide log conformity of better than ±0.5 dB over the +5° to +55°C range.


P&A: $65 each; 6 weeks. Nexus, 480 Neponset, Canton, Mass. Phone: (617) 828-9000.
SEE AT BOOTH 2H45.
Circle No. 598

PIN diodes

A complete line of silicon PIN diodes is offered, designed for series mounting in strip transmission line circuits. A typical model, the MA-4732C, has a 75 v minimum breakdown voltage, and maximum total capacity of 0.3 pf, 2 ohms series resistance and 10 nsec switching speed. The devices are available with axial wire or ribbon leads.

Microwave Assoc., Inc., South St., Burlington, Mass. Phone: (617) 272-3000. *Circle No. 599*
SEE AT BOOTH 2D02-2D04.

Aladdin® electronics ADJUSTABLE INDUCTORS

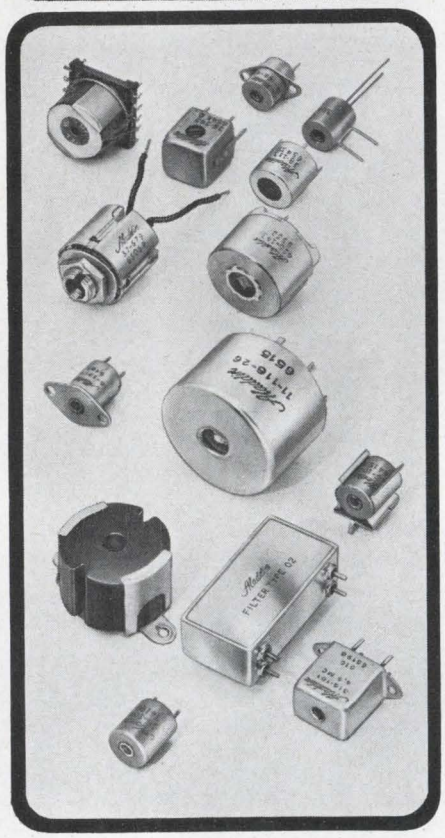

If your problem is one of packaging inductive components, then the answer can probably be found in one of the Aladdin Electronics configurations shown above. As specialists in inductive components for frequency generation or selectivity, we can confidently recommend our products for your exacting applications. The units shown above may be used as fixed and adjustable inductors, fixed and adjustable transformers (either tuned or untuned), and as filter elements. They have been designed to help you solve both the problem of making your equipment more compact and also the problem of improving performance through the use of more stable inductive components.


For help concerning component selection for FREQUENCY SELECTIVE NETWORKS or for free literature on Aladdin inductive components write to:

Dept 3-C
Aladdin® electronics
where the magic of magnetics is a science*

Nashville, Tennessee 37210
615-242-3411 TWX: NV252
*T.M.

Speed Inquiry to Advertiser via Collect Night Letter

ON READER-SERVICE CARD CIRCLE 784

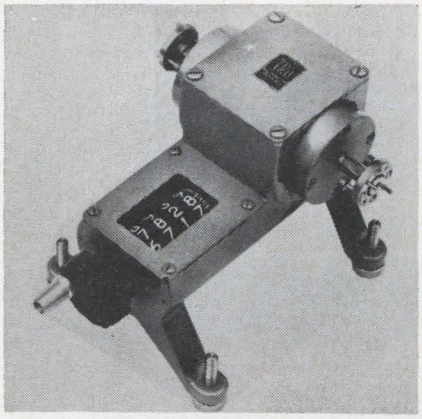


Phase shifter

A direct-reading unit, Series 528 is designed for use in millimeter RF bridge networks. Available in the standard waveguide bands from 12.4-110 GHz, the instrument consists of two quarter-wave plates separated by a rotary half-wave plate in circular waveguide. Rotation at the center section produces a phase shift equal to twice the angle of rotation.

TRG, 400 Border St., East Boston, Mass. Phone: (617) 569-2110.
SEE AT BOOTH 2D43.

Circle No. 600

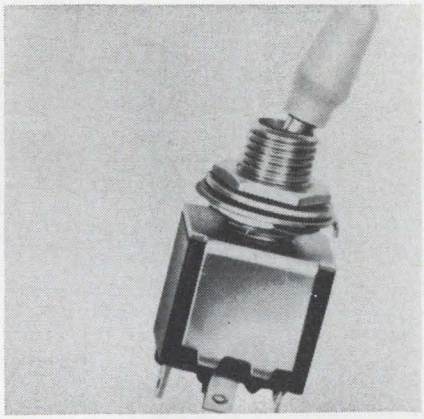

Toggle switches

Called Series 7203, a line of on-off-on dpdt switches is offered. Contact rating is 5 amps resistive load at 115 Vac. Contact resistance is 20 milliohms at 2-4 Vdc, 1 amp. Dielectric strength is 1000 Vrms at sea level. Electrical life for the 5.5 gm units is 100,000 make-and-break cycles min. Uses include test equipment, computers, and communications switchboards.

C&K, 103 Morse, Newton, Mass. Phone: (617) 926-0800.
SEE AT BOOTH 1F33.

Circle No. 601

"They laughed when I sat down to play the Mathatron."



"Little did they realize then that this was no ordinary $5,000 Mathatron. All they could see was the simple algebraic keyboard, and the paper tape readout.

"But underneath the Mathatron, cleverly disguised in the table, was capacity bringing the totals to 48 individually addressable storage registers, 480 steps of program memory, 18 prewired programs of 48 steps each, increased speed, and added program control!

"By my right hand, unknown to those snickering on my left, close by the candelabra, was an additional control box which told me, by blinking lights, which of the 10 loops I was addressing. And there were other buttons there, too.

"When I finished my evaluation of the formula involving trigonometric, logarithmic and other functions, matrix manipulations, triangulation and the solution of polynomials, they applauded generously." Send for complete details.

MATHATRONICS, INC.


257 Crescent Street, Waltham, Massachusetts 02154 (617) 894-0835

Mathatron 8-48 plus Auxiliary Program Storage: ferrite core memory, 100 column number capacity, 8-9 significant digit accuracy, automatic decimal placement, all solid state logic & circuitry. Page printer, paper tape punch/reader and other accessories available.

ON READER-SERVICE CARD CIRCLE 785

Now! a NEW HIGH STABILITY CERAMIC CAPACITOR

Typical NYTcap Stability

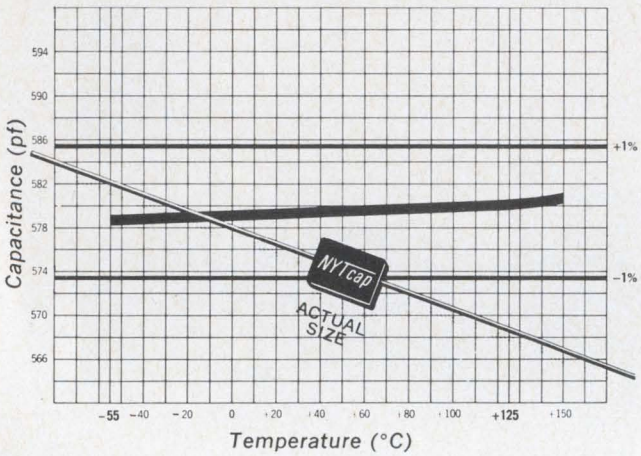

The NEW NYTcap

Temperature Coefficient: Within 1% envelope over temperature range of —55°C to +125°C.

The new NYTcap now offers the design engineer these important advantages: Package size 0.350 x 0.250 x 0.1; Capacitance range 100pf. to 1000pf.; Capacitance tolerance ±10%; Standard E.I.A. values; Loss (at 1 kc) less than 0.001 at 25°C, less than 0.002 at 125°C; Voltage rating 200 Volts dc; and Insulation resistance at 25°C 1,000,000 megohms, and 125°C 10,000 megohms. 24 hour delivery.

The NYTcap is the newest product to join the Nytronics subminiature family of inductors, ceramic capacitors, precision wire wound resistors, thin film resistors, crystal filters, L-C filters, transformers, and delay lines. Use coupon for engineering data!

NYTRONICS

Design Leaders — STANDARD Components to Meet CUSTOM Requirements

550 Springfield Ave., Berkeley Heights, N. J.

MAIL COUPON TODAY FOR COMPLETE DATA!

TO: NYTRONICS, INC. Dept. ED
550 Springfield Avenue, Berkeley Heights, N. J.

Please send complete engineering data on the NYTcap


NAME/TITLE _____

FIRM _____

ADDRESS _____

CITY/STATE/ZIP _____

ON READER-SERVICE CARD CIRCLE 786

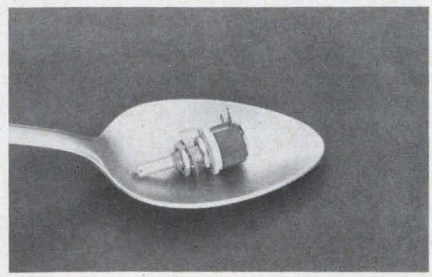

Photon-coupled isolator

A 2 pf and 10^{11} ohms non-photon coupling between input and output is featured in the hpa-4310 isolator. The solid-state device is housed in a 4-lead TO-18 case, permitting its use on p/c boards. Intended for use in circuits needing moderate-level input/output common mode isolation, the unit's 10 MHz bandwidth permits isolation of video bandwidth signals.

P&A: $55 (1-9); stock to 5 weeks. HP Associates, 620 Page Mill Rd., Phone: (415) 326-7000. Palo Alto, Calif.

SEE AT BOOTH 3E01.

Circle No. 577

Small power rheostat

Smaller than most 1/2-watt composition potentiometers, the model C rheostat is rated 7-1/2 watts at 40°C ambient (104°F). It measures 1/2-in in diameter and 15/32-in depth behind panel and is available in values ranging from 10 ohms to 5k ohms in standard and lock-bushing types. A high torque version will hold its setting under vibration and shock.

Ohmite, 3670 Howard, Skokie, Ill. Phone: (312) 675-2600.

SEE AT BOOTHS 2F39-43

Circle No. 578


Connector

A contact resistance under 0.002 ohms is featured in the Quadricon connector. Said to provide MIL performance at commercial prices, it offers one-piece insulator, crimp-on-snap-on contacts, and a one-piece insulator which requires no shells, brackets, or other mounting hardware.

Cinch Manufacturing, 1026 South Hoffman, Chicago. Phone: (312) 632-2000.

SEE AT BOOTHS 2W05-06.

Circle No. 579

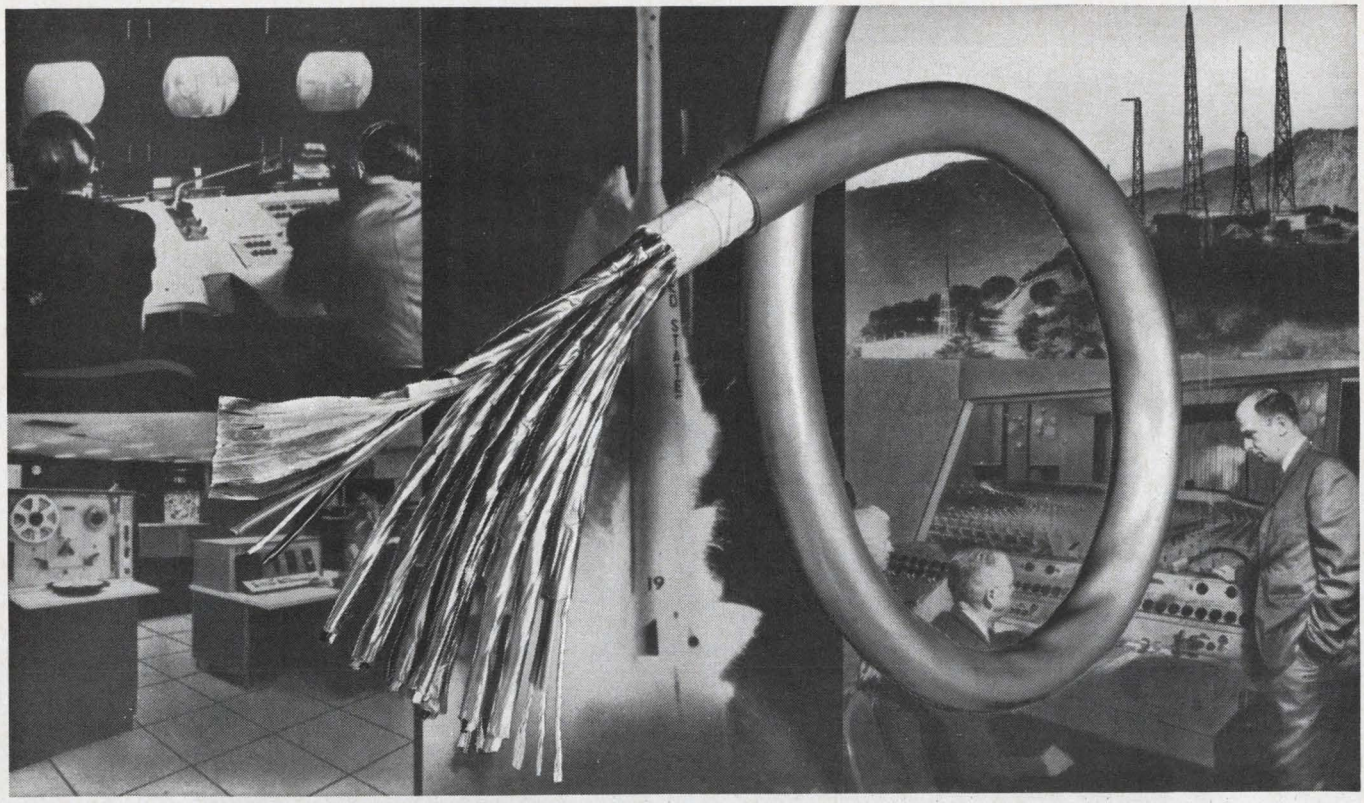

How Beldfoil* reduces hum—noise


By Frank Timmons, Chief Engineer, Electronics Division, Belden Manufacturing Company

Today's sensitive electronic equipment, in most instances, cannot tolerate hum and noise resulting from pickup and interaction between conductors in cable and wire. In an effort to assist electronic engineers to meet these requirements, Belden Manufacturing Company, in 1957, introduced Beldfoil, a cable with total shielding. Frank Timmons, Chief Engineer of the Electronics Division at Belden's Richmond, Indiana plant answers a number of frequently asked questions on Beldfoil.

Q *How does a Beldfoil shielded cable differ from other types of cable?*

A Beldfoil cable is shielded with a laminated material . . . a sheet that is a combination of Mylar† and aluminum foil. The result is a high dielectric insulation that gives *total* shielding . . . 100% isolation between adjacent pairs.

Q *Are Beldfoil shield cables smaller than other types of cables?*

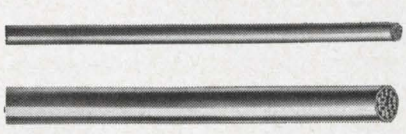

A Yes. Beldfoil shielding reduces the diameter of some multiconductor cables by as much as 66⅔%.

The two cables shown above have the same number of twisted pairs with identical AWG. The smaller of the two is the Beldfoil shielded cable. Beldfoil helps electronic engineers design for miniaturization. It provides extra conduit, raceway, console, and rack space.

Q *What about flexing?*

A Because Beldfoil shielding is applied spirally (as shown below) instead of longitudinally, it will flex repeatedly and maintain 100% shield coverage.



Q *What is meant by "pressure points" in a cable with braid-shields?*

A Braid-shields present a very irregular surface to the insulations under, or beside the shield. Pressures, within the cable, and as a result of crushing forces upon the cable, cause the braid to be forced into insulation at these pressure points. These conditions may be a cause of early cable failure. Beldfoil shields are smooth and do not contain these pressure points.

Q *What about terminating Beldfoil shielded cables?*

A Every Beldfoil shield features a drainwire that contacts the aluminum portion of the shield along the full length of the cable, draining any accumulated static charges from the shield. This drainwire is a convenient ground wire with sufficient circular-mil-area so that it may be used as a conductor for relay and annunciator circuits.

Q *What are some of the applications of Beldfoil?*

A Beldfoil is effective over the entire audio and RF range (even to 1000 Mc). Typical applications include instrumentation, data processing, and telemetering equipment, as well as any information measurement circuits. Recent specific applications have been for TV audio circuits, Air Force communications systems, TV receivers, radios, phonographs, aircraft communications equipment, and mobile communications equipment.

Q *How would you summarize some of the important benefits and properties of Beldfoil?*

A Beldfoil eliminates dirty (wide-band) noise, and the problems of crosstalk. It saves space, it's easy to install, it is easy to terminate, and it has long life. And users report that it reduces end costs because of minimum maintenance or repair required of installations after they are in the field.

Q *I assume descriptive literature is available on request.*

A Yes. Requests should be directed to Belden Manufacturing Company, P.O. Box 5070-A, Chicago, Illinois 60680.

Belden 8-10-4

*Belden Trademark Reg. U.S. Pat. Off. † duPont Trademark

SEE US IN BOOTHS 4C-27, 4C-29 IEEE SHOW

ON READER-SERVICE CARD CIRCLE 787

CEI's NEW 900 SERIES VHF RECEIVERS



NOW RE-DESIGNED FOR EVEN FINER PERFORMANCE

State-of-the-art circuitry advances—plus improvements in readability and re-setability—mark CEI's new and outstanding 900 Series VHF receivers. A 26" metal tape dial provides increased precision and readability in tuning, and a local oscillator output to drive a digital counter (such as CEI Type DRO-300) has been added. Additional new features include all solid state circuitry except in the front end, where nuvistors are employed for superior signal handling performance and to assure low intermodulation products.

Types 901B, 904A, 905A and 906A all receive AM, FM and CW from 30 to 300 mc, are identical except that the 904A includes a crystal marker oscillator (CMO), the 905A contains a carrier operated relay (COR) and the 906A contains both.

Covering their range in two bands (30-90 and 60-300 mc), they offer selectable IF bandwidths of 300 kc and 20 kc, with a built-in BFO activated automatically in CW mode and operable in either bandwidth.

For full information about these feature-packed receivers, please contact:

CEI

COMMUNICATION ELECTRONICS INCORPORATED

6006 Executive Blvd., Rockville, Md. 20852 Phone: (301) 633-2800 TWX: 710-824-9603

ON READER-SERVICE CARD CIRCLE 788



FREE BROCHURE

on custom designed transformers and inductors that meet or exceed MIL and Aerospace Specs.

Ask for Brochure ADV. 500

If you have MILITARY and AEROSPACE applications . . . get the facts on the following **custom designed** magnetic components:

TRANSFORMERS: Power, Variable, Current, Plate, Filament and Audio.

MAGNETIC AMPLIFIERS

TOROIDAL INDUCTORS

SATURABLE AND LINEAR REACTORS

CHOKES • FILTERS

All components produced to MIL-T-27 or other military and aerospace specifications. Full data also provided on Basler's engineering, prototype, production and testing capabilities.

BASLER BE Electric Company

BOX 269, HIGHLAND, ILLINOIS 62249

ON READER-SERVICE CARD CIRCLE 789

Coaxial attenuators

Flat from dc to 12.4 GHz, Model 8491A fixed units have either a 10 or 20 dB nominal value.

Calibration accuracy is ± 0.5 dB to 7 GHz, ± 1 dB from 7-12.4 GHz. SWR specification is < 1.2 to 7 GHz, < 1.3 from 7-12.4 GHz.

The 2-7/16-in. long units are 13/16-in. in diameter. One male and one female Type N connector is provided.

P&A: $50 each; 2 weeks. Hewlett-Packard, 1501 Page Mill Rd., Palo Alto, Calif. Phone: (415) 326-7000.

SEE AT BOOTH 3E01

Circle No. 602

Circuit sockets

A contact design reported to assure minimum contact resistance with repeated device insertions is reported for the Press-Fit Series 60.

Sockets units for 8-, 10- and 12-lead TO-5 integrated circuit packages as well as 3- and 4-lead TO-18 and TO-5 packages are available. Bushings designed to serve as spacers between circuit boards and chassis and other uses are also offered.

Sealectro Corp., 225 Hoyt St., Mamaroneck, N. Y. Phone: (914) 698-5600.

SEE AT BOOTHS 2G43-45.

Circle No. 603

Time-delay relay

A low cost electronic time-delay relay features interchangeability with motor-driven types.


One to 90 second timing ranges in either fixed or adjustable delay types are offered.

Other specifications include dpdt output, 105-125 Vac input, solder terminals, and $\pm 5\%$ repeat accuracy at nominal voltage and room temperature.

P&A: $15.50; stock. Aemco div. Midtex, 10 State, Mankato, Minn.

SEE AT BOOTH 4A03

Circle No. 604

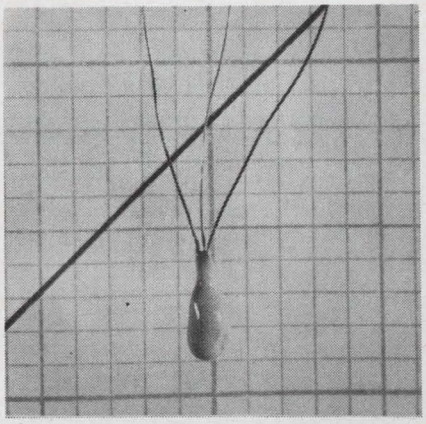


Composite thermistors

Linear resistance changes of up to 127 ohms/°C with deviations of 2 parts in 1000 from 0° to 100°C are featured in the thermilinear of composite thermistors. Smaller deviations are reported over smaller ranges. The units are interchangeable for easy replacement or for multiple readings.

P&A: $11.60; stock. Yellow Springs Instruments, P.O. Box 279, Yellow Springs, Ohio. Phone: (513) 767-7242.

SEE AT BOOTH 1A23

Circle No. 621

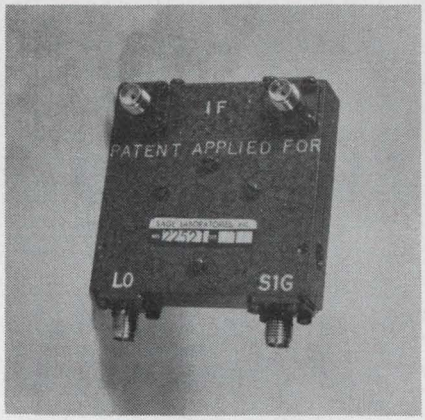

Coaxial attenuators

The dc to 8 GHz frequency range is covered by models 9317-3, -6, -10 and -20 coaxial attenuators. Attenuation is 3 dB ±1 dB. Vswr is under 1.30. The 3/4 oz. devices have a 1 W power handling capacity. Any combinations of miniature connectors are available.

P&A: $30; 60 days. Sage Labs. 3 Huron, Natick, Mass. Phone: (617) 653-0844.

SEE AT BOOTH 1B27.


Circle No. 622

TC



± 100 ppm/°C

What else is new with the CTS Series 185 Cermet Trimmer?

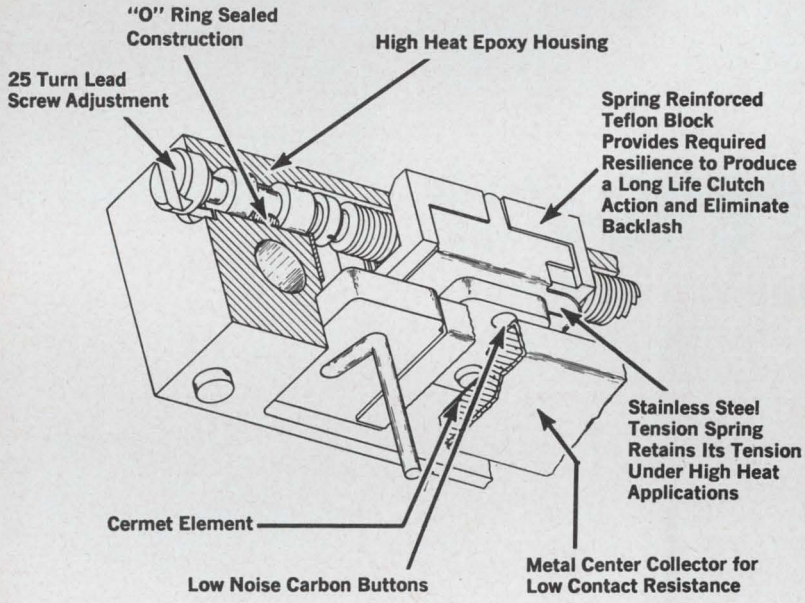

Meets MIL-R-22097B, Char. C, Style RJ11.

Rugged, sealed construction keeps out dust and water—reduces noise.

Lower cost ($2.95 ea. in 1000 quant.) due to ⅓ fewer parts than CTS Series 180.

Highly reliable cermet resistance element provides: high wattage (1 Watt @ 85°C), stability under extreme environments, wide resistance range (25 ohms to 1 megohm), low noise, long life and infinite resolution.

Printed circuit or wire leads; bushing mounting with printed circuit, wire or hook leads also available.

Request Data Sheet 3185.

Founded 1896


CTS MICROELECTRONICS, INC.

LAFAYETTE, INDIANA

Subsidiary of **CTS CORPORATION**, Elkhart, Indiana

ON READER-SERVICE CARD CIRCLE 790


HOW CAN YOU POSITION

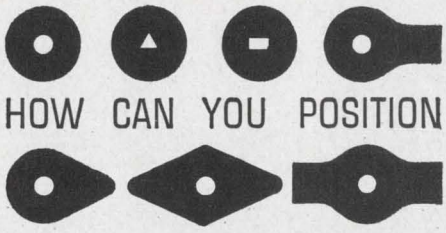

EACH OF THESE SYMBOLS



IN JUST 3 SECONDS?

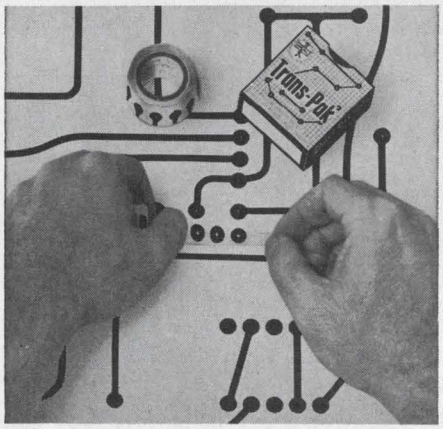

WITH

Trans-Pak

DIE-CUT SYMBOLS IN ROLL FORM!

Simply position, press and peel your way to faster, more accurate, distortion-free printed circuit masters. With Trans-Pak every terminal pad, elbow, connector, teardrop, or any other symbol is "predrawn" for you. No inking! No cutting! No stripping! Trans-Pak pressure-sensitive die-cut symbols are available in black crepe and red translucent material. Any symbols can be made up in die-cut roll form conveniently packaged 250 symbols to a roll . . . *without a die-charge.* Send for Trans-Pak catalog of printed circuit symbols and Free sample strip of Trans-Pak. Introduce yourself to the best method of making printed circuit masters. Look in the Yellow Pages for your Chart-Pak dealer's name.

Chart-Pak, Inc.
633 River Road
Leeds, Massachusetts.

Please send a Trans-Pak sample strip, Trans-Pak Printed Circuit catalog, and the Chart-Pak general catalog.

Name..... Title.....

Company.....

Address.....


City..... State..... Zip.....

CHART-PAK, INC.

Dealers in principal cities throughout the world.

ON READER-SERVICE CARD CIRCLE 791

Hybrid couplers

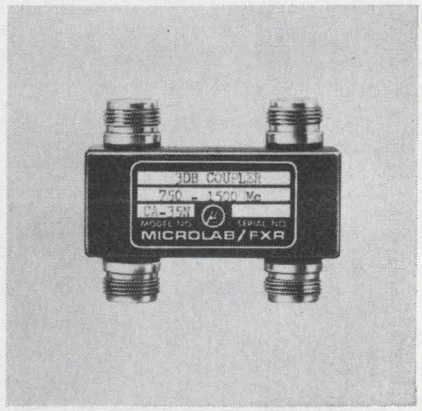


A 25 dB directivity over a full octave frequency range, with a ±1 dB coupling deviation are featured in Series CA hybrid couplers. Mainline vswr is 1.15. Six units cover the 200 to 4000 MHz range in overlapping octave bandwidths, with either N or TNC connectors. The 4-port devices offer both ends of the auxiliary line.

P&A: $90; stock. Microlab/FXR, Livingston, N. J. Phone: (201) 992-7700.

SEE AT BOOTHS IG27-29.

Circle No. 623

Telemetry antennas

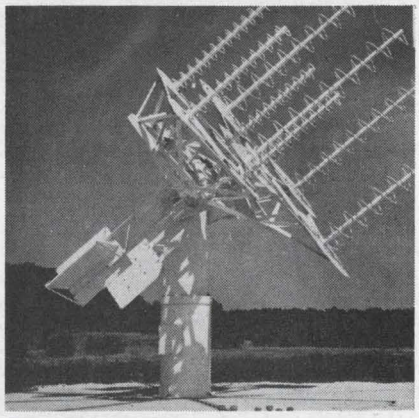


Designed for use aboard instrumentation ships, a line of telemetry antennas is mounted on a heavy duty positioner and is reported to withstand 120 mph winds with icing conditions. The elevation-over-azimuth positioner will operate at a maximum speed of 40°s under a windload of 75 mph.

P&A: about $45,000; 6-9 months. Andrew Corp., Post Office Box 807. Chicago, Ill. Phone: (312) 349-3300

SEE AT BOOTHS IF12-14.

Circle No. 624

Video detectors

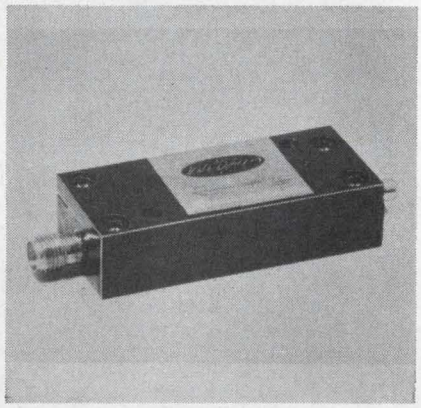


A series of three video detectors measures under 0.75 cu in., meet Class 4 environmental requirements of MIL-E-5400 and MIL-T-5422. All three units can be operated with self- or external-bias. A typical unit, model TV 11 has a −53 dB sensitivity over the full RF bandwidth from 2-4 GHz with video bandwidth exceeding 17 MHz.

Sanders, 95 Canal, Nashua, N. H. Phone: (603) 883-3321.

SEE AT BOOTHS 2W02-04

Circle No. 625

Switching module

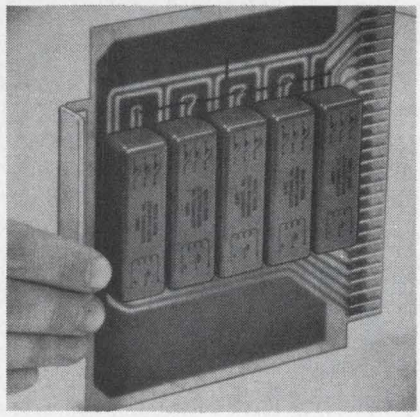

Signals from microvolts to 200 V are switched in under 750 μs by a low-to-medium level signal switching sub-system module, the Microscanner. Available in six models (three dpst and three 3pst, two or three circuits/channel), the units accept drives of 6, 12 or 20 Vdc. Uses include data multiplexing and analog data switching.

P&A: $59-$97; 3-8 wks. James Electronics, 4050 N. Rockwell, Chicago. Phone: (312) 222-0745.

SEE AT BOOTH 2A01.

Circle No. 626

Because *one* data sheet — representing Motorola's new MR1120-30 series 12-ampere, 7/16″ stud rectifiers — now gives you the chance to replace any of more than 65 older EIA 3 to 12-ampere devices . . . *all* priced considerably higher than this new series (the lowest-cost counterpart to a $1.00,* 400-volt MR1124 unit is $3.05*)! And Motorola 12-ampere capability in lower-current sockets gives you an extra cost-saving bonus in lessened heat sinking needs.

But don't let the low price tags obscure the topnotch performance and efficiency advantages of these rectifiers:

- highest obtainable current/temperature capability — handles a 12-ampere load up to 150°C . . . superior to more than 4 out of 5 other 7/16″ stud devices
- greatest surge-current handling ability — 300-amperes (½-cycle) @ 150°C . . . at least 20% more protection than other 12-ampere units
- low forward voltage drop — 0.55 $V_{F(AV)}$ @ $T_C = 150°C$ . . . less power loss in your circuit — minimizes thermal excursions and early device failure


*100-up

Contact your franchised Motorola semiconductor distributor now for evaluation units. For the latest word in comprehensive, low-to-medium-current-rectifier data sheets, write Dept. TIC, Box 955, Phoenix, Arizona 85008.

TYPE	$V_{RM(rep)}$ Volts
MR1120	50
MR1121	100
MR1122	200
MR1123	300
MR1124	400
MR1125	500
MR1126	600
MR1128	800
MR1130	1000
Reverse polarities available	

MOTOROLA
Semiconductors

See total 1 to 1,000-amp Rectification Capability at IEEE Booths 1A18-1A24

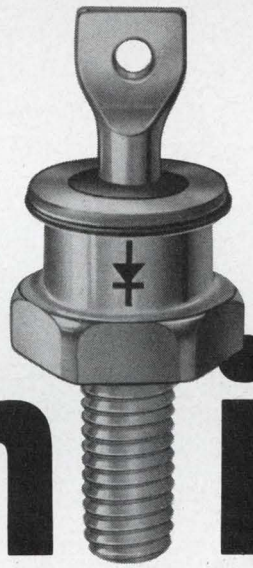

Design in DC for ⅔ Less

(and throw out 27 data sheets)


Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CRCLE 792

HIGH VOLTAGE CAPACITORS

with Big ECONOMY! EFFICIENCY! EXCELLENCE!

Quality built, hermetically sealed capacitors with a voltage range of 2,000 to 10,000 volts; from 1 Mfd. to 10 Mfd. Advanced production facilities, more expert engineering combine to make possible these quality capacitors from the capacitor people who consistently deliver more performance, more value and more satisfaction.

See How! Write today for informative and complete details on the EP units.

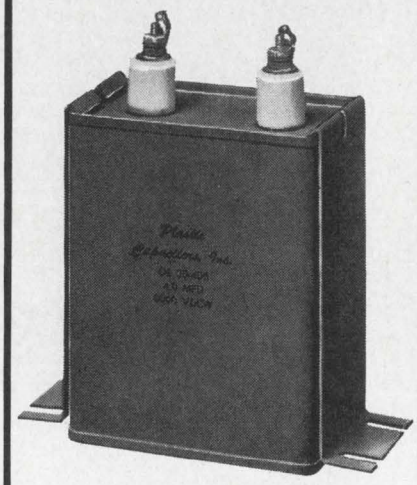

Plastic Capacitors, INC.
2620 N. Clybourn · Chicago 14, Ill.
DI 8-3735

Custom PC Engineering at Production Prices

ON READER-SERVICE CARD CIRCLE 793

CHALPAK POWER SUPPLIES


fill special needs at standard prices



Whatever you require can be delivered in a standard Chalpak. Any voltage to 500v. Any current to 100 amps. Regulation: 1%, .1%, or .01%.


Multiple form factors give you wide latitude: 1/6 rack, 1/4, 1/3, 1/2, and full rack. Overload protection is standard. So are silicon transistors, and remote sensing/programming. Options include over and/or under voltage protection. *Low cost... low maintenance.*

Send for Chalpak catalog.



CHALCO ENGINEERING CORP.
Mfrs. of tape readers and D.C. power supplies
15126 S. BROADWAY, GARDENA, CALIFORNIA • FA 1-0121 (213)

ON READER-SERVICE CARD CIRCLE 794

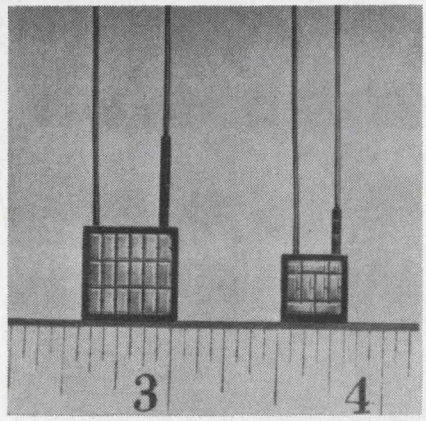


Thermoelectric modules

Two thermoelectric modules are designed for heat and power applications where size and construction are critical. The TL0606 measures 0.445 x 0.445 x 0.167-in. and weighs only 3 grams. Operating at hotface temperatures of up to 180°C, it offers a minimum capacity of 3 W at zero δT. The TL0404 is similar, measuring 0.315 x 0.315 x 0.167-in.

Asarco Intermetallics, 120 Bway., New York. Phone: (212) 732-9500.
SEE AT BOOTH 4E15.

Circle No. 627

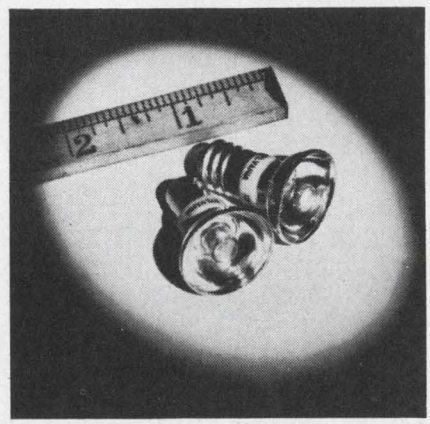


Annunciator lamp

High brightness and a 10,000-hour environmental life are featured in a new annunciator lamp. Available in three voltages and two base types, it is produced in 12 V, 0.170 amp; 60 v, 0.050 amp and 120 v, 0.025 amp versions. The 120 V lamp is a range voltage unit up to 130 V. All are produced in bayonet or candelabra screw bases.

Sylvania, Lighting Products Div., 60 Boston, Salem, Mass. Phone: (617) 745-4500
SEE AT BOOTHS 2C25-36.

Circle No. 628

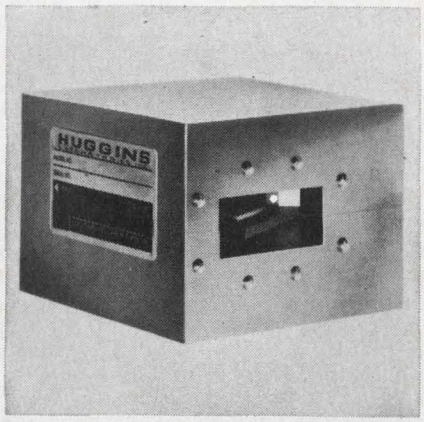

Microwave products


Broad band 3-port waveguide circulators covering 3.95-12.4 GHz in four bands and 2-W TWT amplifiers are available. The circulators display a 0.3 dB maximum insertion loss and a 1.20 vswr. Minimum isolation is 20 dB, and the units are designed for 10 kW peak power rating. The amplifiers have a solid-state supply.

Huggins Laboratories, 999 E. Arques, Sunnyvale, Calif. Phone: (408) 736-9330.

SEE AT BOOTHS 2G17-19.

Circle No. 629

Miniature pots

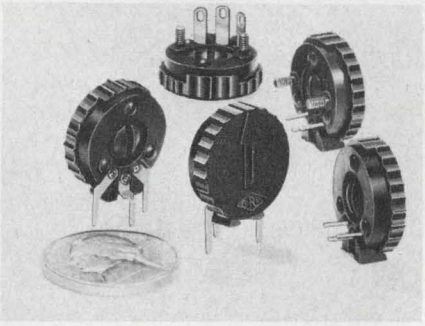

Trimmer needs in printed-circuit test, measurement and communications equipment are met by a new miniature closed-construction potentiometer. It features a rotational life in excess of 25,000 cycles and is 0.696″ in diameter and 0.250″ deep (including knob). Designated the Model 9, its range is 100Ω to 10 MΩ (1/5 W) in the linear version and 200Ω to 1 MΩ (1/10 W) with a non-linear taper. 20% tolerance is standard; 10% optional.

P&A: $0.30 (in quantity); 2-6 weeks. Centralab Div. of Globe-Union Inc., P. O. Box 591, Milwaukee, Wisc. 53201.

SEE AT BOOTH 2J32.

Circle No. 630

5MC LABORATORY FREQUENCY STANDARD



5 x 10^{-10} per day frequency stability.
1 x 10^{-9} temperature stability over −15°C to +65°C ambient.

Output frequency can be adjusted to an exact value with a resolution of approximately 1 x 10^{-10} per minor division.

The standard uses silicon transistors and a polished, high precision, fifth overtone quartz crystal having a Q in excess of 3 million. Model JKTO-66 features a double proportional control oven with a Dewar flask to provide maximum temperature stability.

Chassis is ruggedly constructed to withstand shock and vibration. Front panel mounting.

Write for Data Sheet JKTO-66 for complete specifications.


CTS KNIGHTS

CTS Knights, Inc.


of Sandwich, Illinois
(formerly The James Knights Co.)
a subsidiary of CTS Corporation, Elkhart, Indiana

ON READER-SERVICE CARD CIRCLE 795

STABILITY 5x10^{-9}
ONE MEGACYCLE

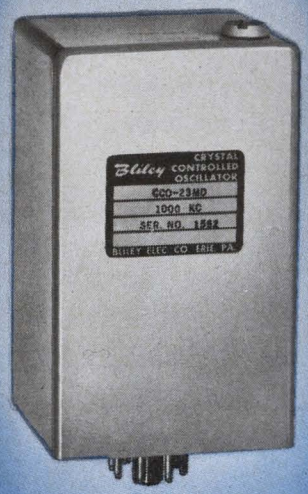

TYPE CCO-23MD
CRYSTAL
OSCILLATOR

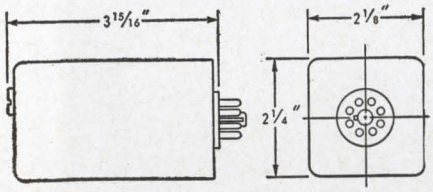

Select Type CCO-23MD for an ultra stable time base. Compact plug-in unit incorporates a high Q glass sealed crystal and full proportional temperature control. Solid state oscillator and oven circuitry assure long term reliability.


Request Bulletin 540A for complete information.

Bliley *If you buy quality*

BLILEY ELECTRIC COMPANY
Union Station Bldg. • Erie, Pennsylvania
ON READER-SERVICE CARD CIRCLE 796

MICROWAVES

Three-port circulator

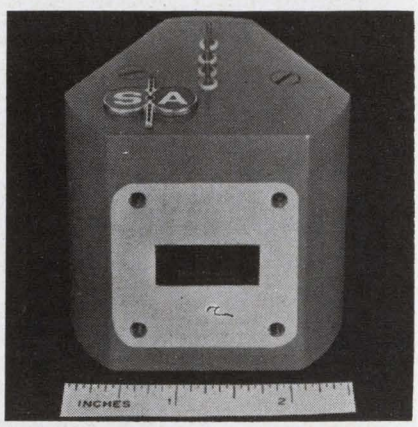

Latching, ferrite, three port circulators of waveguide and strip transmission line styles are available.


The pictured X-band model X-662-02 operates at 9.0-12.0 GHz. Isolation is 20 dB, insertion loss—0.5 dB over the band. Switching time of one μs is practical.

Strip line S-band models have similar specs over more than half-octave ranges. Low-level energy accomplishes switching.

Scientific-Atlanta, Box 13654, Atlanta, Ga. Phone: (404) 938-2930.

Circle No. 609

Laser source

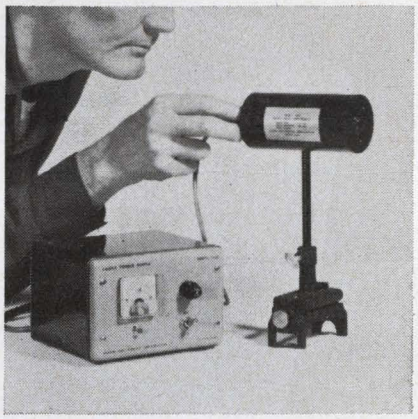


Laser pulsing with this gallium-arsenide source gives at least one watt peak power at room temperature (0.1-1.0 kHz).

Current pulses of 100 A for 100 ns are generated. Output light has a wavelength of about 9000 Å and bandwidth about 150 Å. The beam is collimated (or focused) by means of a lens. A 3/8-in. rod is provided for optical bench mounting.

Price: $750. Austin Eelectronics Corp., P. O. Box 9312, Austin, Tex. Phone: (512) 45-4096.

Circle No. 610

Octave-pass MW mixer

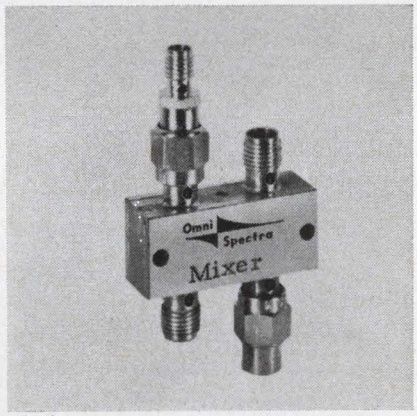


Series 20810 miniature single-ended mixers feature low noise figure and good local oscillator isolation in compact construction.

These units are available to cover octave bandwidths from 1.0 to 12.4 GHz and have easily replaceable diodes. Over-all noise figure, including a 1.5 dB IF amplifier noise level, is typically 8 to 12 dB, depending on frequency range.

P&A: $175-$225; 4 weeks. Omni Spectra, Inc., 19800 W. Eight Mile Rd., Southfield, Mich. Phone: (313) 444-8890. TWX: (810) 232-1611.

Circle No. 611

TWT power amplifier

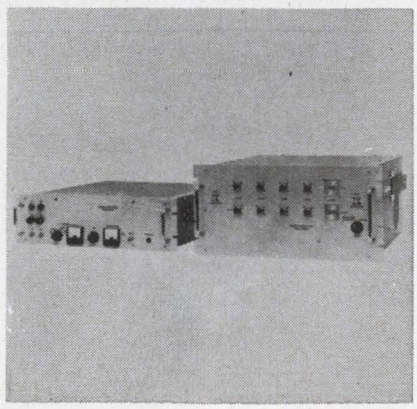

Five bands cover 1.0-18.0 MHz in the Model 135 Multiband amplifier. Output power is 18 W to 12.4 MHz, 8 W beyond. Small signal gain is 35 dB per band. Type "n" RF connections and waveguide are provided.

Changing bands requires only plug changes and screwdriver adjustments. Options include AM and/or serrodyne modulation inputs, and non-standard voltage and frequency provisions.

Alto, 4083 Transport, Palo Alto, Calif. Phone: (415) 321-3434.

Circle No. 612

ON READER-SERVICE CARD CIRCLE 237 ➤

We call them Microstacks®. They are being used in the lunar excursion module of the Apollo program, the Agena satellite, and the Minuteman missile.

They take tough temperature requirements in stride. Memory cores remain stable over a wide temperature range.

They can take a beating too. They're not built like conventional memory stacks. The "X" and "Y" axis of all the memory planes are continuously wired, then assembled in a folded array. This design, which we originated, eliminates more than 80% of the solder joints and reduces size and weight. Stacks are ultra-reliable when packaged to meet Mil Spec shock, vibration, humidity, and other extreme-environment conditions.

When specifications call for a new core, or stack configuration, nobody can match Indiana General's design, development, and production capabilities. We make and sell more ferrite memory cores than anyone in the world. In fact, we invented them. Many of our competitors are licensees.

If you have a military application for a high-reliability, low-power, miniaturized memory stack we'd like to send you our new Microstack Bulletin. Write to Mr. Thomas Loucas, Manager of Sales, Indiana General Corporation, Electronics Division/Memory Products, Keasbey, New Jersey.


INDIANA GENERAL

Our memory stacks play it cool when Mil Specs make things hot.



1G30-1G34

(remember these numbers)

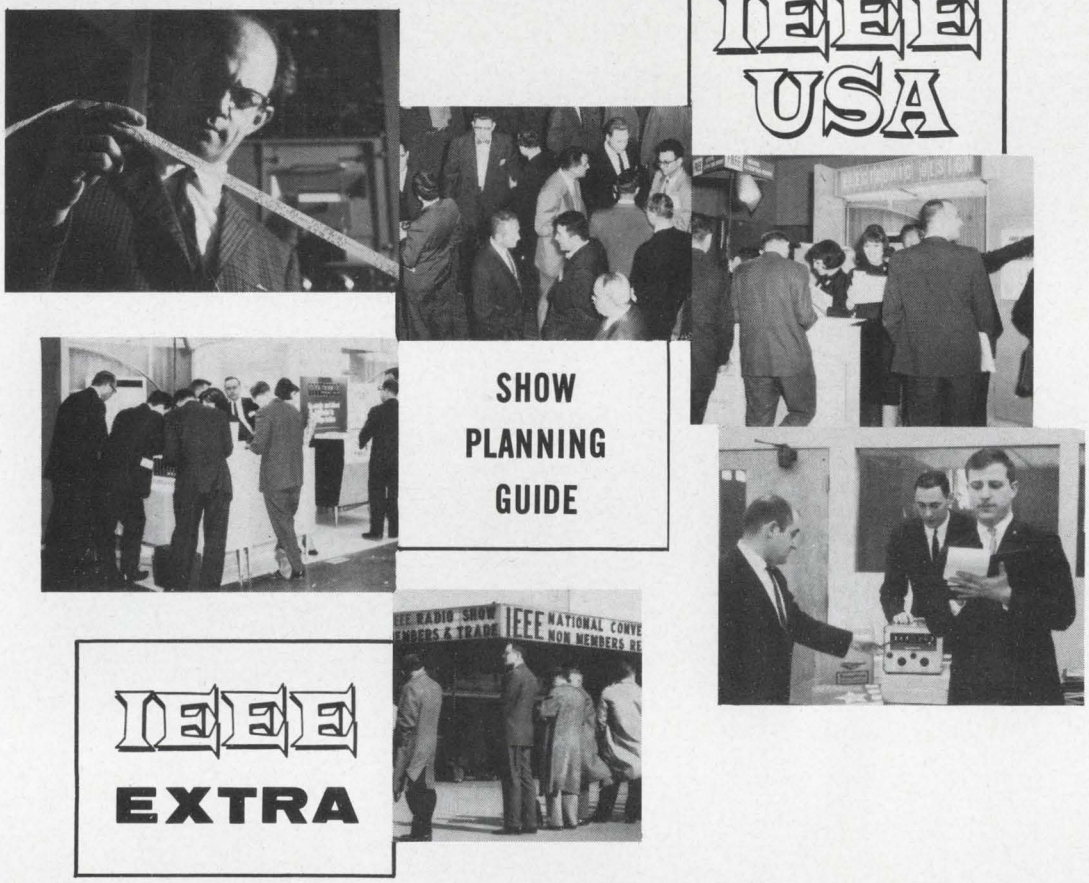


What, more numbers? *These* refer to *Electronic Design's* booth at IEEE. We hope you will include our exhibit in your show itinerary; you'll find it a worthwhile stop. Editors will be on hand to answer questions about the magazine . . . to discuss the industry . . . to save you steps at the Coliseum. Take the time to tell us about your current projects, problems, ideas . . . design plans . . . technical information needs. (Here is an opportunity to apply for your own subscription if you are currently a pass-along reader.)

Electronic Design is on the move! We have a lot to tell you about. Available literature includes:

- **Free Authors' Guides**
- **Editorial Reprints**
- **Copies of *Electronic Design's* "IEEE EXTRA"**
- **Show Planning Guides**
- **Subscription Information**

see you at the show!

Electronic Design — booth 1G30–1G34 — IEEE

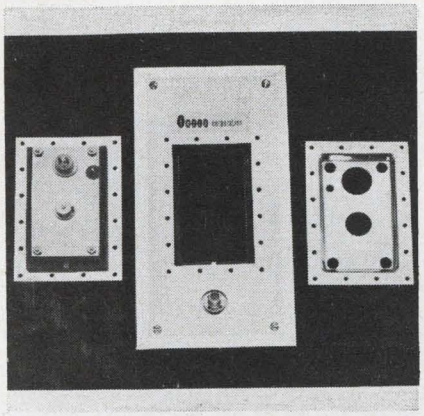


Stripiine oscillator

The GSG-1102 strip transmission line triode plug-in oscillator is designed for stripline circuits. The package plugs into a 1-1/2 by 2-1/2 inch hole in the stripline boards.

Output power is 25 watts peak, grid pulsed, or 20 milliwatts cw. The GSG-1102, weighing 2.5 ounces, is tunable over the frequency range 2.2 to 2.3 GHz. Other models are available for L and S bands.

Terra Corp., Albuquerque, N. M. Phone: (505) 255-0157.

Circle No. 605

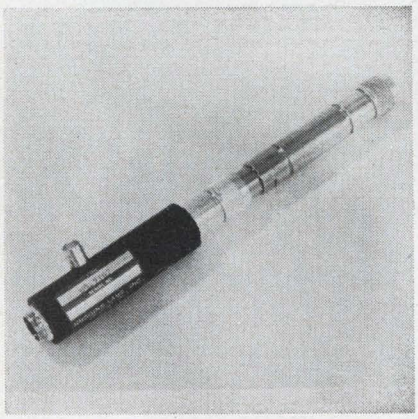

Microwave detector


A 100 dB dynamic range and bandwidth of 2-3 GHz give the HS-7162 diode detector a sensitivity of 100 mV ±3dB/mW in the square law region. Input vswr is less than 1.3:1. Inputs from less than 0.1 mW to 50 watts (cw) may be detected.

The detector has a hot cathode operating at 6.3V, 135 mA. Size is 9-1/2 x 1 inch and weight is 16 oz.


P&A: $490; 30 days. Huggins Labs., 999 E. Arques, Sunnyvale, Calif. Phone: (408) 736-9330.

Circle No. 606

We're into electronics up to our ears...

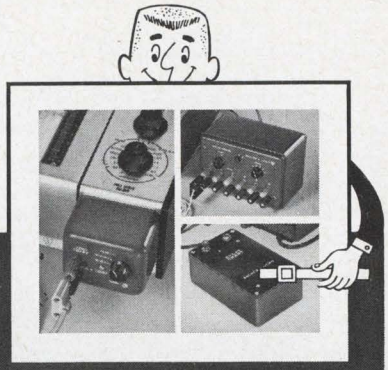

that's why Bausch & Lomb V.O.M. Recorders ASSURE YOU outstanding performance!

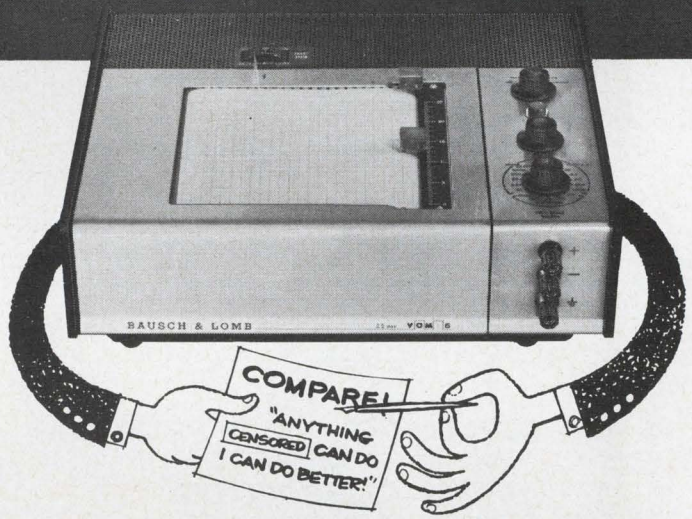

V.O.M. Recorders are backed by years of experience in engineering the most sophisticated electronic circuitry for a wide variety of precision scientific instruments. An entire division is devoted exclusively to the development and production of electronic products. Result? Outstanding performance and reliability . . . with exclusive important advantages for you at surprisingly low cost. Like recording multiple inputs . . . volts, ohms, milliamps . . . directly, without extra converters. Or the 5 chart speeds, and many more. People who buy them, like them and buy more. The V.O.M. Recorder in use is its own best salesman!

	V.O.M.-5	V.O.M.-6	V.O.M.-7	V.O.M.-8
Voltage range:	10 mv—500 v DC	2.5 mv—125 v DC	0.5 mv—10 v DC	Absorbance/ Transmittance Measurement (voltage, current, resistance ranges same as V.O.M.-5) $900 COMPLETE
Current range:	10 μa—100 ma	2.5 μa—25 ma	1 μa—10 ma	
Resistance range:	1 ohm—100 K ohms	0.25 ohms—25 K ohms	1 ohm—100 K ohms	
Prices: (suggested list)	$595 COMPLETE	$700 COMPLETE	$885 COMPLETE	

We also have the capability of designing special recorders . . . modified to handle whatever applications you wish. For complete information on our standard recorders and the many time-saving accessories available for them, write for Catalog 37-2068. Let us know if you are interested in modification for special needs. Bausch & Lomb, 91527 Bausch Street, Rochester, New York 14602.


BAUSCH & LOMB

ELECTRONICS DIVISION

Visit our Booth # 3K43 at the IEEE Show, New York Coliseum, March 21-24

ON READER-SERVICE CARD CIRCLE 797

PLAYING THE GAME WITH A SEVERE HANDICAP?

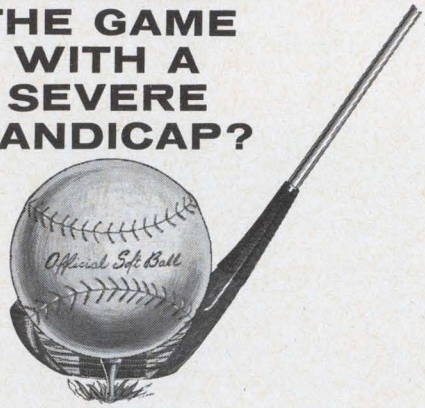

Then Let's Talk Quality. Reliance in a critical product is often confidence in its manufacturer. We've got the name because we're quality happy. Our superb new plant facilities are built around quality control, and nothing is too good to suit us . . . or you. We're efficient, too!! That's why you'll pay the lowest prices for our semi-conductors in the industry . . . 6,000 different types, immediately available to you throughout our nationwide distribution network . . . More than any other three manufacturers combined. And each unit is quality coded . . . because it bears our name.

Lowest Cost . . . Highest Quality . . . Immediate Availability

Your Western Distributor . . .
The One Source for All Your Semi-Conductor Needs!!


WESTERN TRANSISTOR CORPORATION
Dept. B-5 • 11581 FEDERAL DR. • EL MONTE, CALIF. 91731 • PHONE: 442-5507


ON READER-SERVICE CARD CIRCLE 798

IS AIR MOVEMENT YOUR PROBLEM?

WANT GUARANTEED

TROUBLE-FREE PERFORMANCE?






Over 5 *million* successful installations! That's the record of the Howard Unit Bearing Motor, available only in HOWARD CYCLOHM Fans and Blowers. A complete line engineered to provide greater output at less cost, and guaranteed for 5 years to require no maintenance or re-lubrication. For rating tables, prices and full information, ask for the Howard Fan and Blower bulletins.

HOWARD INDUSTRIES
DIVISION OF MSL INDUSTRIES, INC.
1760 STATE STREET, RACINE, WIS. 53404
Sales Offices and representatives in principal cities. Consult Yellow Pages.

ON READER-SERVICE CARD CIRCLE 799

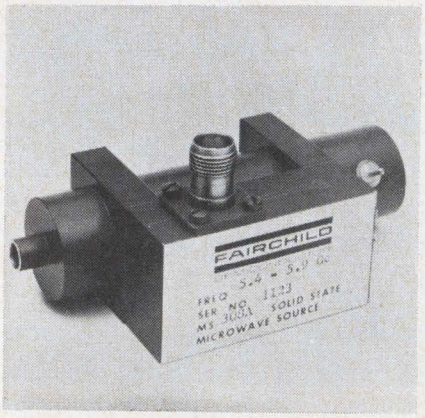


C-band sources

Two solid-state C-band microwave signal sources provide 5 mW min power out. Designated M306A and M308A, they offer less than 2 Hz rms residual FM noise. Frequency ranges are 4.4-5.0 GHz for the M306A and 5.4-5.9 GHz for the M308A.

Spurious harmonics are 60 dB below the output, and operating temperatures −55 to +100°C.

P&A: $400; stock. Fairchild Semiconductor, Mountain View, Calif. Phone: (415) 962-2530.

Circle No. 607

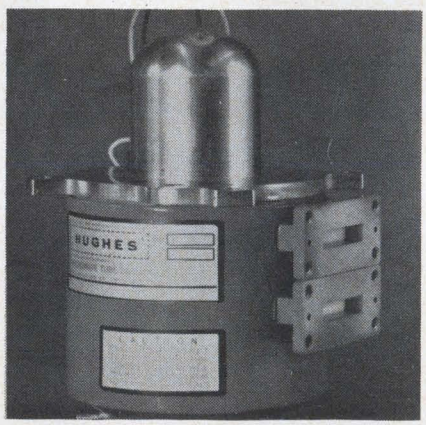

100 W klystron

A new compact klystron amplifier is a high-gain unit operating in the X-band with 100 W of CW power.


Metal-ceramic construction gives the klystron very low noise under extreme vibration conditions. It was designed for operation in airborne and missile environments.

The unit weighs 4-1/2 pounds, and measures 3 x 3 x 5-ins.

Hughes Microwave Tube Div., Hughes Aircraft Co., 11105 S. La Cienaga Blvd., Los Angeles, Calif. Phone: (213) 391-0711.

Circle No. 608

THE AWH AYDON COMPANY Timing & Control Devices

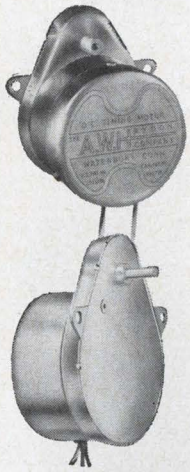

TIMING AND DRIVE MOTORS

The A. W. Haydon Co. offers fifty-three series of standard and special motors with a wide range of gear reductions. Quiet, self-starting, reversible, synchronous AC motors; all standard frequencies from 25 to 400 cps. DC motors offer high starting torque, speed adjustable with voltage, easy reversibility, low power consumption. Hollow rotor design eliminates iron and prevents cogging, providing smooth, low-voltage starts and more constant speed under load variations. Chronometrically and electronically governed DC motors maintain constant speed from no load to full load, with voltage variations as great as ±20%.


Circle 101

STEPPER MOTORS


A wide range of stepper motors, operating from simple pulse control circuits or electronic logic circuits. Miniature, high-torque, general duty, MIL-SPEC, industrial and commercial models — unidirectional or bi-directional. Over 150 gear reductions available.

These steppers respond in discrete shaft angle increments to pulsed inputs. Some of their uses are driving counters, positioning synchros, pots, or rotary devices; driving cams, actuators, drums, or charts. They can be used for integrating timing, data transfer, count or position memory, and for digital/analog conversion.

Low-cost, efficient units are available from The A. W. Haydon Co. to fit your application.

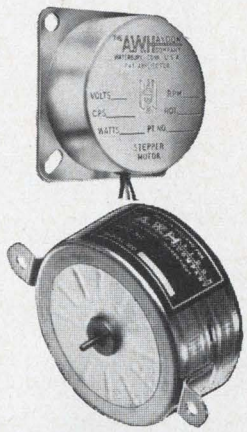

Circle 102

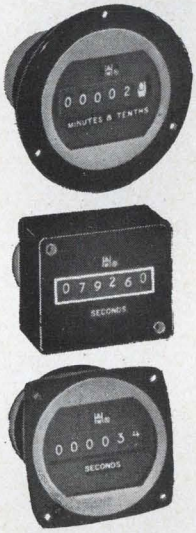

ELAPSED TIME INDICATORS

Three new low cost meters especially designed by The A. W. Haydon Co. for industrial/commercial applications dependably record operating time of any mechanism. Highly legible six-digit counter provides readings in hours and tenths, minutes and tenths, or seconds. Synchronous motor drive, available in a wide voltage and frequency range.

Also — miniature, subminiature, and microminiature military type units. Lightweight, compact, and rugged. Hermetically sealed, reset and non-reset types, available in 60 or 400 cps AC models and governed or ungoverned DC versions.


Circle 103

REPEAT CYCLE TIMERS

Both electromechanical and electronic low-cost industrial types handle up to 25 amp load. Standard motor-driven timers have up to 12 switches, cycle times from one second to five days. Sub-miniature units afford small size and lightweight plus ability to meet MIL spec environmentals.

Electronic timers feature versatility and fast timing capabilities for both industrial and military use. Typical industrial unit shown has solid state circuitry and has adjustable "on-off" times, which can be varied from 0.5 to 100 seconds independently. Fixed cycle time units capable of handling 100 amp loads can be supplied.

All repeat cycle timers available in AC and DC. The A. W. Haydon Co. welcomes special problems.

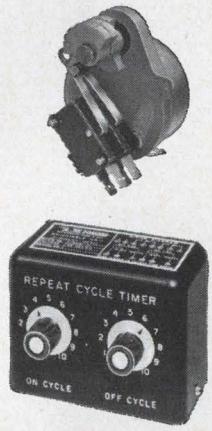

Circle 104


TIME CODE GENERATORS


Electronic and electromechanical time code generators for aircraft, missile, ground support, and industrial applications. Typical electronic system shown provides illuminated visual readout plus modified IRIG, PARSET, and HUACHUCA codes. Other units manufactured by The A. W. Haydon Co. include Time of Year Generator, Elapsed Time Generator, etc. Accuracies up to 1 part in 10^8 are possible.

Electromechanical units use a synchronous motor-driven switch for a time base, and supply straight decimal or binary coded decimal switch patterns, rapidly stepped to provide digital time inputs to data handling equipment. Visual readout counter display. Readings from seconds to 369 days.

Other Time Code Generators to your specifications.

Circle 105



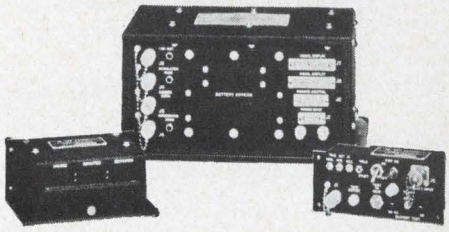


TIME DELAY RELAYS

A broad line of electromechanical and electronic timers for industrial and military applications. Available in AC and DC, fixed or adjustable delay times. Motor-driven units are ideally suited for multi-switch requirements where fixed delay times between a number of circuits are required.

Solid state timing assemblies consist of an RC delay with a bridge-type pick-off network built into a high density welded module. Where size, weight, extreme environmental conditions, or very short delay times are required, these electronic units are particularly appropriate.

Circle 106





VISIT US AT IEEE BOOTH 1D07-1D11

THE AWH AYDON COMPANY

232 NORTH ELM ST., WATERBURY, CONN. 06720
Tel: 203-756-4481 TWX: 710-477-3141


4060 INCE BLVD., CULVER CITY, CALIF. 90231
Tel: 213-UPton 0-5461 TWX: 213-836-0444

Timing & Stepper Motors • Electromechanical & Electronic Timing Devices & Systems

ON READER-SERVICE CARD CIRCLE 101 thru 106

Number
ONE
Choice
PERMACOR®
for Every
Electronic
Powdered
Iron Core
Need...

There are many reasons why Permacor ranks as number one producer of iron cores. Experience, facilities and dedication to quality, are but a few of them. Whether your iron core needs are standard stock, or custom crafted, look into Permacor capabilities today.

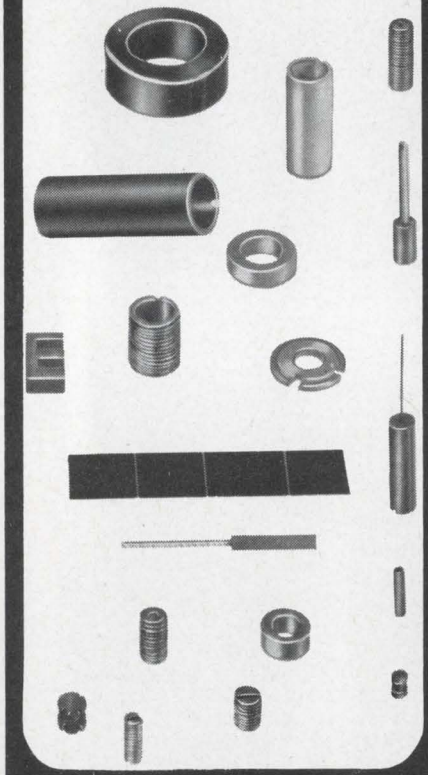

Write for Complete Information

PERMACOR®
A Division of Radio Cores, Inc.
9540 Tulley Ave., Oak Lawn, Ill.
Phone: 312 — HI 5-5733


ON READER-SERVICE CARD CIRCLE 801


Stable transducer has high output

Problem: Design a small, stable and lightweight temperature transducer with relatively linear output that requires no amplification of its output signal.

Solution: A compact, lightweight transducer that uses the temperature-dependence of a planar silicon transistor's base-to-emitter voltage to provide a zero-to-five-volt signal proportional to temperature.

The major element of the transducer is the transistor whose base is held at a constant voltage by a regulated source operating through a voltage divider, R_1 and R_2. The regulated source is also connected through the emitter resistor R_3. The output of the transducer is developed across the collector resistor R_4, to register the voltage change with temperature.

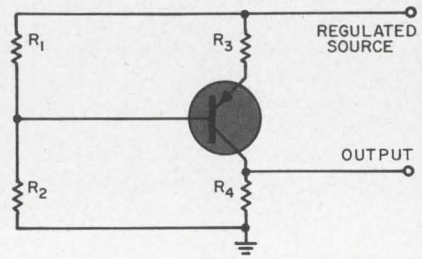

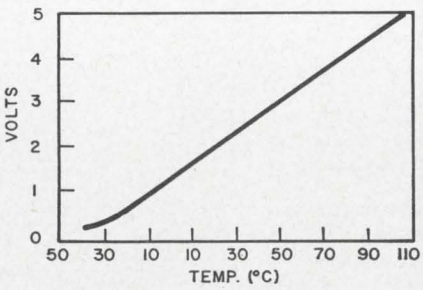


The transducer's output is sufficient for telemetry purposes to the extent that no preamplification is required.

It is disk-shaped and approximately 1/2 inch in diameter by 1/3-inch thick. Its weight, with 36-inch leads, is about 6 grams.

Twelve of these transducers are presently providing temperature data on various experiments and components now flying aboard the Orbiting Solar Observatory (OSO-B2).

Title to this invention has

ROTARY
SWITCHES

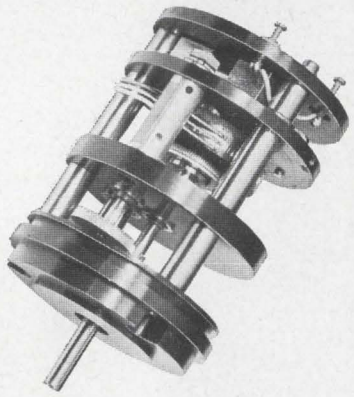

PROGRAMMING SWITCHES
The Northern Precision Laboratories line of Programming Switches offers an almost infinite range of possible switching patterns. Complex output codes, programmed sequences, and multi-pole functions can be readily attained.

COMPONENT SWITCHES
This line of switching devices has been expanded to satisfy the ever increasing demand of various rotary component manufacturers for combination inline assemblies. These units are incorporated into ganged assemblies by brake, clutch, potentiometer, and synchro suppliers. Also available are switching devices utilizing internal gearheads or mechanical stops.

TELEMETERING SWITCHES
Telemetering or sampling switches can be supplied to meet individual customer specifications. Multi-pole, multi-channel ganged assemblies with phase adjustability between poles are readily available. These devices can be manufactured to satisfy either BBM or MBB modes of switching.

NORTHERN
PRECISION
LABORATORIES
INCORPORATED
541 COMMERCE STREET
FRANKLIN LAKES, N. J.
AREA CODE 201 — 337-8118

• SWITCHING AND TELEMETERING DEVICES
• ANALOG TO DIGITAL ENCODERS
• SLIP RING ASSEMBLIES
• PRECISION SERVO PACKAGES

ON READER-SERVICE CARD CIRCLE 802


been waived under the provisions of the National Aeronautics and Space Act (42 U.S.C. 2457 (f)), to Ball Brothers Research Corporation, Boulder Industrial Park, Boulder, Colorado. Source: William H. Follett of Ball Brothers Research Corporation under contract to Goddard Space Flight Center (GFSC-446).

Zener diode switches large dc currents

Problem: Design a simple circuit to control the switching (gating) of large dc signals.

Solution: A high-current zener diode is connected in series with the positive input terminal of the dc supply to block the flow of direct current until a high-frequency (RF) control signal is applied across the zener diode.

The zener diode, being a high-impedance device, prevents the flow of direct current, as long as the zener voltage is not exceeded. When the RF control signal

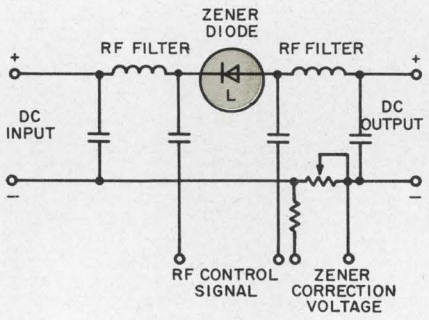


is applied to the dc blocking capacitors across the zener diode, its impedance drops to a very low value and therefore permits essentially full direct-current flow from the dc input to output terminals.

The RF filters and blocking capacitors isolate the dc lines from the RF lines. The zener correction voltage input compensates for the small dc voltage drop across the diode during the conduction state.

For further information, contact: Technology Utilization Officer, Manned Spacecraft Center, P. O. Box 1537, Houston, Texas 77001 (B65-10350).

NEW TORQUE MOTOR DRIVER

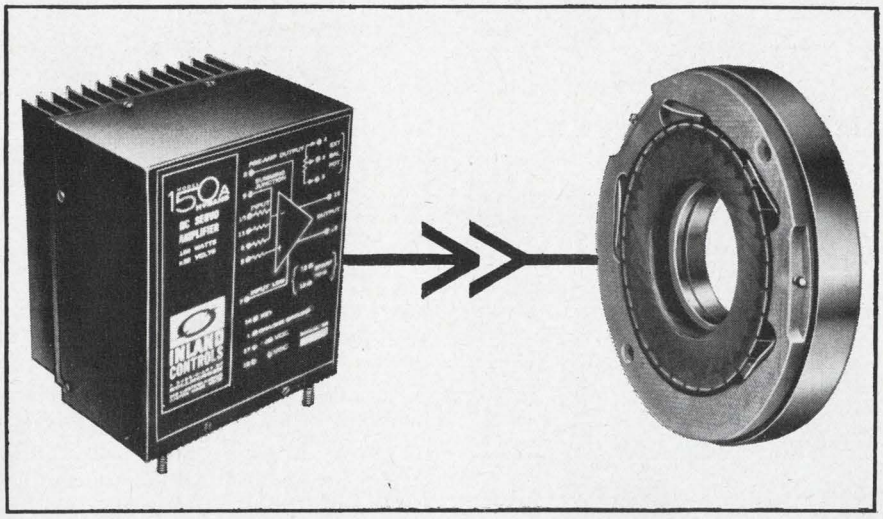

Cut costs and time with off-the-shelf HYBAND DC Servo Power Amplifiers by INLAND

Inland Controls specializes in the design and manufacture of reversible polarity, wide bandwidth DC servo power amplifiers that help you:

- ELIMINATE design and development ***costs***
- ACCELERATE delivery ***schedules***
- AVOID motor/amplifier interface ***problems***

Ranging from 50 watts to 3000 watts, these amplifiers, designed specifically for driving Inland Motor* DC torque motors, are available in either compact modular design or standard rack-mounted design. Current-limiting, short-circuit protection, multiple summing inputs, high gain preamplifier, and provisions for servo compensation networks are built-in standard features of the HYBAND amplifiers.

To avoid your interface problem entirely, why not let Inland Controls supply guaranteed matching amplifiers, or complete amplifier and torque motor blocks? We can do this and satisfy your most demanding needs. Don't let interface and transfer function problems get you down . . . call on the INLAND team and relax . . . our amplifiers offer proven and outstanding compatability, reliability, and availability.

A Condensed Selection guide offering detailed information on the HYBAND amplifiers is available immediately and we will be happy to send you a copy.



This Demonstrator Kit, designed to illustrate exactly how these amplifiers operate in a closed-loop servo, can be shown in your plant at your convenience. All it takes is a call or letter from you.

INLAND CONTROLS
A SUBSIDIARY OF KOLLMORGEN

*Inland Motor Corporation is also a subsidiary of Kollmorgen


342 WESTERN AVENUE • BOSTON, MASSACHUSETTS 02135
Telephone: 617 254-0442 TWX: 710 330-0143

IEEE Show Booths 2A05 and 2A07

ON READER-SERVICE CARD CIRCLE 803

OAK

...35 YEARS LEADERSHIP
IN ROTARY SWITCHES

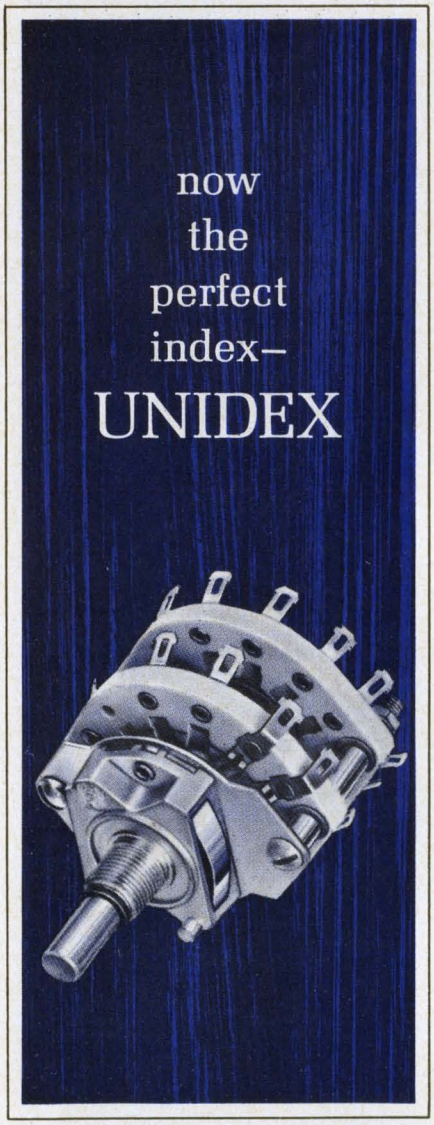

UNIDEX™ is the universal index for Oak rotary switches. Its revolutionary new method of operation provides a consistent "velvet-feel" torque for the life of the switch, a longer index life—by many thousands of operations, a lubrication reservoir and a sturdy one-piece housing that guarantees electrical continuity.

Only Oak® offers you Unidex . . . and at no extra cost. For more information write for Bulletin SP 178.

OAK MANUFACTURING CO.


A DIVISION OF OAK ELECTRO/NETICS CORP
CRYSTAL LAKE, ILLINOIS 60014 • Telephone: 815-459-5000
TWX: 815-459-5628 • Cable Address OAKMANCO
Speed Inquiry to Advertiser
via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 804

Photodiodes increase range of multiplier

Problem: Perform analog multiplication of two or more variables of either polarity over a wide frequency range. To achieve equal performance with previous multipliers would require extremely complex, expensive electronics requiring major adjustments.

Solution: Solid-state photodiodes (shown in color) are placed in the arms of a simple Wheatstone bridge and exposed to a light source whose intensity is proportional to the input signal voltage. The voltage potential across the bridge is proportional to the product of the voltage applied to the light source and the voltage applied to the bridge.

If E_2 is held constant, the resistances of the photodiodes, R_d, vary inversely with the potential of E_1. If E_1 increases, R_d decreases, causing E_a to fall and E_b to rise. This in turn linearly increases E_{out}, which is $E_b - E_a$. If E_1 decreases, then, by the inverse process, a linear decrease in E_{out} occurs.

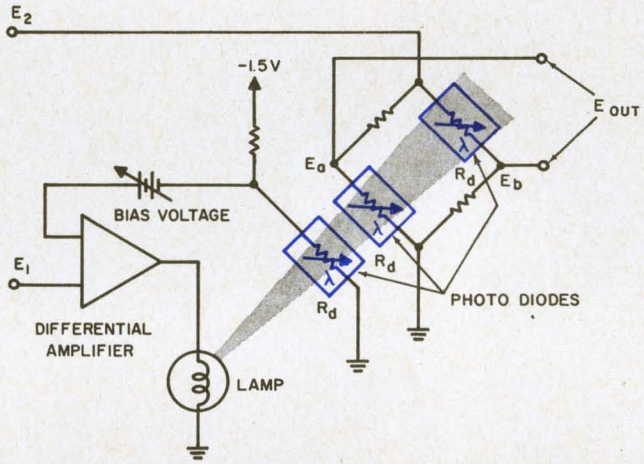

If E_1 is held constant, then an increase in E_2 causes an increase in E_{out} and a decrease in E_2 causes a decrease in E_{out}. Thus the voltage, E_{out}, is a linear function of the light source and the voltage applied to the bridge; or E_{out} is proportional to E_1 times E_2.

The differential amplifier in the closed loop of the light source compares the output of a photodiode to the input E_1. The output of the photodiode and potential of E_1 are made essentially equal (discounting the bias offset).

A series of multiplications can be carried out or variables may be taken to any desired power by the addition of other photoactivated bridges.

The multiplier operates from direct current. Its frequency is limited by either the light source or the closed-loop difference amplifier.


For further information, contact: Technology Utilization Officer, Goddard Space Flight Center, Greenbelt Maryland 20771. Reference: (B65-10287).

MYCALEX

establishes new
design horizons in

COMMUNICATIONS
NUCLEONICS
AEROSPACE
COMPUTERS
ELECTROMECHANICAL
DEVICES
ELECTRONICS

Mycalex® glass-bonded mica
Supramica® ceramoplastics
Synthamica® synthetic mica

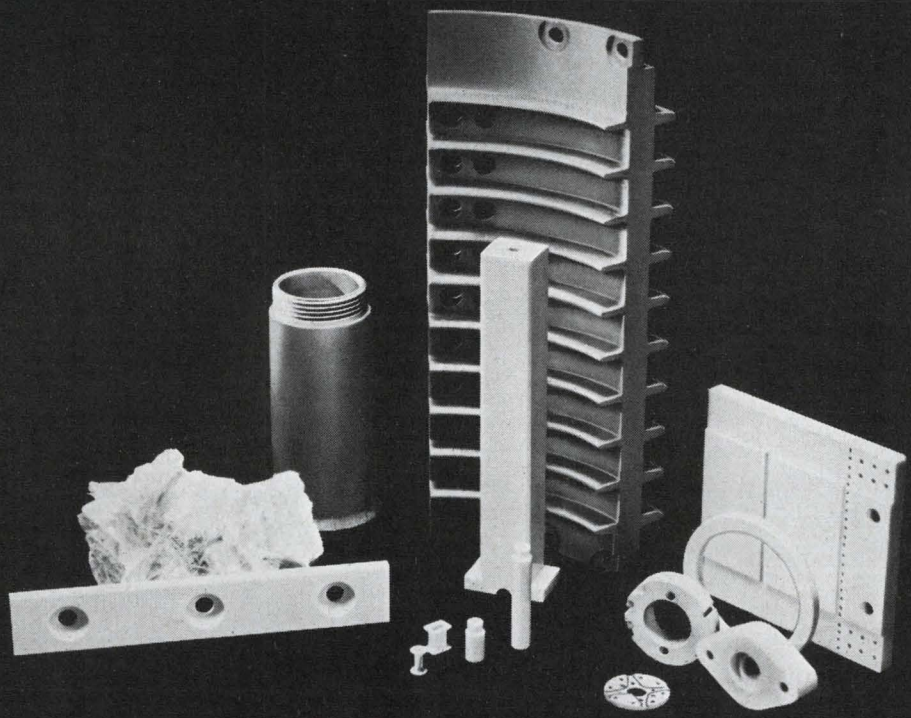

For almost half a century, MYCALEX CORPORATION OF AMERICA has pioneered in the development of materials with unique characteristics for the sophisticated requirements of insulation technology. The combination of properties inherent in MYCALEX® GLASS-BONDED MICA, and in SUPRAMICA® CERAMOPLASTICS has made possible production of components meeting the requirements of reliability and complexity of present, and future design concepts.

MYCALEX products provide this *combination* of characteristics:

Closely controlled insulation values equal to those of other ceramic materials

Moldable or machinable to close dimensional tolerances

Thermal expansion equivalent to that of many metals, permitting molding with metallic inserts without voids, cracks or shrinkage

Arc resistant, non-tracking, non-combustible

Complete, permanent dimensional stability throughout the entire temperature range

Impervious to moisture

High strength, and good impact resistance

Capable of withstanding temperatures from 700 deg. F. to 1500 deg. F., depending on grade.

Can be used for true hermetic seals, in a variety of design situations.

ON READER-SERVICE CARD CIRCLE 805

A comprehensive 36 page catalog provides complete technical and design information. Write or call for your copy.

SYNTHAMICA® SYNTHETIC MICA
SINCE 1919 MYCALEX® ALL-INSULATOR
SUPRAMICA® CERAMOPLASTIC

MYCALEX
CORPORATION OF AMERICA

World's largest manufacturer of ceramoplastics, glass-bonded mica and synthetic mica products

125 Clifton Boulevard, Clifton, N.J.

OAK

...35 YEARS LEADERSHIP
IN ROTARY SWITCHES

Now... popular pushbutton, lever, slide and rotary switches from Oak Distributors



Oak® offers the broadest line of switches immediately available from distributor shelves. We've expanded this line of over 180 popular OEM rotary switches by adding preferred sizes of pushbutton, lever and slide switches. These Distributor Switches have the same precision quality as custom-made OEM switches. And you get Oak pioneered double-wiping action contacts plus military finishes at commercial prices.

Break 1 amp at 28 vdc, 0.5 amp at 110 vac, *carry* 5 amps.

You'll find many switches you can't find anywhere else on a stock basis. For full details, write for Oak Distributor Catalog.

OAK MANUFACTURING CO.


A DIVISION OF OAK ELECTRO/NETICS CORP
CRYSTAL LAKE, ILLINOIS 60014 • Telephone: 815-459-5000
TWX: 815-459-5628 • Cable Address OAKMANCO
Speed Inquiry to Advertiser
via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 806

Magnetic multi for square waves

Problem: Design a variable-frequency magnetic multivibrator which provides a stable square-wave output over wide variations in temperature and in the power supply's potential.

Solution: A frequency-control circuit which operates in a full-wave fashion rather than only over a portion of the multivibrator's cycle of operation. This results in greater stability at the low end of the operating frequency, and in the rejection of undesirable high-frequency modes.

The multivibrator includes an uncontrolled magnetic core, 1, and a controlled magnetic core, 2. A pair of conductive loops, 3 and 4, and one of the controlled transistor switches, Q_1 and Q_2 provide the necessary alternate mode of operation for the multivibrator.

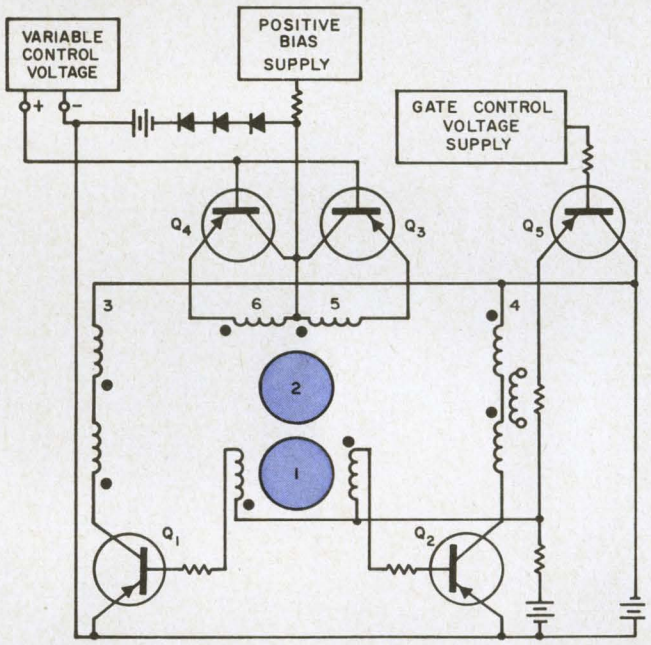


The frequency of the multivibrator is controlled by a full-wave voltage-limiter arrangement of transistors Q_3 and Q_4 and windings 5 and 6.

The operation of the voltage limiter is controlled by the level of the variable control voltage. Changes in magnitude of this variable control voltage change the operating frequency of the multivibrator.


The electronic gate, Q_5, starts and stops the multivibrator. A temperature-compensating circuit consists of the diodes, a fixed bias potential and a positive bias supply.

This circuit may find applications in devices using or concerning clocks, synchronous motor control, stable square-wave variable signal generators, test instruments, power generation control, matching magnetic bearing devices, and radio and television communications.

For further information, contact: Technology Utilization Officer, Goddard Space Flight Center, Greenbelt, Maryland, 20771. (B65-10124).



This little latching relay



does everything this full size crystal can latching relay does.

When size and weight are important considerations in specifying relays, take a look at Electronic Specialty Co.'s 55R series of half-size latching relays. These 2 PDT, 2 amp relays are electrically and mechanically interchangeable with full-size crystal can relays yet only half the weight and height (.4 in. x .4 in. x .8 in.). And, there are no higher quality relays made. The 55R series' all-welded sealing insures cleanliness, eliminating fluxing and increasing efficiency. They meet or exceed MIL-R-5757D and withstand vibrations of 30G, 3000 cycles. A qualification test report is available.

That's the 55R series of relays by Electronic Specialty Co. (formerly from Iron Fireman Mfg. Co.). Send for a data sheet.


ELECTRONIC SPECIALTY CO. 18900 N.E. Sandy Boulevard, Portland, Oregon

In Europe contact Elektro-Metall, Dusseldorf, Germany

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 807

OAK

...35 YEARS LEADERSHIP IN ROTARY SWITCHES

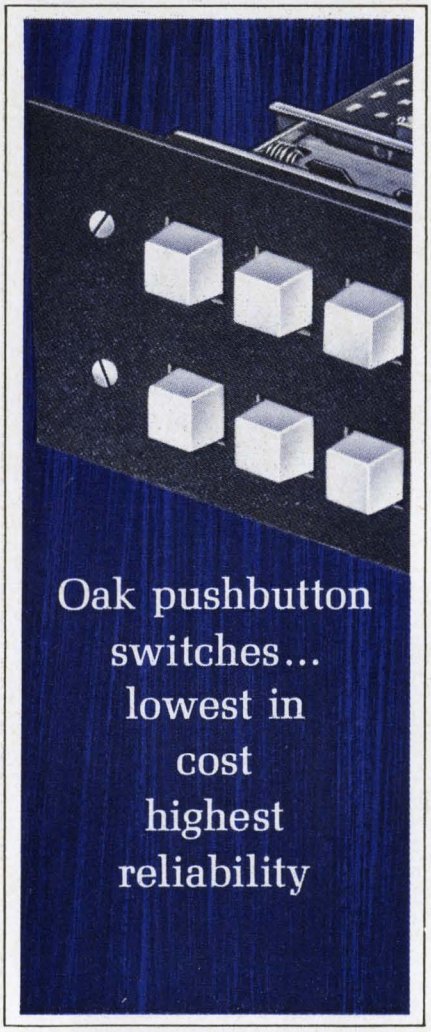

Built-in economies reduce costs and maintenance. Modern Oak® styling gives smart appearance for simplified or complicated arrangements. More flexible circuit design than provided by many rotary switches because of the large number of blade shapes combined with plunger actions. Oak-pioneered double-wiping action contacts are used in push-button switches. Special frames for lamps prevent vibration and shock, give long lamp life. Lighted pushbuttons use one lamp to illuminate 1, 2 or 4 buttons. Unlighted pushbutton switches also.

For full details, write for Bulletin SP-165.

OAK MANUFACTURING CO.

A DIVISION OF OAK ELECTRO/NETICS CORP
CRYSTAL LAKE, ILLINOIS 60014 • Telephone: 815-459-5000
TWX: 815-459-5628 • Cable Address OAKMANCO
Speed Inquiry to Advertiser
via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 808

New Literature

Semiconductor wafers

Beryllium oxide semiconductor wafers and other stock parts are covered in bulletin 166. Several added items including a wafer for the TO-66 configuration are covered. Bulletin 266 covers revised properties of thermalox beryllium oxide ceramic materials. Brush Beryllium Co.

Circle No. 540

Electron beam gun

A six page, illustrated brochure summarizes the theory of electron beam gun technology and its application to commercial research and production tools. Aslo included are descriptions and illustrations of: vacuum equipment; power supplies designed for electron beam devices; sub-contract electron beam welding facilities; and sub-contract production of precision machining of electron beam and vacuum devices. Microperv, Inc.

Circle No. 541

Large ellipse templates

Large ellipse templates, 2-3/4 to 4 inch size, in 10 projections, are described in an illustrated catalog. Timely Products Co.

Circle No. 542

Pressure transducer

Series 2201 TELEFLIGHT pressure transducers are described in an illustrated bulletin. Using new sensing element, the Series 2201 has no moving parts—resulting in negligibly hysteresis and repeatability error. The new instrument is 1-in in diameter and weighing less than 3.50 ounces, which makes it useful for applications which require minimum size and weight. Taber Instrument Corp.

Circle No. 543

High alumina ceramics

An 8-page "Designer's" brochure aids product designers in the dimensional and property selection of high alumina ceramics. Contents include the basic description of ceramic material which has aluminum oxide (Al_2O_3) as a basic ingredient. Also, comparative properties and scope of uses for electrical-electronic, mechanical, chemical, wear resistant and high heat applications are described. Diamonite Products Mfg. Co.

Circle No. 544

Mercury relay manual

A new edition of the mercury plunger relay manual titled "A New Standard of Reliability in Controls" covers the range of relays made by the manufacturer. A total of 31 different new relays are described in four separate categories. The first three categories cover 100, 50 and 25 amp at 120 Vac in 1, 2 and 3 pole types. The fourth category includes single pole units completely encapsulated in epoxy for 25 and 50 amp. Ebert Electronics Corp.

Circle No. 545

Aircraft instrument data

Five technical data pages describe aircraft instrumentation, accessories and support assemblies. Aircraft altimeters, air speed instruments, a contaminated fuel detector, precision slip rings and a portable, manually operated pump and reservoir package used for jet aircraft lubrication are described. Telectro-Mek, Inc.

Circle No. 546


Gas discharge devices

Product reference bulletin, No. 301, catalogs typical gas discharge tubes and devices now being produced by the manufacturer. Main performance parameters for typical two-element spark gaps, triggered spark gaps, microwave noise sources and miniature microwave noise generators are included. Dimensional drawings are shown for representative two-element and triggered spark gaps covering the most popular voltage ranges. Signalite Inc.


Circle No. 547

VERSATILITY AT AMCO MEANS:

Parts you can stock for quick, in-plant assembly of racks and enclosures

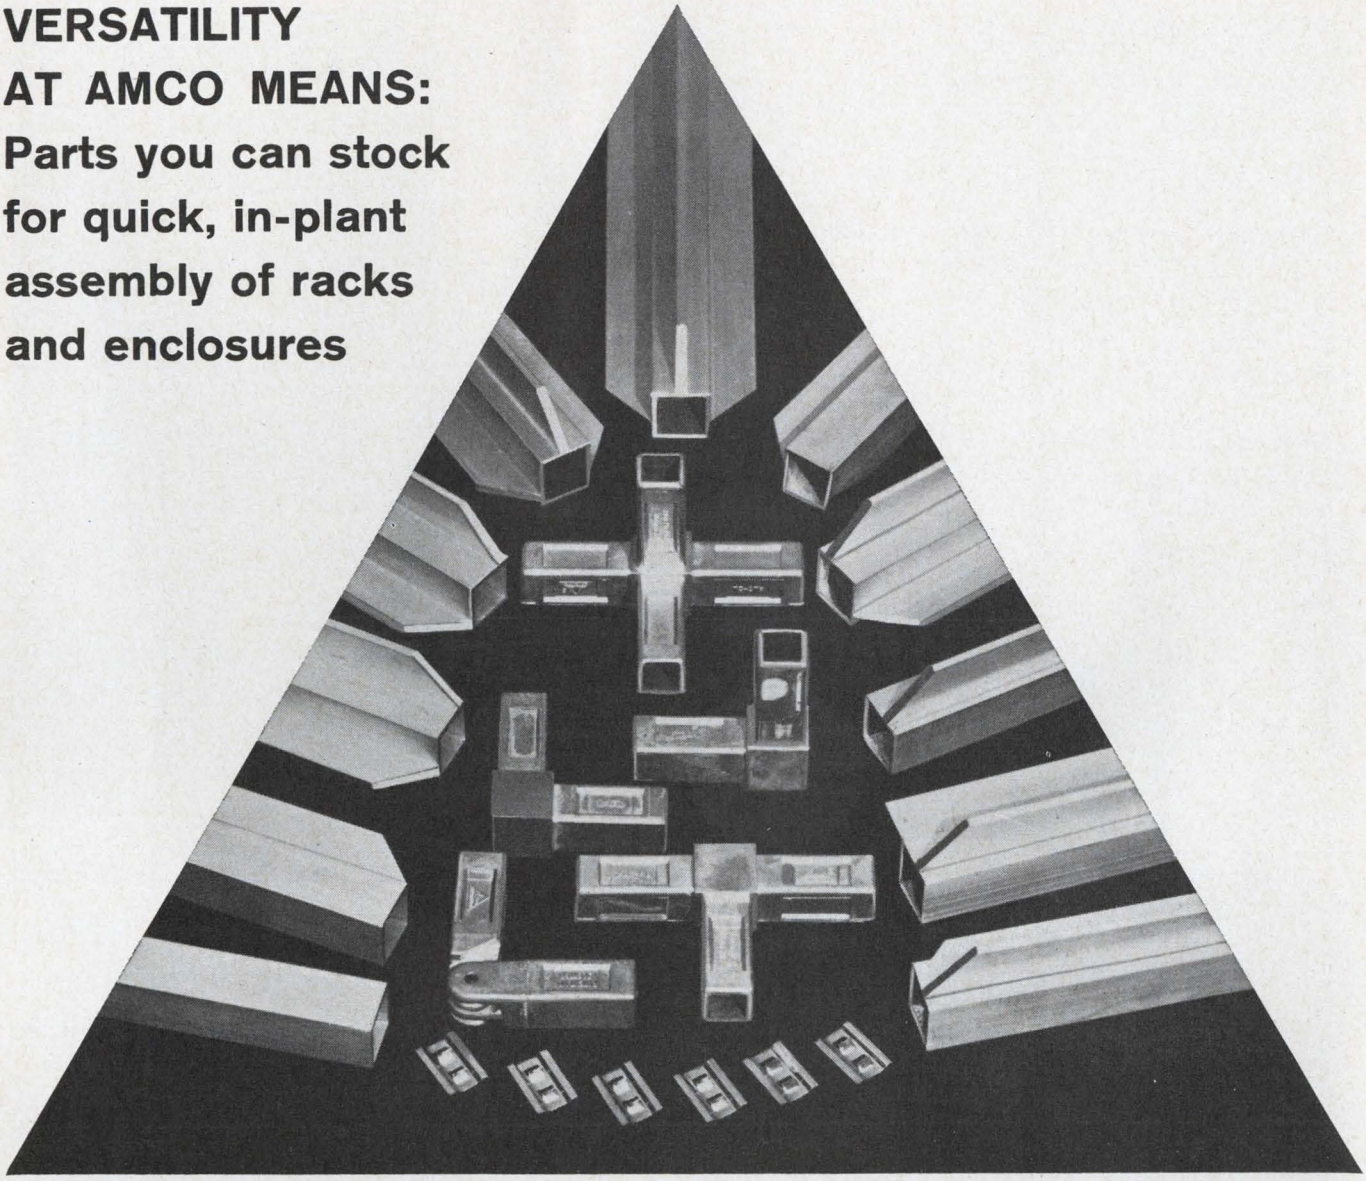

ELEVEN BASIC EXTRUSIONS AND FIVE CORNER CASTINGS PERMIT ASSEMBLY OF ENCLOSURE FRAMES IN ANY CONFIGURATION

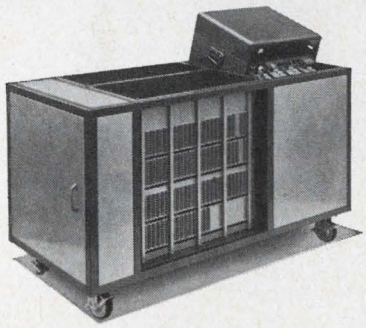

AMCO has designed two aluminum enclosure systems to give you versatility unlimited. One is for light duty and the other for heavy duty applications. They go far beyond basic enclosure needs.

When you want a cabinet for special test equipment, false flooring, QC control, tool racks, equipment cabinets, prototype set-ups, you want it right now. Why wait weeks or months for delivery on a custom unit?

With a minimum stock of AMCO aluminum extrusions and corner castings right on hand in your own plant, you can put together enclosure frames for almost any purpose in a matter of minutes.

The AMCO lightweight system utilizes ¾" square tubing, the heavy-duty system provides extra strength with 1½" square tubing. Both are aluminum, as are all corner castings. As the photo above shows, a variety of integral flanges on the tubing permits complete freedom for panel and equipment mounting. Tubing and corners are joined in a simple force fit that eliminates the need for nuts, bolts, welding or drilling. Yet strength can be even superior to welded construction. With simple gusseting, the heavy-duty line can satisfy critical military applications requiring extreme shock and vibration resistance.

Detailed test data available on request.


IN STEP WITH THE FUTURE . . .

AMCO ENGINEERING CO.

7333 West Ainslie Street
Chicago, Illinois 60656

ON READER-SERVICE CARD CIRCLE 809

When Motor Specifications
demand
- HIGH INITIAL TORQUE
- FLEXIBLE SPEEDS
- CONTINUOUS USE
- RESISTANCE TO HEAT OR COLD



turn the job over to SYNCHRON® MOTORS!

No matter whether you need a motor that can "do tricks" or handle simple routine work, think of a SYNCHRON Motor first. Here at Hansen Manufacturing Co., we've helped designers and production people solve problems ranging from unusual cycling patterns, to meeting swiftly varying temperatures, and a hundred other special applications. And of course we've supplied industry with literally millions of motors for uncomplicated designs. We can help you, too; write or phone us!

HANSEN
MANUFACTURING COMPANY, INC.
PRINCETON, INDIANA

HANSEN REPRESENTATIVES: CAREY & ASSOCIATES, Houston, Tex., R. S. HOPKINS CO., Sherman Oaks, Calif., MELCHIOR & MACPHERSON, INC., San Carlos, Calif., THE FROMM CO., Chicago, Ill., H. C. JOHNSON AGENCY, INC., Rochester, N. Y., WINSLOW ELECTRIC CO., Essex, Conn., Narberth, Pa., and New York, N. Y. EXPORT DEPARTMENT, 64-14 Woodside Ave., Woodside, N. Y.

ON READER-SERVICE CARD CIRCLE 815

NEW LITERATURE

Relay literature

Catalogs and promotional literature on a line of relays include data sheets and specification details for ordering. Square D.

Circle No. 256

Relay catalog

Thirty-nine different types of relays and solenoids are illustrated and described in this catalog. The DSC-2 catalog lists most commonly used relay types, arranged by category—telephone, power, general purpose, antenna-coaxial, sensitive, time delay, high voltage, microminiature, relays, and solenoids. Phillips-Advance Control Co.

Circle No. 257

Microwave components

A brochure covers strip transmission line components, waveguide components, command receivers and antennas. Included for each unit are a general description, photograph, major features, specifications and characteristic charts. Radiation Systems, Inc.

Circle No. 258

Ultrasonic transducers

A data sheet describes two ultrasonic transducers for remote control applications. Applications are listed, and performance characteristics are tabulated and graphed. Dynamics Corp. of America.


Circle No. 259

Rocker/slide switches

A new bulletin covers a complete line of switches. Bulletin 78/79-101 is arranged to provide complete specification information on both slide and rocker switches at a glance. Specification guides describe particular switch features. Stackpole Carbon Co.

Circle No. 260

iNSULTITE
heat-shrinkable tubing

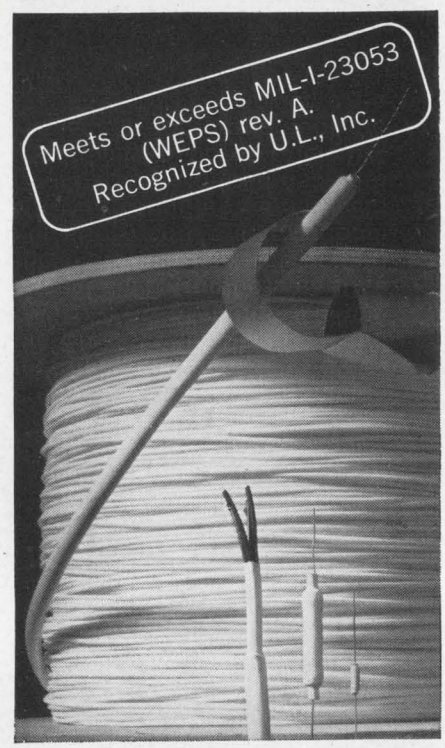

first of the iNSULRAD family of irradiated polyolefins from E.C.C.

Now there's an important new source of heat-shrinkable tubing–INSULTITE from Electronized Chemicals Corporation.

INSULTITE meets competitive heat-shrinkable tubing requirements spec for spec—*outperforms* other shrinkables in volume resistivity, longitudinal change, water absorption, and resistance to solvents.

INSULTITE is the answer wherever skin-tight packaging or encapsulating covers are needed. Apply heat: INSULTITE molds itself around smooth or irregular shapes to form a tight protective jacket.

INSULTITE is available in standard colors and sizes and is supplied in four-foot or specified lengths . . . all competitively priced and available now. For more information on this new product, write, wire or call Electronized Chemicals Corporation, Burlington, Mass. Tel. 617-272-2850. Dealer inquiries are invited.

ELECTRONIZED CHEMICALS CORPORATION
a subsidiary of
HIGH VOLTAGE ENGINEERING

See us at the IEEE Show
New York Coliseum, Booth 4B24

ON READER-SERVICE CARD CIRCLE 816

Metal spinning

Advantages of metal spinning over other fabrication methods are covered in a booklet entitled "Why Spin?" Applications of metal spinning in nucleonics, aerospace technology, and parabolic reflector areas are covered. C. W. Torngren Co.

Circle No. 261

Microwave devices

WR series directional couplers and the 90 SR 36 waveguide rotary switch are described in separate data sheets. Electrical and physical specifications for both devices are coupled with ordering information. Microwave Development Laboratories.

Circle No. 262

Fastener catalog

Technical descriptions, specifications, and installation procedures cover a line of single-turn snap-ring fasteners with slotted or wing nut heads. Simmons Fastener.

Circle No. 263

Dielectric capacitors

A four-page catalog covers a newly expanded series of NPO dielectric capacitors. Temperature coefficient, capacitance, Q, insulation resistance and temperature change are graphed in all possible combinaefficient, capacitance, Q, insulation by part No., size, and capacitance. Electro Materials Corp.

Circle No. 264

Magnetic heads

A six-page brochure describes and illustrates this company's capability of producing precision magnetic heads for computer and instrument applications. Applied Magnetics.


Circle No. 265

Communication Systems

Audio communication systems and equipment are described in a new six-page pamphlet. Illustrations and short descriptions are included. Cook Electric Co.

Circle No. 266

Now! Get 2½ watts @ 1GHz.

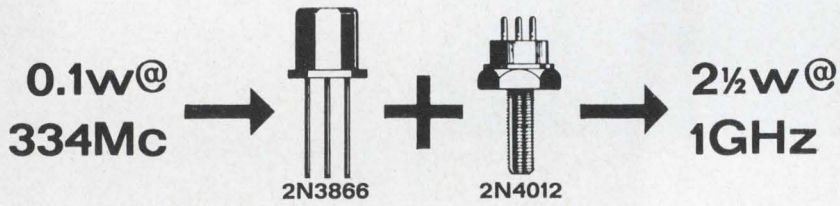

- With our new transistor, you can get 2.5 watts output at 1 gigahertz for use as a UHF band frequency multiplier.
- Used in combination with Vector's 2N3866 NPN silicon power transistor, the new 2N4012 features a conversion gain of 4.0 db with collector efficiency of greater than 25%.
- The structure of these epitaxial silicon transistors consists of many parallel microscopic emitter areas, interconnected by advanced metalization and photoengraving techniques. The 2N4012 is packaged in a JEDEC TO-60 with isolated electrodes. Stud mounting provides maximum thermal capability.
- Both components available now, in quantity, to provide a most economical power team.

For additional information, call Vector Solid State Laboratories, (215) 355-2700.


See us at Booths 2C43-50, IEEE Show.

Vector DIVISION OF UNITED AIRCRAFT CORPORATION

SOUTHAMPTON, PENNSYLVANIA

ON READER-SERVICE CARD CIRCLE 817

NO BRUSH FAILURES IN THESE SYNCHROS

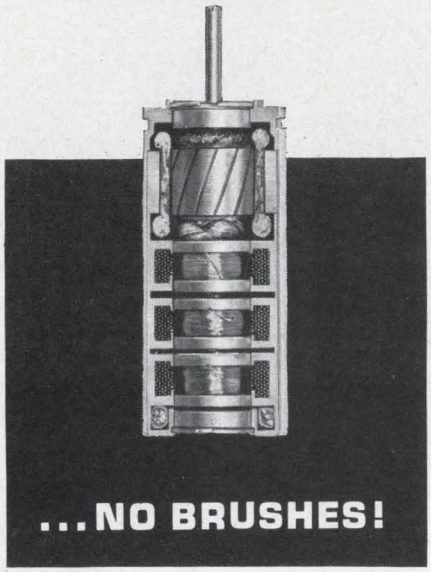

...NO BRUSHES!

Rotary transformers couple power into rotors without contact, eliminating the number-one cause of early synchro failure. Without brushes, synchro life depends on bearing life alone—normally at least 5 or 6 times average brush life.

Harowe brushless synchros are available for all functions: control and torque transmitters, control transformers, differentials, resolvers. Sizes 5, 8, 10, and 11 are standard; larger sizes available. Use them to boost life expectancy of new systems; upgrade existing systems. Write for complete specs—

See them at IEEE:
Studio M, Barbizon Plaza,

Harowe

SERVO CONTROLS, INC.
20 Westtown Road
West Chester, Pa. 19380
(215) 692-2700

1H-6100
ON READER-SERVICE CARD CIRCLE 818

NEW LITERATURE

Connector catalog

Expandable insert connectors are listed in this new catalog. Pictures and tabulated descriptions cover an entire line. Heli-Coil Corp.

Circle No. 267

Miniature choppers

A 2-page brochure describes three miniature, plug-in choppers, 50 P, 60 P, and 70 P by name. Typical applications are covered together with the units' electronic and mechanical characteristics. Solid-State Electronics.

Circle No. 268

Timing handbook

A twelve-page "Timing Handbook" outlines timing devices ranging from interval timers to multichannel programers, covering military and industrial applications. Complete electronic and mechanical specifications of the manufacturer's units are given. Artisan Electronics.

Circle No. 269

Flow indicators

A four-page bulletin gives data on low-flow indicators. Design features, construction details, connections, dimensional drawings, capacity tables and ordering information for the manufacturer's line are included. Brooks Instruments Div. Emerson Electric.

Circle No. 270

Integrated circuit catalog

A brochure covers the company's complete line of HLTTL integrated circuits. The pamphlet outlines in detail the facilities and processes involved in these state-of-the-art monolithic devices. Included are fold-out selection charts which show comprehensive diagrams and schematics of the logic circuits. Transitron Electronic Corp.

Circle No. 271

Data annotation

A 12-page, two-color brochure details the company's capabilities in data annotation. Conversion, data handling and display are covered. "Modular construction, plug-in commonality, expandability, and reliability" are stressed. Bowmar-Fort Wayne.

Circle No. 272

Semiconductor data

A 60-page condensed catalog includes semiconductor, special products, metal-film resistors, wire and cable products, and precision connectors. Parameters and specifications are coupled with cross-references, selection charts, and outline drawings for all devices. The catalog is thumb-indexed. Transitron Electronic Corp.

Circle No. 273

Instrumentation catalog

Catalog H describes electronic instrumentation for investigations in the fields of biophysics, neurophysiology, geophysics, analog computation, low-frequency phenomena, and limited energy measurements. Electrometers, signal isolation devices, pulse and waveform generators, differential preamplifiers, and other instruments are described. Argonaut Associates.

Circle No. 274

Dipping compound

Isochemsupergel 157, a novelac peracetic dipping compound with excellent moisture and electrical specs is described in a data sheet. Applications and prices are included. Isochem Resins Corp.

Circle No. 275

Thermistors, varistors

General purpose thermistors, varistors, and miscellaneous assemblies are described with graphs and tables in an eight-page bulletin. Mechanical and electrical characteristics of all the devices are listed. Victory Engineering Corp.

Circle No. 276



NEW 1966 CATALOG

STANCOR
STANDARD
TRANSFORMERS


- Entirely new concept in transformer catalogs
- All inclusive:
  Commercial, Military, TV/Radio Replacement
- Completely descriptive—both electrical and mechanical specifications

REQUEST YOUR FREE COPY TODAY!

SOLD NATIONALLY THROUGH ELECTRONIC DISTRIBUTORS BY
ELECTRONIC MARKETING DIVISION
ESSEX WIRE CORPORATION

3501 W. Addison Street • Chicago, Illinois 60618
See us at the IEEE Show, Booths 2H33

ON READER-SERVICE CARD CIRCLE 819

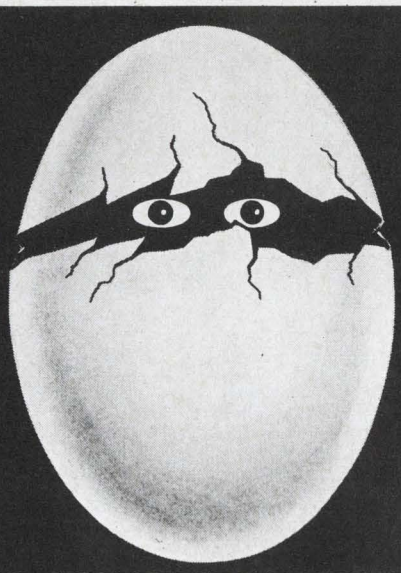


LOOK WHAT'S HATCHED AT
LITTELFUSE
The world's smallest fuse—Picofuse.
1/8 thru 5 amps...1/6 grain...125 v.

LITTELFUSE
DES PLAINES, ILLINOIS

ON READER-SERVICE CARD CIRCLE 820

Visit Our Booth 1A01 IEEE Show

GLOBE
low-cost
bi-directional
variable speed device

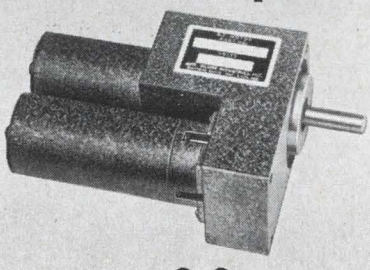


100 RPM CLOCKWISE THROUGH 0 TO 100 RPM COUNTER-CLOCKWISE

Globe a.c. and d.c. differentials offer torques up to 1000 oz. in. with top speeds of from 10 to 100 rpm in either direction. Smooth transitions from top speed in one direction through 0 rpm to top speed in the opposite direction at full torque are possible. Motor options: to 115 v.d.c.; to 230 v.a.c., 50/60 and 400 cps. Antenna drives, tracking devices, positioning or servocontrol systems are typical applications. For further information, request Bulletin DI.

Globe Industries, Inc., 2275 Stanley Ave.,
Dayton, Ohio 45404. Tel.: 513 222-3741

ON READER-SERVICE CARD CIRCLE 821

20 to 100 μa— no charge for 1% tracking or taut-band

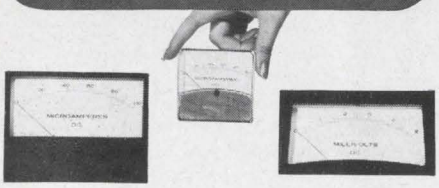

Offered only by api

API is the only manufacturer who offers ±1% tracking and frictionless taut-band construction as standard specifications for production-quantity meters, at no extra cost.

Precise tracking is the most useful attribute of a panel meter in modern electronic applications. Taut-band meters give truer readings, respond to smaller signals, resist damage from shock or vibration and do not deteriorate in operation.

Order from Stock

Best of all, API also offers quick delivery from stock of DC panel meters with the double-header bonus of taut-band plus 1% tracking.

You get all this in the most popular ranges of nine models in API's economically priced Stylist and Panelist lines (illustrated). Take your pick of these full-scale DC ranges:

Microamperes	Millivolts
0— 20	0— 5
0— 50	0—10
0—100	

(You also get the double header in the 0-25 millivolt range, but it isn't stocked.)

If precise tracking is a real fetish with you, don't forget that API can give you 0.5% tracking at reasonable extra cost. No other manufacturer can even discuss this "super-calibration"—much less accomplish it.

Bulletin 47-A describes all API panel meters and pyrometers

api
INSTRUMENTS CO.
Formerly Assembly Products, Inc
CHESTERLAND OHIO · PHONE 216-423-3131

IEEE Show — 2J-25 and 27
ON READER-SERVICE CARD CIRCLE 822

NEW LITERATURE

720 power supplies

A bulletin describes the "L" series of 720 power supplies, with up to 1800 watts output. All units are overload protected, with automatic recovery when the fault is removed. Deltron, Inc.

Circle No. 277

Technical training

Training schools for process, industrial, and aerospace studies are described in this 12-page bulletin. Enrollment information is included with course descriptions, and an illustrated tour of the program. General Electric.

Circle No. 278

Scintillation counting

A technical bulletin entitled "Combustion of Samples for Liquid Scintillation Counting" is available. The two-color bulletin describes techniques for sample combustion, problems encountered, and solutions. It is profusely illustrated with drawings and photographs. Nuclear-Chicago.

Circle No. 279

Lighted switches

A 16-page catalog lists the Twistlite series of illuminated pushbutton switches and word indicators. Circuit and dimensioning diagrams are given, together with ordering information per MIL-S-22885. Master Specialties.

Circle No. 280

Solid-state devices

An illustrated 8-page booklet, SF-7002, describes the company's line of switches, limiters, duplexers and phase shifters, including electrical and mechanical specifications. Microwave Associates.

Circle No. 281

Fastener catalog

This 24-page, 2-color catalog illustrates and gives specifications for 15,000 sizes of stainless steel fasteners. Star Stainless Screw Co.

Circle No. 282

Magnetic pickup data

An 8-page bulletin describes applications for the manufacturer's line of electromagnetic proximity switches and pickups. Electro Products.

Circle No. 283

ARNOLD SUBMINIATURE CONVERTER

*6 new models! new applications!



NEW MODELS NOW AVAILABLE

- * 2 KVDC @ 0.7 Ma. & 6.3 VAC for CRTs
- * 1 KVDC @ 1.5 Ma. & 6.3 VAC for CRTs
- * 1 KVDC @ 3.0 Ma.—programmable for BWOs
- * 4-6 VRMS @ 300 Ma.—4-6 KC sq. wave for VFO Telemetry
- * 500 VDC @ 6.0 Ma. for Decade Tubes
- * 12 VDC @ 250 Ma. for Strain Gages

PLUS...12 NEW MODIFICATIONS including an RFI version to MIL-I-26600, Class I.

There's now a wider selection than ever to choose from in the HIGHER POWER 'THIN-VERTER'™ Series—voltages from 3 Volts to 20 KV, up to 40 watts . . . AND they are small!

Be sure you've got all the specifications on AMC's small Power Conversion Equipment.

ARNOLD MAGNETICS
ARNOLD MAGNETICS CORP.
6050 W. Jefferson Blvd., Los Angeles, Calif. 90016
Telephone: 837-5313; 870-6284 (213)
TWX: 213-836-0430

ON READER-SERVICE CARD CIRCLE 823

Ceramics newsletter

A bi-monthly newsletter called IITRI CERAMICS is available on a regular basis. The first issue has a feature on mechanical property measurements and design with brittle materials. A list of publications pertaining to design using ceramic materials includes several available from the IIT Research Institute.

All items appearing in the newsletter are available for republishing in whole or in part. IIT Research Institute.

Circle No. 284

Resistor catalog

Catalog 100 is a complete listing of the manufacturer's resistors. A section on construction and design is included, as is selection and ordering information. Ohmite.

Circle No. 285

Capacitor catalog

A new 34-page OEM capacitor catalog gives detailed descriptions of testing procedures for each basic capacitor type. Capacitors are listed by size and voltage rating. Curves are given showing frequency characteristics and temperature coefficient.

Low voltage, semiconductor ceramic, temperature compensating, antenna coupling, line bypass, polystyrene, and R-C combination units augment the standard disc and tubular listings. Centralab Div. of Globe-Union.

Circle No. 286

Flat-Braid Shielding


Flat-braid cable shielding for reduced size and weight is discussed in a 4-page brochure. Tables of weights, sizes, and mechnical and electrical properties are provided. Raychem.

Circle No. 287

How to service relays

A 20-page booklet with illustrations on how to adjust and maintain relays is available. It contains information in relay terminology, what tool to use, maintenance of the armature assembly, tensioning, gauging, current values and timing for most types of relays. P. K. Neuses.

Circle No. 288

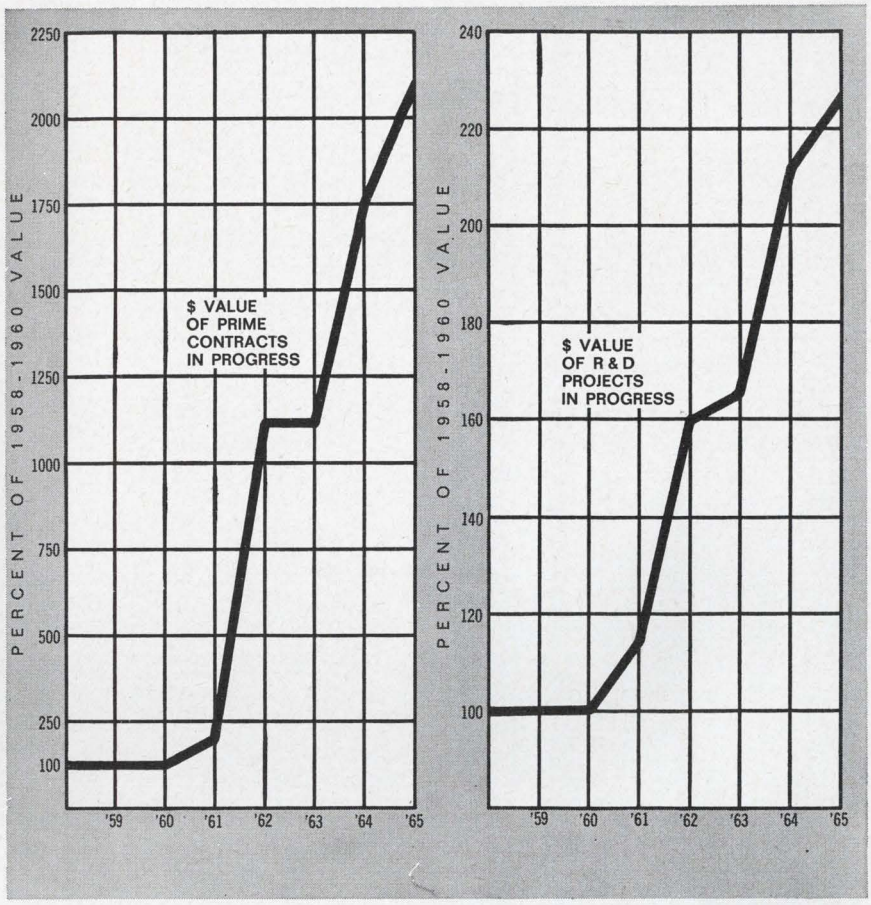

2 REASONS WHY THERE'S MORE ENGINEERING OPPORTUNITY AT ECI

Where there's engineering excitement there's engineering opportunity. Two key indicators — prime contracts in progress and R&D work in progress — prove that exciting things are happening at Electronic Communications, Inc. ECI has generated these remarkable activity increases by building a solid, successful reputation in airborne systems, multiplexing, space instrumentation and other areas of military and aerospace communication. You can get aboard this upward trend immediately if you are qualified in:

RF ENGINEERING — aggressive new programs are now under way in the design and development of microminiature transmitters and receivers. Positions require at least a BS degree, with a minimum of three years experience, and sound knowledge of transmitter and/or receiver design theory.

SPACE INSTRUMENTATION PROJECT ENGINEERING — you'll need in-depth technical ability, plus six years experience in data handling, control, or analog instrumentation.

THIN-FILM CIRCUIT DESIGN — involving theory and application of thermodynamics, mechanics of materials and electronic component design in the development of microelectronic circuitry. BS or MS in EE or physics required.

SYSTEMS INTEGRATION — you must be thoroughly grounded in aircraft electrical systems and be familiar with interface problems involved in installation of airborne communications equipment. Prior systems integration or field installation experience is most desirable.


If you are qualified, send your resume, in confidence, to Duane Meyer, ECI, Box 12248D, St. Petersburg, Fla., or call him collect at (813) 347-1121. (An equal opportunity employer.)

ELECTRONIC COMMUNICATIONS, INC.

ST. PETERSBURG, FLORIDA

ON CAREER-INQUIRY FORM CIRCLE 912

want oscillograph flexibility?

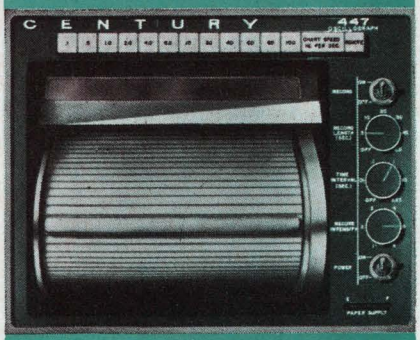

the new Century 447 has 1,000 chart speeds!

- specify any 12 speeds (.1 "/ sec. to 100 "/ sec.)
- change to any 12 speeds of a possible 1,000 anytime you wish—as often as you wish!

The new CENTURY 447 has a highly precise electronic drive which permits a wide range of speeds. Specify the speeds you require—you can quickly change to other speeds at any time.

The new CENTURY 447 also features:

- AUTOMATIC RECORD LENGTH based on time—the common base for all measurement.
- CONTINUOUSLY VARIABLE REMOTE SPEED CONTROL for optimum record analysis.

Remote control options include START, STOP, and CHART SPEED DRIVE.

Send for the Century 447 brochure containing detailed specifications.

447

CENTURY

ELECTRONICS & INSTRUMENTS

Subsidiary of Century Geophysical Corp.
6540 E. Apache St., Tulsa, Oklahoma 74115

ON READER-SERVICE CARD CIRCLE 825

NEW LITERATURE

Plastics brochure

Three engineering plastics (Lexan, polycarbonate resin, and PPO polyphenolene oxide) are discussed in an 8-page brochure. Specifications and properties are tabulated. General Electric.

Circle No. 289

Motor catalog

Servo motors of all types are included with special purpose motors, stepper motors, synchronous motors and design formulas in this new 31-page catalog. Kearfott Div., General Precision.

Circle No. 290

Coil guide

The "Guide To Coil Construction" is a 20-page discussion of the major categories and types of coils. Construction considerations, MIL specs and the Underwriters Laboratory aspects of fabrications are covered. Wabash Magnetics.

Circle No. 291

Armored cables

A 36-page catalog gives details on C-L-X armored cables. Complete descriptions are included, for all sizes and constructions of stock and special cables, together with prices and ordering information. Simplex.

Circle No. 292

Noise-figure measurements

An 18-page book covers the theory and techniques of noise figure measurements. The book also acts as a catalog for the manufacturer's instrumentation in that field. Airborne Instr. div. Cutler-Hammer.

Circle No. 293

Wire cable catalog

A wire rope and cable assembly catalog covers physical properties, specifications and application data. Microlin miniaturized cable, eletromechanical cable and plastic jacketed cable are features. Bergen Wire Rope Co.

Circle No. 294

Receiving-tube guide

Vol. 32, No. 3 of Sylvania News is a replacement guide for industrial receiving tubes. It lists direct replacements for frequently encountered types in CATV, broadcast, mobile communications, and aviation equipment. Sylvania.

Circle No. 295

MW switch catalog

Hermetically sealed coaxial switches are described in a 12-page catalog. Diagrams and specifications for 23 microwave switches are accompanied by an ordering guide and technical details on the variations of voltages, rf connectors, and power terminations that are available with each type. Electronic Specialty.

Circle No. 296

Recorder brochure

A 12-page paper details the workings of the integrated vibration data recorder. Complete specifications for the 98-channel unit are accompanied by graphs, photographs, and tabulations of parameters. Data Control Systems.

Circle No. 297

Microscopes/microtomes

A line of microscopes and microtomes for clinical and industrial use is described in a 28-page brochure. Adjustments, special features and usage are included. Reichert.

Circle No. 298

Integrated circuit memory

An 11-page brochure on the integrated circuit "VersaSTORE" memory gives block diagrams, interface circuit diagrams, timing charts and specifications. The memory has capacities of 256 to 4096 words of up to 24 bits. Decision Control.

Circle No. 299

Microwave tubes

A quick reference guide to principal specifications of more than 200 of the most widely used microwave tubes has been compiled.

This 28-page catalog and cross-reference lists klystrons, magnetrons, crossed field amplifiers, traveling wave tubes, and backward wave tubes. Within each family, tubes are listed by frequency. Raytheon.

Circle No. 300

Instrument reference

A new catalog contains photographs, descriptions, specifications and prices for a complete line of instrumentation. Handy definitions, check-lists, and applications are included in the 56 page book. Keithley Instruments.

Circle No. 301

MASKS for integrated circuitry thin film devices semiconductors

PHOTOMASKS

NEW Perma-Chrome (metal film on glass).

High resolution photo emulsion.

EVAPORATION MASKS

Electroformed nickel.


Etched molybdenum and stainless steel.

Bimetal (electroformed nickel and copper).

Prompt quotations and deliveries.

TOWNE LABORATORIES, INC.
Somerville, N. J. • Tel. 201 – 722-9500

ON READER-SERVICE CARD CIRCLE 826

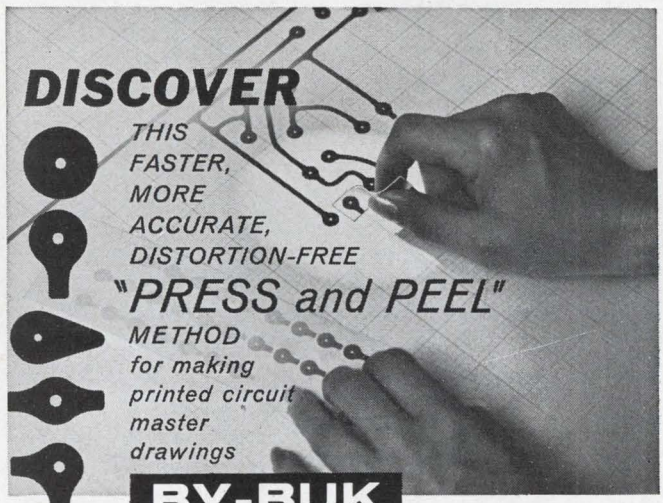

DISCOVER
THIS FASTER, MORE ACCURATE, DISTORTION-FREE
"PRESS and PEEL" METHOD for making printed circuit master drawings

BY-BUK "TAPE-LIFT"

PRINTED CIRCUIT DRAFTING AIDS in flat 8" strips packaged in handy slip-pack boxes. Featuring our NEW Black Matte Finish, Clear Adhesive Centerless Donuts, Teardrops and Oval Pads in many new stock sizes, also Tees, Elbows, Fillets, Adapters, Register Marks, Drafting Film and Grids, Conductor line tapes in Matte or Creped finish in widths from 1/64" up.

Write for our NEW CROSS-REFERENCE DRAFTING AIDS GUIDE & PRICE LIST NO. P-41 – FREE SAMPLES.

BY-BUK COMPANY
4326 W. Pico Blvd., Los Angeles, Calif. 90019 • (213) 937-3511

ON READER-SERVICE CARD CIRCLE 827

IT'S HARD TO CONTACT YOU IF YOU DON'T CONTACT US.

It isn't that we don't have a phone or men out beating the bushes. It's just that, if you don't let us know about any electrical contact or sub-assembly problem you might have, we may not find you. And that would be a shame. You'd be depriving yourself of the opportunity of dealing with people who have seen enough contact problems to realize that yours may well be different from all the others. And, people who know what to do about your problem!

Once a solution is reached, it is executed with the finest, most modern, and in many cases, exclusive facilities in our industry. That's another reason it would be a shame not to get in touch with us. Two more are service (and our eager approach to it) and delivery (we break our necks to be prompt). So do us a favor by doing yourself a favor. Next time the subject of contacts comes up, contact Deringer. It's your best bet for quick, economical service.

FOR CONTACTS—CONTACT
DERINGER
METALLURGICAL CORPORATION
1250 Town Line Road - Mundelein, Illinois 60060


ON READER-SERVICE CARD CIRCLE 828

Now — the most adaptable, reliable

DATALITE®

SYSTEM OF INDICATION

For computers, data processing, and other readout applications

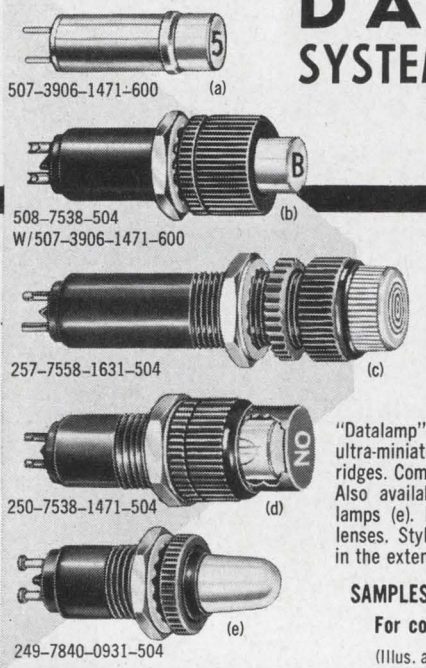

Build your light indicators with a system—the DATALITE system. Here's how: Choose a "Datalamp" Cartridge (a) and combine it with a "Datalamp Holder" (b); or use a screw-on "Data Cap" with a rotatable readout lens (c, d)...For multi-indications, "Datalamp" Cartridges may be mounted on a "Data Strip" or "Data Matrix" in any required configuration.

"Datalamp" Holders accommodate DIALCO's own plug-in ultra-miniature Neon or Incandescent "Datalamp" Cartridges. Complete assembly mounts in 3/8" clearance hole. Also available with permanent (not replaceable) Neon lamps (e). Legends may be hot-stamped on cylindrical lenses. Styles shown here are only typical components in the extensive DATALITE system of light indication.

SAMPLES ON REQUEST—AT ONCE—NO CHARGE.

For complete data, request current Catalog.

(Illus. approx. actual size)

Foremost Manufacturer of Indicator Lights

DIALCO®

DIALIGHT CORPORATION

60 STEWART AVENUE, BROOKLYN, N.Y. 11237 212 HYACINTH 7-7600

Booths 2D33 — 2D35 at the IEEE Show


ON READER-SERVICE CARD CIRCLE 829

DON'T BE A

Guinea Pig!

Try a WABASH HYDRAULIC PRESS At Our "Press Clinic" Before You Buy!

Wabash builds the most complete line of hydraulic transfer and compression presses for research, testing, production. For molding, rubber, phenolics, and premix; laminating; pressing; multilayer circuitry; seating; imbedment; encapsulating; trimming — you name it. 12 to 150-tons capacity. Electric or steam heated platens. Also "push button control" models. Features galore, based upon more than 25 years of successful experience.

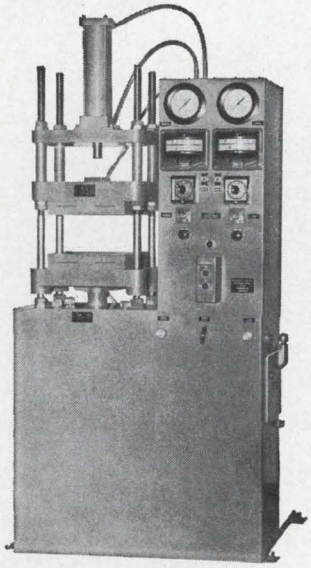

Ask about our "clinic" — visit with our engineers — see precision Wabash Presses being built, "On the Banks of the Wabash" — ask for details or send for Catalog!

WABASH HYDRAULIC PRESSES

WABASH METAL PRODUCTS COMPANY, INC.

Hydraulic Press Specialists

1521 Morris St., Wabash, Indiana 46992

ON READER-SERVICE CARD CIRCLE 830

NEW LITERATURE

Teflon materials

A 24-page catalog lists over 40 stock parts and products of Teflon, with complete information on sizes; thicknesses and tolerances. It includes rod, tubing, tape, film, instrument balls, gaskets, packing, seals, rings, insulators, terminals, jacks, plugs and Teflon-metal laminates as well as information on the company's custom molding, machining, extruding and compounding operations. Tri-point Industries Inc.

Circle No. 302

Switch catalog

Bulletin 70 shows a wide variety of lighted control-panel switches. Included are 28 Vdc and 115-230 Vac switches in assorted colors and sizes, including two-color and two-level button combinations. Micro Switch—Honeywell.

Circle No. 303

Analog instruments

A 24-page clip-bound catalog covers a complete line of analog instruments and electronic solid-state counters. Specifications and illustrations are coupled with pricing and applications information. Anadex.

Circle No. 304

Knob catalog

This brochure features aluminum instrument knobs, with construction details and ordering information. Included are dual concentric and fine tuning types, as well as other configurations. Atomite Electronics.

Circle No. 305

Infrared components

A 44-page catalog gives specifications for a variety of components and instruments in infrared technology. Also listed are certain new semiconductor developments in allied fields. Santa Barbara Research Center, Hughes Aircraft.

Circle No. 306

Monolithic plug-ins

A four-page technical brochure describes a line of monolithic plug-in integrated DTL circuits. It gives diagrams and schematics for the complete set of logic elements, and includes loading and interface rules. Signetics.

Circle No. 307

Differential voltmeter

This 2-page engineering note describes the model 661 ac/dc guarded differential voltmeter, which operates as a dc potentiometer, dc VTVM and ac VTVM. The note describes the instrument, lists its specifications, and shows the block diagram. Keithley Instruments Inc.

Circle No. 308

Circuit breakers

A four-page condensed catalog covers precision circuit breakers, their selection and application. Thermal and magnetic styles find coverage in these pages—one, two, and three-pole varieties, be they automatic or manually set in type. Tabular material includes dimensions, characteristics, approvals, and typical applications. Glossaries are appended. Texas Instruments.

Circle No. 309

Reed relay catalog

A folder describes five series of reed relays. The 12-page booklet gives specifications, drawings, technical data, and application details. Package configurations, contact ratings, operating parameters, and electrical data are quick-referenced for standard and miniature models. New Product Engineering.

Circle No. 310

Miniature accelerometer

Data sheet T-154, describes the model 610-TX micro-miniature triaxial accelerometer designed for the simultaneous measurement of acceleration phenomena in three mutually perpendicular directions. Complete specifications, electrical and physical, are provided for the instrument. Columbia Research Labs., Inc.

Circle No. 311

Mobile transceiver tubes

A push-to-talk-service guide contains the basic specifications and ratings of the most popular mobile communications tubes. The 3-color pocket-size sheet includes a card for requesting information and catalogs. Amperex.

Circle No. 312

Polymer catalog

An illustrated 16-page brochure describes industrial plastic materials, molding compounds, nylon hose, tubing and plastic costings. Physical properties, applications and stock availability are covered. Polymer Corp.

Circle No. 313

Drafting aids catalog

Drafting aids symbols are featured in a new catalog. The symbols are individually die-cut, printed on adhesive-backed opaque film, and packaged in rolls. Accuracy to ±0.001 in. is maintained in symbols such as integrated circuits, flat packs, welded modules, and PERT diagrams. Bishop Industries.

Circle No. 314

Logic card catalog

A wide variety of analog and digital integrated circuit logic cards is described in this 20-page catalog. Interface and power cards and mechanical accessories are included. Data Technology.

Circle No. 315

Process control systems

A line of miniaturized dc electronic process control equipment is featured in a new 40-page publication.

Graphic and photographic illustrations enhance the catalog's presentation of specifications. Block diagrams show the system's operation. Robertshaw Controls.

Circle No. 316

Aerospace indicators

Catalog No. 15 illustrates and gives specifications for aerospace indicators. Included are tachometers, synchros, special purpose indicators, and ground and shipboard indicators. Engineering data and a MIL-spec index are features. Bendix.


Circle No. 317

Accuracy is our policy

There were two errors in the article "Find the received signal . . . ," published on page 84 of the Feb. 15, 1966, issue of ELECTRONIC DESIGN.

The expression in brackets in the second line of the equation should read (6400 sin d/6400) instead of (6400 sin 6400/d). Mr. Salley's name should read Ernest J. Salley instead of Edward J. Salley.

Pt/PtRh Thermocouple Wire... 600°C-1500°C

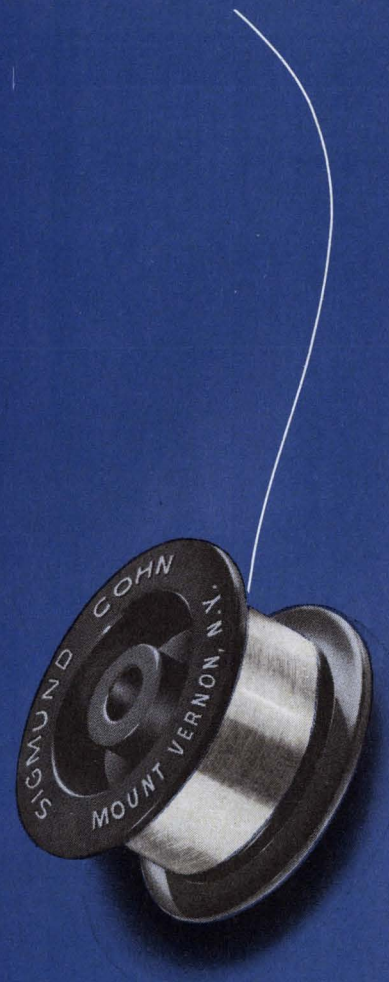

Thermocouples made of Reference Grade Platinum/Platinum-Rhodium match the EMF values given in National Bureau of Standards Circular No. 561 within ±0.1% above 600°C.
Write for Bulletin today . . .


Since 1901

SIGMUND COHN Corp.
121 So. Columbus Ave., Mount Vernon, N.Y.

SIGMUND COHN CORP. OF CALIFORNIA, Burbank, Cal.
SIGMUND COHN-PYROFUZE, INC., Dallas, Texas

ON READER-SERVICE CARD CIRCLE 238 ➤

Performance Proves:

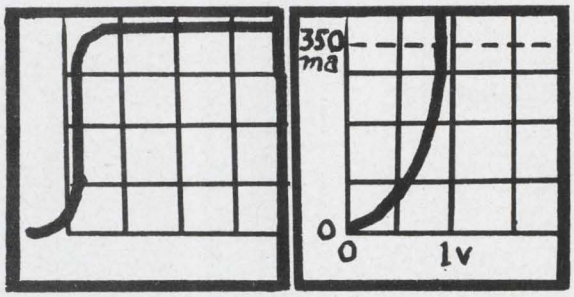

Fastest Switching Diode With High Forward Current

Test waveforms show that International Diode Corp.'s ID3-050T alloy junction diode has a reverse recovery time (left) in the picosecond range, with a 200-to-400 milliampere forward conductance (right). IDC can provide more than 100 types to solve your design problems, including Q6-100, Q5-100, ID3-050, 1N3146. Price as low as 45 cents in quantities; delivery mostly from stock. Write or phone for details.

INTERNATIONAL DIODE CORP.

90 Forrest Street, Jersey City, N. J. 07304

201 - 432-7151


ON READER-SERVICE CARD CIRCLE 832

Brand NEW FROM HICKOK

DMS-3200 Digital Measuring System



DMS-3200 Main Frame **$320**
(shown with DP-100)

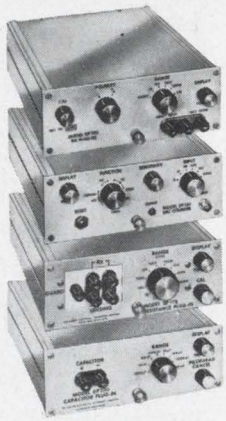

DP-100 DC Voltmeter Plug-in **$175**

DP-150 1 MC Counter Plug-in **$175**

DP-170 Ohmmeter Plug-in **$240**

DP-200 Capacity Meter Plug-in **$240**

HIGHLIGHT FEATURES

3-digit Biquinary Tube Read-out
Plug-in Flexibility
All-electronic
Fully-transistorized
Modular Design
Fully Field-tested
Automatic Polarity Indication
Automatic Decimal Point Indication

AS A DIGITAL DC VOLTMETER (DP100 Plug-in)
Range 0.1 millivolts to 1000 volts
Accuracy ±0.1% FS, ±0.1% of reading
True integrating voltmeter design
10 megohms input impedance at all times

AS A DIGITAL 1 MC COUNTER (DP150 Plug-in)
±0.005% accuracy: Resolution 1 part in 10^7
(Overrange capability with sector read-out permits 3-digit display to be equivalent of a 7-digit instrument)
Frequency measurement range 0.1 cps to 1 mc
Period measurement range 0.1 ms to 999 seconds

AS A DIGITAL OHMMETER (DP170 Plug-in)
Range 0.01 ohm to 1,000 megohms
Accuracy ±0.1% FS, ±0.2% of reading

AS A DIGITAL CAPACITY METER (DP200 Plug-in)
Range 1.0 picofarad to 10,000 microfarads
Accuracy ±0.1% FS, ±0.2% of reading

The DMS-3200 is designed for rugged industrial and laboratory applications. By utilizing a design which has the optimum combination of accuracy capability and number of digit display, the DMS-3200 meets the general purpose measurement needs of industry for reliable, precision digital measurement equipment in the $400-$500 price range.

THE HICKOK ELECTRICAL INSTRUMENT CO. • 10514 Dupont Avenue • Cleveland, Ohio 44108

ON READER-SERVICE CARD CIRCLE 833

NEW LITERATURE

RF interference

An 18-page report deals with radio interference problems related to the operation of engine-generators.

As a guide for specifying or using noise-generating equipment in areas of strategic radio transmission, this paper lists radio suppression classifications and control limits issued by the various military branches. Shielding methods and materials are considered, as well as test data. Onan Div. Studebaker-Packard.

Circle No. 318

Telemetry receiver

A brochure describes a solid-state radio receiver. Block diagrams and photographs are incorporated with specifications for the receiver, RF heads, spectrum display units, etc. Data Control Systems.

Circle No. 319

Corrosion resistance

Corrosion resistance of alloys is discussed in a 38-page booklet. Comparisons of different alloy corrosion resistances to 13 corrosives are detailed in 33 charts and 63 tables.

Technical explanations are developed on passivity, general corrosion, galvanic corrosion, concentration-cell or crevice corrosion, chemical pitting, intergranular corrosion, and the effect of stress on corrosion. Huntington Alloy Div., International Nickel.

Circle No. 320

Silicones brochure

A 20-page brochure gives a good look at the recent explosive pace of developments in RTV silicone rubbers. Emphasis is placed on the problem solving nature of the new compounds. General Electric.


Circle No. 321

Polyester laminates

A polyester based flexible laminate is described in a new brochure. Printed circuitry, formed circuits, and flat cable applications are described and illustrated. Physical, electrical, and dimensional characteristics are tabulated. Electrical Prod. Div. of G. T. Schjeldahl Co.

Circle No. 322

This YIG sphere is magnified 40 times so you can see it.



Actual diameter: 21/1000"

Loral uses it in YIG filters, discriminators, multiplexers. It makes them smaller and simpler. And does the same for the equipment you design them into.

Loral solid-state YIG filters, discriminators, and multiplexers are much smaller and simpler than conventional electro-mechanical devices. And much more reliable.

So is the equipment you design them into.

Loral YIG devices are electronically tunable. They sweep over bandwidths at high speed. Feature low insertion loss, wide tunable ranges, maximum isolation, and low power consumption. Because they have no moving parts, they're virtually maintenance-free.

The key is the tiny sphere above. We make these spheres from yttrium-iron garnet crystals that we grow ourselves. We even make our own magnets, and the cores that go into them. It's the best way to control quality from start to finish.


Loral continues to pioneer in the design, manufacture, and applications of YIG devices. Our people will work with you. Run evaluation tests. Help solve your microwave problems with a broad line of compact YIG devices, including: band pass, band reject, tracked/isolated, and tracked/offset filters in reciprocal and non-reciprocal designs from 250 mc to 18 gc. Plus YIG tuned RF discriminators and multiplexers.

Write for technical specs on our complete line. Another advanced state-of-the-art solution to microwave problems from Loral. 825 Bronx River Avenue, Bronx, N. Y. 10472.

Loral Electronic Systems
Advanced Products
A Division of Loral Corporation

ON READER-SERVICE CARD CIRCLE 834

VERSATILITY



ANYTHING YOU CAN PUT ON FILM YOU CAN DISPLAY ON IEE READOUTS

(EVEN COLORS!)

NUMBERS, LETTERS, WORDS, SYMBOLS, COLORS! There is literally no limit to the display versatility of IEE readouts. As rear-projectors, they operate by back-lighting display symbols arranged on film and projecting the selected message on a non-glare viewing screen.

VERSATILITY OF SIZES, TOO! Five sizes with maximum character heights of ⅜", ⅝", 1", 2", 3⅜".


SEND TODAY FOR COMPLETE INFORMATION!

INDUSTRIAL ELECTRONIC ENGINEERS, INC.
7720 Lemona Avenue • Van Nuys, California
Phone: (213) 787-0311 • TWX (213) 781-8115

Representatives in Principal Cities

SEE IEE AT IEEE BOOTH 1F-32

ON READER-SERVICE CARD CIRCLE 835

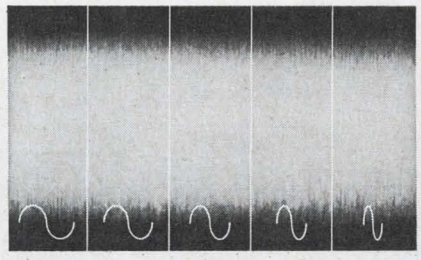

Acton

magnetostrictive filters

Sharp, Highly Stable, Light and Small, Permanently Tuned, Shock Resistant, 15kc-450kc, High or Low Impedance, Q's 2,000-30,000, Single or Multi-unit Arrays. Temperature Coefficient-0.1ppm/°C.



For spectrum analysis instrumentation, telemetry systems, encoding, decoding, and wherever you need high accuracy, narrow bandwidth capabilities AND the unique advantages of magnetostrictive design. COMPLETE DATA ON REQUEST.

ACton starts with AC. If you use it, call us.

© 1966 ACTON®
Laboratories, Inc.
531 Main Street • Acton, Massachusetts
A subsidiary of Bowmar Instrument Corporation

ON READER-SERVICE CARD CIRCLE 836



Booths 1F27-1F29, IEEE Show

ON READER-SERVICE CARD CIRCLE 837



ON READER-SERVICE CARD CIRCLE 838

Application Notes

Power Semiconductors

This 25-page bulletin 671.1 gives applications present and future for SCRs and TRIACs. Full schematics, waveform charts, design descriptions, and application considerations are given. General Electric.

Circle No. 548

Semiconductor abstracts

Application note 200.0 is a listing of application notes, reprinted articles, manuals, and paper presentations pertaining to semiconductors. An abstract of each piece of literature is given with pricing information for five manuals or guides that are for sale. Order forms are included for free and price-tagged literature. General Electric.

Circle No. 549

Gyro handbook

A handbook on floating integrated gyros gives technical information on theory, design and operation of single-axis floated gyros and accelerometers. They are described in terms of internal construction, basic relevant equations, block diagrams, basic errors, and other data. Microsyns and temperature regulations are considered, and information regarding rate gyros, linear accelerometers and special purpose instruments such as pendulous integrating gyros and angular accelerometers is incorporated. Reeves.

Circle No. 550

Electronics Reports

Microelectronic engineering practices as described by John Hopkins University, a physics reliability handbook from Battelle Memorial Institute, and a design for a logarithmic video amplifier by Syracuse University are offered by the National Bureau of Standards Clearinghouse for Scientific and technical information.

Available from Clearinghouse, U.S. Dept. of Commerce, Springfield, Va. with the following nomenclature and prices: AD-624 315 Microelectronic Engineering Vol I, $7 (microfiche $1.75); AD-624 769 Reliability Physics Handbook, $6 (microfiche $1.50); A Logarithmic Video Amplifier, $2 (microfiche $.50). *Circle No. 551*

Plastics properties

PLASTEC report 23 "Electrical Properties of Plastic Materials; Data Compiled from Technical Conference Search" is the title of a new report. It presents data on electrical properties of over 20 families of materials, and represents 1600 papers presented at 49 technical conferences from 1960-1965. Several indexes facilitate data retrieval.

Available for $5 from Clearinghouse for Federal Scientific and Technical Information, Springfield, Va.

Printed circuit production

Techniques for printed circuits production and assemblies for reliable applications are detailed in this guide. Charts, graphs and illustrations compare characteristics and performance data of base materials from phenolic paper to epoxy glass. Industrial Circuits Co.

Circle No. 553

Aerospace antennae

A design handbook on high temperature antennae for space vehicle points to the promising use of superalloys. The 150-page handbook prepared by the Cornell Aeronautical Laboratory for the Air Force, includes evaluations of experimental results, design technology is reviewed, requirements of an aerospace system are outlined, and the properties and limitations of high temperature materials are outlined.

Air Force Avionics Lab, Defense Documentation Center (DDC), Cameron Sta. Alexandria, Va.

Circle No. 554

Isolation Efficiency

Bulletin 901 is a family of isolation efficiency curves. The three-color curve permits quick reading of vibration isolation parameters in a flexibly mounted assembly with any combination of static deflection and disturbing frequencies. Lord.

Circle No. 555


Material Selection

Vulcanized fibre, Anilite resin-impregnated vulcanized fibre, Phenolite laminated plastic, and Filamite glass filament-wound tubing are tabulated, graded, priced, and compared. Properties and characteristics are listed in the 15-page data listing. NVF Co.

Circle No. 556

H·S·I

ADMITS NOT TELLING ALL ABOUT THE 6100 ▸ AND 6300 ▸ SWITCHES





New Interesting Facts Now Brought To Light!

HSI Catalog 72 outlines conservative ratings for the 6100 and 6300 series switches. We haven't publicized the fact that:


... **while** the switches are normally rated 5 amp resistive, 3 amp inductive, we can furnish variations capable of handling 15 amp resistive 8 amp inductive loads, and the same switch will carry 100 amp squib load for 50 ms.

... **while** our standard rating for vibration is 20g 10 - 2000 CPS, the switches have actually performed under vibration conditions of 65g 10 - 2000 CPS.

... **while** the catalog doesn't specify contact resistance, superior cleaning and sealing techniques enable us to supply switches when required with consistently low contact resistance such as 30 milliohms initially and 40 milliohms over the life of the switch.

HSI emphasizes that performance characteristics such as operating and release forces, differential, pretravel, overtravel, etc. can be tailored to meet the specific requirements of an application.

Or if you have a really tough requirement, perhaps our 6200 series hermetically sealed switch with glass to metal and Heliarc® metal to metal seals will solve the problem. Since no flux is used in the sealing process and there are no organic materials inside the switch, we can furnish the unit for high temperature operation up to 660°F or with different contact materials for low level work where the contact resistance will be exceptionally low and remain constant over the life of the switch.



H·S·I

HAYDON SWITCH & INSTRUMENT, INC.


Building Confidence Through Dependability

1500 MERIDEN ROAD, WATERBURY, CONN. 06720

AREA CODE (203) 756-7441

ON READER-SERVICE CARD CIRCLE 839

Weld Insulated Wire Fast and Reliably!

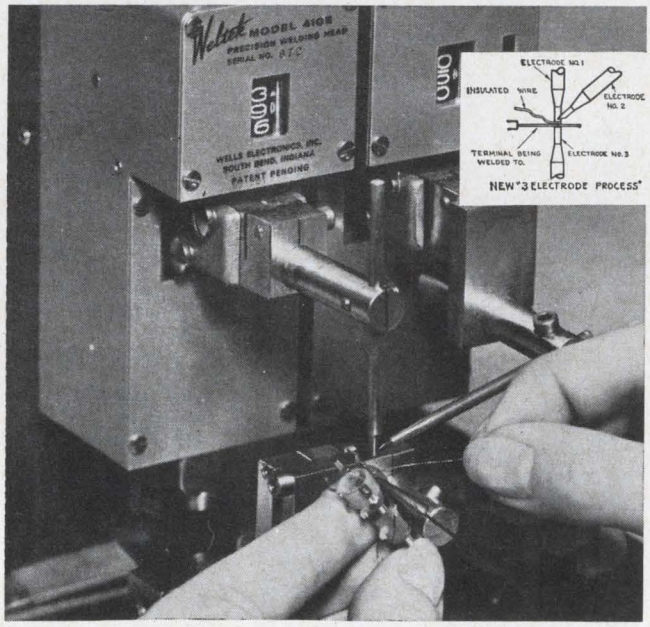


Get rid of costly wire stripping operations... ask about our new AC-10/410-E system. It welds through insulated wire (up to .010" dia.) in less than 1/3 second. Send samples.


Weltek Precision Welders
by **WELLS ELECTRONICS, INC.**
1701 S. Main Street, South Bend, Indiana, U.S.A.
ON READER-SERVICE CARD CIRCLE 840

Send for your copy of this NEW catalog on...

BUCKEYE matching Instrument Knobs

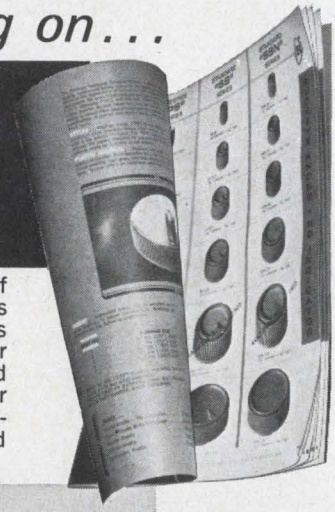

Greatly expanded line of three standard series plus wide range of modifications • Molded of tough Implex or Cycolac in four standard colors • Concentrics, bar knobs and spinners • Standard with metal bushing and set screws

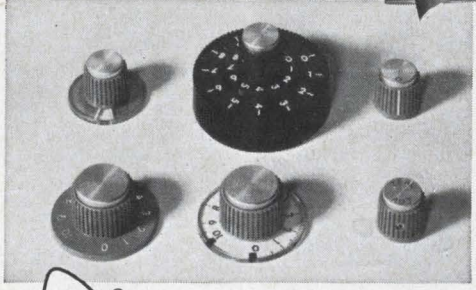

Complete stock maintained to provide samples and quick delivery.

the BUCKEYE stamping co.
555 MARION RD., COLUMBUS, O. 43207
"QUALITY PRODUCTS SINCE 1902"
ON READER-SERVICE CARD CIRCLE 841

DESIGN AIDS

Weights table

Weights of Tungsten, Columbium, Tantalum and Molybdenum are broken down in a new pocket-size conversion table. It includes round bar, billets, and sheets according to size in inches. Universal-Cyclops.

Circle No. 531

Mica design manual

Mica data manual K-6 consists of four pages of electrical and physical data on mica insulating film and sheet. Data include dielectric strength and loss, dielectric constant, and permittivities, restivities, specific heats and expansions. Physical data are hardness, tensile strength, chemical composition and minimum bending radius. Magnetic Shield Div. Perfection Mica.

Circle No. 532

Conversion tables

A new, ready-reference wall chart, lists conversion tables on the Brinell and Rockwell hardness test readings. The wall chart presents the hardness conversion numbers in bold type, enabling more than one person to refer to it at a time. The chart measures 11" x 22" and is printed on heavy stock. King Tester Corp.

Circle No. 533

Transducers

The first in a series of eight new catalogs gives a simplified chart for selecting transducers. Drawings and introductory material are included. G. L. Collins Corp.

Circle No. 534

Printed-circuit design

A brochure for design engineers covers printed circuit boards. It acts as a manual for the newcomer to the field, and as a reference to those actively engaged.

A reference table gives dimensional tolerances. Other material covers artwork, location and alignment of holes, physical characteristics, conductors, platings, soldering and printed circuit board markings. Lockheed Electronics.

Circle No. 535

IN STOCK ... standard **RBM** enclosed relays with all the advantages of "specials"



millions in use—time tested and field proven under exacting operating conditions

TYPE 84 8 AMP (Inductive) SPNO or SPDT


RBM TOTALLY ENCLOSED AC RELAYS... AT OPEN TYPE PRICES



TYPE 129 18 AMP (Inductive) SPNO or SPDT

AUTHORIZED STOCKING DISTRIBUTORS

ALLIED	FEDERATED	PIONEER/SREPCO
BLUFF CITY	FISHER SWITCHES	POWELL
LEW BONN	GRAHAM	RISSI
BURSTEIN-APPLEBY	HAMMOND	RADIO PARTS
CRAMER	INTERSTATE	SPECIALTY
DIXIE RADIO	LOU JOHNSON	STACK
ELECTRONIC EQPT.	KIERULFF	TEXAS INSTRUMENTS SUPPLY
ELECTRO TECH	NEWARK	WESTERN ELECTRONICS

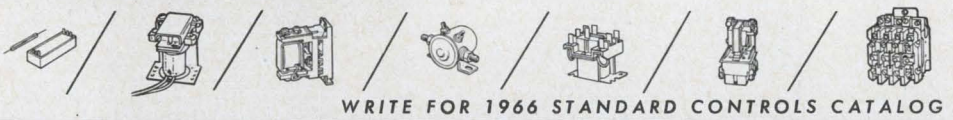



WRITE FOR 1966 STANDARD CONTROLS CATALOG

SOLD NATIONALLY THROUGH ELECTRONIC DISTRIBUTORS BY


ELECTRONIC MARKETING DIVISION

ESSEX WIRE CORPORATION

3501 W. Addison Street • Chicago, Illinois 60618

See us at IEEE Show, Booth 2H33

ON READER-SERVICE CARD CIRCLE 845

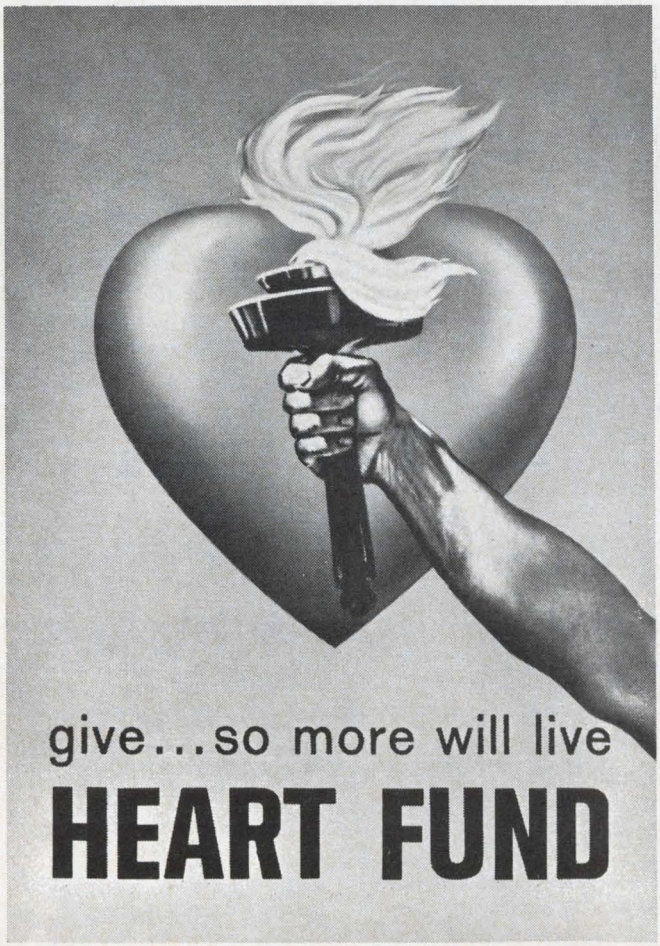

The widest line of

magnetic reed switches

in the industry.

SUGGESTED APPLICATIONS:

- PUSH BUTTONS
- KEYBOARDS ■ INTERLOCKS
- RELAYS ■ COUNTING

Write or call today for your FREE copy of the Gordos Full Line folder . . .

. . . complete with cross referencing chart.



GORDOS CORPORATION

250 GLENWOOD AVE., BLOOMFIELD, N.J. 07003 (201) 743-6800

ON READER-SERVICE CARD CIRCLE 846

Advertisers' Index

*PARTCIPANTS IN NIGHT LETTER PROGRAM

Advertiser	Page
ACI Division, Kent Corporation	37
*AMP, Incorporated	267
*API Instruments Co.	320
Acopian Corporation	36
Acton Laboratories, Inc.	327
Ad-Yu Electronics, Inc.	336
Aerovox Corporation	47
Agastat Timing Instruments, Elastic Stop Nut Corporation of America	U146
*Aladdin Electronics	292
Allen-Bradley Co.	176A-B
Amco Engineering Co.	315
American Aluminum Company	U154
Arnold Magnetics Corp.	320
Art Wire and Stamping Co.	216
Associated Testing Laboratories, Inc.	U163
Augat, Inc.	U114
Basler Electric Company	296
Bausch & Lomb, Electronics Division	305
Beckman Instruments, Inc.,	U134
Belden Manufacturing Company	295
Bendix Corporation, The	19
Biddle, James G.	334
Bird Electronic Corporation	272
Bliley Electric Co.	302
*Bodine Electric Company	209
*Bourns, Inc.	245
Bowmar-Fort Wayne Division	15
Branson Corp.	258
Braun Tool & Instrument Co. Inc.	U166
Buchanan Electrical Products Corporation	U133
Buckeye Stamping Co., The	330
Burndy Corporation	243
*Burr-Brown Research Corporation	46
*Burroughs Corporation	8, 9
By-Buk Company	323
CTS Microelectronics, Inc.	297
C T S Knights Inc.	301
California Resistor Corporation	328
Century Electronics & Instruments	322
Ceramics International, Inc.	260
Chalco Engineering Corp.	300
Chart-Pak, Inc.	298
Chassis-Trak Inc.	U149
Clairex Corporation	U172
Clarostat Mfg. Co., Inc.	57
*Clevite Corporation, Piezoelectric Division	250
*Clifton Precision Products, Division of Litton Industries	Cover II
Cohn Corp., Sigmund	325
Cohu Electronics, Inc.,	49
Columbia Wire & Supply Co.	U152
Comar Electric Company	U139
Communication Electronics, Incorporated	296
Components, Inc.	U136
*Computer Control Company, Inc.	28
*Computer Measurements Company	4
Consolidated Avionics, A Division of Condec Corporation	53
Control Logic, Inc.	U119
Coors Porcelain Company	259
*Corning Glass Works	U159
Curtis Development & Mfg. Co.	U171, 334
*Dale Electronics, Inc.	Cover III
Del Electronics Corporation	328
Delco Radio, Division of General Motors	202
Deringer Metallurgical Corp.	323
Dialight Corporation	324
Dickson Electronics Corporation	261
*Digital Equipment Corporation	291
Dormeyer Industries	U140
*Dow Corning Corporation	U130, U131
ESI/Electro Scientific Industries	U75
Eagle Signal, Division E. W. Bliss Company	50, 51
Eastern Industries, A Division of Laboratory for Electronics, Inc.	288
Eastman Chemical Products, Inc.	U171
*Eimac, A Division of Varian Associates	231
Electrical Industries	223
Electro Instruments, Inc.	249
Electro International, Inc.	224
Electronic Communications, Inc.	321
Electronic Controls, Corporation	252
Electronic Marketing Division, Essex Wire Corporation	312, 331
Electronic Research Associates, Inc.	U97
*Electronic Specialty Co.	313
Electronized Chemicals Corporation	316
Electrovert, Inc.	U164
Elgenco, Inc.	292
Erie Technological Products, Inc.	34
Fabri-Tek, Incorporated	230
Fenwal Electronics, Inc.	265
Filtors, Inc.	262

Advertiser	Page
*Fluke Mfg. Co., Inc., John	U83
Frequency Electronics, Inc.	U172
G-V Controls, Inc.	248
Gardner-Denver Company	U141
General Electric Company, Industrial Sales Division	U84, U85, 96AA-BB, 273
General Electric Company, Lamp Metals & Components Division	264
General Electric Company Miniature Lamp Dept.	289
General Instrument Corporation	6
General Precision Inc., Kearfott Division	U160, U161
General Radio Company	1
Globe Industries, Inc.	319
Gordos Corporation	331
Gudebrod Bros. Silk Co., Inc.	208B
Hansen Manufacturing Company, Inc.	316
Harowe Servo Controls, Inc.	318
Hayden Books	U150
Haydon Company, A. W.	307
Haydon Switch & Instrument Inc.	329
*Heinemann Electric Company	7
*Hewlett-Packard, Boonton Division	269
Hewlett-Packard, Loveland	23
Hewlett-Packard, Sanborn Division	195
Hewlett-Packard, Moseley Division	281
Hickok Electrical Instrument Co., Inc., The	326
High Vacuum Electronics, Inc.	229
Hoffman Semiconductor Division	U135
Honeywell, Denver Division	253
Honeywell, Precision Meter Division	288A
Hopkins Engineering Company	U173
Houston Omnigraphic, Corporation	48
Howard Industries, Inc.	306
Hudson Tool & Die Company, Inc.	U128A-B
Hyperion Industries Corporation	58
IEEE	286
*IRC, Inc.	5
ITT Semiconductors	U122, U123
Ideal Precision Meter Co. Inc.	278
Indiana General Corporation	303
Industrial Electronic Engineers, Inc.	327
Inland Controls, A Subsidiary of Kollmorgen	309
Inland Motor Corporation	282
Interelectronics Corp.	290
International Diode Corp.	326
Johanson Manufacturing Corp.	U156
Johnson Company, E. F.	33
Kay Electric Company	U175
Kidde & Company, Inc., Walter	U121
Kistler Instrument Corporation	335
LFE Electronics, Division of Laboratory of Electronics, Inc.	277
Lambda Electronics Corp.	42, 43
Licon, Division Illinois Tool Works	U76, U77
Littelfuse	319
Little Falls Alloys Inc.	U165
*Litton Industries, Electron Tube Division	64
Loral Electronic Systems	327
M-O Valve Co., Ltd.	U174
McLean-Fogg Lock Nut Company	335
Mac Panel Company	284
Macrosonic Corporation	U162
Magnetic Controls Company	52
*Magnetics, Inc.	27
Malco Manufacturing Company, Inc.	U138
*Mallory & Co., Inc., P. R.	U155
Mallinckrodt Chemical Works	263
Markel & Sons, L. Frank	254
Matheson Company, Inc.	335
Mathatronics Inc.	293
Mepco. Inc.	U137
*Metals & Controls, Inc.	274, 275
Micro Instrument Company	U148
*MicroSwitch, A Division of Honeywell	U128, D-E
Monroe/Data Log, Division of Litton Industries	45
Monsanto Electronics Department	U112, U113, U115
*Motorola Semiconductor Products, Inc.	299
Mullard Ltd.	U125
Mycalex Corporation of America	311
Northern Precision Laboratories, Inc.	308
Nortronics, Inc.	215
Nytronics, Inc.	294
*Oak Manufacturing Co.	310, 312, 214
Ohmite Manufacturing Company	59
Paktron Division, Illinois Tool Works Inc.	U80A-B
Parker Instrument Corporation	U169
Parsons Electronics Company, The Ralph	266
Perfection Mica Company	286
Photocircuits Corporation	208


Advertiser	Page
Plastic Capacitors, Inc.	300
Polaroid Corporation	U109
Potter Company, The	U176
*Potter & Brumfield Division of American Machine & Foundry Company	U92, U93
Procedyne Corporation	U118
Pyrofilm Resistor Co., Inc.	U157
RBM Controls Division	U127
RCA Electronic Components and Devices	Cover IV
*Radiation, Incorporated	24, 25
Radio Cores, Inc.	308
*Redcor Corporation	2
Reeves Hoffman Division of DCA	61
Republic Electronics Corp.	268
Revere-Mincom Division, 3M Company	251
Rogan Brothers, Inc.	U171
Sanders Associates, Inc.	U128F
Schjeldahl Company, G. T.	287
Siemens America, Incorporated	U106, U107
Sigma Instruments, Inc.	38, 39
Signetics Corporation	32A—D
Siliconix Incorporated	31
Simpson Electric Company	247
*Singer Company, Diehl Division	U153
Singer Company, Metrics Division	270, 271
*Sola Electric Company	U120
Sorensen, A Unit of Raytheon Company	16
Soshin Electric Co., Ltd.	285
Space Craft, Inc.	201
Specific Products	U126
Spectrol Electronics Corporation	U117
Sprague Electric Company	10, 20
Stackpole Carbon Company	208A
*Standard Condenser Corporation	U167
Standard Telephone and Cables, Limited	333
Switchcraft, Inc.	U124
Syntronic Instruments, Inc.	278
*Systron-Donner Corporation	12
TRW Capacitors,	62
Tech Laboratories, Inc.	44
Technical Information Corp.	U151
Technology Instrument Corporation of California	285
Tektronix, Inc., Oscilloscopes	217
Telonic Industries, Inc.	U145, U170
Telrex Laboratories	U164
Tenney Engineering, Inc.	276
Texas Instruments Incorporated	60
Texas Instruments Incorporated, Semiconductors- Components Division	186, 187
Times Wire and Cable, Division of The International Silver Company	U116
Town Laboratories Inc.	323
Ucinite Company, The	U128
United Aircraft Corp., Hamilton Standard Division	255
United Aircraft, Norden Division	225
United Control Corporation	280
U.S. Components, Inc.	279
*Unitrode Corporation	55
Useco Division of Litton Industries	54
Varian Associates	283
Vector Division of United Aircraft	317
*Vidar Corporation	256
Wabash Metal Products, Inc.	324
Wakefield Engineering, Inc.	285
Wayne-Kerr Corporation	U143
Wells Electronics, Inc.	330
Western Transistor Corp.	306
Westinghouse Capacitors Department	U147
Westinghouse Molecular Electronics Division	U111


Regional Advertising

*Arnold Engineering Company, The	288B
*Brush Instrument Division of Clevite	288A
*JFD Electronics Corporation	288D
*Leach Corporation	288C

Career Advertising

Delco Radio Division, General Motors	235
Douglas Missile & Space Systems Division	239
General Electric Apollo Support Department	237
Hughes Aircraft Company Aerospace Divisions	236
IBM Federal Systems Center	238
Motorola, Inc.	232
National Cash Register Company, The	240 A-B
Raytheon Company	240
U.S. Navy, Bureau of Ships	241

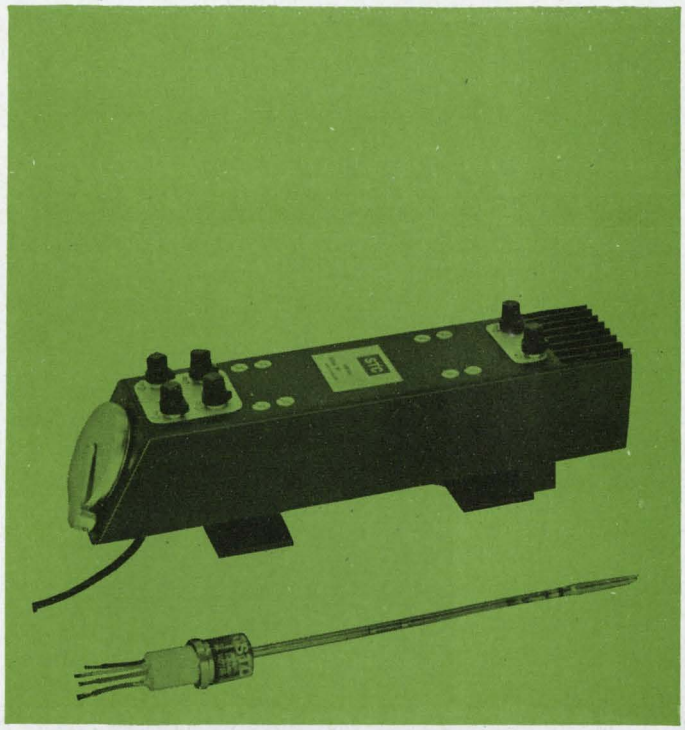

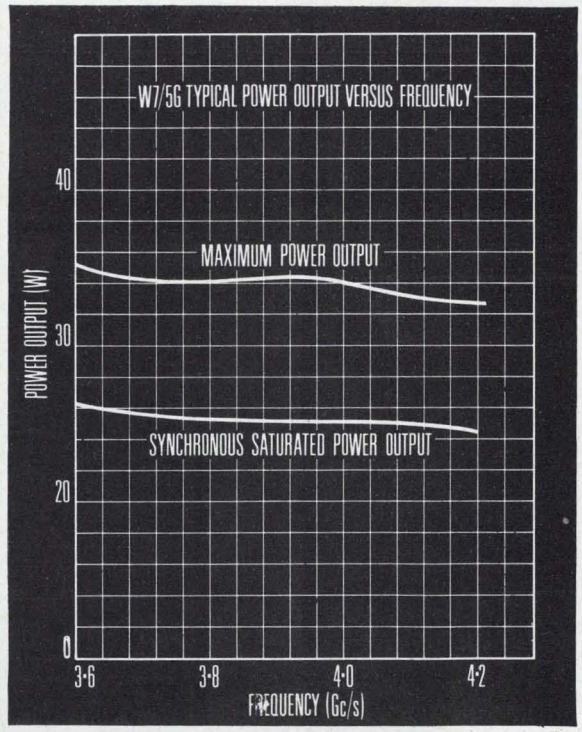

New 30W TWT for the 4Gc/s communications band

STC's new, low-voltage travelling-wave amplifier tube, Type W7/5G, has been designed for use in 1800 channel radio communications links in the 3·6 to 4·2 Gc/s frequency range. It has a typical gain of 43 dB at a working output of 20W. (30W saturated output). This means that, in an existing system which incorporates a tube with a 40 dB gain and an output of 10W, the tube can be replaced by the W7/5G to produce twice the previous output for the same drive power.

The tube operates in a robust periodic permanent magnet mount, Type WM110A. Incorporated in the mount are r.f. input and output waveguide connections (a choice of WG12A or WR229 is offered), mechanical alignment, deflection and matching adjustments; tube ejection control at either end of the mount, a convection cooler and facilities for easy field replacement of tubes.

USA enquiries to:
ITT Electron Tube Division,
Box 100, Easton, Pennsylvania.

Other countries contact:
STC Valve Division, Brixham Road, Paignton, Devon, England.

Standard Telephones and Cables Limited

Subsidiary of International Telephone and Telegraph Corporation

ITT

65/9MS

ON READER-SERVICE CARD CIRCLE 847

Reprints Available

The following reprints are available free and in limited quantities. To obtain single copies, circle the number of the article you want on the Reader-Service Card.

High Volume-Low Cost: Designers Challenge (No. 740)

Guidelines for Selecting Laser Materials (No. 741)

First Aid for Ailing Speakers (No. 742)

A Quick Way to Find Radar Range (No. 743)

Which Device for High Power Switching Part 1 (No. 744)

Which Device for High Power Switching Part 2 (No. 745)

Improve Device Reliability with Physics of Failure Techniques (No. 746)

Comparing the Three Most Popular Temperature Sensors (No. 747)

A Design Approach to Transistorized Voltage Controlled Crystal Oscillators (No. 748)

A New Tool for Easier Network Synthesis (No. 749)

Harmonic Generators: Is the Step Recovery Diode Best (No. 750)

Simple IC Tester Handles Prototype Quantities (No. 751)

Subscription Policy

ELECTRONIC DESIGN is circulated free of charge to qualified design engneers in the U.S., Western free Europe and England. To establish your qualifications, send ELECTRONIC DESIGN the following information on your company's letterhead: Your name, engineering title, description of your design duties and a list of your company's major products. The letter must be signed by you personally.

Subscription rates for nonqualified subscribers—*$25.00* per year in U.S.A., *$35.00* in all other countries. Single copy, *$1.50*.

Change of Address


An address change for a subscriber requires a restatement of his qualifications. To expedite the change, and to avoid missing any issues, send along a label from a back copy.

Microfilm copies of all 1961, 1962, 1963 and 1964 issues of ELECTRONIC DESIGN are available through University Microfilms, Inc., 313 N. First Street, Ann Arbor, Mich.

Design Data from

(Advertisement)

Terminal Block Selector




A new 24-page, completely illustrated catalog contains photos, descriptions, ratings, engineering drawings, and prices of the complete line of Curtis terminal blocks. Included are printed circuit, insulated feed-thru, quick disconnect, track type, and high current terminal blocks. Handy selection chart quickly locates the perfect block for your particular requirements. Send today for your free copy.

Curtis Development & Mfg. Co.
3236 North 33rd Street
Milwaukee, Wisconsin 53216

171

Biddle Precision Test Instruments




This new condensed catalog covers the full line of Biddle Precision Laboratory Standards and Test Instruments, and is designed to bring you up to date on new and improved models. Described are: Resistance Standards, Resistance Boxes, Wheatstone Bridges, Kelvin Bridges, Temperature Bridges, Potentiometers, Shunt and Volt Boxes, Voltage Dividers, and Ratio Sets. Also reference is made to a selection of Kipp Instruments; Galvanometers, Microammeters, etc. A checklist is included for requesting more detailed bulletins on instruments of your choice.

James G. Biddle
Plymouth Meeting, Pa. 19462

173

Books For The Electronics Engineer



The 1966 Hayden Book Company, Inc., catalog contains such new titles as "Microelectronic Design," "100 Ideas for Design '66," "The Electron in Electronics," "Synthesis of RC Networks with Arbitrary Zeros," "Transistor and Diode Network Calculations," and "Matrix Algebra for Electronic Engineers." As well as the expanded list for design engineers, the catalog includes Hayden and John F. Rider Publisher training texts at all levels. Send for your free catalog today.

Hayden Book Company, Inc.
116 West 14th Street
New York, N. Y. 10011

175

Manufacturers

Advertisements of booklets, brochures, catalogs and data sheets. To order use Reader-Service Card.

Non-Pendulous Servo Accelerometer




This 8-page Technical Bulletin gives description, specifications and price information on Model 303 non-pendulous, true-translational, linear servo accelerometer for precision telemetry and control applications. Bulletin explains how an exceptionally tight, high frequency, electrical constraint on an ideally suspended seismic element virtually eliminates errors due to cross axis, angular and vibratory motion. A thorough discussion of servo accelerometer theory is included.

Kistler Instrument Corporation
8969 Sheridan Drive
Clarence, N. Y. 14031

172

Dope On Doping Gases



Data Sheets list Physical Constants, Typical Analysis, Recommended Controls, use suggestions, etc., for Matheson Doping Gases. Arsine, Diborane, Germane, Hydrogene Selenide, Phosphine and Silane are available pure, or as mixtures, diluted with carrier gas. (Diborane available only as a mixture.) Gases shipped from our plants in East Rutherford, N. J., Joliet, Ill., La Porte, Texas, Newark, Calif., Morrow, Ga.

The Matheson Company, Inc.
P. O. Box 85
East Rutherford, N. J.

174

Manual on Lock Nuts



This eight page booklet is a condensation of MacLean-Fogg's general catalog of lock nuts, locking screws, and fasteners of all types. Tables for each product give dimensional data, part number, and weight. There are also application sketches that serve as an idea file for engineers. Included in the MacLean-Fogg line are three styles of prevailing torque lock nuts, free spinning Whiz-Lock nuts and screws in hex and flange styles, Weld Nuts, Flange Nuts, Clinch Nuts and Cap Nuts. MacLean-Fogg's line of products is so complete that the company is known throughout industry as "Lock Nut Headquarters."

MacLean-Fogg Lock Nut Company
1060 Allanson Road
Mundelein, Illinois

176

Electronic Design

Advertising Representatives

New York 10022
Robert W. Gascoigne
Thomas P. Barth
George W. Fleck
John F. Gilbert, Jr.
Rick Brough
850 Third Avenue
(212) PLaza 1-5530
TWX: 867-7866

Philadelphia 19066
Fred L. Mowlds, Jr.
P. O. Box 206
Merion Station, Pa.
(215) MO 4-1073

Marblehead 01945
Richard Parker
7 Redstone Lane
(617) 742-0252

Chicago 60611
Thomas P. Kavooras
Berry Conner, Jr.
720 N. Michigan
(312) 337-0588

Cleveland 44107
Robert W. Patrick
8410 Treetower Drive
Chagrin Falls, Ohio
(216) 247-7670

Los Angeles 90005
Stanley I. Ehrenclou
Terrence D. Buckley
W. James Bischof
2930 W. Imperial Highway
Inglewood, Calif. 90303
(213) 757-0183

San Francisco 94306
Ashley P. Hartman
541 Del Medio
Suite #301
Mountain View, Calif.
(415) 327-6536

Southwestern 75235
Tommy L. Wilson
6200 North Central Expressway
Dallas, Tex. 75206
(214) EMerson 1-2311

London W. 1
Brayton C. Nichols
44 Conduit Street

Tokyo
Yoshihiro Takemura
International Planning Service, Inc.
Room No. 512 Nikkoh Mita Building
1, Nishidaimachi, Shiba-Takanawa
Minato-ku, Tokyo

BPA BPEA


AMERICAN BUSINESS PRESS, INC.

New FROM AD-YU ELECTRONICS INC.

249 TERHUNE AVE., PASSAIC N. J.
PHONE 472-5622 (AREA CODE 201)

DIGITAL PHASE METER TYPE 524A3

±0.03 Degree Accuracy, 20 CPS to 500 KC

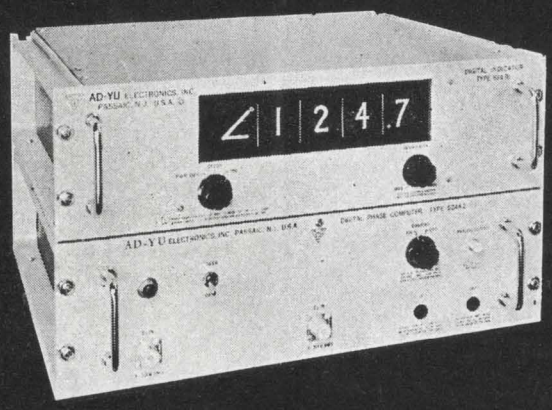

Type 524A3 with indicator. Computer alone (bottom panel) can produce analog output to drive recorder and d.c. digital voltmeter. Price $999.

FEATURES:

Phase reading directly in degrees in 5 digits (or 4 digits).

No amplitude adjustment from 0.3v to 50v.

No frequency adjustment up to 500 kc.

Analog output available for recorder or programmable system.


USES:

Plot phase vs. frequency curve of unknown network.

Plot envelope delay curve with RF sweep oscillator.

A standard phase meter with 5-digit readout.

WIDEBAND PHASE VECTOR VOLTMETER TYPE 248A

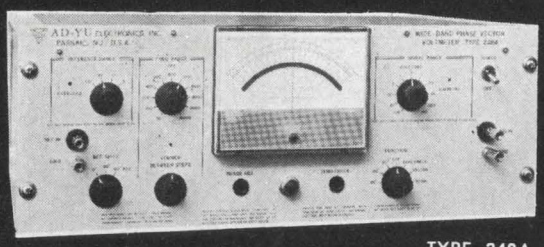

TYPE 248A

SPECIFICATIONS:

Frequency—40 cps to 20 kc.
Accuracy—±¼° or ±1%
Nulling Sensitivity—2 microvolts.
Quadrature Rejection—60 db.
Input Impedance—1 megohm.

USES:

Plots phase curve and in-phase components up to 20 kc. Measures quadrature phase angle. Indicates null for synchro bridges.



FEATURES:

Direct reading of total, in-phase, and quadrature components.

Direct reading of phase angle without adjustments.

Transistorized, with ruggedized components.

Reads a small fraction of 1° from 0°, 90°, 180° or 270°.

HF NANOSECOND PHASE DETECTOR Type 205B1-6	VECTORLYZER Type 203	TRANSISTORIZED PRE-AMPLIFIERS Type A102 Series	VIDEO and RF PHASE METER Type 422A
			
Accuracy ±0.05° or ± 1%; 15 mc to 1700 mc.	Accuracy ±0.02°; full scale sensitivity 0.1°, 0.2°, 1°, 2° up to 180°; 50 cps to 20 kc.	Gain 40 db or 60 db. 1 cps to 5 mc bandwidth. Size including batteries, 2⅞" x 1 1/16" x 1½".	50 cps to 10 mc. Direct reading in degrees. No frequency adjustment, no amplitude adjustment.

See our Booths 3D05-3D07 at the IEEE Show

ON READER-SERVICE CARD CIRCLE 848

Designer's Datebook

MARCH						
S	M	T	W	T	F	S
		1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30	31		

APRIL						
S	M	T	W	T	F	S
					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30

March 21-25

IEEE International Convention (New York) Sponsor: IEEE; The IEEE, 345 East 47th St., New York, N. Y.

April 12-15

International Quantum Electronics Conference (Phoenix) Sponsors: AIP/IEEE; Dr. J. P. Gordon, Bell Telephone Laboratories, Murray Hill, N. J.

April 17-20

International Conference on Electron and Ion Beam Technology (New York) Sponsors: AIME and Electrochemical Society; Metallurgical Society of AIME, 345 East 47th St., New York, N. Y.

April 18-20

Symposium on Process Automation (Newport Beach, Calif.) Sponsors: Beckman Instruments, Consolidated Electrodynamics, Control Data, SDS Data Systems; Dr. William Biles, Shell Development Co., Houston, Tex.

April 20-22

1966 Intermag (International Conference on Magnetics) (Stuttgart, Germany) Sponsor: IEEE G-Mag; Dr. E. W. Pugh, IBM Corp., 1000 Westchester Ave., White Plains, N. Y.

April 25-28

Audio Engineering Society Convention (Los Angeles) Sponsor: Audio Engineering Society; John C. Baumann, Ampex Corp., 8467 Beverly Boulevard, Los Angeles, Calif.


April 26-28

Spring Joint Computer Conference (Boston) Sponsors: AFIPS, IEEE, ACM; Dr. Harlan Anderson, Digital Equip. Corp., Maynard, Mass.

DALE®


RELIABILITY

TOTAL CAPABILITY IN PRECISION RESISTANCE

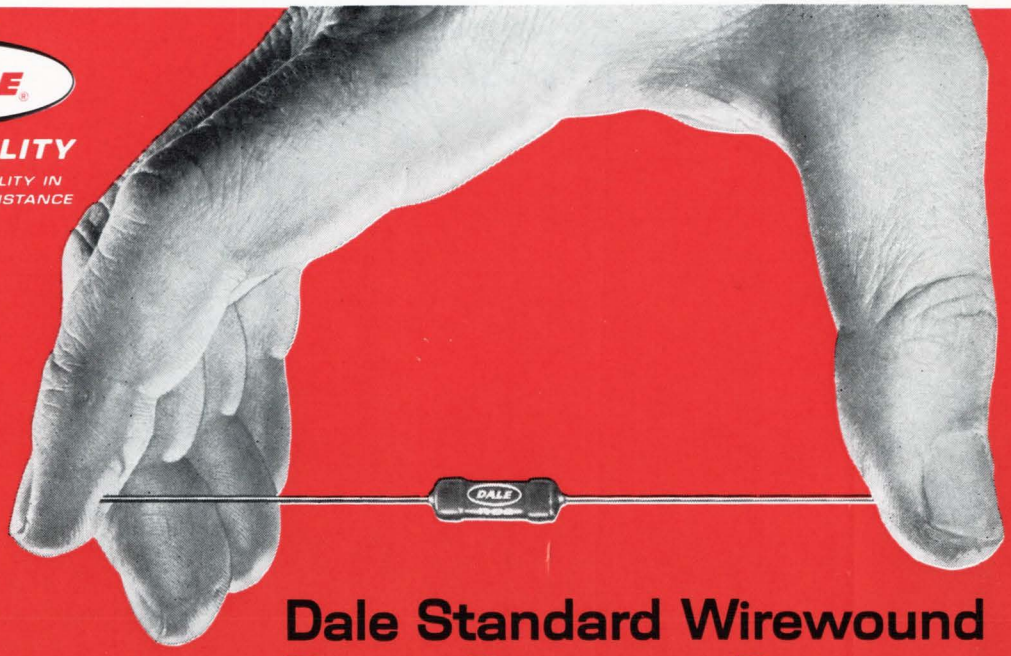

Dale Standard Wirewound Power Resistors Prove 99.994% RELIABLE in 32,000,000 Unit Hours of Testing!

RS Type Precision Wirewound Resistors are a part of the DALE High-Rel Development Program.

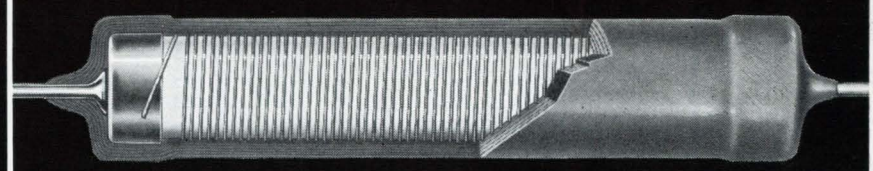

You simply can't match the reliability and versatility which Dale makes available in its RS Precision Power Wirewounds. *RS reliability*—yours at no extra cost—is solidly documented in continuing tests patterned after Dale's famous Minuteman High Reliability Development Program. Write for test report. *RS versatility* is so broad that more than 400 special variations have been made from our basic silicone-coated, all-welded construction. Standard or special—you simply can't buy more confidence at competitive prices.

WRITE FOR ■ RS Reliability Study
■ Catalog A

LATEST RS RELIABILITY REPORT

Unit Test Hours: 32,000,000 • **Reliability:** 99.994%
Stability: Units will not shift more than initial tolerance after 1,000 hours load life.
Test Conditions: 60% confidence level, 100% rated power, 25°C ambient 1% Δ R failure point.

RS SPECIFICATIONS

- **Applicable Mil. Spec:** MIL-R-26C & MIL-R-23379 (a new Spec. designed especially for precision power resistors)
- **Wattage Sizes:** ¼, ½, 1, 2, 2.5, 3, 5, 7, 10
- **Tolerances:** 0.05%, 0.1%, 0.25%, 1%, 3%
- **Operating Temperature Range:** −55°C to 350°C
- **Resistance Range:** .1 ohm to 273K ohms
- **Load Life Stability:** 1% max. Δ R after 1000 hours at full rated power
- **Moisture Resistance:** .5% max. Δ R after MIL-R-26C moisture test
- **Dielectric Strength:** 500 volts, RS-¼ through RS-1B; 1000 volts RS-2 through RS-10
- **Thermal Shock:** .5% max. Δ R after MIL-R-26C thermal shock test
- **Insulation Resistance:** 100 megohms minimum
- **Temperature Coefficient:** 20 ppm (high values); 30 ppm (intermediate values); 50 ppm (low values). Specific T.C. chart available on request.


DALE®

DALE ELECTRONICS, INC.
1328 28th Avenue, Columbus, Nebraska
Also Sold by Dale Electronics Canada, Ltd., Toronto, Ontario, Canada

SEE OUR SPECIFICATIONS IN VSMF THE MICROFILM CATALOG FILE

Speed Inquiry to Advertiser via Collect Night Letter
ON READER-SERVICE CARD CIRCLE 843


SPECTRAL RESPONSE CHARACTERISTICS

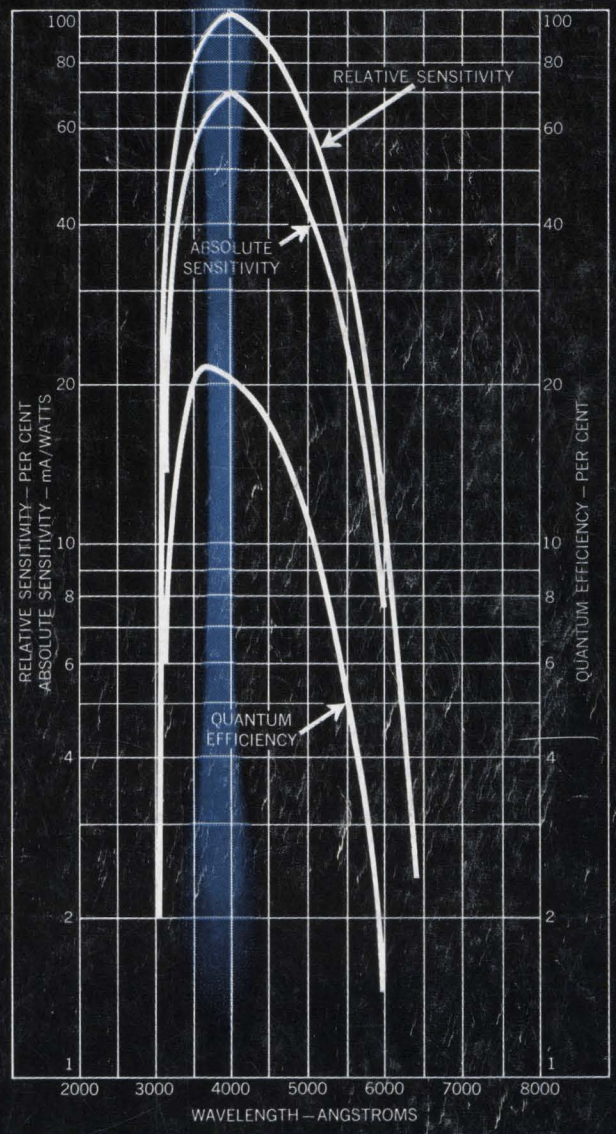

The RCA Bialkali Photocathode offers...

Up to 100 to 1 DARK-CURRENT REDUCTION

Typical QE at 3850 Å = 24%

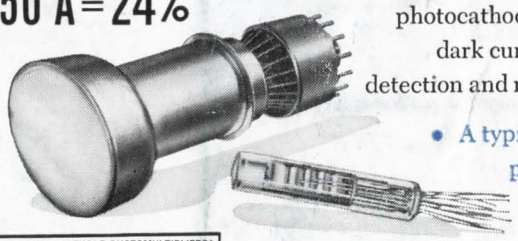

The Bialkali Photocathode is now available in many new RCA tube designs as well as in variants of most of RCA's commercially known photomultipliers. This new photocathode provides advantages in higher quantum efficiency and lower dark current. Designed for scintillation counting and other low-light-level detection and measurement systems, units with the RCA Bialkali cathode offer:

- A typical quantum efficiency of 24% at 3850 Å—a significant increase in performance (more than 50%) when compared with types having S-11 response (cesium-antimony photocathode)
- A dark-current reduction of as much as 100 to 1.

Proved in the unparalleled success of the RCA-8575, the RCA Bialkali Photocathode is now available in tube types with standard base, semi-flexible leads, or potted voltage dividers. Ask your RCA Representative about the advantages of the RCA Bialkali Photocathode in upgrading your existing system performance. For technical data on specific types, write: RCA Commercial Engineering, Section C-18Q-3, Harrison, N. J.

THE RCA LINE OF BIALKALI CATHODE PHOTOMULTIPLIERS*			
Nominal Size	No. of Stages	Proto-type	Bialkali Variant
¾"	10	4460 7767	C70042G
1½"	10	4461	C70114F
1½"	10	6199 4438	C7151S
2"	10	6342A	C7164N
2"	10	8053	C70109F
2"	10	— —	C70150
2"	10	— —	C70144
2"	12	7850	C70101B
2"	12	— —	C70101C
3"	10	8054	C70030E
3"	10	— —	C70145
3"	10	— —	C31009
3"	10	— —	C31012
3"	14	— —	C70045D†
5"	10	8055	C70043G
5"	14	— —	C70133

*All types shown are constructed with CuBe dynodes.
†Side-on type.

RCA Electronic Components and Devices

The Most Trusted Name in Electronics